


REVITALIZATIONS LLC 72 MONROE ROAD HATTIESBURG, MS 39401 WWW. REVITALIZATIONSLLC. COM 601-520-6931

Delivery Information


Thank you for choosing Derksen.

Be prepared for your building delivery. There are some things that must be provided by the customer prior to free delivery:

Solid Concrete Pad Blocks are recommended for setting up and leveling your building, and cinder blocks can be used in conjunction for extra height (solid blocks on bottom). Ask your delivery driver how many blocks will be needed for your building's width and length and the leveling requirements of your specific site. Standard solid blocks are 4x8x16". For larger buildings, 4x16x16" solid blocks may be needed. Delivery driver will provide treated lumber for leveling and shimming of building if concrete pad blocks are not provided.

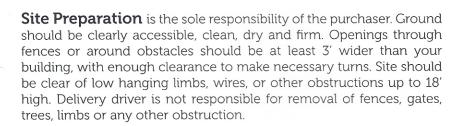

Contact your local Codes Office to verify regulations regarding outdoor storage buildings. It is the sole responsibility of the purchaser to secure any needed permits, property line information, signed permission to cross properties, HOA permissions, etc. Derksen Buildings is not responsible for any permits, permissions, guidelines or code restraints.



How many blocks do I need?

Generally, on a level surface, a block will be placed under each skid at the outside edge of each short wall. A block will be placed beneath each set of door hinges, and every 4' - 6' down the length of each skid. Blocks will be stacked vertically for leveling. You can estimate the number of blocks needed by knowing the length and width of your building. 8' - 10' wide buildings come standard with two skids. 12' - 16' wide buildings come standard with four skids. Ask your dealer or delivery driver for more details.







Know what's **below.**

811 service will mark your utility lines for FREE.

Before we deliver your Derksen Portable Bulding, it is the responsibility of the purchaser to have all underground utilities, such as gas, elecric, phone lines, plumbing and invisible pet fences located.

If you will be anchoring your building, it is **REQUIRED** to have underground utility lines marked. Building anchors may penetrate the groud up to 36" deep. Call 811 at least TWO working days before your scheduled building delivery.

*Derksen Buildings reserves the right to refuse or reschedule delivery and setup to sites that are not properly prepared, inaccessible, or unsafe. Important: Only one (1) delivery and setup attempt is free. Additional charges may apply to any subsequent delivery and setup trips.

0'	F .	
Signed	1 1210	
Junea	Date	