

MANUFACTURING PART # VPG-1920-TGTS	INNER DIAMETER 19mm	OUTER DIAMETER 23.5mm	LENGTH 20 Meters
---	--------------------------------------	--	-----------------------------------




ACTIVFLEX PROTECTIVE TUBING


- High-Temperature, Spatter-Resistant Cable & Hose Protection
- Suitable for casting, welding and industrial applications.
- Pre-slit along length for retrofitting in field installations

	Property	Specification	Unit	Value
General	Color			Gray
	Applications	Welding, casting, industrial, general purpose		
	Material	PTFE		
	Coating	none		
	Split Configuration	Split entire length		
Mechanical	Inner Diameter	+/- 5%	mm	19.0
	Outer Diameter	+/- 5%	mm	23.5
	Wall Thickness	+/- 5%	mm	0.85
	Length	+/- 5%	m	20.0
	Bend Radius	min.	cm	5
Operating Temperature	-50 to +250 deg C	Continuous (max)	deg C	250

I.D. = 19 mm

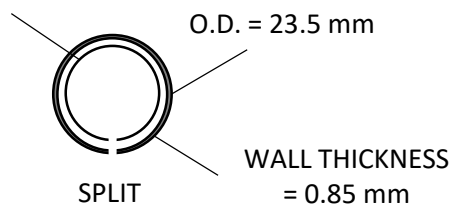

OVERALL LENGTH = 20 meter

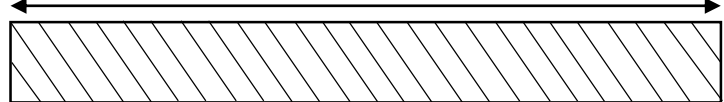

APPLICATION NOTE:

- Product intended for application within operating temperature specifications.
- Product not intended for fluid handling applications.
- Operators of the product are responsible for compliance with measures relating to the protections of persons, equipment, electrical standards and environmental regulations.