


MANUFACTURING PART # <b>VPG-6510-TGTS</b>	INNER DIAMETER <b>6.5mm</b>	OUTER DIAMETER <b>10.0mm</b>	LENGTH <b>10 Meter</b>
--	--------------------------------	---------------------------------	---------------------------



**ACTIVFLEX PROTECTIVE TUBING**

- High-Temperature, Spatter-Resistant Cable & Hose Protection
- Suitable for casting, welding and industrial applications.
- Pre-slit along length for retrofitting in field installations

	Property	Specification	Unit	Value
<b>General</b>	Color			Gray
	Applications	Welding, casting, industrial, general purpose		
	Material	PTFE		
	Coating	none		
	Split Configuration	Split entire length		
<b>Mechanical</b>	Inner Diameter	+/- 5%	mm	6.5
	Outer Diameter	+/- 5%	mm	10
	Wall Thickness	+/- 5%	mm	0.70
	Length	+/- 5%	m	10.0
	Bend Radius	min.	cm	2.5
<b>Operating Temperature</b>	-50 to +250 deg C	Continuous (max)	deg C	250

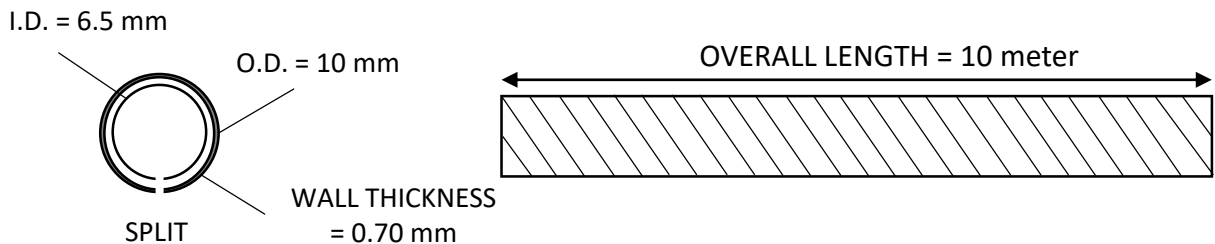

**APPLICATION NOTE:**

- Product intended for application within operating temperature specifications.
- Product not intended for fluid handling applications.
- Operators of the product are responsible for compliance with measures relating to the protections of persons, equipment, electrical standards and environmental regulations.