

OFV


OIL FILTER & ISOLATION VALVE

Oil filter and Isolation valve in one tidy, robust, and compact unit

For use with the KBB and KBB/E Fire Valve range

Avoid expensive engineer call outs

Supplied with 1/2" to 1" BSP adaptor for connection to oil tank and an anti-crush insert for 10mm copper pipe

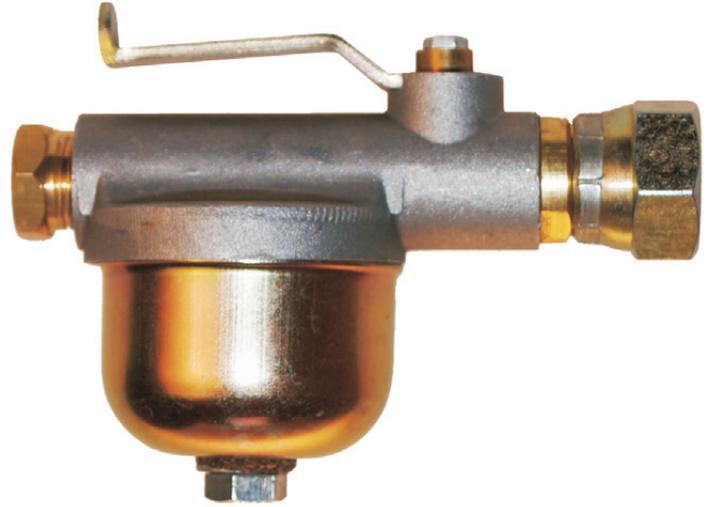

OFV1

Application

For use on bottom take-off connections on steel or plastic domestic heating oil tanks.

The filter and isolating valve is positioned in the oil feed pipe, usually near the tank, running to the boiler. This insures that the oil supply can quickly be turned off, for example, during boiler servicing.

The OFV is fitted with a nylon filter, this is important because even the smallest particle of dirt or rust can permanently damage a boiler's oil pump and/or block the very fine oil atomising jet.

Technical Specification


Material:
Body: Aluminium.
Filter bowl: Steel.
Filter: Nylon (40 - 50µm).

Connection sizes:
In: 1/2" BSP Swivel.
Out: 10mm compression with copper olive.

Flow rate: 151 L/hr kerosene at 1 metre head.

Weight: 320g (without adaptor)

Outline Details

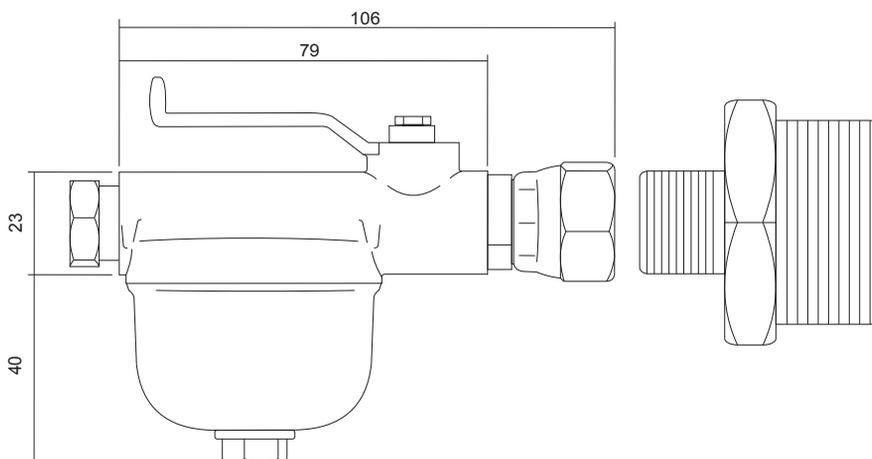

HYTEK

Hytek (GB) Ltd

Delta House, Green Street, Elsenham, CM22 6DS

+44 (0) 1279 815 600

info@hytekgb.com

www.hytekgb.com



FM 1790