



NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL CODES.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND PREPARATION WORK.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
4. UNIVERSAL MOUNTING BRACKET IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOL LESS MOUNT FOR 3RD PARTY ENCLOSURES, BRACKET IS PROVIDED WITH THE UNIT.

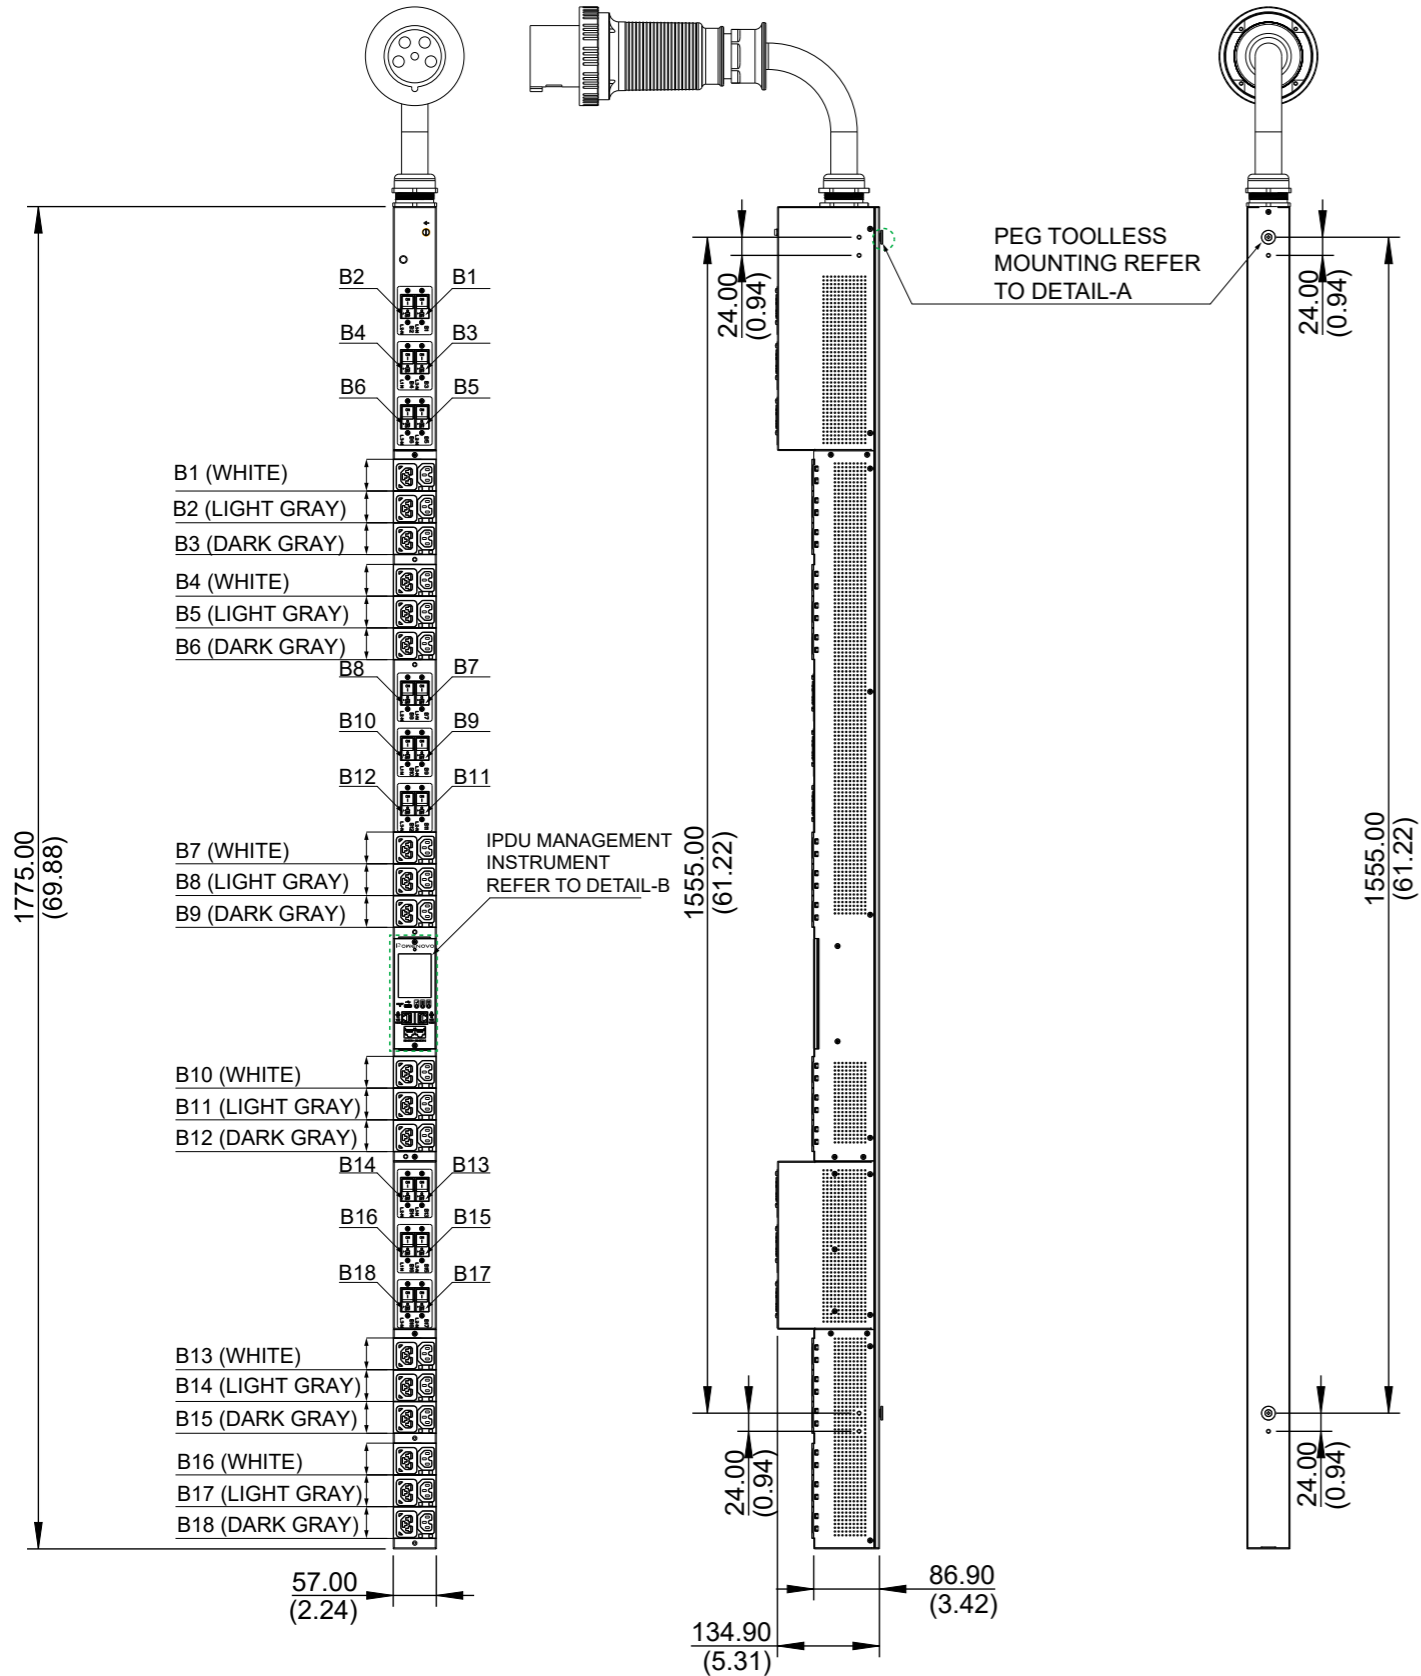


REV.	DESCRIPTION	DATE	APPROVED
01	INITIAL RELEASE	2026/04/11	TomZhong

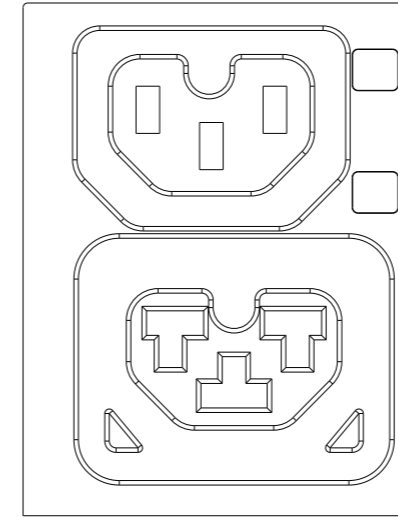


COMBO C13/C15 10A,
250V MAX RATED OUTPUT


COMBO C13/C15/C19/C21
16A,250V MAX RATED OUTPUT

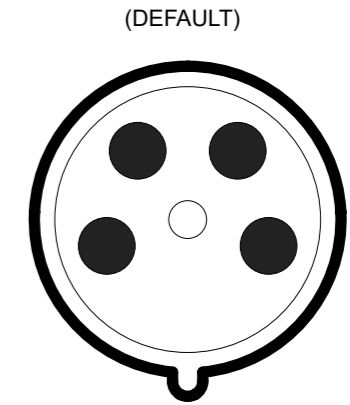

(DEFAULT)
IEC 60309, 4P 5W,6H
IP67(WATERTIGHT)
100A/125A,415V MAX RATED INPUT
(80A DERATED)

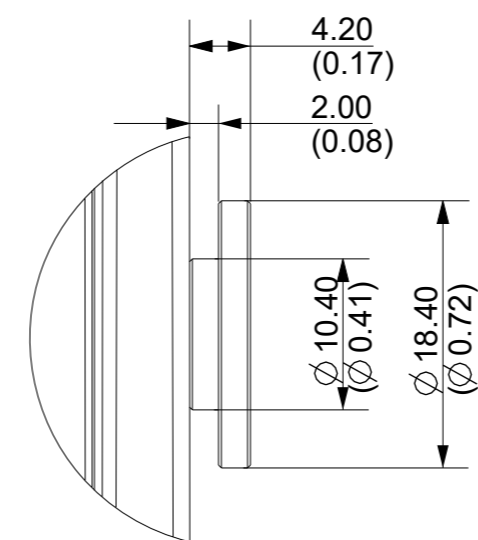

DETAIL-A
PEG TOOL LESS MOUNTING
ENLARGED VIEW

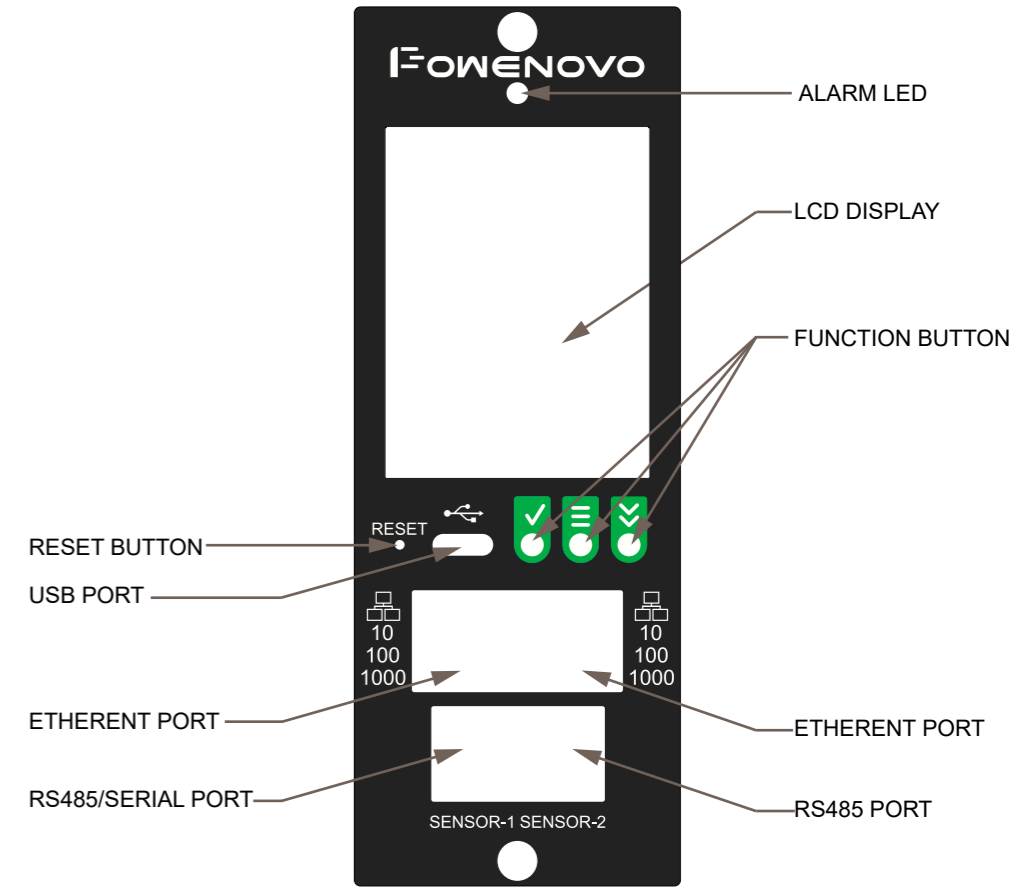


DETAIL-B
IPDU MANAGEMENT INSTRUMENT
ENLARGED VIEW

PROPRIETARY AND CONFIDENTIAL		LINEAR TOLERANCE		ANGULAR TOLERANCE		TITLE: Advantage Series Metered Input		FOWENOVO				
THIS DRAWING AND ITS SPECIFICATIONS ARE THE PROPERTY OF POWENOVO AND SHALL NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION FROM POWENOVO. THIS DRAWING IS BASED UPON THE LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE		<30	±0.1	< 30°	±0.5°	DRAWN BY	TomZhong	2026/04/11	PART NO:	P3D36V100A		
		>30 to < 60	±0.2	>30° to < 90°	±1°	APPROVED BY	Roy Rong	2026/04/11	MATERIAL	NA	REV.	01
		>60 to < 100	±0.30	> 90°	±1.5°	DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX		FINISH	NA	SIZE	A3	
		>100 to < 150	±0.40	UNITS:mm		INTERPRET TO ASME Y14.100		SCALE	NA	SHEET	1/2	
		> 150	±0.50	BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY								

NOTES:
 1.INTERNAL WIRING:
 WIRE TYPE: UL AWM 1015, 10&12&18AWG
 LINE 1/R/X COLOR: BLACK
 LINE 2/S/Y COLOR: ORANGE
 LINE 3/T/Z COLOR: RED
 EARTH GROUND COLOR: GREEN STRIPE

2.FOR FINISHED GOOD PART NUMBER SEE IDENTIFICATION

REV.	DESCRIPTION	DATE	APPROVED
01	INITIAL RELEASE	2026/05/06	Yang Yang

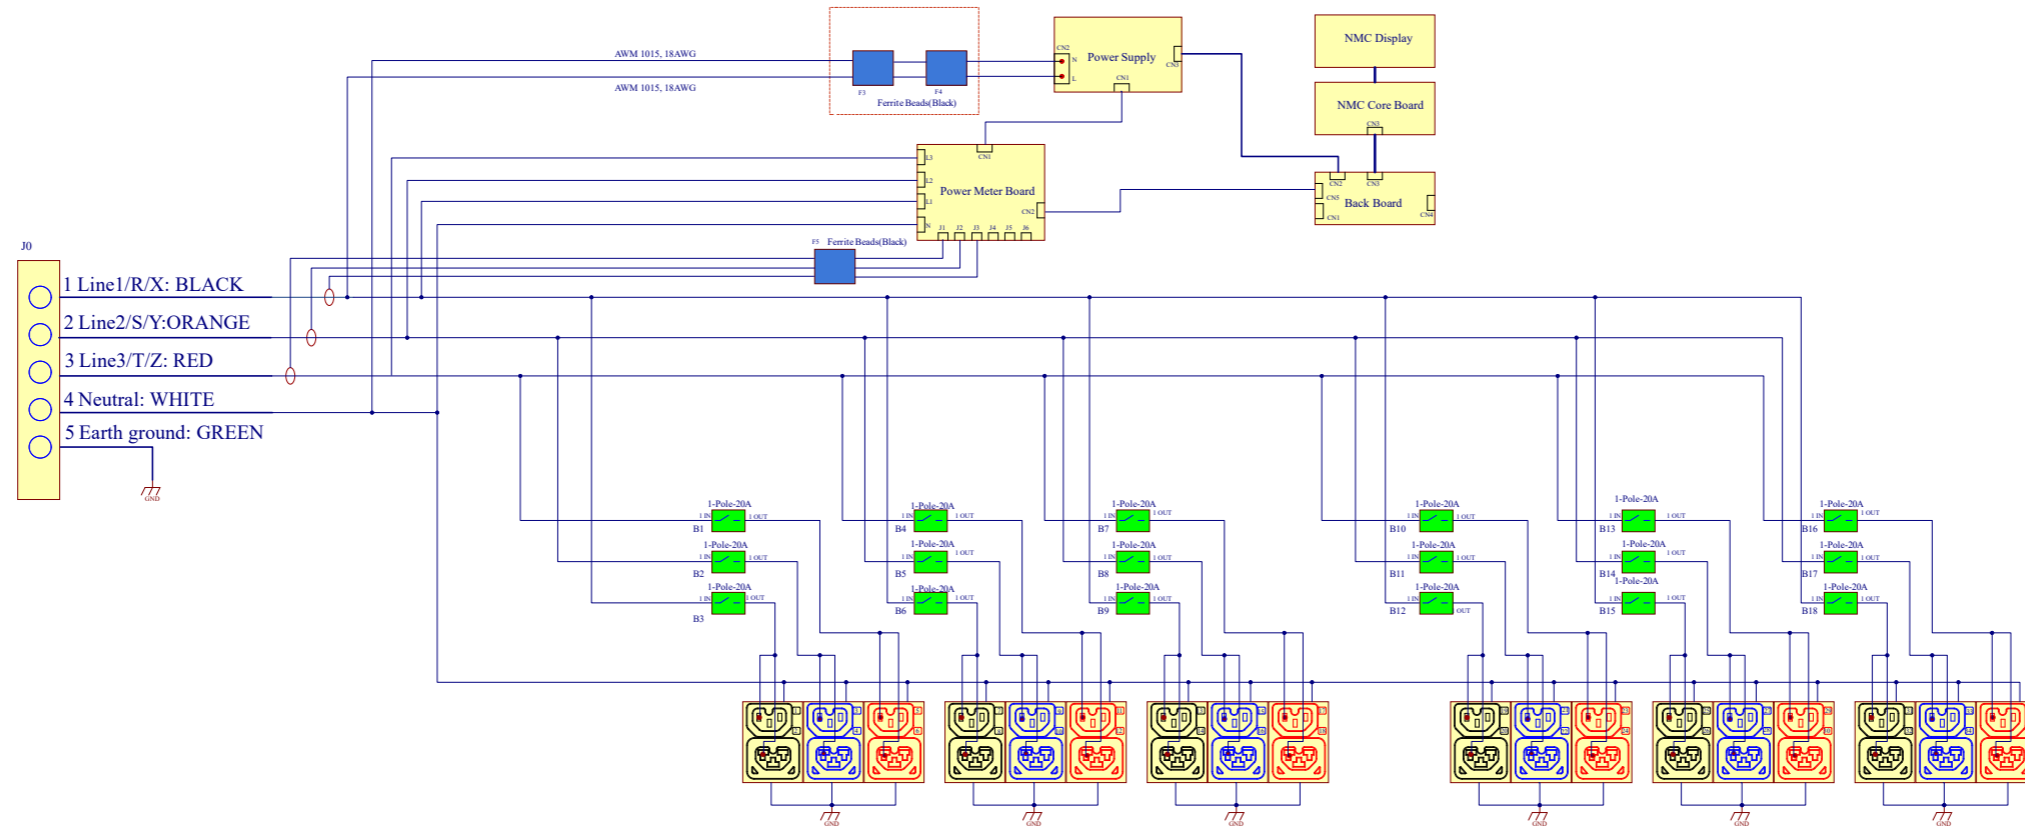

INTERNAL WIRING SCHEMATIC

LINEAR TOLERANCE		ANGULAR TOLERANCE		TITLE:			FOWENOVO			
<30	±0.1	< 30°	±0.5°	Advantage Series Metered Input						
>30 to < 60	±0.2	>30° to < 90°	±1°	DRAWN BY	Yang Yang	2026/05/06	PART NO:	P3D36V100A		
>60 to < 100	±0.30	> 90°	±1.5°	APPROVED BY	Roy Rong	2026/05/06	MATERIAL	NA	REV.	01
>100 to < 150	±0.40	UNITS:mm DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX	FINISH NA SIZE A3							
> 150	±0.50			BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY	INTERPRET TO ASME Y14.100	SCALE	NA	SHEET	2/2	

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING AND ITS SPECIFICATIONS ARE THE PROPERTY OF POWENOVO AND SHALL NOT BE COPIED, REPRODUCED, OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION FROM POWENOVO. THIS DRAWING IS BASED UPON THE LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE