

STREET LIGHT SCOBLAT-20

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:20W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:40mm



◆ Product Drawing

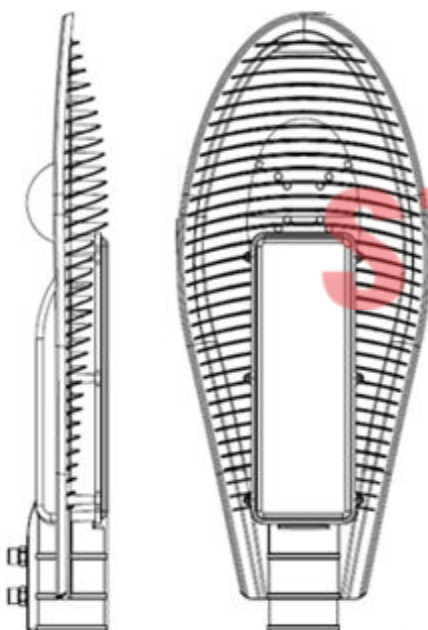

◆ Packing Information

Product Size: L390*W165*H70mm

Packing Carton Size: 420*200*145mm

Net.Weight:0.92kg

Gross.Weight: 1.52kg

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
3m	49.5lux	69.3lux
4m	28.2lux	39.5lux
5m	17.9lux	25.1lux
6m	12.5lux	17.5lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-25

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:25W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:40mm



◆ Product Drawing

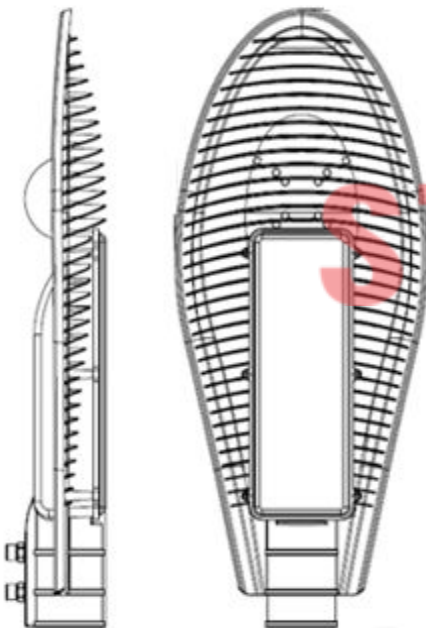

◆ Packing Information

Product Size: L390*W165*H70mm

Packing Carton Size: 420*200*145mm

Net.Weight:1.14kg

Gross.Weight: 1.52kg

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
4m	46.3lux	65.7lux
5m	29.9lux	41.9lux
6m	20.9lux	29.3lux
7m	15.3lux	21.4lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-40

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:40W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:40mm



◆ Product Drawing

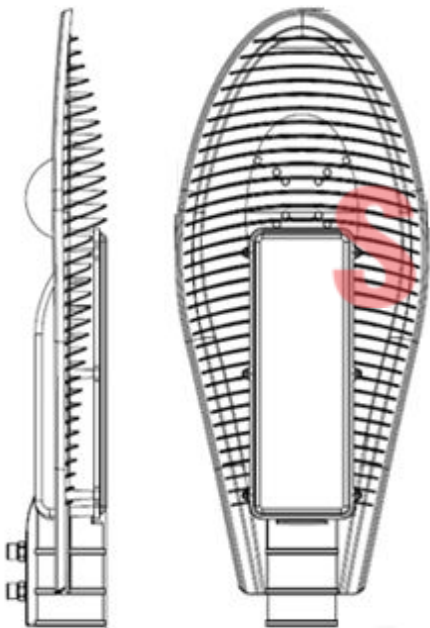

◆ Packing Information

Product Size:L500*W210*H80mm

Packing Carton Size: 520*225*110mm

Net.Weight:2.18kg

Gross.Weight:2.58kg

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
5m	39.9lux	55.9lux
6m	27.9lux	39.1lux
7m	20.4lux	28.6lux
8m	15.7lux	22lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-50

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:50W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:50mm



◆ Product Drawing

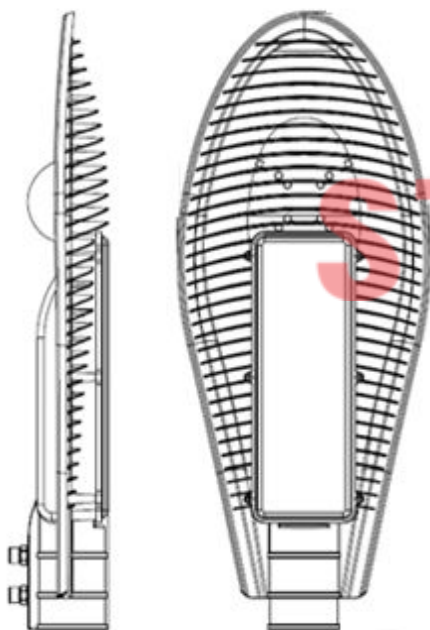

◆ Packing Information

Product Size:L500*W210*H80mm

Packing Carton Size: 520*225*110mm

Net.Weight:2.18kg

Gross.Weight:2.58kg

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
5m	44.8lux	62.7lux
6m	31.4lux	44lux
7m	23lux	32.2lux
8m	17.7lux	24.8lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-60

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:60W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

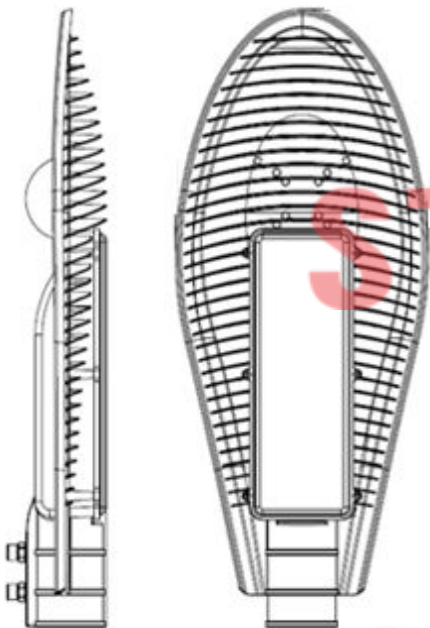

◆ Packing Information

Product Size:L625*W260*H105mm

Packing Carton Size: 660*300*140mm

Net.Weight:3.56kg

Gross.Weight:4.22kg

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
6m	41.8lux	58.5lux
7m	30.6lux	42.8lux
8m	23.5lux	32.9lux
9m	18.5lux	25.9lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-801

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:70W-90W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

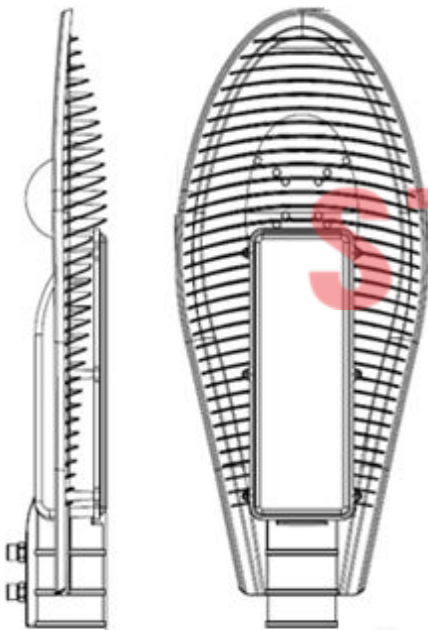

◆ Packing Information

Product Size:L625*W260*H105mm

Packing Carton Size: 660*300*140mm

Net.Weight:3.56kg

Gross.Weight:4.22kg

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
6m	55.7lux	78lux
7m	40.8lux	57.1lux
8m	31.4lux	44lux
9m	24.7lux	34.6lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-802

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:70W-90W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

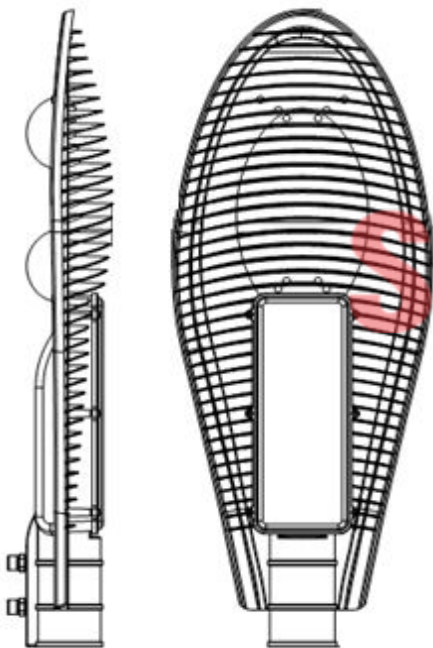

◆ Packing Information

Product Size:L720*W280*H112mm

Packing Carton Size:740*310*142mm

Net.Weight:4.9kg

Gross.Weight:5.4kg

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
6m	55.7lux	78lux
7m	40.8lux	57.1lux
8m	31.4lux	44lux
9m	24.7lux	34.6lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-100

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:100W-110W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

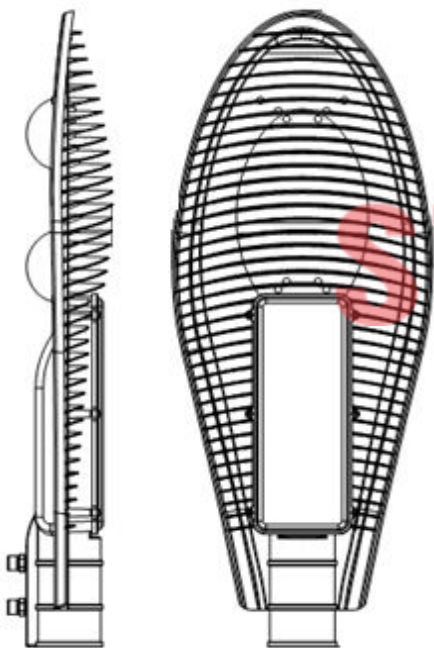

◆ Packing Information

Product Size:L720*W280*H112mm

Packing Carton Size:740*310*142mm

Net.Weight:5.2kg

Gross.Weight:6.2kg

40 HC can be filled with **2574** pcs

◆ Illuminance In Different Height

Pole Height	Average Illuminance	Center Illuminance
7m	51lux	71.4lux
8m	39lux	54lux
9m	30.8lux	43lux
10m	25.1lux	35.1lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-120

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:120W-140W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

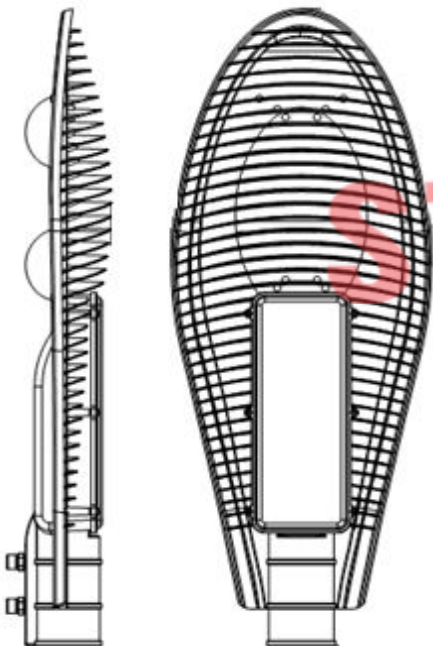

◆ Packing Information

Product Size:L720*W280*H112mm

Packing Carton Size:740*310*142mm

Net.Weight:5.4kg

Gross.Weight:6.4kg

◆ Illuminance In Different Height Pole

Pole Height	Average Illuminance	Center Illuminance
8m	47.1lux	65.9lux
9m	37lux	51.8lux
10m	30.2lux	42.8lux
11m	24.8lux	38.7lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-150

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:150W-170W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

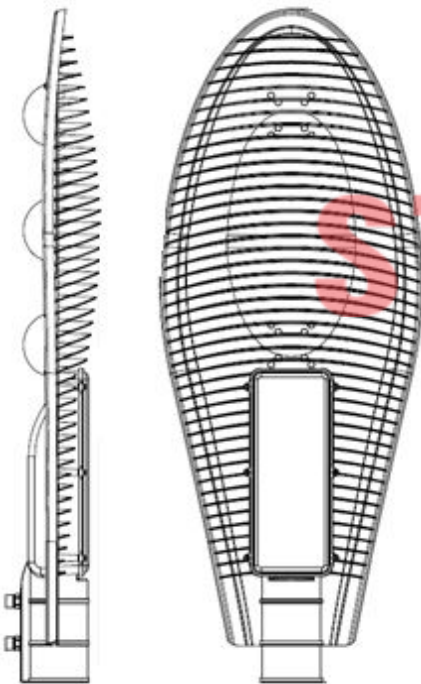

◆ Packing Information

Product Size:L870*W330*H120mm

Packing Carton Size:905*365*150mm

Net.Weight:6.1kg

Gross.Weight:8.0kg

◆ Illuminance In Different Height Pole

Pole Height	Average Illuminance	Center Illuminance
9m	41.6lux	58.2lux
10m	33.9lux	47.5lux
11m	27.9lux	39.1lux
12m	23.3lux	32.6lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-180

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:180W-190W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

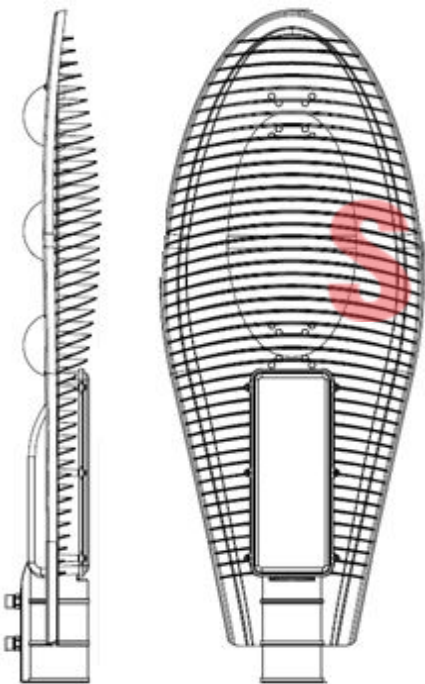

◆ Packing Information

Product Size:L870*W330*H120mm

Packing Carton Size:905*365*150mm

Net.Weight:6.1kg

Gross.Weight:8.0kg

◆ Illuminance In Different Height Pole

Pole Height	Average Illuminance	Center Illuminance
10m	40.7lux	57lux
11m	33.5lux	46.9lux
12m	28lux	39.2lux
13m	24lux	33.6lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-200

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:200W-230W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

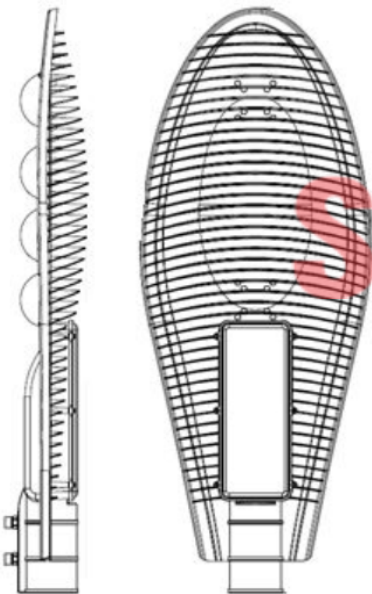

◆ Packing Information

Product Size:L870*W330*H120mm

Packing Carton Size:905*365*150mm

Net.Weight:8.0kg

Gross.Weight:9.0kg

◆ Illuminance In Different Height Pole

Pole Height	Average Illuminance	Center Illuminance
10m	45.2lux	63.3lux
11m	37.2lux	52.1lux
12m	31.1lux	43.5lux
13m	26.7lux	37.4lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



STREET LIGHT SCOBLAT-240

◆ Essential Parameter

Light Source Type: Light control

Lamp Power:240W-300W

Rated Voltage:AC85-265V up to 300V (50-60HZ) /DC12/DC24

LED Efficiency:110lm/w~160lm/w

Lamp Flux:>90lm/w~140lm/w

Beam Angle:130°*60°

CCT:3000-6000K available

Working Temperature:-40°C~70°C


Life Span:>50,000hrs

IP Grade:IP66

Installation Diameter:60mm



◆ Product Drawing

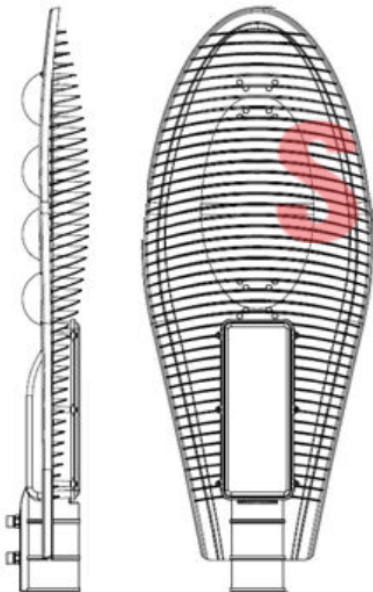

◆ Packing Information

Product Size:L1100*W420*H110mm

Packing Carton Size:1300*450*125mm

Net.Weight: 10.32kg

Gross.Weight:12.5kg

◆ Illuminance In Different Height Pole

Pole Height	Average Illuminance	Center Illuminance
10m	54.3lux	76lux
11m	44.6lux	62.4lux
12m	37.4lux	52.4lux
13m	32lux	44.8lux

◆ Applicable places

Road lighting of express way,village,township roads,residential areas,parks and factory



SSETPL KNOWN AS STALWART is a professional manufacturer of LED lights and solar products. It combines product R & D, product manufacture and installation service in one. Our products include five hundred varieties and nine series, such as LED street lights, courtyard lights, lawn lights, un--derground lights, underwater lights, LED lights, wall lights, solar light, solar system and so on. With their good performances, high quality, energy saving and environmental protecting, the products are well sold in more than 7 domestic States and regions, such as U.P., M.P., BIHAR, RAJASTHAN, DELHI, etc.

We are a professional LED light manufacturer which focus on three parts: Solar Led Street Light, Building Decoration Lighting and Solar Power Generation. they are highly appreciated. We've got CE, TUV and ROHS certificates.



STALWART

Our Enterprise Mission

We provide more energy-efficient, more environmentally friendly lighting to the world.

Our Goal

Let Indian use more energy-efficient, more environmentally friendly lighting, also let people of the world use our lighting products.

Our Values

Serve the customers—we bend ourselves to make all of our customers satisfy and help them to get success. Innovation—we pursue the innovation that is important to our customers and us. Meanwhile we promote it will be realized quickly and efficiently.

Honesty and Integrity—we uphold the trust, honesty and responsibility to the internal or external people. Win Win cooperation—we promote mutual understanding and value the diversity, treating our culture openly and fairly.

