


# COMBiLiFT

LIFTING INNOVATION

## COMBi-ST

The stand-on multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

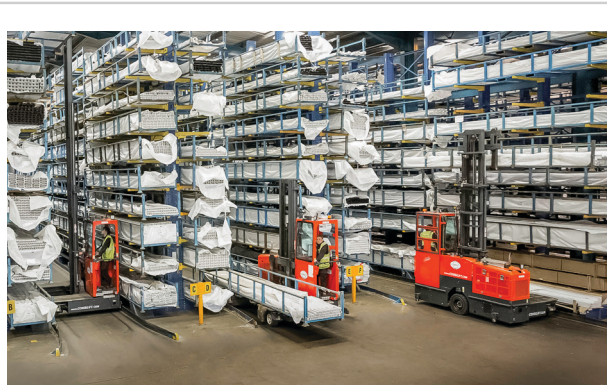

COMBi-ST


[combilift.com](http://combilift.com)

REF.	DESCRIPTION	C6000 ST	C8000 ST
1a	Max. Lift Height		159"
1b	Free Lift Height		0"
2	Height Mast Closed	111½"	132"
3	Max. (Mast raised)		204¼"
4	Overall Length	78¾"	82½"
5	Mast Travel		51"
6	Ground Clearance Under Mast		9"
7	Ground Clearance to Center of Wheelbase		5"
8	Height Over Cab (without work lights)		104¾"
9	Platform Width		120"
10	Outside Spread of Fork Arms		53"
11	Track Front		97¼"
12	Frame Opening		59"
13	Load Center Distance		24"
14	Overhang Front		8"
15	Wheelbase	65½"	69¼"
16	Overhang Back		5¼"
17	Length From Face of Fork	31½"	35½"
18	Approach Angle		45°
19	Ramp Angle		17°
20	Departure Angle		45°
21	Forward Tilt		3°
22	Backward Tilt		4°
23	Minimum Outside Radius		95¼"
24	Platform Height		19 ½"
25	Platform Length		47¼"
26	Overall Width		126"
A	Capacity	6,000 lbs	8,000 lbs
B	Unladen Weight	13,200 lbs	14,330 lbs
C	Maximum Ground Speed		6 mph
D	Gradeability		10%
E	Kubota V1505- T Diesel		43 HP
F	LPG		65 HP
G	Fork Section	2" x 5" x 47¼"	2" x 6" x 47¼"
H	16 x 7 – 10.5 Front Tire (Solid)		OD 16" / Width 7"
I	23 x 10 – 12 Rear Tire (Super Elastic)		OD 22¾" / Width 9½"
J	Standard Color		Green & Gray

### Features Include:

- Rubber Mounted Cabin
- Multi-Directional Operation
- Load Sensing Steering
- 2 Wheel Hydrostatic Drive
- 4-way Lever Positioning of Wheels
- Stand up Operator

### Distributed by:

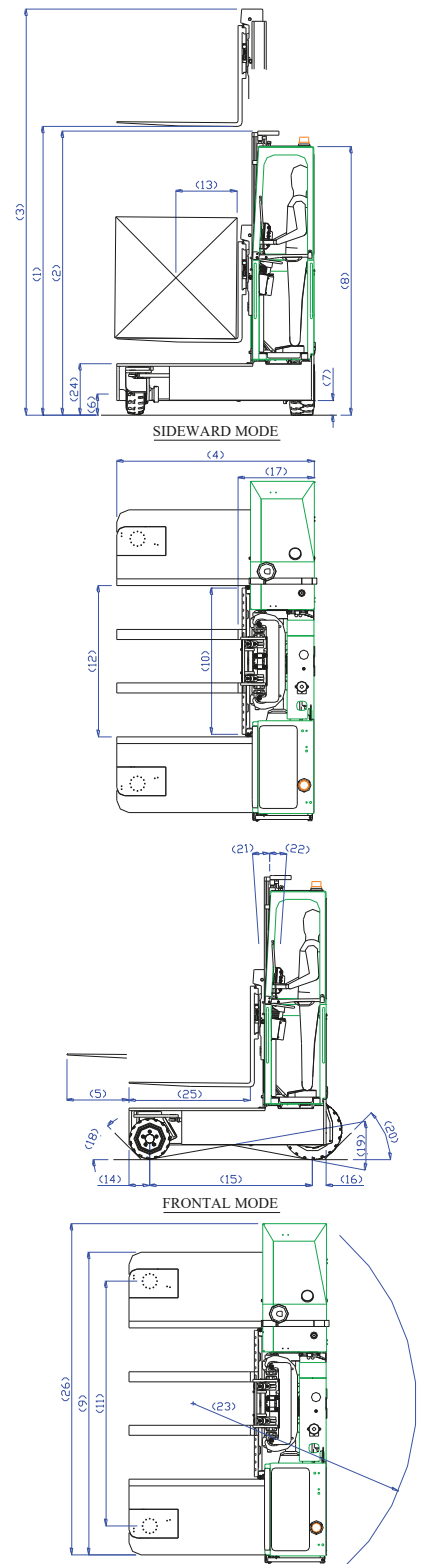

303 Concord Street  
Greensboro  
North Carolina 27406  
**Toll Free: 1-877 COMBI 56**  
T: 336-378-8884  
info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

# COMBI-ST

**combilift.com**