COMBi-GT 10,000 lbs

COMBILIFT
LIFTING INNOVATION

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.














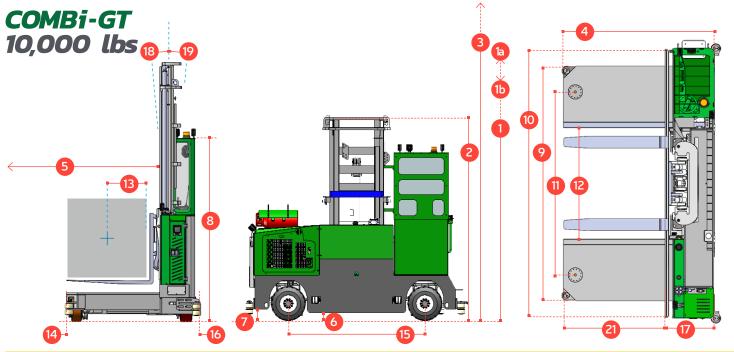

	,							
REF.	DESCRIPTION	C10,000 GT						
1a	Lift Height				248"			
1b	Free Lift Height	104"						
2	Height Mast Closed	157"						
3	Max. Mast Raised				303"			
4	Overall Length	54"	60"	66"	72"	78"	84"	90"
5	Mast travel	26"	32"	38"	44"	50"	56"	62"
6	Ground Clearance Under Mast	5"						
7	Ground Clearance to Center of Wheelbase				5"			
8	Height Over Cab (without work lights)	112"						
9	Width Across Platforms	116"						
10	Outside Spread of Fork Arms	131½"						
11	Wheelbase	901/2"						
12	Frame Opening	55"						
13	Load Center Distance	12"	15"	18"	21"	24"	24"	24"
14	Overhang Front				6"			
15	Track	42"	48"	54"	60"	66"	72"	78"
16	Overhang Back	6"						
17	Length from Face of Fork	30"						
18	Forward Tilt	3°						
19	Backward Tilt	4½°						
20	Platform Height (with front lowered)	161/2"						
21	Platform Length	24"	30"	36"	42"	48"	54"	60"
Α	Capacity				10,000 lbs			
В	Unladen Weight	19,000 lbs	19,500 lbs	20,000 lbs	20,500 lbs	21,000 lbs	21,500 lbs	22,000 lbs
C	Maximum Ground Speed	7½ mph						
D	Gradeability	10%						
E	3 ltr GM LPG	65 HP						
F	Electrics	12 Volt						
G	Fork Section 2" x 6" x	24"	30"	36"	42"	48"	54"	60"
Н	350 / 150 - 280 Front Tire (Solid) x2	OD 14" / Width 6"						
- 1	16 x 7 - 12 Rear Tire (Super Elastic) x2	OD 23" / Width 10"						
J	Standard Color	Green & Gray						

Distributed by:

Features Include:

- Rubber Mounted Overhead Guard
- 4 Wheel Steering
- Load Sensing Steering
- 2 Wheel Hydrostatic Drive
- Tilting Chassis +/- 1/2" at front
- · Hydraulic Oil Cooler

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.