


Thank you for your purchase!

Installing the duck is very easy, completely reversible, and requires no modification to the factory components.

First, open the rear cargo area, flip up the rear windshield, and pull the hose off of the factory washer nozzle by gripping the hose just below the nozzle, and pulling away from the glass.

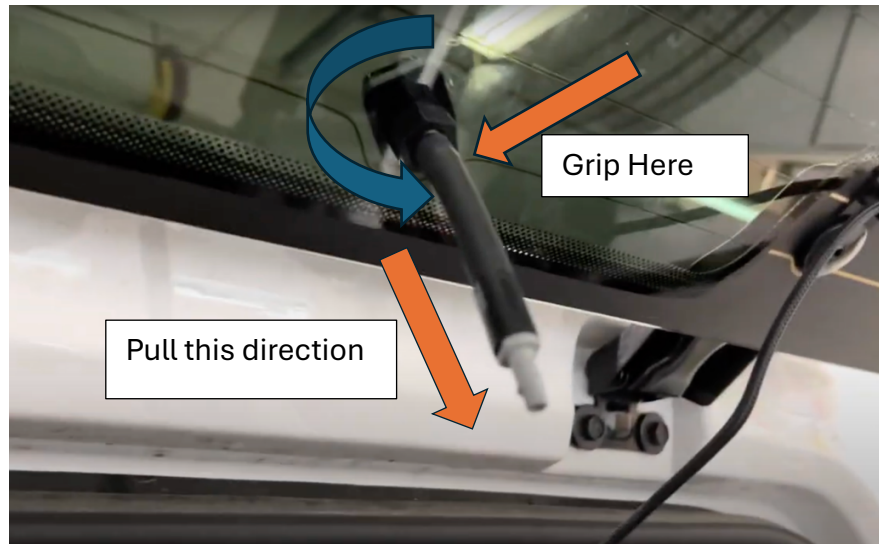

After pulling the hose off the nozzle, rotate the nut on the nozzle counterclockwise to remove the nozzle.

Replace the nozzle with the duck, and use the factory nut to attach the duck to the glass. Make sure to place the gasket on the outside of the glass, to seal against leakage.

Gently push the hose onto the hose barb on the duck.

Be sure to unplug the wiper motor plug, to prevent dirt from being rubbed on the glass, as you use the duck. There is a plastic cover over the rear windshield wiper motor. You must remove this cover, to access the rear wiper motor, and unplug it.



That's it! Enjoy your duck!