

**Table 6F-1. Temporary Traffic Control Zone Sign and Plaque Sizes (Sheet 1 of 3)**  
**(Delaware Revision)**

Sign or Plaque	Sign Designation	Section	Standard	Minimum
Stop	R1-1	6F.06	48 x 48	—
Stop (on Stop/Slow Paddle)	R1-1	6E.03	24 x 24	—
Yield	R1-2	6F.06	48 x 48 x 48	36 x 36 x 36
To Oncoming Traffic (plaque)	R1-2aP	6F.06	48 x 36	24 x 18
Wait on Stop	R1-7	6E.05	24 x 30	—
Go on Slow	R1-8	6E.05	24 x 30	—
Speed Limit	R2-1	6F.12	36 x 48	—
Fines Higher (plaque)	R2-6P	6F.12	36 x 24	—
Fines Double (plaque)	R2-6aP	6F.12	36 x 24	—
\$XX Fine (plaque)	R2-6bP	6F.12	36 x 24	—
Begin Higher Fines Zone	R2-10	6F.12	36 x 48	—
End Higher Fines Zone	R2-11	6F.12	36 x 48	—
End Work Zone Speed Limit	R2-12	6F.12	36 x 54	—
Movement Prohibition	R3-1,2,3,4,18,27	6F.06	36 x 36	—
Mandatory Movement (1 lane)	R3-5	6F.06	30 x 36	—
Optional Movement (1 lane)	R3-6	6F.06	30 x 36	—
Right (Left) Lane Must Turn Right (Left)	R3-7	6F.06	30 x 30	—
Advance Intersection Lane Control	R3-8	6F.06	Varies x 30	—
Do Not Pass	R4-1	6F.06	36 x 48	—
Pass With Care	R4-2	6F.06	36 x 48	—
Keep Right	R4-7	6F.06	36 x 48	—
Narrow Keep Right	R4-7c	6F.06	18 x 30	—
Stay in Lane	R4-9	6F.11	36 x 48	—
Do Not Enter	R5-1	6F.06	36 x 36	—
Wrong Way	R5-1a	6F.06	42 x 30	—
One Way	R6-1	6F.06	54 x 18	—
One Way	R6-2	6F.06	36 x 48	—
No Parking (symbol)	R8-3	6F.06	36 x 36	—
Pedestrian Crosswalk	R9-8	6F.13	36 x 18	—
Sidewalk Closed	R9-9	6F.14	24 x 12	—
Sidewalk Closed, Use Other Side	R9-10	6F.14	24 x 12	—
Sidewalk Closed Ahead, Cross Here	R9-11	6F.14	24 x 18	—
Sidewalk Closed, Cross Here	R9-11a	6F.14	24 x 12	—
Road Closed	R11-2	6F.08	48 x 30	—
Road Closed - Local Traffic Only	R11-3a,3b,4	6F.09	60 x 30	—
Weight Limit	R12-1,2	6F.10	36 x 48	—
Weight Limit (with symbols)	R12-5	6F.10	36 x 48	—
Turn and Curve Signs	W1-1,2,3,4	6F.16	48 x 48	30 x 30
Reverse Curve (2 or more lanes)	W1-4b,4c	6F.48	48 x 48	30 x 30
One-Direction Large Arrow	W1-6	6F.16	60 x 30	48 x 24
Chevron Alignment	W1-8	6F.16	30 x 36	—
Stop Ahead	W3-1	6F.16	48 x 48	30 x 30
Yield Ahead	W3-2	6F.16	48 x 48	30 x 30
Signal Ahead	W3-3	6F.16	48 x 48	30 x 30
Be Prepared to Stop	W3-4	6F.16	48 x 48	30 x 30
Reduced Speed Limit Ahead	W3-5	6F.16	48 x 48	30 x 30
XX MPH Speed Zone Ahead	W3-5a	6F.16	48 x 48	30 x 30
Merging Traffic	W4-1,5	6F.16	48 x 48	36 x 36
Lane Ends	W4-2	6F.24	48 x 48	30 x 30
Merge (Left or Right)	W4-2-DE	6F.24	48 x 48	30 x 30
Added Lane	W4-3,6	6F.16	48 x 48	30 x 30
No Merge Area (plaque)	W4-5P	6F.16	24 x 30	—

**Table 6F-1. Temporary Traffic Control Zone Sign and Plaque Sizes (Sheet 2 of 3)**  
**(Delaware Revision)**

Sign or Plaque	Sign Designation	Section	Standard	Minimum
Road Narrows	W5-1	6F.16	48 x 48	30 x 30
Narrow Bridge	W5-2	6F.16	48 x 48	30 x 30
One Lane Bridge	W5-3	6F.16	48 x 48	30 x 30
Ramp Narrows	W5-4	6F.26	48 x 48	30 x 30
Divided Highway	W6-1	6F.16	48 x 48	30 x 30
Divided Highway Ends	W6-2	6F.16	48 x 48	30 x 30
Two-Way Traffic	W6-3	6F.32	48 x 48	30 x 30
Two-Way Traffic	W6-4	6F.76	12 x 18	—
Hill (symbol)	W7-1	6F.16	48 x 48	30 x 30
Next XX Miles (plaque)	W7-3aP	6F.53	36 x 30	—
Bump	W8-1	6F.16	48 x 48	30 x 30
Dip	W8-2	6F.16	48 x 48	30 x 30
Pavement Ends	W8-3	6F.16	48 x 48	30 x 30
Soft Shoulder	W8-4	6F.44	48 x 48	30 x 30
Slippery When Wet	W8-5	6F.16	48 x 48	30 x 30
Truck Crossing	W8-6	6F.36	48 x 48	30 x 30
Loose Gravel	W8-7	6F.16	48 x 48	30 x 30
Rough Road	W8-8	6F.16	48 x 48	30 x 30
Low Shoulder	W8-9	6F.44	48 x 48	30 x 30
Uneven Lanes	W8-11	6F.45	48 x 48	30 x 30
No Center Line	W8-12	6F.47	48 x 48	30 x 30
Fallen Rocks	W8-14	6F.16	48 x 48	30 x 30
Grooved Pavement	W8-15	6F.16	48 x 48	30 x 30
Motorcycle (plaque)	W8-15P	6F.54	30 x 24	—
Shoulder Drop Off (symbol)	W8-17	6F.44	48 x 48	30 x 30
Shoulder Drop-Off (plaque)	W8-17P	6F.44	30 x 24	—
Road May Flood	W8-18	6F.16	48 x 48	24 x 24
No Shoulder	W8-23	6F.16	48 x 48	30 x 30
Steel Plate Ahead	W8-24	6F.46	48 x 48	30 x 30
Shoulder Ends	W8-25	6F.16	48 x 48	30 x 30
Lane Ends	W9-1,2	6F.16	48 x 48	30 x 30
Center Lane Closed Ahead	W9-3	6F.23	48 x 48	30 x 30
Grade Crossing Advance Warning	W10-1	6F.16	36 dia.	—
Truck	W11-10	6F.36	48 x 48	30 x 30
Double Arrow	W12-1	6F.16	30 x 30	—
Low Clearance	W12-2	6F.16	48 x 48	30 x 30
Advisory Speed (plaque)	W13-1P	6F.52	30 x 30	18 x 18
On Ramp (plaque)	W13-4P	6F.25	36 x 36	—
No Passing Zone (pennant)	W14-3	6F.16	64 x 64 x 48	40 x 40 x 30
XX Feet (plaque)	W16-2P	6F.16	30 x 24	—
Road Work (with distance)	W20-1	6F.18	48 x 48	30 x 30
Detour (with distance)	W20-2	6F.19	48 x 48	30 x 30
Road (Street) Closed (with distance)	W20-3	6F.20	48 x 48	30 x 30
One Lane Road (with distance)	W20-4	6F.21	48 x 48	30 x 30
Lane(s) Closed (with distance)	W20-5,5a	6F.22	48 x 48	30 x 30
Flagger (symbol)	W20-7	6F.31	48 x 48	30 x 30
Flagger Ahead	W20-7-DE	6F.31	48 x 48	30 x 30
Flagger	W20-7a	6F.31	48 x 48	30 x 30
Slow (on Stop/Slow Paddle)	W20-8	6E.03	24 x 24	—
Workers	W21-1,1a	6F.33	48 x 48	30 x 30
Fresh Oil (Tar)	W21-2	6F.34	48 x 48	30 x 30
Road Machinery Ahead	W21-3	6F.35	48 x 48	30 x 30

**Table 6F-1. Temporary Traffic Control Zone Sign and Plaque Sizes (Sheet 3 of 3)**  
**(Delaware Revision)**

Sign or Plaque	Sign Designation	Section	Standard	Minimum
Slow Moving Vehicle	W21-4	6G.06	—	—
Shoulder Work	W21-5	6F.37	48 x 48	30 x 30
Shoulder Closed	W21-5a	6F.37	48 x 48	30 x 30
Shoulder Closed (with distance)	W21-5b	6F.37	48 x 48	30 x 30
Survey Crew	W21-6	6F.38	48 x 48	30 x 30
Utility Work Ahead	W21-7	6F.39	48 x 48	30 x 30
Mowing Ahead	W21-8	6G.06	48 x 48	30 x 30
Blasting Zone Ahead	W22-1	6F.41	48 x 48	30 x 30
Turn Off 2-Way Radio and Cell Phone	W22-2	6F.42	42 x 36	—
End Blasting Zone	W22-3	6F.43	42 x 36	36 x 30
Slow Traffic Ahead	W23-1	6F.27	48 x 24	—
New Traffic Pattern	W23-2P-DE	6F.30	30 x 24	—
Double Reverse Curve (1 lane)	W24-1	6F.49	48 x 48	30 x 30
Double Reverse Curve (2 lanes)	W24-1a	6F.49	48 x 48	30 x 30
Double Reverse Curve (3 lanes)	W24-1b	6F.49	48 x 48	30 x 30
All Lanes (plaque)	W24-1cP	6F.49	30 x 24	—
Wet Road Paint	W25-1-DE	6G.02	48 x 48	—
Wet Road Paint	W25-1-DE1	6G.02	54 x 12	—
Road Work Next XX Miles	G20-1	6F.56	72 x 48	60 x 24
End Road Work	G20-2	6F.57	48 x 24	—
End Mowing	G20-2-DE	6G.06	48 x 24	—
Pilot Car Follow Me	G20-4	6F.58	—	—
Work Zone (plaque)	G20-5aP	6F.12	36 x 24	—
Exit Open	E5-2	6F.28	48 x 36	—
Exit Closed	E5-2a	6F.28	48 x 36	—
Exit Only	E5-3	6F.29	48 x 36	—
Detour	M4-8	6F.59	30 x 15	—
End Detour	M4-8a	6F.59	24 x 18	—
End	M4-8b	6F.59	24 x 12	—
Detour	M4-9	6F.59	48 x 36 – I/F/E* 30 x 24 – Other	—
Detour (Through)	M4-9-DE	6F.59	48 x 36 – I/F/E* 30 x 24 – Other	—
Detour (U-turn)	M4-9-DE1	6F.59	48 x 36 – I/F/E* 30 x 24 – Other	—
Bike/Pedestrian Detour	M4-9a	6F.59	30 x 24	24 x 18
Pedestrian Detour	M4-9b	6F.59	30 x 24	24 x 18
Mini Pedestrian Detour	M4-9b-DE	6F.59	9 x 12	—
Mini Pedestrian Detour End	M4-9b-DE1	6F.59	9 x 12	—
Bike Detour	M4-9c	6F.59	30 x 24	24 x 18
Detour	M4-10	6F.59	48 x 18	—

\* I/F/E – Interstate / Freeway / Expressway

Notes: 1. Larger signs may be used wherever necessary for greater legibility or emphasis  
2. Dimensions are shown in inches and are shown as width x height

**Option:**

02 Where special emphasis is needed, signs may be placed on both the left-hand and right-hand sides of the roadway. Signs mounted on portable supports may be placed within the roadway itself. Signs may also be mounted on or above barricades.

**Support:**

03 The provisions of this Section regarding mounting height apply unless otherwise provided for a particular sign elsewhere in this Manual.

**Standard:**

04 **(DE Revision)** The minimum height, measured vertically from the bottom of the sign to the elevation of the near edge of the pavement, of signs installed at the side of the road in rural areas shall be 7 feet (see Figure 6F-1).

05 The minimum height, measured vertically from the bottom of the sign to the top of the curb, or in the absence of curb, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, of signs installed at the side of the road in business, commercial, or residential areas where parking or pedestrian movements are likely to occur, or where the view of the sign might be obstructed, shall be 7 feet (see Figure 6F-1).

06 The minimum height, measured vertically from the bottom of the sign to the sidewalk, of signs installed above sidewalks shall be 7 feet.

**Option:**

06A **(DE Revision)** When signs are mounted on portable sign supports, the minimum mounting heights may be reduced from 7 feet to either 5 feet or 1 foot depending on the duration of use provided in Paragraphs 8A through 8C.

07 The height to the bottom of a secondary sign mounted below another sign may be 1 foot less than the height provided in Paragraphs 4 through 6.

**Guidance:**

08 Neither portable nor permanent sign supports should be located on sidewalks, bicycle facilities, or areas designated for pedestrian or bicycle traffic. If the bottom of a secondary sign that is mounted below another sign is mounted lower than 7 feet above a pedestrian sidewalk or pathway (see Section 6D.02), the secondary sign should not project more than 4 inches into the pedestrian facility.

08A **(DE Revision)** Except as provided in Paragraph 8C, signs mounted on portable sign supports with a minimum mounting height of 5 feet should not be used for a duration of longer than 3 days.

08B **(DE Revision)** Except as provided in Paragraph 8C, signs mounted on portable sign supports with a minimum mounting height of 1 foot will only be permitted upon approval from DelDOT Traffic.

**Option:**

08C **(DE Revision)** The R9-8 through R9-11a series, R11 series, W1-6 through W1-8 series, M4-10, E5-1, or other similar type signs (see Figures 6F-3, 6F-4, and 6F-5) may be used on portable sign supports that do not meet the minimum mounting heights provided in Paragraphs 4 through 6 for longer than 3 days.

**Standard:**

08D **(DE Revision)** Sign supports shall be crashworthy. Where large signs having an area exceeding 50 square feet are installed on multiple breakaway posts, the clearance from the ground to the bottom of the sign shall be at least 7 feet.

**Standard:**

09 Where it has been determined that the accommodation of pedestrians with disabilities is necessary, signs shall be mounted and placed in accordance with Section 4.4 of the “Americans with Disabilities Act Accessibility Guidelines for Buildings and Facilities (ADAAG)” (see Section 1A.11).

10 Signs mounted on barricades and barricade/sign combinations shall be crashworthy.

**Guidance:**

11 **(DE Revision)** Paragraph relocated.



Option:

12 (DE Revision) Paragraph relocated.

Support:

13 Methods of mounting signs other than on posts are illustrated in Figure 6F-2.

Guidance:

14 Signs mounted on Type 3 Barricades should not cover more than 50 percent of the top two rails or 33 percent of the total area of the three rails.

Standard:


15 (DE Revision) Paragraph relocated.

Option:


16 (DE Revision) Paragraph deleted.

17 For mobile operations, a sign may be mounted on a work vehicle, a shadow vehicle, or a trailer stationed in advance of the TTC zone or moving along with it.


**Figure 6F-1. Height and Lateral Location of Signs—Typical Installations**  
(Delaware Revision)

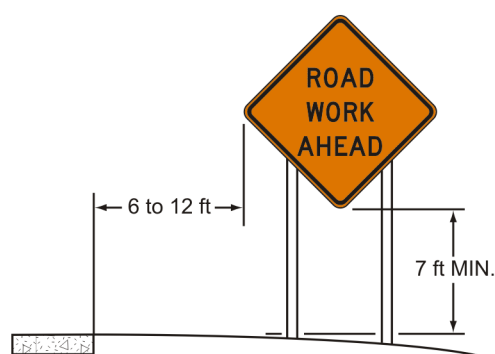


**A - RURAL AREA**

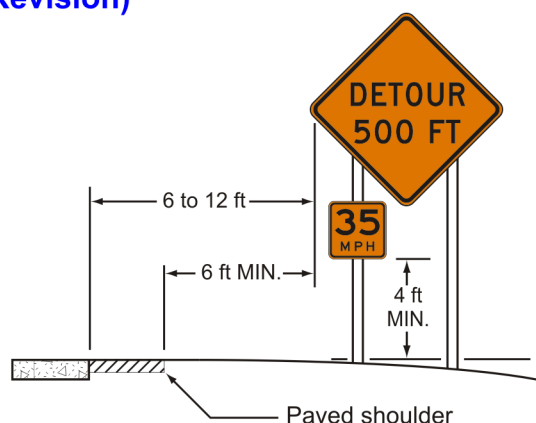

**B - RURAL AREA WITH ADVISORY SPEED PLAQUE**

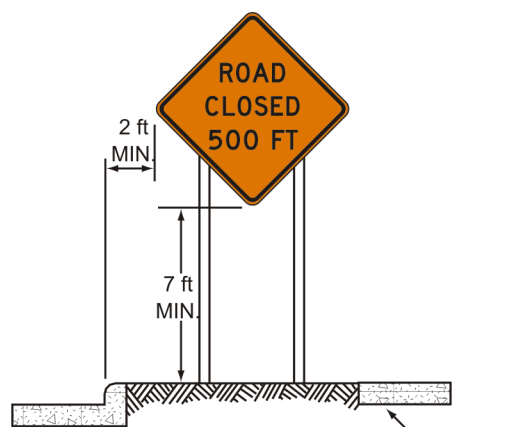


**C - BUSINESS, COMMERCIAL,  
OR RESIDENTIAL AREA**

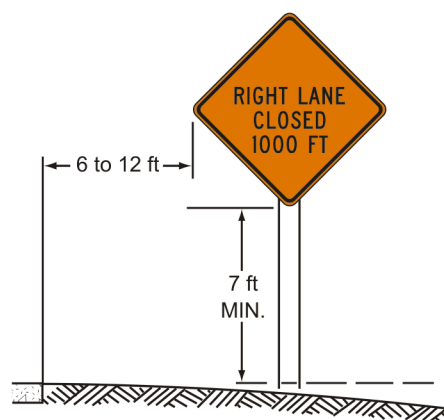


**D - BUSINESS, COMMERCIAL, OR RESIDENTIAL  
AREA (WITHOUT CURB)**


**Figure 6F-2. Methods of Mounting Signs Other Than on Posts**  
**(Delaware Revision)**

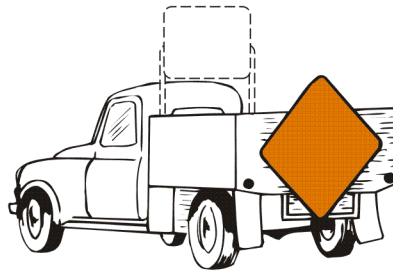

PORTABLE MOUNTINGS

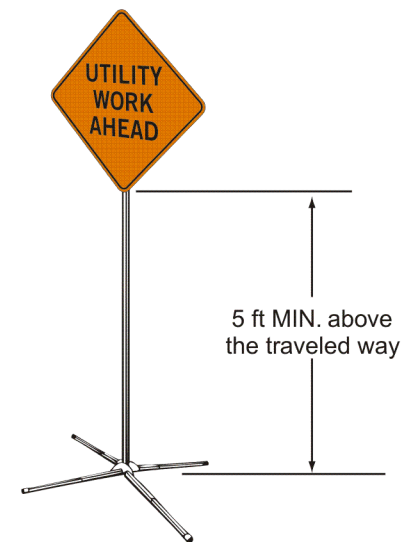


Operations < 72 hrs.

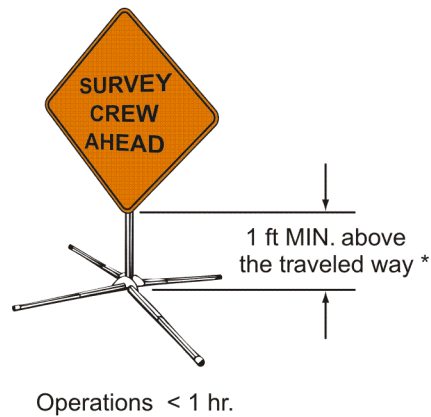

Operations < 1 hr.

TEMPORARY MOUNTINGS

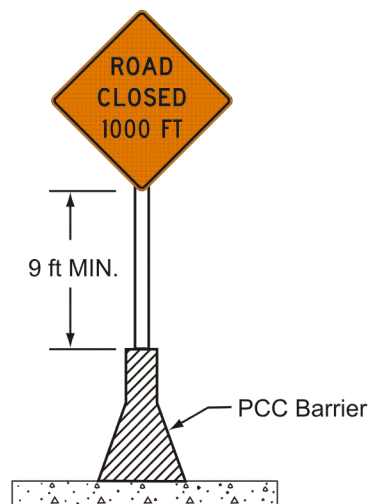

\* 1 ft mounting height only permitted with approval from DelDOT Traffic

BARRIER MOUNTING

**Figure 6F-3. Regulatory Signs and Plaques in Temporary Traffic Control Zones**  
 (Sheet 1 of 2)  
 (Delaware Revision)



R1-1



R1-2



R1-2aP



R1-7



R1-8



R1-10P-DE



G20-5aP



R2-1



R2-6P




R2-6aP




R2-6bP



R2-10



R2-11



R2-12



R3-1



R3-2




R3-3



R3-4



R3-5



R3-6



R3-7



R3-8



R3-18



R3-27



R4-1



R4-2



R4-7



R4-7c



R4-9



R5-1

**Figure 6F-3. Regulatory Signs and Plaques in Temporary Traffic Control Zones**  
 (Sheet 2 of 2)  
**(Delaware Revision)**



R5-1a



R6-1



R6-2



R8-3



R9-8



R9-9



R9-10




R9-11




R9-11a



R11-2

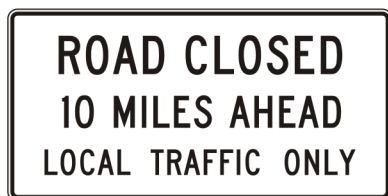

R11-3a

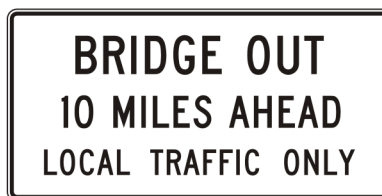

R11-3b




R11-4



R12-1



R12-2



R12-5-DE

17A (DE Revision) If utility conflicts or concrete sidewalks/medians prevent the installation of permanent signs in the appropriate location, portable sign supports may be used.

Support:

18 If alterations are made to specific traffic control device supports that have been successfully crash tested in accordance with NCHRP Report 350 and AASHTO's MASH, the altered supports might not be considered to be crashworthy.

**Standard:**

19 (DE Revision) When portable signs are no longer in use, the signs and their supports shall be removed or placed behind positive protection.

## Section 6F.04 Sign Maintenance

*Guidance:*

01 Signs should be properly maintained for cleanliness, visibility, and correct positioning.

02 Signs that have lost significant legibility should be promptly replaced.

Support:

03 (DE Revision) Section 2A.08 and 6F.01 contain information regarding the retroreflectivity of signs, including the signs that are used in TTC zones.

*Guidance:*

04 (DE Revision) On high-speed expressways or other situations where temporary sign stands may be susceptible to overturning in the wind, ballasting should be used.

Option:

05 (DE Revision) In accordance with the temporary sign stand manufacturer's recommendations, sandbags, or a manufacturer approved alternative, may be placed on the lower parts of the frame or the stays of the temporary sign stand to provide the required ballast.

**Standard:**

06 (DE Revision) If used, sand ballasts shall consist of a suitable mixture of material to preclude the ballast from freezing.

## Section 6F.05 Regulatory Sign Authority

Support:

01 Regulatory signs such as those shown in Figure 6F-3 inform road users of traffic laws or regulations and indicate the applicability of legal requirements that would not otherwise be apparent.

**Standard:**

02 Regulatory signs shall be authorized by the public agency or official having jurisdiction and shall conform with Chapter 2B.

*Guidance:*

03 (DE Revision) A Traffic Control Device Authorization should be approved by DelDOT Traffic prior to the installation of a TTC regulatory sign or modification to an existing TTC regulatory sign.

## Section 6F.06 Regulatory Sign Design

**Standard:**

01 TTC regulatory signs shall comply with the Standards for regulatory signs presented in Part 2 and in the FHWA's "Standard Highway Signs and Markings" book (see Section 1A.11).

Support:

02 Regulatory signs are generally rectangular with a black legend and border on a white background. Exceptions include the STOP, YIELD, DO NOT ENTER, WRONG WAY, and ONE WAY signs.

Option:

03 The ONE WAY sign may be either a horizontal or vertical rectangular sign.

## Section 6F.07 Regulatory Sign Applications

### Standard:

01 If a TTC zone requires regulatory measures different from those existing, the existing permanent regulatory devices shall be removed or covered and superseded by the appropriate temporary regulatory signs. This change shall be made in compliance with applicable ordinances or statutes of the jurisdiction.

## Section 6F.08 ROAD (STREET) CLOSED Sign (R11-2)

### Guidance:

01 The ROAD (STREET) CLOSED (R11-2) sign (see Figure 6F-3) should be used when the roadway is closed to all road users except contractors' equipment or officially authorized vehicles. The R11-2 sign should be accompanied by appropriate warning and detour signing.

### Option:

02 The words BRIDGE OUT (or BRIDGE CLOSED) may be substituted for ROAD (STREET) CLOSED where applicable.

### Guidance:

03 The ROAD (STREET) CLOSED sign should be installed at or near the center of the roadway on or above a Type 3 Barricade that closes the roadway (see Section 6F.68).

### Standard:

04 The ROAD (STREET) CLOSED sign shall not be used where road user flow is maintained through the TTC zone with a reduced number of lanes on the existing roadway or where the actual closure is some distance beyond the sign.

## Section 6F.09 Local Traffic Only Signs (R11-3a, R11-4)

### Guidance:

01 The Local Traffic Only signs (see Figure 6F-3) should be used where road user flow detours to avoid a closure some distance beyond the sign, but where local road users can use the roadway to the point of closure. These signs should be accompanied by appropriate warning and detour signing.

02 In rural applications, the Local Traffic Only sign should have the legend ROAD CLOSED XX MILES AHEAD, LOCAL TRAFFIC ONLY (R11-3a).

### Option:

03 In urban areas, the legend ROAD (STREET) CLOSED TO THRU TRAFFIC (R11-4) or ROAD CLOSED, LOCAL TRAFFIC ONLY may be used.

04 In urban areas, a word message that includes the name of an intersecting street name or well-known destination may be substituted for the words XX MILES AHEAD on the R11-3a sign where applicable.

05 The words BRIDGE OUT (or BRIDGE CLOSED) may be substituted for the words ROAD (STREET) CLOSED on the R11-3a or R11-4 sign where applicable.

## Section 6F.10 Weight Limit Signs (R12-1, R12-2, R12-5)

### Standard:

01 A Weight Limit sign (see Figure 6F-3), which shows the gross weight or axle weight that is permitted on the roadway or bridge, shall be consistent with State or local regulations and shall not be installed without the approval of the authority having jurisdiction over the highway.

02 When weight restrictions are imposed because of the activity in a TTC zone, a marked detour shall be provided for vehicles weighing more than the posted limit.

## Section 6F.11 STAY IN LANE Sign (R4-9)

### Option:

01 A STAY IN LANE (R4-9) sign (see Figure 6F-3) may be used where a multi-lane shift has been incorporated as part of the TTC on a highway to direct road users around road work that occupies part of the roadway on a multi-lane highway.

## Section 6F.12 Work Zone and Higher Fines Signs and Plaques

### Option:

01 A WORK ZONE (G20-5aP) plaque (see Figure 6F-3) may be mounted above a Speed Limit sign to emphasize that a reduced speed limit is in effect within a TTC zone. An END WORK ZONE SPEED LIMIT (R2-12) sign (see Figure 6F-3) may be installed at the downstream end of the reduced speed limit zone.

### Guidance:

02 A BEGIN HIGHER FINES ZONE (R2-10) sign (see Figure 6F-3) should be installed at the upstream end of a work zone where increased fines are imposed for traffic violations, and an END HIGHER FINES ZONE (R2-11) sign (see Figure 6F-3) should be installed at the downstream end of the work zone.

### Option:

03 Alternate legends such as BEGIN (or END) DOUBLE FINES ZONE may also be used for the R2-10 and R2-11 signs.

04 A FINES HIGHER, FINES DOUBLE, or \$XX FINE plaque (see Section 2B.17 and Figure 6F-3) may be mounted below the Speed Limit sign if increased fines are imposed for traffic violations within the TTC zone.

04A (DE Revision) The BEGIN HIGHER FINES ZONE sign and FINES HIGHER plaque may be omitted within TTC zones per §4105 of Title 21 of the Delaware Code.

05 Individual signs and plaques for work zone speed limits and higher fines may be combined into a single sign or may be displayed as an assembly of signs and plaques.

## Section 6F.13 PEDESTRIAN CROSSWALK Sign (R9-8)

### Option:

01 The PEDESTRIAN CROSSWALK (R9-8) sign (see Figure 6F-3) may be used to indicate where a temporary crosswalk has been established.

### Standard:

02 If a temporary crosswalk is established, it shall be accessible to pedestrians with disabilities in accordance with Section 6D.02.

## Section 6F.14 SIDEWALK CLOSED Signs (R9-9, R9-10, R9-11, R9-11a)

### Guidance:

01 SIDEWALK CLOSED signs (see Figure 6F-3) should be used where pedestrian flow is restricted. Bicycle/Pedestrian Detour (M4-9a) signs or Pedestrian Detour (M4-9b) signs should be used where pedestrian flow is rerouted (see Section 6F.59).

02 The SIDEWALK CLOSED (R9-9) sign should be installed at the beginning of the closed sidewalk, at the intersections preceding the closed sidewalk, and elsewhere along the closed sidewalk as needed.

03 The SIDEWALK CLOSED, (ARROW) USE OTHER SIDE (R9-10) sign should be installed at the beginning of the restricted sidewalk when a parallel sidewalk exists on the other side of the roadway.

04 The SIDEWALK CLOSED AHEAD, (ARROW) CROSS HERE (R9-11) sign should be used to indicate to pedestrians that sidewalks beyond the sign are closed and to direct them to open crosswalks, sidewalks, or other travel paths.

05 The SIDEWALK CLOSED, (ARROW) CROSS HERE (R9-11a) sign should be installed just beyond the point to which pedestrians are being redirected.

### Support:

06 These signs are typically mounted on a detectable barricade to encourage compliance and to communicate with pedestrians that the sidewalk is closed. Printed signs are not useful to many pedestrians with visual disabilities. A barrier or barricade detectable by a person with a visual disability is sufficient to indicate that a sidewalk is closed. If the barrier is continuous with detectable channelizing devices for an alternate route, accessible signing might not be necessary. An audible information device is needed when the detectable barricade or barrier for an alternate channelized route is not continuous.

## Section 6F.15 Special Regulatory Signs

Option:

- 01 (DE Revision) Special regulatory signs, such as a TAKE YOUR TURN (R1-10P-DE) sign (see Figure 6F-3), may be used based on engineering judgment consistent with regulatory requirements.

Guidance:

- 02 *Special regulatory signs should comply with the general requirements of color, shape, and alphabet size and series. The sign message should be brief, legible, and clear.*

## Section 6F.16 Warning Sign Function, Design, and Application

Support:

- 01 TTC zone warning signs (see Figure 6F-4) notify road users of specific situations or conditions on or adjacent to a roadway that might not otherwise be apparent.

Standard:

- 02 (DE Revision) TTC warning signs shall comply with the Standards for warning signs presented in Part 2 and in FHWA's "Standard Highway Signs and Markings" book (see Section 1A.11). Except as provided in Paragraph 3, TTC warning signs shall be diamond-shaped with a black legend and border on an **fluorescent orange background**, except for the W10-1 sign which shall have a black legend and border on a **yellow background**, and except for signs that are required or recommended in Parts 2 or 7 to have **fluorescent yellow-green backgrounds**.

Option:

- 03 Warning signs used for TTC incident management situations may have a black legend and border on a fluorescent pink background.
- 04 Mounting or space considerations may justify a change from the standard diamond shape.
- 05 In emergencies, available warning signs having yellow backgrounds may be used if signs with orange or fluorescent pink backgrounds are not at hand.

Guidance:

- 06 *Where roadway or road user conditions require greater emphasis, larger than standard size warning signs should be used, with the symbol or legend enlarged approximately in proportion to the outside dimensions.*
- 07 *Where any part of the roadway is obstructed or closed by work activities or incidents, advance warning signs should be installed to alert road users well in advance of these obstructions or restrictions.*
- 08 *Where road users include pedestrians, the provision of supplemental audible information or detectable barriers or barricades should be considered for people with visual disabilities.*

Support:

- 09 Detectable barriers or barricades communicate very clearly to pedestrians who have visual disabilities that they can no longer proceed in the direction that they are traveling.

Option:

- 10 Advance warning signs may be used singly or in combination.
- 11 Where distances are not displayed on warning signs as part of the message, a supplemental plaque with the distance legend may be mounted immediately below the sign on the same support.

## Section 6F.17 Position of Advance Warning Signs

Guidance:


- 01 *Where highway conditions permit, warning signs should be placed in advance of the TTC zone at varying distances depending on roadway type, condition, and posted speed. Table 6C-1 contains information regarding the spacing of advance warning signs. Where a series of two or more advance warning signs is used, the closest sign to the TTC zone should be placed approximately 100 feet for low-speed urban streets to 1,000 feet or more for freeways and expressways.*
- 02 *Where multiple advance warning signs are needed on the approach to a TTC zone, the ROAD WORK AHEAD (W20-1) sign should be the first advance warning sign encountered by road users.*




**Figure 6F-4. Warning Signs and Plaques in Temporary Traffic Control Zones (Sheet 1 of 3)**  
**(Delaware Revision)**



**Figure 6F-4. Warning Signs and Plaques in Temporary Traffic Control Zones (Sheet 2 of 3)**  
**(Delaware Revision)**

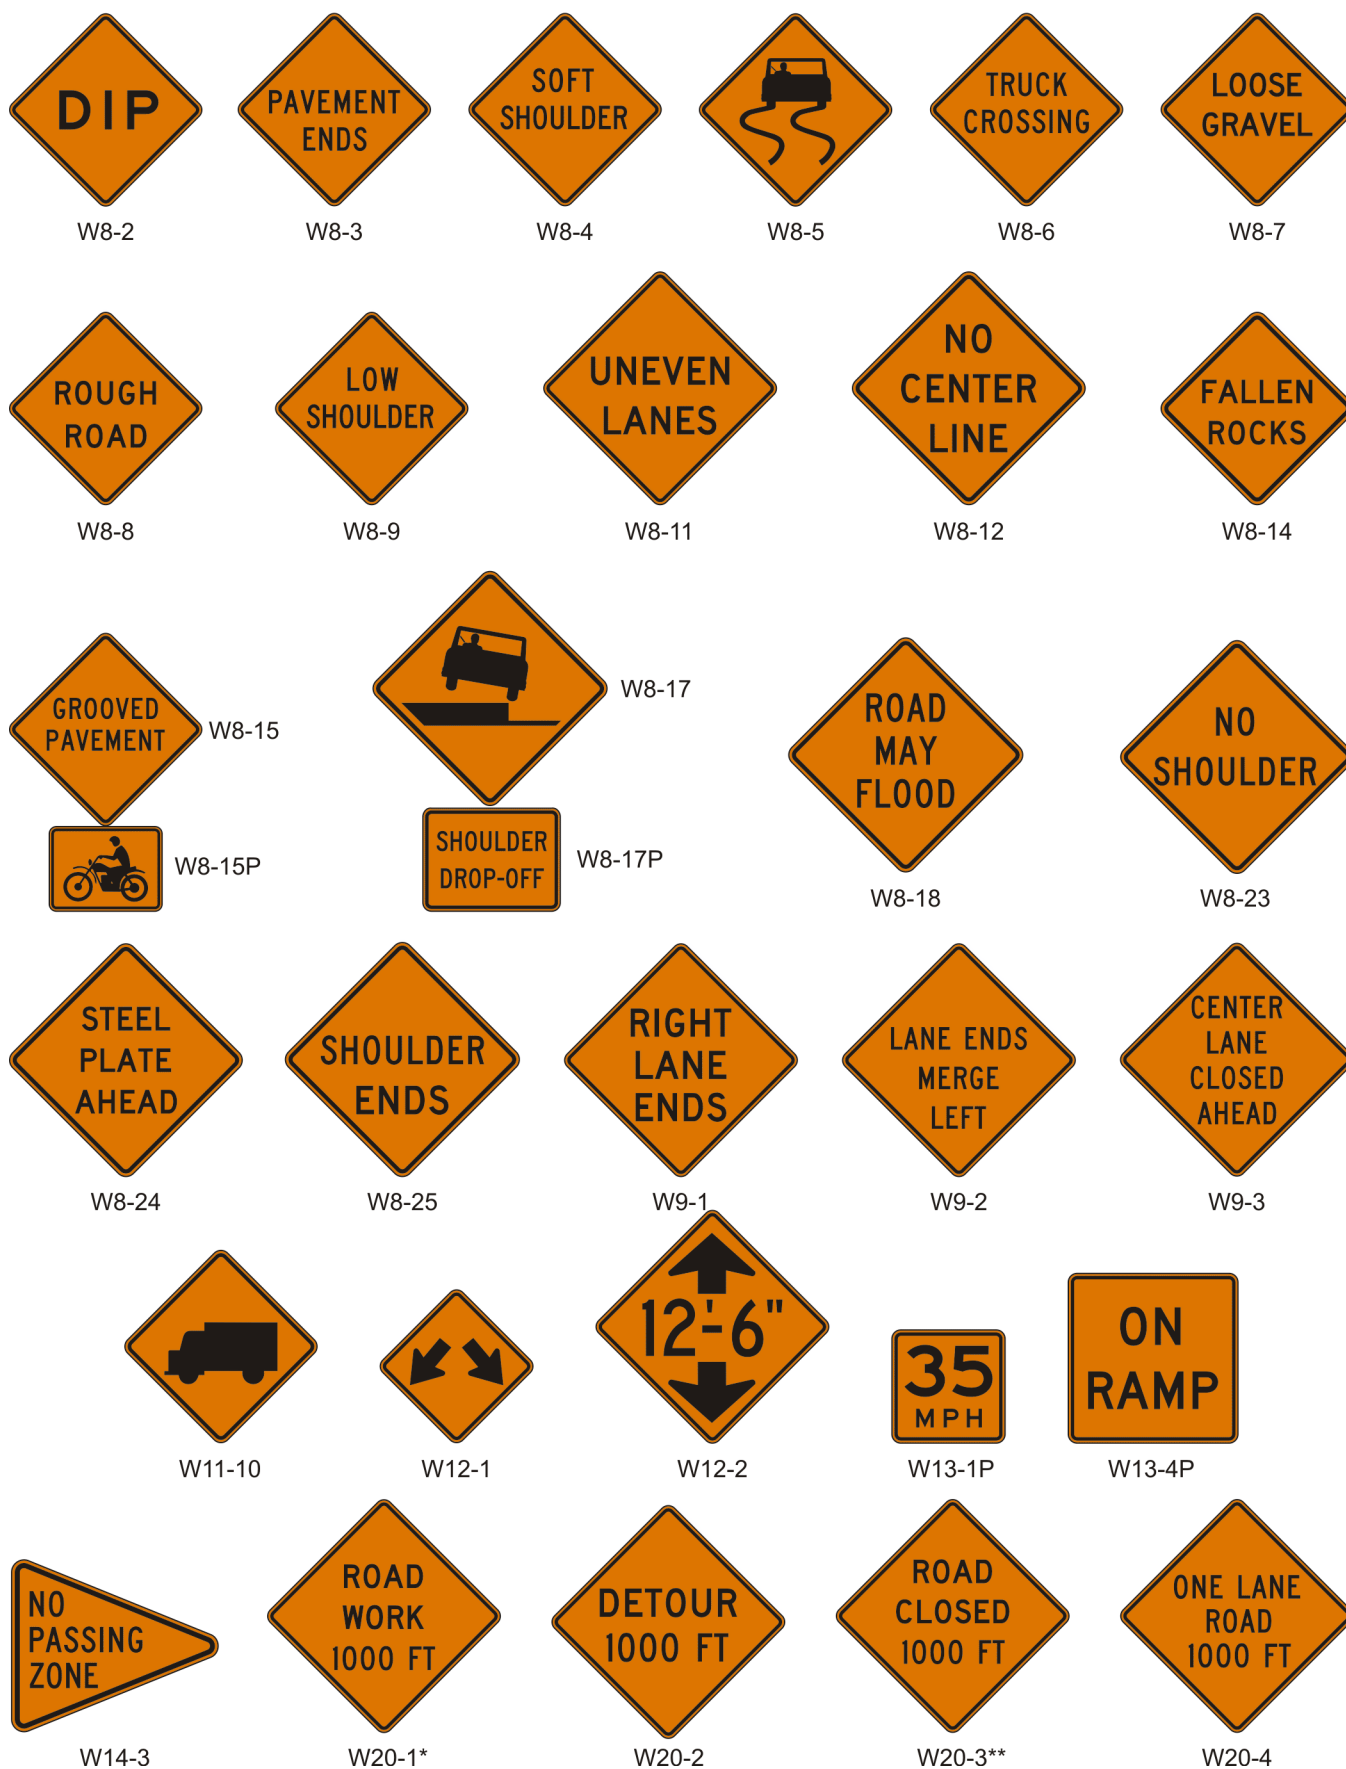

**Figure 6F-4. Warning Signs and Plaques in Temporary Traffic Control Zones (Sheet 3 of 3)**  
**(Delaware Revision)**

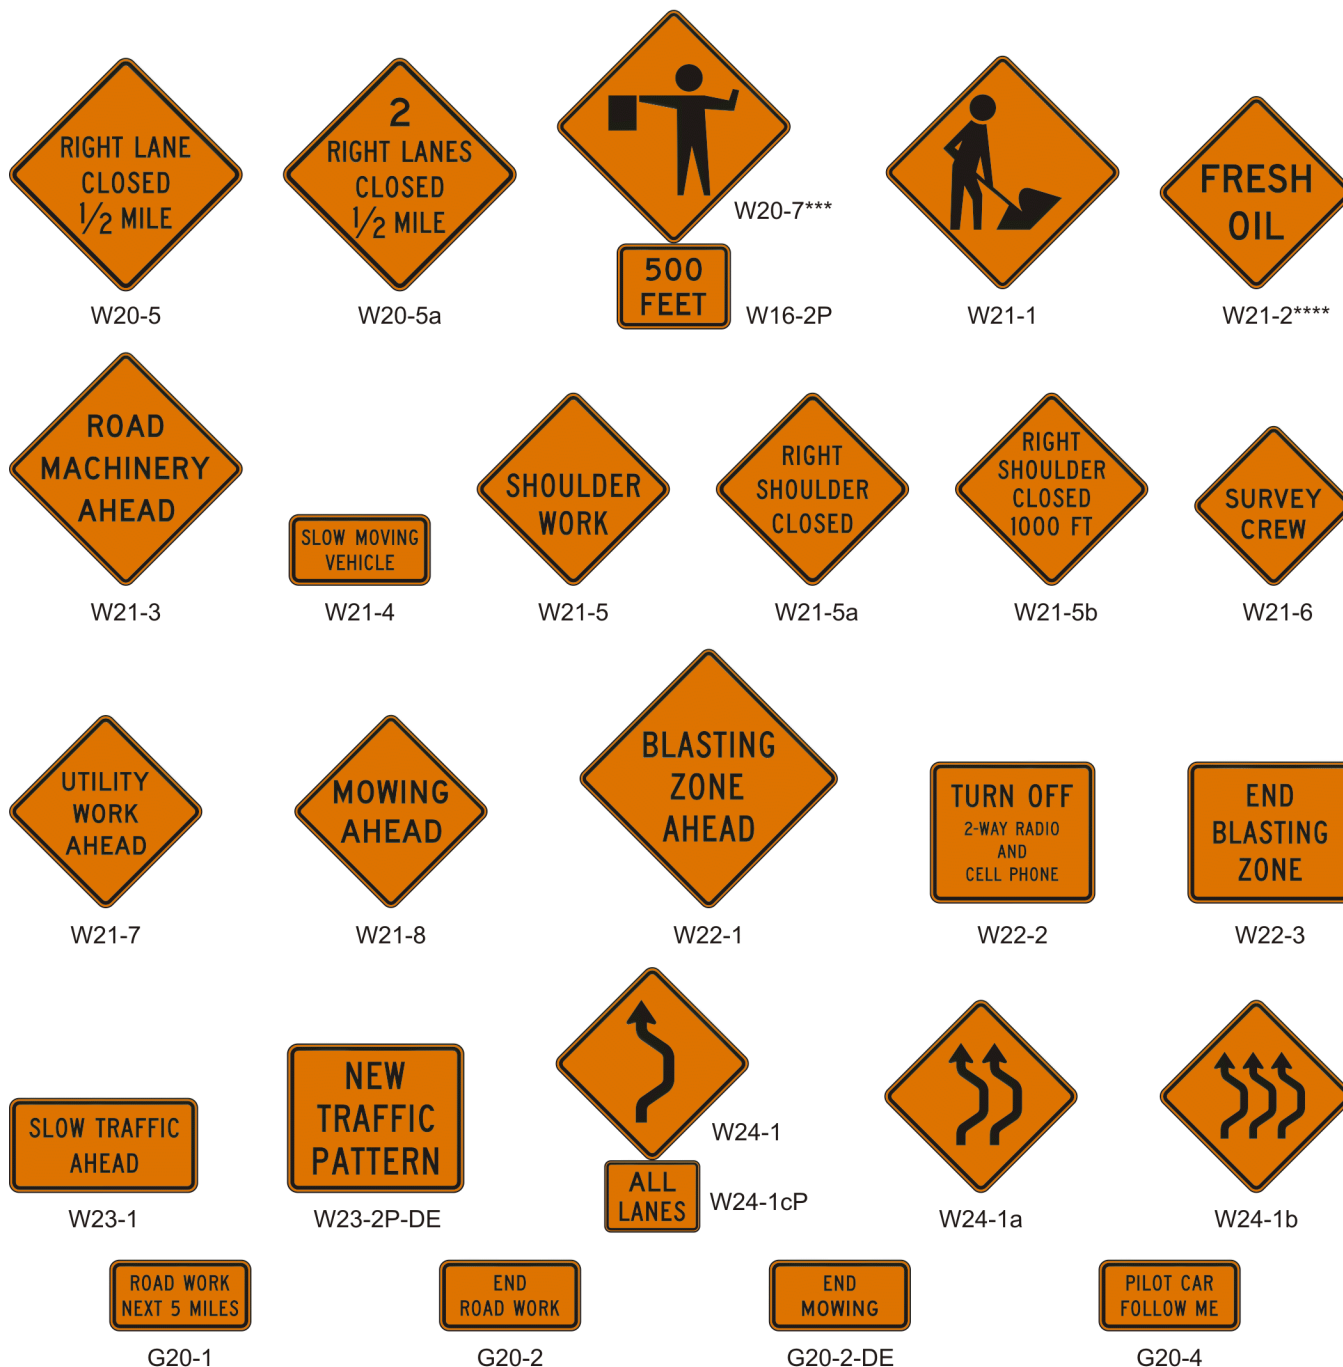

\* An optional STREET WORK word message sign is shown in the "Standard Highway Signs and Markings" book.

\*\* An optional STREET CLOSED word message sign is shown in the "Standard Highway Signs and Markings" book.

\*\*\* An optional FLAGGER (W20-7a) word message sign is shown in the "Standard Highway Signs and Markings" book.

\*\*\*\* An optional FRESH TAR word message sign is shown in the "Standard Highway Signs and Markings" book.

*02A (DE Revision) Signs erected for individual operations within the TTC zone limits of a construction project should be placed with appropriate spacing and should not conflict with advance warning signs that are to remain for the entire duration of the project.*

Support:

03 Various conditions, such as limited sight distance or obstructions that might require a driver to reduce speed or stop, might require additional advance warning signs.

Option:

04 As an alternative to a specific distance on advance warning signs, the word AHEAD may be used.

Support:

05 At TTC zones on lightly-traveled roads, all of the advance warning signs prescribed for major construction might not be needed.

Option:

06 Utility work, maintenance, or minor construction can occur within the TTC zone limits of a major construction project, and additional warning signs may be needed.

Guidance:

07 *Utility, maintenance, and minor construction signing and TTC should be coordinated with appropriate authorities so that road users are not confused or misled by the additional TTC devices.*

## **Section 6F.18 ROAD (STREET) WORK Sign (W20-1)**

Guidance:

01 *The ROAD (STREET) WORK (W20-1) sign (see Figure 6F-4), which serves as a general warning of obstructions or restrictions, should be located in advance of the work space or any detour, on the road where the work is taking place.*

02 *Where traffic can enter a TTC zone from a crossroad or a major (high-volume) driveway, an advance warning sign should be used on the crossroad or major driveway.*

**Standard:**

03 **The ROAD (STREET) WORK (W20-1) sign shall have the legend ROAD (STREET) WORK, XX FEET, XX MILES, or AHEAD.**

## **Section 6F.19 DETOUR Sign (W20-2)**

Guidance:

01 *The DETOUR (W20-2) sign (see Figure 6F-4) should be used in advance of a road user detour over a different roadway or route.*

**Standard:**

02 **The DETOUR sign shall have the legend DETOUR, XX FEET, XX MILES, or AHEAD.**

## **Section 6F.20 ROAD (STREET) CLOSED Sign (W20-3)**

Guidance:

01 *The ROAD (STREET) CLOSED (W20-3) sign (see Figure 6F-4) should be used in advance of the point where a highway is closed to all road users, or to all but local road users.*

**Standard:**

02 **The ROAD (STREET) CLOSED sign shall have the legend ROAD (STREET) CLOSED, XX FEET, XX MILES, or AHEAD.**

## **Section 6F.21 ONE LANE ROAD Sign (W20-4)**

**Standard:**

01 **The ONE LANE ROAD (W20-4) sign (see Figure 6F-4) shall be used only in advance of that point where motor vehicle traffic in both directions must use a common single lane (see Section 6C.10). It shall have the legend ONE LANE ROAD, XX FEET, XX MILES, or AHEAD.**

## Section 6F.22 Lane(s) Closed Signs (W20-5, W20-5a)

### Standard:

- 01 The Lane(s) Closed sign (see Figure 6F-4) shall be used in advance of that point where one or more through lanes of a multi-lane roadway are closed.
- 02 For a single lane closure, the Lane Closed (W20-5) sign (see Figure 6F-4) shall have the legend RIGHT (LEFT) LANE CLOSED, XX FEET, XX MILES, or AHEAD. Where two adjacent lanes are closed, the W20-5a sign (see Figure 6F-4) shall have the legend XX RIGHT (LEFT) LANES CLOSED, XX FEET, XX MILES, or AHEAD.

## Section 6F.23 CENTER LANE CLOSED AHEAD Sign (W9-3)

### Guidance:

- 01 The CENTER LANE CLOSED AHEAD (W9-3) sign (see Figure 6F-4) should be used in advance of that point where work occupies the center lane(s) and approaching motor vehicle traffic is directed to the right or left of the work zone in the center lane.

## Section 6F.24 Lane Ends Sign (W4-2) and MERGE (LEFT or RIGHT) Sign (W4-2-DE)

### Option:

- 01 (DE Revision) The Lane Ends (W4-2) symbol sign or MERGE (LEFT or RIGHT) (W4-2-DE) sign (see Figure 6F-4) may be used to warn drivers of the reduction in the number of lanes for moving motor vehicle traffic in the direction of travel on a multi-lane roadway.

## Section 6F.25 ON RAMP Plaque (W13-4P)

### Guidance:

- 01 When work is being done on a ramp, but the ramp remains open, the ON RAMP (W13-4P) plaque (see Figure 6F-4) should be used to supplement the advance ROAD WORK sign.

## Section 6F.26 RAMP NARROWS Sign (W5-4)

### Guidance:

- 01 The RAMP NARROWS (W5-4) sign (see Figure 6F-4) should be used in advance of the point where work on a ramp reduces the normal width of the ramp along a part or all of the ramp.

## Section 6F.27 SLOW TRAFFIC AHEAD Sign (W23-1)

### Option:

- 01 The SLOW TRAFFIC AHEAD (W23-1) sign (see Figure 6F-4) may be used on a shadow vehicle, usually mounted on the rear of the most upstream shadow vehicle, along with other appropriate signs for mobile operations to warn of slow moving work vehicles. A ROAD WORK (W20-1) sign may also be used with the SLOW TRAFFIC AHEAD sign.

## Section 6F.28 EXIT OPEN and EXIT CLOSED Signs (E5-2, E5-2a)

### Option:

- 01 An EXIT OPEN (E5-2) or EXIT CLOSED (E5-2a) sign (see Figure 6F-5) may be used to supplement other warning signs where work is being conducted in the vicinity of an exit ramp and where the exit maneuver for vehicular traffic using the ramp is different from the normal condition.

### Guidance:

- 02 When an exit ramp is closed, an EXIT CLOSED sign panel with a black legend and border on an orange background should be placed diagonally across the interchange/intersection guide signs.


## Section 6F.29 EXIT ONLY Sign (E5-3)

### Option:

- 01 An EXIT ONLY (E5-3) sign (see Figure 6F-5) may be used to supplement other warning signs where work is being conducted in the vicinity of an exit ramp and where the exit maneuver for vehicular traffic using the ramp is different from the normal condition.



**Figure 6F-5. Exit Open and Closed and Detour Signs  
(Delaware Revision)**

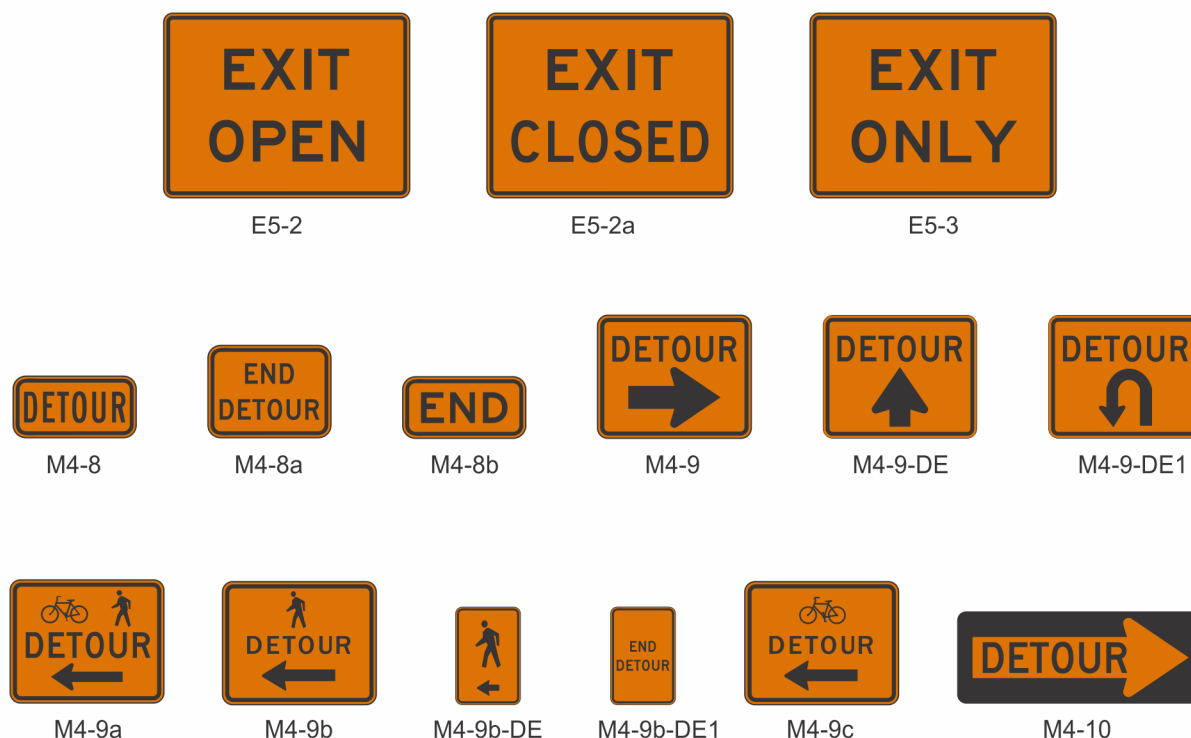

### Section 6F.30 NEW TRAFFIC PATTERN Sign (W23-2P-DE)

Option:

01 (DE Revision) A NEW TRAFFIC PATTERN (W23-2P-DE) sign (see Figure 6F-4) may be used on the approach to an intersection or along a section of roadway to provide advance warning of a change in traffic patterns, such as revised lane usage, roadway geometry, or signal phasing.

Guidance:

02 (DE Revision) The NEW TRAFFIC PATTERN (W23-2P-DE) plaque (see Section 2C.62 and Figure 2C-12) should be used along state-maintained roadways to provide advance warning of a change in a traffic pattern. If used, the NEW TRAFFIC PATTERN plaque should be mounted below a warning or regulatory sign and should be removed when the traffic pattern returns to normal, when the changed pattern is no longer considered to be new, or within six months.

### Section 6F.31 Flagger Signs (W20-7, W20-7-DE, W20-7a)

Guidance:

01 (DE Revision) The Flagger (W20-7) symbol sign or FLAGGER AHEAD (W20-7-DE) sign (see Figure 6F-4) should be used in advance of any point where a flagger is stationed to control road users.

Option:

02 A distance legend may be displayed on a supplemental plaque below the Flagger sign. The sign may be used with appropriate legends or in conjunction with other warning signs, such as the BE PREPARED TO STOP (W3-4) sign (see Figure 6F-4).

03 The FLAGGER (W20-7a) word message sign with distance legends may be substituted for the Flagger (W20-7) symbol sign.

### Section 6F.32 Two-Way Traffic Sign (W6-3)

#### Guidance:

01 *When one roadway of a normally divided highway is closed, with two-way vehicular traffic maintained on the other roadway, the Two-Way Traffic (W6-3) sign (see Figure 6F-4) should be used at the beginning of the two-way vehicular traffic section and at intervals to remind road users of opposing vehicular traffic.*

### Section 6F.33 Workers Signs (W21-1, W21-1a)

#### Option:

01 A Workers (W21-1) symbol sign (see Figure 6F-4) may be used to alert road users of workers in or near the roadway.

#### Guidance:

02 *In the absence of other warning devices, a Workers symbol sign should be used when workers are in the roadway.*

#### Option:

03 The WORKERS (W21-1a) word message sign may be used as an alternate to the Workers (W21-1) symbol sign.

### Section 6F.34 FRESH OIL (TAR) Sign (W21-2)

#### Guidance:

01 *The FRESH OIL (TAR) (W21-2) sign (see Figure 6F-4) should be used to warn road users of the surface treatment.*

### Section 6F.35 ROAD MACHINERY AHEAD Sign (W21-3)

#### Option:

01 The ROAD MACHINERY AHEAD (W21-3) sign (see Figure 6F-4) may be used to warn of machinery operating in or adjacent to the roadway.

### Section 6F.36 Motorized Traffic Signs (W8-6, W11-10)

#### Option:

01 Motorized Traffic (W8-6, W11-10) signs may be used to alert road users to locations where unexpected travel on the roadway or entries into or departures from the roadway by construction vehicles might occur. The TRUCK CROSSING (W8-6) word message sign may be used as an alternate to the Truck Crossing (W11-10) symbol sign (see Figure 6F-4) where there is an established construction vehicle crossing of the roadway.

#### Support:

02 These locations might be relatively confined or might occur randomly over a segment of roadway.

### Section 6F.37 Shoulder Work Signs (W21-5, W21-5a, W21-5b)

#### Support:

01 Shoulder Work signs (see Figure 6F-4) warn of maintenance, reconstruction, or utility operations on the highway shoulder where the roadway is unobstructed.

#### Standard:

02 **The Shoulder Work sign shall have the legend SHOULDER WORK (W21-5), RIGHT (LEFT) SHOULDER CLOSED (W21-5a), or RIGHT (LEFT) SHOULDER CLOSED XX FT or AHEAD (W21-5b).**

#### Option:

03 The Shoulder Work sign may be used in advance of the point on a non-limited access highway where there is shoulder work. It may be used singly or in combination with a ROAD WORK NEXT XX MILES or ROAD WORK AHEAD sign.

#### Guidance:

04 *On freeways and expressways, the RIGHT (LEFT) SHOULDER CLOSED XX FT or AHEAD (W21-5b) sign followed by RIGHT (LEFT) SHOULDER CLOSED (W21-5a) sign should be used in advance of the point where the shoulder work occurs and should be preceded by a ROAD WORK AHEAD sign.*

**Section 6F.38 SURVEY CREW Sign (W21-6)***Guidance:*

01 The *SURVEY CREW (W21-6)* sign (see Figure 6F-4) should be used to warn of surveying crews working in or adjacent to the roadway.

**Section 6F.39 UTILITY WORK Sign (W21-7)***Option:*

01 The UTILITY WORK (W21-7) sign (see Figure 6F-4) may be used as an alternate to the ROAD (STREET) WORK (W20-1) sign for utility operations on or adjacent to a highway.

*Support:*

02 Typical examples of where the UTILITY WORK sign is used appear in Figures 6H-4, 6H-6, 6H-10, 6H-15, 6H-18, 6H-21, 6H-22, 6H-26, and 6H-33.

**Standard:**

03 The UTILITY WORK sign shall carry the legend UTILITY WORK, XX FEET, XX MILES, or AHEAD.

**Section 6F.40 Signs for Blasting Areas***Support:*

01 Radio-Frequency (RF) energy can cause the premature firing of electric detonators (blasting caps) used in TTC zones.

**Standard:**

02 Road users shall be warned to turn off mobile radio transmitters and cellular telephones where blasting operations occur. A sequence of signs shall be prominently displayed to direct operators of mobile radio equipment, including cellular telephones, to turn off transmitters in a blasting area. These signs shall be covered or removed when there are no explosives in the area or the area is otherwise secured.

**Section 6F.41 BLASTING ZONE AHEAD Sign (W22-1)****Standard:**

01 The BLASTING ZONE AHEAD (W22-1) sign (see Figure 6F-4) shall be used in advance of any TTC zone where explosives are being used. The TURN OFF 2-WAY RADIO AND CELL PHONE and END BLASTING ZONE signs shall be used in sequence with this sign.

**Section 6F.42 TURN OFF 2-WAY RADIO AND CELL PHONE Sign (W22-2)****Standard:**

01 The TURN OFF 2-WAY RADIO AND CELL PHONE (W22-2) sign (see Figure 6F-4) shall follow the BLASTING ZONE AHEAD sign and shall be placed at least 1,000 feet before the beginning of the blasting zone.

**Section 6F.43 END BLASTING ZONE Sign (W22-3)****Standard:**

01 The END BLASTING ZONE (W22-3) sign (see Figure 6F-4) shall be placed a minimum of 1,000 feet past the blasting zone.

*Option:*

02 The END BLASTING ZONE sign may be placed either with or preceding the END ROAD WORK sign.

**Section 6F.44 Shoulder Signs and Plaque (W8-4, W8-9, W8-17, and W8-17P)***Option:*

01 The SOFT SHOULDER (W8-4) sign (see Figure 6F-4) may be used to warn of a soft shoulder condition.



**Standard:**

02 **(DE Revision) The LOW SHOULDER (W8-9) and Shoulder Drop Off (W8-17) signs (see Figure 6F-4) shall be used in accordance with Table 6G-1.**

*Guidance:*

03 *(DE Revision) Paragraph deleted.*

*Option:*

04 A SHOULDER DROP-OFF (W8-17P) supplemental plaque (see Figure 6F-4) may be mounted below the W8-17 sign.

**Section 6F.45 UNEVEN LANES Sign (W8-11)****Standard:**

01 **(DE Revision) The UNEVEN LANES (W8-11) sign (see Figure 6F-4) shall be used in accordance with Table 6G-1.**

**Section 6F.46 STEEL PLATE AHEAD Sign (W8-24)***Option:*

01 A STEEL PLATE AHEAD (W8-24) sign (see Figure 6F-4) may be used to warn road users that the presence of a temporary steel plate(s) might make the road surface uneven and might create slippery conditions during wet weather.

**Section 6F.47 NO CENTER LINE Sign (W8-12)***Guidance:*

01 *(DE Revision) The NO CENTER LINE (W8-12) sign (see Figure 6F-4) should be used when the work obliterates the center line pavement markings. This sign should be placed at the beginning of the TTC zone, at every major entry point to the TTC zone, and repeated at 2-mile intervals in long TTC zones.*

*Option:*

01A *(DE Revision) The NO CENTER LINE sign may be placed at shorter than 2-mile intervals in TTC zones.*

*Support:*

02 Section 6F.78 contains information regarding temporary markings.

**Section 6F.48 Reverse Curve Signs (W1-4 Series)***Guidance:*

01 *(DE Revision) In order to give road users advance notice of a lane shift, a Reverse Curve (W1-4, W1-4b, or W1-4c) sign or LANE SHIFT XX FT (W1-4-DE) sign (see Figure 6F-4) should be used when a lane (or lanes) is being shifted to the left or right. If the design speed of the curves is 30 mph or less, a Reverse Turn (W1-3) sign should be used.*

**Standard:**

02 **If a Reverse Curve (or Turn) sign is used, the direction of the reverse curve (or turn) shall be appropriately illustrated. Except as provided in Paragraph 3, the number of lanes illustrated on the sign shall be the same as the number of through lanes available to road users.**

*Option:*

03 Where two or more lanes are being shifted, a W1-4 (or W1-3) sign with an ALL LANES (W24-1cP) plaque (see Figure 6F-4) may be used instead of a sign that illustrates the number of lanes.

04 Where more than three lanes are being shifted, the Reverse Curve (or Turn) sign may be rectangular.

**Section 6F.49 Double Reverse Curve Signs (W24-1 Series)***Option:*

01 The Double Reverse Curve (W24-1, W24-1a, or W24-1b) sign (see Figure 6F-4) may be used where the tangent distance between two reverse curves is less than 600 feet, thus making it difficult for a second Reverse Curve (W1-4 series) sign to be placed between the curves. If the design speed of the curves is 30 mph or less, Double Reverse Turn signs should be used.

**Standard:**

02 **If a Double Reverse Curve (or Turn) sign is used, the direction of the double reverse curve (or turn) shall be appropriately illustrated. Except as provided in Paragraph 3, the number of lanes illustrated on the sign shall be the same as the number of through lanes available to road users.**

**Option:**

03 Where two or more lanes are being shifted, a W24-1 (or Double Reverse Turn sign showing one lane) sign with an ALL LANES (W24-1cP) plaque (see Figure 6F-4) may be used instead of a sign that illustrates the number of lanes.

04 Where more than three lanes are being shifted, the Double Reverse Curve (or Turn) sign may be rectangular.

**Section 6F.50 Other Warning Signs****Option:**

01 Advance warning signs may be used by themselves or with other advance warning signs.

02 Besides the warning signs specifically related to TTC zones, several other warning signs in Part 2 may apply in TTC zones.

02A (DE Revision) When shoulder or lane closures affect bicycle facilities, the Bicycle IN LANE (W11-1-DE) sign may be used to warn of unexpected entries by bicycles into the roadway.

**Standard:**

03 **Except as provided in Section 6F.02, other warning signs that are used in TTC zones shall have black legends and borders on an orange background.**

**Section 6F.51 Special Warning Signs****Option:**

01 Special warning signs may be used based on engineering judgment.

**Guidance:**

02 *Special warning signs should comply with the general requirements of color, shape, and alphabet size and series. The sign message should be brief, legible, and clear.*

**Section 6F.52 Advisory Speed Plaque (W13-1P)****Option:**

01 In combination with a warning sign, an Advisory Speed (W13-1P) plaque (see Figure 6F-4) may be used to indicate a recommended speed through the TTC zone.

**Standard:**

02 **The Advisory Speed plaque shall not be used in conjunction with any sign other than a warning sign, nor shall it be used alone. When used with orange TTC zone signs, this plaque shall have a black legend and border on an orange background. The sign shall be at least 24 x 24 inches in size when used with a sign that is 36 x 36 inches or larger. Except in emergencies, an Advisory Speed plaque shall not be mounted until the recommended speed is determined by the highway agency.**

**Section 6F.53 Supplementary Distance Plaque (W7-3aP)****Option:**

01 In combination with a warning sign, a Supplementary Distance (W7-3aP) plaque (see Figure 6F-4) with the legend NEXT XX MILES may be used to indicate the length of highway over which a work activity is being conducted, or over which a condition exists in the TTC zone.

02 In long TTC zones, Supplementary Distance plaques with the legend NEXT XX MILES may be placed in combination with warning signs at regular intervals within the zone to indicate the remaining length of highway over which the TTC work activity or condition exists.

**Standard:**

03 **The Supplementary Distance plaque with the legend NEXT XX MILES shall not be used in conjunction with any sign other than a warning sign, nor shall it be used alone. When used with orange TTC zone signs, this plaque shall have a black legend and border on an orange background. The sign shall be at least 30 x 24 inches in size when used with a sign that is 36 x 36 inches or larger.**

*Guidance:*

04 *When used in TTC zones, the Supplementary Distance plaque with the legend NEXT XX MILES should be placed below the initial warning sign designating that, within the approaching zone, a temporary work activity or condition exists.*

**Section 6F.54 Motorcycle Plaque (W8-15P)***Option:*

01 A Motorcycle (W8-15P) plaque (see Figure 6F-4) may be mounted below a LOOSE GRAVEL (W8-7) sign, a GROOVED PAVEMENT (W8-15) sign, a METAL BRIDGE DECK (W8-16) sign, or a STEEL PLATE AHEAD (W8-24) sign if the warning is intended to be directed primarily to motorcyclists.

**Section 6F.55 Guide Signs***Support:*

01 Guide signs along highways provide road users with information to help them along their way through the TTC zone. The design of guide signs is presented in Part 2.

*Guidance:*

- 02 *The following guide signs should be used in TTC zones as needed:*
- A. Standard route markings, where temporary route changes are necessary,*
  - B. Directional signs and street name signs, and*
  - C. Special guide signs relating to the condition or work being done.*

**Standard:**

03 **If additional temporary guide signs are used in TTC zones, they shall have a black legend and border on an orange background.**

*Option:*

04 Guide signs used in TTC incident management situations may have a black legend and border on a fluorescent pink background.

05 When directional signs and street name signs are used in conjunction with detour routing, these signs may have a black legend and border on an orange background.

06 When permanent directional signs or permanent street name signs are used in conjunction with detour signing, they may have a white legend on a green background.

**Section 6F.56 ROAD WORK NEXT XX MILES Sign (G20-1)***Guidance:*

01 *The ROAD WORK NEXT XX MILES (G20-1) sign (see Figure 6F-4) should be installed in advance of TTC zones that are more than 2 miles in length.*

*Option:*

02 The ROAD WORK NEXT XX MILES sign may be mounted on a Type 3 Barricade. The sign may also be used for TTC zones of shorter length.

**Standard:**

03 **The distance displayed on the ROAD WORK NEXT XX MILES sign shall be stated to the nearest whole mile.**

## Section 6F.57 END ROAD WORK Sign (G20-2)

### Guidance:

01 *When used, the END ROAD WORK (G20-2) sign (see Figure 6F-4) should be placed near the downstream end of the termination area, as determined by engineering judgment.*

### Option:

02 The END ROAD WORK sign may be installed on the back of a warning sign facing the opposite direction of road users or on the back of a Type 3 Barricade.

## Section 6F.58 PILOT CAR FOLLOW ME Sign (G20-4)

### Standard:

01 **The PILOT CAR FOLLOW ME (G20-4) sign (see Figure 6F-4) shall be mounted in a conspicuous position on the rear of a vehicle used for guiding one-way vehicular traffic through or around a TTC zone (see Section 6C.13).**

## Section 6F.59 Detour Signs (M4-8, M4-8a, M4-8b, M4-9, M4-9-DE, M4-9-DE1, M4-9a, M4-9b, M4-9b-DE, M4-9b-DE1, M4-9c, and M4-10)

### Standard:

01 **Each detour shall be adequately marked with standard temporary route signs and destination signs.**

### Option:

02 Detour signs in TTC incident management situations may have a black legend and border on a fluorescent pink background.

03 (DE Revision) The Detour Arrow (M4-10), DETOUR Through Arrow (M4-9-DE), or the DETOUR U-turn Arrow (M4-9-DE1) sign (see Figure 6F-5) may be used where a detour route has been established.

04 The DETOUR (M4-8) sign (see Figure 6F-5) may be mounted at the top of a route sign assembly to mark a temporary route that detours from a highway, bypasses a section closed by a TTC zone, and rejoins the highway beyond the TTC zone.

04A (DE Revision) Special detour signs (see Figure 6H-20) may be used on roadways that intersect closed roadways to advise motorists of a corresponding detour.

### Guidance:

04B (DE Revision) *Special detour sign legends should have a minimum letter height of 6 inches on two-lane roadways and multi-lane roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 miles per hour. Special detour sign legends should have a minimum letter height of 8 inches on multi-lane roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 miles per hour.*

### Guidance:

05 *The Detour Arrow (M4-10) sign should normally be mounted just below the ROAD CLOSED (R11-2, R11-3a, or R11-4) sign. The Detour Arrow sign should include a horizontal arrow pointed to the right or left as required.*

06 *The DETOUR (M4-9) sign (see Figure 6F-5) should be used for unnumbered highways, for emergency situations, for periods of short durations, or where, over relatively short distances, road users are guided along the detour and back to the desired highway without route signs.*

07 *A Street Name sign should be placed above, or the street name should be incorporated into, a DETOUR (M4-9) sign to indicate the name of the street being detoured.*

### Option:

08 The END DETOUR (M4-8a) or END (M4-8b) sign (see Figure 6F-5) may be used to indicate that the detour has ended.

### Guidance:

09 *When the END DETOUR sign is used on a numbered highway, the sign should be mounted above a route sign after the downstream end of the detour.*

10 *The Pedestrian/Bicycle Detour (M4-9a) sign (see Figure 6F-5) should be used where a pedestrian/bicycle detour route has been established because of the closing of a pedestrian/bicycle facility to through traffic.*

**Standard:**

11 **If used, the Pedestrian/Bicycle Detour sign shall have an arrow pointing in the appropriate direction.**

**Option:**

12 The arrow on a Pedestrian/Bicycle Detour sign may be on the sign face or on a supplemental plaque.

13 **(DE Revision)** The Pedestrian Detour (M4-9b or M4-9b-DE) sign or Bicycle Detour (M4-9c) sign (see Figure 6F-5) may be used where a pedestrian or bicycle detour route (not both) has been established because of the closing of the pedestrian or bicycle facility to through traffic.

13A **(DE Revision)** The Pedestrian END DETOUR (M4-9b-DE1) sign (see Figure 6F-5) may be used to indicate that the pedestrian detour has ended.

**Section 6F.60 Portable Changeable Message Signs****Support:**

01 Portable changeable message signs (PCMS) are TTC devices installed for temporary use with the flexibility to display a variety of messages. In most cases, portable changeable message signs follow the same provisions for design and application as those given for changeable message signs in Chapter 2L. The information in this Section describes situations where the provisions for portable changeable message signs differ from those given in Chapter 2L.

02 Portable changeable message signs are used most frequently on high-density urban freeways, but have applications on all types of highways where highway alignment, road user routing problems, or other pertinent conditions require advance warning and information.

03 Portable changeable message signs have a wide variety of applications in TTC zones including: roadway, lane, or ramp closures; incident management; width restriction information; speed control or reductions; advisories on work scheduling; road user management and diversion; warning of adverse conditions or special events; and other operational control.

04 The primary purpose of portable changeable message signs in TTC zones is to advise the road user of unexpected situations. Portable changeable message signs are particularly useful as they are capable of:

- A. Conveying complex messages,
- B. Displaying real time information about conditions ahead, and
- C. Providing information to assist road users in making decisions prior to the point where actions must be taken.

05 Some typical applications include the following:

- A. Where the speed of vehicular traffic is expected to drop substantially;
- B. Where significant queuing and delays are expected;
- C. Where adverse environmental conditions are present;
- D. Where there are changes in alignment or surface conditions;
- E. Where advance notice of ramp, lane, or roadway closures is needed;
- F. Where crash or incident management is needed; and/or
- G. Where changes in the road user pattern occur.

**Guidance:**

06 *The components of a portable changeable message sign should include: a message sign, control systems, a power source, and mounting and transporting equipment. The front face of the sign should be covered with a protective material.*

**Standard:**

07 **Portable changeable message signs shall comply with the applicable design and application principles established in Chapter 2A. Portable changeable message signs shall display only traffic operational, regulatory, warning, and guidance information, and shall not be used for advertising messages.**

07A **(DE Revision)** All portable changeable message signs to be placed within State Right of Way and the messages they display shall be approved by DelDOT Traffic prior to installation, except those used for emergency operations.

Support:

07B (DE Revision) The Portable Changeable Message Sign Approval Form can be found on the DelDOT website at [www.deldot.gov](http://www.deldot.gov).

08 Section 2L.02 contains information regarding overly simplistic or vague messages that is also applicable to portable changeable message signs.

**Standard:**

09 **The colors used for legends on portable changeable message signs shall comply with those shown in Table 2A-5.**

Support:

10 Section 2L.04 contains information regarding the luminance, luminance contrast, and contrast orientation that is also applicable to portable changeable message signs.

*Guidance:*

11 *Portable changeable message signs should be visible from 1/2 mile under both day and night conditions.*

Support:

12 Section 2B.13 contains information regarding the design of portable changeable message signs that are used to display speed limits that change based on operational conditions, or are used to display the speed at which approaching drivers are traveling.

*Guidance:*

13 *A portable changeable message sign should be limited to three lines of eight characters per line or should consist of a full matrix display.*

14 *Except as provided in Paragraph 15, the letter height used for portable changeable message sign messages should be a minimum of 18 inches.*

Option:

15 For portable changeable message signs mounted on service patrol trucks or other incident response vehicles, a letter height as short as 10 inches may be used. Shorter letter sizes may also be used on a portable changeable message sign used on low speed facilities provided that the message is legible from at least 650 feet.

16 The portable changeable message sign may vary in size.

*Guidance:*

17 *Messages on a portable changeable message sign should consist of no more than two phases, and a phase should consist of no more than three lines of text. Each phase should be capable of being understood by itself, regardless of the order in which it is read. Messages should be centered within each line of legend. If more than one portable changeable message sign is simultaneously legible to road users, then only one of the signs should display a sequential message at any given time.*

Support:

18 Road users have difficulties in reading messages displayed in more than two phases on a typical three-line portable changeable message sign.

**Standard:**

19 **Techniques of message display such as animation, rapid flashing, dissolving, exploding, scrolling, travelling horizontally or vertically across the face of the sign, or other dynamic elements shall not be used.**

*Guidance:*

20 *When a message is divided into two phases, the display time for each phase should be at least 2 seconds, and the sum of the display times for both of the phases should be a maximum of 8 seconds.*

21 *All messages should be designed with consideration given to the principles provided in this Section and also taking into account the following:*

- A. *The message should be as brief as possible and should contain three thoughts (with each thought preferably shown on its own line) that convey:*
  1. *The problem or situation that the road user will encounter ahead,*
  2. *The location of or distance to the problem or situation, and*
  3. *The recommended driver action.*



- B. If more than two phases are needed to display a message, additional portable changeable message signs should be used. When multiple portable changeable message signs are needed, they should be placed on the same side of the roadway and they should be separated from each other by a distance of at least 1,000 feet on freeways and expressways, and by a distance of at least 500 feet on other types of highways.*

**Standard:**

- 22 **When the word messages shown in Tables 1A-1 or 1A-2 need to be abbreviated on a portable changeable message sign, the provisions described in Section 1A.15 shall be followed.**
- 23 **In order to maintain legibility, portable changeable message signs shall automatically adjust their brightness under varying light conditions.**
- 24 **The control system shall include a display screen upon which messages can be reviewed before being displayed on the message sign. The control system shall be capable of maintaining memory when power is unavailable.**
- 25 **Portable changeable message signs shall be equipped with a power source and a battery back-up to provide continuous operation when failure of the primary power source occurs.**
- 26 **The mounting of portable changeable message signs on a trailer, a large truck, or a service patrol truck shall be such that the bottom of the message sign shall be a minimum of 7 feet above the roadway in urban areas and 5 feet above the roadway in rural areas when it is in the operating mode.**

*Guidance:*

- 27 *Portable changeable message signs should be used as a supplement to and not as a substitute for conventional signs and pavement markings.*
- 28 *When portable changeable message signs are used for route diversion, they should be placed far enough in advance of the diversion to allow road users ample opportunity to perform necessary lane changes, to adjust their speed, or to exit the affected highway.*
- 29 *Portable changeable message signs should be sited and aligned to provide maximum legibility and to allow time for road users to respond appropriately to the portable changeable Message sign message.*
- 30 *(DE Revision) Portable changeable message signs should be placed off the shoulder of the roadway and behind a traffic barrier, if practical. Where a traffic barrier is not available to shield the portable changeable message sign, it should be placed off the shoulder and outside of the clear zone.*

**Standard:**

- 30A **(DE Revision) If a portable changeable message sign is placed on the shoulder of the roadway or within the clear zone, it shall be delineated with retroreflective TTC devices.**
- 30B **(DE Revision) Six (6) channelizing devices (drums or cones) shall be provided to close the shoulder in advance of each portable changeable message sign located within the shoulder during the daytime. When a portable changeable message sign will be on site at night, drums shall be utilized.**

*Guidance:*

- 30C *(DE Revision) If a portable changeable message sign is placed on the median of a divided roadway and is less than 30 feet from either direction of travel, the portable changeable message sign should be delineated with 6 drums in that direction of travel.*
- 30D *(DE Revision) On conventional roads, portable changeable message signs should be placed, to the extent possible, such that four feet of space exists between the drums and the painted edge line to allow for bicycles to travel without entering the travel lane.*
- 31 *When portable changeable message signs are used in TTC zones, they should display only TTC messages.*
- 32 *(DE Revision) Portable changeable message signs should be located, to the extent possible, outside of the clear zone or shielded behind a traffic barrier.*

**Standard:**

- 32A **(DE Revision) When portable changeable message signs are not being used to display TTC messages and if relocation or shielding is not practical, portable changeable message signs shall be delineated with a minimum of 6 drums.**
- 32B **(DE Revision) All portable changeable message signs no longer in use shall be removed from the work area within 48 hours, unless approved by DelDOT Traffic.**

*Guidance:*

33 *Portable changeable message sign trailers should be delineated on a permanent basis by affixing retroreflective material, known as conspicuity material, in a continuous line on the face of the trailer as seen by oncoming road users.*

**Section 6F.61 Arrow Boards****Standard:**

01 **An arrow board shall be a sign with a matrix of elements capable of either flashing or sequential displays. This sign shall provide additional warning and directional information to assist in merging and controlling road users through or around a TTC zone.**

*Guidance:*

02 *An arrow board in the arrow or chevron mode should be used to advise approaching traffic of a lane closure along major multi-lane roadways in situations involving heavy traffic volumes, high speeds, and/or limited sight distances, or at other locations and under other conditions where road users are less likely to expect such lane closures.*

03 *If used, an arrow board should be used in combination with appropriate signs, channelizing devices, or other TTC devices.*

04 *An arrow board should be placed on the shoulder of the roadway or, if practical, farther from the traveled lane. It should be delineated with retroreflective TTC devices. When an arrow board is not being used, it should be removed; if not removed, it should be shielded; or if the previous two options are not feasible, it should be delineated with retroreflective TTC devices.*

**Standard:**

05 **Arrow boards shall meet the minimum size, legibility distance, number of elements, and other specifications shown in Figure 6F-6.**

*Support:*

06 Type A arrow boards are appropriate for use on low-speed urban streets. Type B arrow boards are appropriate for intermediate-speed facilities and for maintenance or mobile operations on high-speed roadways. Type C arrow boards are intended to be used on high-speed, high-volume motor vehicle traffic control projects. Type D arrow boards are intended for use on vehicles authorized by the State or local agency.

**Standard:**

07 **Type A, B, and C arrow boards shall have solid rectangular appearances. A Type D arrow board shall conform to the shape of the arrow.**

08 **All arrow boards shall be finished in non-reflective black. The arrow board shall be mounted on a vehicle, a trailer, or other suitable support.**

08A (DE Revision) **A One-Direction Large Arrow (W1-6) sign shall be centered below and attached to the bottom of all trailer-mounted arrow boards.**

08B (DE Revision) **The One-Direction Large Arrow (W1-6) sign shall point in the direction that traffic should merge and shall be covered or removed when not in use or when caution mode is being displayed on the trailer mounted arrow board.**

08C (DE Revision) **When arrow boards are not in use they shall be removed from the roadway.**

*Guidance:*

09 *The minimum mounting height, measured vertically from the bottom of the board to the roadway below it or to the elevation of the near edge of the roadway, of an arrow board should be 7 feet, except on vehicle-mounted arrow boards, which should be as high as practical.*

10 *A vehicle-mounted arrow board should be provided with remote controls.*

**Standard:**










11 **Arrow board elements shall be capable of at least a 50 percent dimming from full brilliance. The dimmed mode shall be used for nighttime operation of arrow boards.**

*Guidance:*

12 *Full brilliance should be used for daytime operation of arrow boards.*



**Figure 6F-6. Advance Warning Arrow Board Display Specifications**  
**(Delaware Revision)**

Operating Mode	Display (Type C arrow board illustrated)		
1. At least one of the three following modes shall be provided:	(right arrow shown; left is similar)		
Flashing Arrow	 Merge Right		
Sequential Arrow		 Merge Right	
Sequential Chevron		 Merge Right	
2. The following mode shall be provided: Flashing Double Arrow	 Merge Right or Left		
3. The following mode shall be provided: Flashing Caution	 Flashing Caution		

Arrow Board Type	Minimum Size	Minimum Legibility Distance	Minimum Number of Elements
A	48 x 24 inches	1/2 mile	12
B	60 x 30 inches	3/4 mile	13
C	96 x 48 inches	1 mile	15
D	None*	1/2 mile	12

\*Length of arrow equals 48 inches, width of arrowhead equals 24 inches

**Standard:**

13 **The arrow board shall have suitable elements capable of the various operating modes. The color presented by the elements shall be yellow.**

*Guidance:*

14 *If an arrow board consisting of a bulb matrix is used, the elements should be recess-mounted or equipped with an upper hood of not less than 180 degrees.*

**Standard:**

15 **The minimum element on-time shall be 50 percent for the flashing mode, with equal intervals of 25 percent for each sequential phase. The flashing rate shall be not less than 25 or more than 40 flashes per minute.**

16 **An arrow board shall have the following three mode selections:**

- A. A Flashing Arrow, Sequential Arrow, or Sequential Chevron mode;
- B. A Flashing Double Arrow mode; and
- C. A Flashing Caution or Alternating Diamond mode.

*Guidance:*

16A (DE Revision) *Only the Flashing Arrow or Flashing Caution operating modes should be used on state-maintained roadways.*

**Standard:**

17 **An arrow board in the arrow or chevron mode shall be used only for stationary or moving lane closures on multi-lane roadways.**

18 **For shoulder work, blocking the shoulder, for roadside work near the shoulder, or for temporarily closing one lane on a two-lane, two-way roadway, an arrow board shall be used only in the caution mode.**

*Guidance:*

19 *For a stationary lane closure, the arrow board should be located on the shoulder at the beginning of the merging taper.*

20 *Where the shoulder is narrow, the arrow board should be located in the closed lane.*

**Standard:**

21 **When arrow boards are used to close multiple lanes, a separate arrow board shall be used for each closed lane.**

*Guidance:*

22 *When arrow boards are used to close multiple lanes, if the first arrow board is placed on the shoulder, the second arrow board should be placed in the first closed lane at the upstream end of the second merging taper (see Figure 6H-37). When the first arrow board is placed in the first closed lane, the second arrow board should be placed in the second closed lane at the downstream end of the second merging taper.*

23 *For mobile operations where a lane is closed, the arrow board should be located to provide adequate separation from the work operation to allow for appropriate reaction by approaching drivers.*

**Standard:**

24 **A vehicle displaying an arrow board shall be equipped with high-intensity rotating, flashing, oscillating, or strobe lights.**

25 **Arrow boards shall only be used to indicate a lane closure. Arrow boards shall not be used to indicate a lane shift.**

*Option:*

26 A portable changeable message sign may be used to simulate an arrow board display.

**Section 6F.62 High-Level Warning Devices (Flag Trees)***Option:*

01 A high-level warning device (flag tree) may supplement other TTC devices in TTC zones.

*Guidance:*

01A *(DE Revision) High-level warning devices (flag trees) should not be used on state-maintained roads unless approved by DelDOT Traffic.*

*Support:*

02 A high-level warning device is designed to be seen over the top of typical passenger cars. A typical high-level warning device is shown in Figure 6F-2.

**Standard:**

03 **A high-level warning device shall consist of a minimum of two flags with or without a Type B high-intensity flashing warning light. The distance from the roadway to the bottom of the lens of the light and to the lowest point of the flag material shall be not less than 8 feet. The flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color.**

*Option:*

04 An appropriate warning sign may be mounted below the flags.

*Support:*

05 High-level warning devices are most commonly used in high-density road user situations to warn road users of short-term operations.

**Section 6F.63 Channelizing Devices****Standard:**

01 **(DE Revision) Designs of various channelizing devices shall be as shown in Figure 6F-7. All channelizing devices shall be crashworthy and shall have retroreflective sheeting.**

01A **(DE Revision) The retroreflective material used on channelizing devices shall have a smooth, sealed outer surface that will display a similar color day or night.**

*Guidance:*

01B *(DE Revision) The retroreflective material used on channelizing devices should be prismatic.*

*Support:*

02 The function of channelizing devices is to warn road users of conditions created by work activities in or near the roadway and to guide road users. Channelizing devices include cones, tubular markers, vertical panels, drums, barricades, and longitudinal channelizing devices.

03 Channelizing devices provide for smooth and gradual vehicular traffic flow from one lane to another, onto a bypass or detour, or into a narrower traveled way. They are also used to channelize vehicular traffic away from the work space, pavement drop-offs, pedestrian or shared-use paths, or opposing directions of vehicular traffic.

**Standard:**

04 **Devices used to channelize pedestrians shall be detectable to users of long canes and visible to persons having low vision.**

05 **Where channelizing devices are used to channelize pedestrians, there shall be continuous detectable bottom and top surfaces to be detectable to users of long canes. The bottom of the bottom surface shall be no higher than 2 inches above the ground. The top of the top surface shall be no lower than 32 inches above the ground.**

*Option:*






06 A gap not exceeding 2 inches between the bottom rail and the ground surface may be used to facilitate drainage.

*Guidance:*

07 *Where multiple channelizing devices are aligned to form a continuous pedestrian channelizer, connection points should be smooth to optimize long-cane and hand trailing.*

08 *(DE Revision) The spacing between cones, tubular markers, vertical panels, drums, and barricades should not exceed a distance in feet equal to 1.0 times the speed limit in mph and should not exceed 60 feet when used for both taper channelization and tangent channelization.*

**Figure 6F-7. Channelizing Devices**  
**(Delaware Revision)**

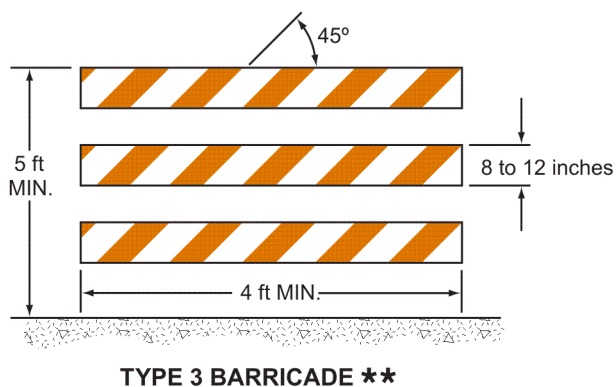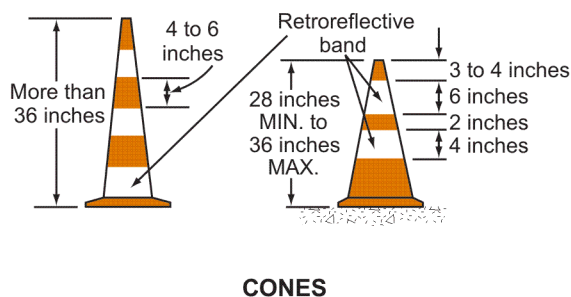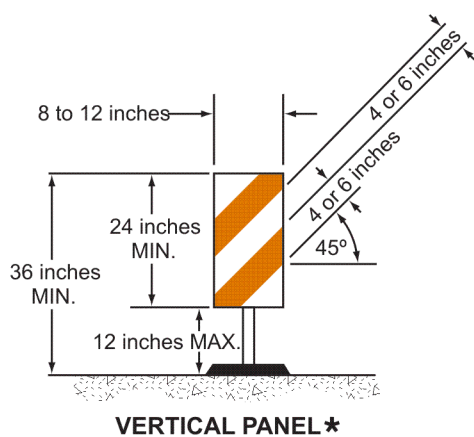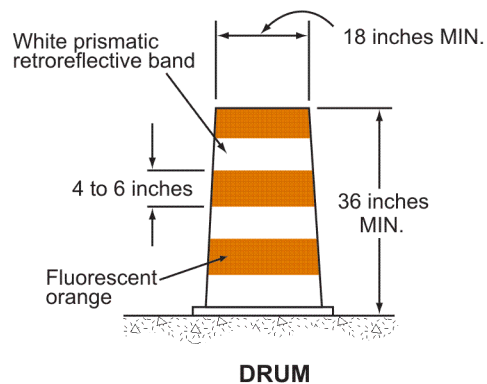

\* Not for use in Delaware on state-maintained roads.

\*\* Rail stripe widths shall be 6 inches, except that 4-inch wide stripes may be used if rail lengths are less than 36 inches. The sides of barricades facing traffic shall have retroreflective rail faces.

08A (DE Revision) *The spacing of the first four channelizing devices in a series used for taper channelization should not exceed 25 feet.*

09 *When channelizing devices have the potential of leading vehicular traffic out of the intended vehicular traffic space as shown in Figure 6H-39, the channelizing devices should be extended a distance in feet of 2.0 times the speed limit in mph beyond the downstream end of the transition area.*

Option:

10 Warning lights (see Section 6F.83) may be added to channelizing devices in areas with frequent fog, snow, or severe roadway curvature, or where visual distractions are present.

*Guidance:*

10A (DE Revision) *Warning lights with channelizing devices should not be used on state-maintained roads unless approved by DelDOT Traffic.*

**Standard:**

11 **Warning lights shall flash when placed on channelizing devices used alone or in a cluster to warn of a condition. Except for the sequential flashing warning lights discussed in Paragraphs 12 and 13, warning lights placed on channelizing devices used in a series to channelize road users shall be steady-burn.**

Option:

12 A series of sequential flashing warning lights may be placed on channelizing devices that form a merging taper in order to increase driver detection and recognition of the merging taper.

**Standard:**

13 **When used, the successive flashing of the sequential warning lights shall occur from the upstream end of the merging taper to the downstream end of the merging taper in order to identify the desired vehicle path. Each warning light in the sequence shall be flashed at a rate of not less than 55 nor more than 75 times per minute.**

14 (DE Revision) **Paragraph relocated.**

Option:

15 The name and telephone number of the highway agency, contractor, or supplier may be displayed on the non-retroreflective surface of all types of channelizing devices.

**Standard:**

16 **The letters and numbers of the name and telephone number shall be non-retroreflective and not over 2 inches in height.**

*Guidance:*

17 *Particular attention should be given to maintaining the channelizing devices to keep them clean, visible, and properly positioned at all times.*

**Standard:**

18 **Devices that are damaged or have lost a significant amount of their retroreflectivity and effectiveness shall be replaced.**

## **Section 6F.64 Cones**

**Standard:**

01 (DE Revision) **Cones (see Figure 6F-7) shall be predominantly orange and shall be made of a material that can be struck without causing damage to the impacting vehicle. Cones shall be a minimum of 28 inches in height for all operations.**

02 (DE Revision) **Except as noted in Paragraphs 3A, 3B and 3C, cones shall not be used for nighttime operations.** Retroreflectorization of cones that are 28 to 36 inches in height shall be provided by a 6-inch wide white band located 3 to 4 inches from the top of the cone and an additional 4-inch wide white band located approximately 2 inches below the 6-inch band.

03 **Retroreflectorization of cones that are more than 36 inches in height shall be provided by horizontal, circumferential, alternating orange and white retroreflective stripes that are 4 to 6 inches wide. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any non-retroreflective spaces between the orange and white stripes shall not exceed 3 inches in width.**

**Option:**

03A (DE Revision) Due to the unique and temporary nature of traffic management for special events, including complex traffic shifts to accommodate ingress and egress, retroreflective cones may be used at night during planned special events.

03B (DE Revision) Retroreflective cones may be used in lieu of drums during a single nighttime emergency operation.

03C (DE Revision) Retroreflective cones may be used to supplement a mobile striping operation.

04 Traffic cones may be used to channelize road users, divide opposing vehicular traffic lanes, divide lanes when two or more lanes are kept open in the same direction, and delineate short duration maintenance and utility work.

**Guidance:**

05 *Steps should be taken to minimize the possibility of cones being blown over or displaced by wind or moving vehicular traffic.*

**Option:**

06 Cones may be doubled up to increase their weight.

**Support:**

07 Some cones are constructed with bases that can be filled with ballast. Others have specially weighted bases, or weight such as sandbag rings that can be dropped over the cones and onto the base to provide added stability.

**Guidance:**

08 *Ballast should be kept to the minimum amount needed.*

**Section 6F.65 Tubular Markers****Standard:**

01 (DE Revision) Tubular markers (see Figure 6F-7) shall be predominantly orange and shall be not less than 28 inches high and 2 inches wide facing road users. They shall be made of a material that can be struck without causing damage to the impacting vehicle.

02 (DE Revision) Paragraph deleted.

03 (DE Revision) Tubular markers shall be retroreflectorized. Retroreflectorization of tubular markers that have a height of less than 42 inches shall be provided by two 3-inch wide white bands placed a maximum of 2 inches from the top with a maximum of 6 inches between the bands. Retroreflectorization of tubular markers that have a height of 42 inches or more shall be provided by four 4- to 6-inch wide alternating orange and white stripes with the top stripe being orange.

**Guidance:**

04 *Tubular markers have less visible area than other devices and should be used only where space restrictions do not allow for the use of other more visible devices.*

05 (DE Revision) *Tubular markers should be stabilized by affixing them to the pavement with epoxy, nails, or other forms of rigid mounting.*

**Option:**

06 Tubular markers may be used effectively to divide opposing lanes of road users, divide vehicular traffic lanes when two or more lanes of moving vehicular traffic are kept open in the same direction, and to delineate the edge of a pavement drop off where space limitations do not allow the use of larger devices.

**Standard:**

07 A tubular marker shall be attached to the pavement to display the minimum 2-inch width to the approaching road users.

**Section 6F.66 Vertical Panels****Guidance:**

01A (DE Revision) *Vertical panels (see Figure 6F-7) should not be used on state-maintained roads without DelDOT Traffic approval.*

**Standard:**

01 **Vertical panels (see Figure 6F-7) shall have retroreflective striped material that is 8 to 12 inches in width and at least 24 inches in height. They shall have alternating diagonal orange and white retroreflective stripes sloping downward at an angle of 45 degrees in the direction vehicular traffic is to pass.**

02 **Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.**

**Option:**

03 Where the height of the retroreflective material on the vertical panel is less than 36 inches, a stripe width of 4 inches may be used.

04 Where space is limited, vertical panels may be used to channelize vehicular traffic, divide opposing lanes, or replace barricades.

**Section 6F.67 Drums****Standard:**

01 **(DE Revision) Drums (see Figure 6F-7) used for road user warning or channelization shall be constructed of lightweight, deformable materials. They shall be a minimum of 36 inches in height and have at least an 18-inch minimum width regardless of orientation. Metal drums shall not be used. The base color of drums shall be predominantly orange. The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4 to 6 inches wide. The horizontal circumferential markings on drums shall be made of fluorescent orange and white prismatic retroreflective sheeting. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any non-retroreflectorized spaces between the horizontal orange and white stripes shall not exceed 3 inches wide. Drums shall have closed tops that will not allow collection of construction debris or other debris.**

**Support:**

02 Drums are highly visible, have good target value, give the appearance of being formidable obstacles and, therefore, command the respect of road users. They are portable enough to be shifted from place to place within a TTC zone in order to accommodate changing conditions, but are generally used in situations where they will remain in place for a prolonged period of time.

**Option:**

03 Although drums are most commonly used to channelize or delineate road user flow, they may also be used alone or in groups to mark specific locations.

**Guidance:**

04 *Drums should not be weighted with sand, water, or any material to the extent that would make them hazardous to road users or workers when struck. Drums used in regions susceptible to freezing should have drain holes in the bottom so that water will not accumulate and freeze causing a hazard if struck by a road user.*

**Standard:**

05 **Ballast shall not be placed on the top of a drum.**

**Option:**

06 **(DE Revision) Two ballast rings ("tire rings") may be used to minimize drum displacement due to passing vehicles or high winds.**

**Support:**

07 **(DE Revision) The use of two ballast rings has been found to minimize the chance a drum could be blown over by a truck or other vehicle passing by at high speed, particularly on roads with posted speed limits of 55 mph or higher, or having the drum blow over due to high winds.**

**Section 6F.68 Type 1, 2, or 3 Barricades****Standard:**

01A **(DE Revision) Type 1 Barricades shall not be used for TTC operations on state-maintained roads.**



01B (DE Revision) Type 2 Barricades shall only be used for pedestrian channelization along temporary pedestrian paths. Type 2 Barricades shall not be used to close a roadway, sidewalk or crosswalk.

01C (DE Revision) When used for pedestrian channelization, Type 2 Barricades shall be continuous and the rails shall be mounted in accordance with ADA in order to provide for a cane rail (bottom rail) and hand rail (top rail).

Support:

01 A barricade is a portable or fixed device having from one to three rails with appropriate markings and is used to control road users by closing, restricting, or delineating all or a portion of the right-of-way.

02 (DE Revision) An example of a Type 3 barricade is shown in Figure 6F-7.

**Standard:**

03 Stripes on barricade rails shall be alternating orange and white retroreflective stripes sloping downward at an angle of 45 degrees in the direction road users are to pass. Except as provided in Paragraph 4, the stripes shall be 6 inches wide.

Option:

04 When rail lengths are less than 36 inches, 4-inch wide stripes may be used.

**Standard:**

05 The minimum length for Type 1 and Type 2 Barricades shall be 24 inches, and the minimum length for Type 3 Barricades shall be 48 inches. Each barricade rail shall be 8 to 12 inches wide. Barricades used on freeways, expressways, and other high-speed roadways shall have a minimum of 270 square inches of retroreflective area facing road users.

*Guidance:*

06 Where barricades extend entirely across a roadway, the stripes should slope downward in the direction toward which road users must turn.

07 Where both right and left turns are provided, the barricade stripes should slope downward in both directions from the center of the barricade or barricades.

08 (DE Revision) Where no turns are intended, or the road is completely closed, the stripes should be positioned to slope downward toward the center of the barricade or barricades.

09 Barricade rails should be supported in a manner that will allow them to be seen by the road user, and in a manner that provides a stable support that is not easily blown over or displaced.

10 The width of the existing pedestrian facility should be provided for the temporary facility if practical. Traffic control devices and other construction materials and features should not intrude into the usable width of the sidewalk, temporary pathway, or other pedestrian facility. When it is not possible to maintain a minimum width of 60 inches throughout the entire length of the pedestrian pathway, a 60 x 60-inch passing space should be provided at least every 200 feet to allow individuals in wheelchairs to pass.

11 Barricade rail supports should not project into pedestrian circulation routes more than 4 inches from the support between 27 and 80 inches from the surface as described in Section 4.4.1 of the "Americans with Disabilities Act Accessibility Guidelines for Buildings and Facilities (ADAAG)" (see Section 1A.11).

Option:

12 (DE Revision) Paragraph deleted.

*Guidance:*

13 On high-speed expressways or in other situations where barricades may be susceptible to overturning in the wind, ballasting should be used.

Option:

14 Sandbags may be placed on the lower parts of the frame or the stays of barricades to provide the required ballast.

**Standard:**

14A (DE Revision) If used, sand ballasts shall consist of an appropriate mixture of material to preclude freezing.



Support:

15 (DE Revision) Paragraph deleted.

Option:

16 Barricades may be used alone or in groups to mark a specific condition or they may be used in a series for channelizing road users.

17 (DE Revision) Paragraph deleted.

Guidance:

18 (DE Revision) Paragraph deleted

**Standard:**

19 (DE Revision) Type 3 Barricades used at a road closure shall be placed completely across a roadway, from curb to curb, or from edge of road to edge of road, with the stripes positioned downward toward the center of the roadway.

Guidance:

20 Where provision is made for access of authorized equipment and vehicles, the responsibility for Type 3 Barricades should be assigned to a person who will provide proper closure at the end of each work day.

Support:

21 When a highway is legally closed but access must still be allowed for local road users, barricades usually are not extended completely across the roadway.

**Standard:**

22 A sign shall be installed with the appropriate legend concerning permissible use by local road users (see Section 6F.09). Adequate visibility of the barricades from both directions shall be provided.

Option:

23 Signs may be installed on barricades (see Section 6F.03).

Guidance:

24 (DE Revision) Signs mounted on Type 3 Barricades should not cover more than 50 percent of the top two rails or 33 percent of the total area of the three rails.

## Section 6F.69 Direction Indicator Barricades

**Standard:**

01 (DE Revision) Paragraph deleted.

01A (DE Revision) The Direction Indicator Barricade shall not be used on state-maintained roads.

02 The One-Direction Large Arrow (W1-6) sign shall be black on an orange background. The stripes on the bottom rail shall be alternating orange and white retroreflective stripes sloping downward at an angle of 45 degrees in the direction road users are to pass. The stripes shall be 4 inches wide. The One-Direction Large Arrow (W1-6) sign shall be 24 x 12 inches. The bottom rail shall have a length of 24 inches and a height of 8 inches.

Option:

03 The Direction Indicator Barricade may be used in tapers, transitions, and other areas where specific directional guidance to drivers is necessary.

Guidance:

04 If used, Direction Indicator Barricades should be used in series to direct the driver through the transition and into the intended travel lane.

## Section 6F.70 Temporary Traffic Barriers as Channelizing Devices

Support:

01 Temporary traffic barriers are not TTC devices in themselves; however, when placed in a position identical to a line of channelizing devices and marked and/or equipped with appropriate channelization features to provide guidance and warning both day and night, they serve as TTC devices.

**Standard:**

02 Temporary traffic barriers serving as TTC devices shall comply with requirements for such devices as set forth throughout Part 6.

03 Temporary traffic barriers (see Section 6F.85) shall not be used solely to channelize road users, but also to protect the work space. If used to channelize vehicular traffic, the temporary traffic barrier shall be supplemented with delineation, pavement markings, or channelizing devices for improved daytime and nighttime visibility.

*Guidance:*

04 Temporary traffic barriers should not be used for a merging taper except in low-speed urban areas.

05 When it is necessary to use a temporary traffic barrier for a merging taper in low-speed urban areas or for a constricted/restricted TTC zone, the taper length should be designed to optimize road user operations considering the available geometric conditions.

**Standard:**

06 When it is necessary to use a temporary traffic barrier for a merging taper in low-speed urban areas or for a constricted/restricted TTC zone, the taper shall be delineated.

*Guidance:*

07 When used for channelization, temporary traffic barriers should be of a light color for increased visibility.

**Section 6F.71 Longitudinal Channelizing Devices***Support:*

01 Longitudinal channelizing devices are lightweight, deformable devices that are highly visible, have good target value, and can be connected together.

**Standard:**

02 If used singly as Type 1, 2, or 3 barricades, longitudinal channelizing devices shall comply with the general size, color, stripe pattern, retroreflectivity, and placement characteristics established for the devices described in this Chapter.

*Guidance:*

03 If used to channelize vehicular traffic at night, longitudinal channelizing devices should be supplemented with retroreflective material or delineation for improved nighttime visibility.

*Option:*

04 Longitudinal channelizing devices may be used instead of a line of cones, drums, or barricades.

05 Longitudinal channelizing devices may be hollow and filled with water as a ballast.

06 Longitudinal channelizing devices may be used for pedestrian traffic control.

**Standard:**

07 If used for pedestrian traffic control, longitudinal channelizing devices shall be interlocked to delineate or channelize flow. The interlocking devices shall not have gaps that allow pedestrians to stray from the channelizing path.

*Guidance:*

08 Longitudinal channelizing devices have not met the crashworthy requirements for temporary traffic barriers and should not be used to shield obstacles or provide positive protection for pedestrians or workers.

**Section 6F.72 Temporary Lane Separators***Option:*

01 Temporary lane separators may be used to channelize road users, to divide opposing vehicular traffic lanes, to divide lanes when two or more lanes are open in the same direction, and to provide continuous pedestrian channelization.

**Standard:**

02 **Temporary lane separators shall be crashworthy. Temporary lane separators shall have a maximum height of 4 inches and a maximum width of 1 foot, and shall have sloping sides in order to facilitate crossover by emergency vehicles.**

**Option:**

03 Temporary lane separators may be supplemented with any of the approved channelizing devices contained in this Chapter, such as tubular markers, vertical panels, and opposing traffic lane dividers.

**Standard:**

04 **If appropriate channelizing devices are used to supplement a temporary lane separator, the channelizing devices shall be retroreflectorized to provide nighttime visibility. If channelizing devices are not used, the temporary lane separator shall contain retroreflectorization to enhance its visibility.**

**Guidance:**

05 *A temporary lane separator should be stabilized by affixing it to the pavement in a manner suitable to its design, while allowing the unit to be shifted from place to place within the TTC zone in order to accommodate changing conditions.*

**Standard:**

06 **At pedestrian crossing locations, temporary lane separators shall have an opening or be shortened to provide a pathway that is at least 60 inches wide for crossing pedestrians.**

**Section 6F.73 Other Channelizing Devices****Option:**

01 Channelizing devices other than those described in this Chapter may be used in special situations based on an engineering study.

**Guidance:**

02 *Other channelizing devices should comply with the general size, color, stripe pattern, retroreflection, and placement characteristics established for the devices described in this Chapter.*

**Section 6F.74 Detectable Edging for Pedestrians****Support:**

01 Individual channelizing devices, tape or rope used to connect individual devices, other discontinuous barriers and devices, and pavement markings are not detectable by persons with visual disabilities and are incapable of providing detectable path guidance on temporary or realigned sidewalks or other pedestrian facilities.

**Guidance:**

02 *When it is determined that a facility should be accessible to and detectable by pedestrians with visual disabilities, a continuously detectable edging should be provided throughout the length of the facility such that it can be followed by pedestrians using long canes for guidance. This edging should protrude at least 6 inches above the surface of the sidewalk or pathway, with the bottom of the edging a maximum of 2 inches above the surface. This edging should be continuous throughout the length of the facility except for gaps at locations where pedestrians or vehicles will be turning or crossing. This edging should consist of a prefabricated or formed-in-place curbing or other continuous device that is placed along the edge of the sidewalk or walkway. This edging should be firmly attached to the ground or to other devices. Adjacent sections of this edging should be interconnected such that the edging is not displaced by pedestrian or vehicular traffic or work operations, and such that it does not constitute a hazard to pedestrians, workers, or other road users.*

**Support:**

03 Examples of detectable edging for pedestrians include:

- A. Prefabricated lightweight sections of plastic, metal, or other suitable materials that are interconnected and fixed in place to form a continuous edge.
- B. Prefabricated lightweight sections of plastic, metal, or other suitable materials that are interconnected, fixed in place, and placed at ground level to provide a continuous connection between channelizing devices located at intervals along the edge of the sidewalk or walkway.
- C. Sections of lumber interconnected and fixed in place to form a continuous edge.
- D. Formed-in-place asphalt or concrete curb.

- E. Prefabricated concrete curb sections that are interconnected and fixed in place to form a continuous edge.
- F. Continuous temporary traffic barrier or longitudinal channelizing barricades placed along the edge of the sidewalk or walkway that provides a pedestrian edging at ground level.
- G. Chain link or other fencing equipped with a continuous bottom rail.

*Guidance:*

04 *Detectable pedestrian edging should be orange, white, or yellow and should match the color of the adjacent channelizing devices or traffic control devices, if any are present.*

## **Section 6F.75 Temporary Raised Islands**

**Standard:**

01 **Temporary raised islands shall be used only in combination with pavement striping and other suitable channelizing devices.**

*Option:*

02 A temporary raised island may be used to separate vehicular traffic flows in two-lane, two-way operations on roadways having a vehicular traffic volume range of 4,000 to 15,000 average daily traffic (ADT) and on freeways having a vehicular traffic volume range of 22,000 ADT to 60,000 ADT.

03 Temporary raised islands also may be used in other than two-lane, two-way operations where physical separation of vehicular traffic from the TTC zone is not required.

*Guidance:*

04 *Temporary raised islands should have the basic dimensions of 4 inches high by at least 12 inches wide and have rounded or chamfered corners.*

05 *The temporary raised islands should not be designed in such a manner that they would cause a motorist to lose control of the vehicle if the vehicle inadvertently strikes the temporary raised island. If struck, pieces of the island should not be dislodged to the extent that they could penetrate the occupant compartment or involve other vehicles.*

**Standard:**

06 **At pedestrian crossing locations, temporary raised islands shall have an opening or be shortened to provide at least a 60-inch wide pathway for the crossing pedestrian.**

## **Section 6F.76 Opposing Traffic Lane Divider and Sign (W6-4)**

*Support:*

01 Opposing traffic lane dividers are delineation devices used as center lane dividers to separate opposing vehicular traffic on a two-lane, two-way operation.

**Standard:**

02 **Opposing traffic lane dividers shall not be placed across pedestrian crossings.**

03 **The Opposing Traffic Lane Divider (W6-4) sign (see Figure 6F-4) shall be an upright, retroreflective orange-colored sign placed on a flexible support and sized at least 12 inches wide by 18 inches high.**

## **Section 6F.77 Pavement Markings**

*Support:*

01 Pavement markings are installed or existing markings are maintained or enhanced in TTC zones to provide road users with a clearly defined path for travel through the TTC zone in day, night, and twilight periods under both wet and dry pavement conditions.

*Guidance:*

02 *The work should be planned and staged to provide for the placement and removal of the pavement markings in a way that minimizes the disruption to traffic flow approaching and through the TTC zone during the placement and removal process.*

**Standard:**

03 Existing pavement markings shall be maintained in all long-term stationary (see Section 6G.02) TTC zones in accordance with Chapters 3A and 3B, except as otherwise provided for temporary pavement markings in Section 6F.78. Pavement markings shall match the alignment of the markings in place at both ends of the TTC zone. Pavement markings shall be placed along the entire length of any paved detour or temporary roadway prior to the detour or roadway being opened to road users.

**Support:**

03A (DE Revision) DelDOT's Temporary Pavement Marking Policy can be found on the DelDOT website at [www.deldot.gov](http://www.deldot.gov).

**Standard:**

04 (DE Revision) For long-term stationary operations, pavement markings, **including raised pavement markers**, in the temporary traveled way that are no longer applicable shall be removed or obliterated as soon as practical. Pavement marking obliteration shall remove the non-applicable pavement marking material, and the obliteration method shall minimize pavement scarring. Painting over existing pavement markings with black paint or spraying with asphalt shall not be accepted as a substitute for removal or obliteration.

**Option:**

- 05 Removable, non-reflective, preformed tape that is approximately the same color as the pavement surface may be used where markings need to be covered temporarily.
- 06 (DE Revision) If a permanent raised pavement marker needs to be obscured in a TTC zone, the retroreflective lens of the raised pavement marker may be removed rather than removing the entire housing.

**Section 6F.78 Temporary Markings****Support:**

01 Temporary markings are those pavement markings or devices that are placed within TTC zones to provide road users with a clearly defined path of travel through the TTC zone when the permanent markings are either removed or obliterated during the work activities. Temporary markings are typically needed during the reconstruction of a road while it is open to traffic, such as overlays or surface treatments or where lanes are temporarily shifted on pavement that is to remain in place.

**Guidance:**

- 02 (DE Revision) Unless justified based on engineering judgment, temporary pavement markings should not remain in place for more than **30** days after the application of the pavement surface treatment or the construction of the final pavement surface on new roadways or over existing pavements.
- 03 The temporary use of edge lines, channelizing lines, lane-reduction transitions, gore markings, and other longitudinal markings, and the various non-longitudinal markings (such as stop lines, railroad crossings, crosswalks, words, symbols, or arrows) should be in accordance with the State's or highway agency's policy.

**Standard:**

- 04 Warning signs, channelizing devices, and delineation shall be used to indicate required road user paths in TTC zones where it is not possible to provide a clear path by pavement markings.
- 05 Except as otherwise provided in this Section, all temporary pavement markings for no-passing zones shall comply with the requirements of Chapters 3A and 3B. All temporary broken-line pavement markings shall use the same cycle length as permanent markings and shall have line segments that are at least 2 feet long.

**Guidance:**

- 06 All pavement markings and devices used to delineate road user paths should be reviewed during daytime and nighttime periods.

**Option:**

- 07 Half-cycle lengths with a minimum of 2-foot stripes may be used on roadways with severe curvature (see Section 3A.06) for broken line center lines in passing zones and for lane lines.
- 08 (DE Revision) For temporary situations of **3** days or less, for a two- or three-lane road, no-passing zones may be identified by using DO NOT PASS (R4-1) signs (see Section 2B.28) rather than pavement markings. Also,

DO NOT PASS signs may be used instead of pavement markings on roads with low volumes for longer periods in accordance with the State's or highway agency's policy.

*Guidance:*

09 *(DE Revision)* If used, the DO NOT PASS signs should be placed in accordance with Section 2B.28 and DelDOT's Temporary Pavement Markings Policy.

10 If used, the NO CENTER LINE sign should be placed in accordance with Section 6F.47.

## Section 6F.79 Temporary Raised Pavement Markers

*Option:*

01 Retroreflective or internally illuminated raised pavement markers, or non-retroreflective raised pavement markers supplemented by retroreflective or internally illuminated markers, may be substituted for markings of other types in TTC zones.

**Standard:**

02 If used, the color and pattern of the raised pavement markers shall simulate the color and pattern of the markings for which they substitute.

03 If temporary raised pavement markers are used to substitute for broken line segments, a group of at least three retroreflective markers shall be equally spaced at no greater than  $N/8$  (see Section 3B.14). The value of  $N$  for a broken or dotted line shall equal the length of one line segment plus one gap.

04 If temporary raised pavement markers are used to substitute for solid lines, the markers shall be equally spaced at no greater than  $N/4$ , with retroreflective or internally illuminated units at a spacing no greater than  $N/2$ . The value of  $N$  referenced for solid lines shall equal the  $N$  for the broken or dotted lines that might be adjacent to or might extend the solid lines (see Section 3B.11).

*Option:*

05 Temporary raised pavement markers may be used to substitute for broken line segments by using at least two retroreflective markers placed at each end of a segment of 2 to 5 feet in length, using the same cycle length as permanent markings.

*Guidance:*

06 Temporary raised pavement markers used on 2- to 5-foot segments to substitute for broken line segments should not be in place for more than 14 days unless justified by engineering judgment.

07 Raised pavement markers should be considered for use along surfaced detours or temporary roadways, and other changed or new travel-lane alignments.

*Option:*

08 Retroreflective or internally illuminated raised pavement markers, or non-retroreflective raised pavement markers supplemented by retroreflective or internally illuminated markers, may also be used in TTC zones to supplement markings as prescribed in Chapters 3A and 3B.

**Standard:**

09 *(DE Revision)* Due to their prior poor performance within Delaware, internally illuminated raised pavement markers shall only be permitted on state-maintained roads with DelDOT Traffic approval.

## Section 6F.80 Delineators

**Standard:**

01 When used, delineators shall combine with or supplement other TTC devices. They shall be mounted on crashworthy supports so that the reflecting unit is approximately 4 feet above the near roadway edge. The standard color for delineators used along both sides of two-way streets and highways and the right-hand side of one-way roadways shall be white. Delineators used along the left-hand side of one-way roadways shall be yellow.

*Guidance:*

02 *Spacing along roadway curves should be as set forth in Section 3F.04 and should be such that several delineators are constantly visible to the driver.*

*Option:*

03 Delineators may be used in TTC zones to indicate the alignment of the roadway and to outline the required vehicle path through the TTC zone.

**Section 6F.81 Lighting Devices****Standard:**

**01A (DE Revision) All work-related vehicles and equipment operating within a TTC zone shall be equipped with and display flashing lights.**

*Guidance:*

01 *Lighting devices should be provided in TTC zones based on engineering judgment.*

02 *When used to supplement channelization, the maximum spacing for warning lights should be identical to the channelizing device spacing requirements.*

*Option:*

03 Lighting devices may be used to supplement retroreflectorized signs, barriers, and channelizing devices.

04 During normal daytime maintenance operations, the functions of flashing warning beacons may be provided by high-intensity rotating, flashing, oscillating, or strobe lights on a maintenance vehicle.

**Standard:**

05 **Although vehicle hazard warning lights are permitted to be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights, they shall not be used instead of high-intensity rotating, flashing, oscillating, or strobe lights.**

**06 (DE Revision) Flashing lights shall be either a separate large rotating amber beacon or strobe light(s). Flashing lights shall be mounted on the vehicle in such a manner as to be clearly visible for 360 degrees around the vehicle. The flashing lights shall be visible from a distance of not less than 3,000 feet under normal atmospheric conditions at night.**

*Option:*

07 (DE Revision) Vehicles that are also expected to perform incident management may supplement the amber flashing lights at the rear of the vehicle with red flashing lights at the rear of the vehicle.

**Section 6F.82 Floodlights****Support:**

01 Utility, maintenance, or construction activities on highways are frequently conducted during nighttime periods when vehicular traffic volumes are lower. Large construction projects are sometimes operated on a double-shift basis requiring night work (see Section 6G.19).

*Guidance:*

02 *When nighttime work is being performed, floodlights should be used to illuminate the work area, equipment crossings, and other areas.*

*02A (DE Revision) Floodlights should be placed off the shoulder of the roadway and behind a traffic barrier, if practical. Where a traffic barrier is not available to shield the floodlight, it should be placed off the shoulder and outside of the clear zone.*

**Standard:**

**02B (DE Revision) If a floodlight is placed on the shoulder of the roadway or within the clear zone, it shall be delineated with retroreflective TTC devices.**

**02C (DE Revision) Six (6) drums shall be provided to close the shoulder in advance of each floodlight located within the shoulder.**



*Guidance:*

02D (DE Revision) *If a floodlight is placed on the median of a divided roadway and is less than 30 feet from either direction of travel, the floodlight should be delineated with 6 drums in that direction of travel.*

02E (DE Revision) *Floodlights should be located, to the extent possible, outside of the clear zone or shielded behind a traffic barrier.*

**Standard:**

02F (DE Revision) **When floodlights are not being used and if relocation or shielding is not practical, floodlights shall be delineated with a minimum of 6 drums.**

02G (DE Revision) **All floodlights no longer in use shall be removed from the work area within 48 hours, unless approved by DelDOT Traffic.**

03 **Except in emergency situations, flagger stations shall be illuminated at night.**

04 **Floodlighting shall not produce a disabling glare condition for approaching road users, flaggers, or workers.**

*Guidance:*

05 *The adequacy of the floodlight placement and elimination of potential glare should be determined by driving through and observing the floodlighted area from each direction on all approaching roadways after the initial floodlight setup, at night, and periodically.*

**Support:**

06 Desired illumination levels vary depending upon the nature of the task involved. An average horizontal luminance of 5 foot candles can be adequate for general activities. Tasks requiring high levels of precision and extreme care can require an average horizontal luminance of 20 foot candles.

**Section 6F.83 Warning Lights****Support:**

01 Type A, Type B, Type C, and Type D 360-degree warning lights are portable, powered, yellow, lens-directed, enclosed lights.

*Guidance:*

01A (DE Revision) *Except as provided in Paragraph 1B, warning lights should not be used on state-maintained roads.*

**Option:**

01B (DE Revision) *When added conspicuity is desired, only Type B warning lights may be used.*

**Standard:**

02 **Warning lights shall be in accordance with the current ITE “Purchase Specification for Flashing and Steady-Burn Warning Lights” (see Section 1A.11).**

03 **When warning lights are used, they shall be mounted on signs or channelizing devices in a manner that, if hit by an errant vehicle, they will not be likely to penetrate the windshield.**

*Guidance:*

04 *The maximum spacing for warning lights should be identical to the channelizing device spacing requirements.*

**Support:**

05 The light weight and portability of warning lights are advantages that make these devices useful as supplements to the retroreflectorization on signs and channelizing devices. The flashing lights are effective in attracting road users’ attention.

**Option:**

06 Warning lights may be used in either a steady-burn or flashing mode.

**Standard:**

07 **Except for the sequential flashing warning lights that are described in Paragraphs 8 and 9, flashing warning lights shall not be used for delineation, as a series of flashers fails to identify the desired vehicle path.**

**Option:**

08 A series of sequential flashing warning lights may be placed on channelizing devices that form a merging taper in order to increase driver detection and recognition of the merging taper.

**Standard:**

09 **If a series of sequential flashing warning lights is used, the successive flashing of the lights shall occur from the upstream end of the merging taper to the downstream end of the merging taper in order to identify the desired vehicle path. Each flashing warning light in the sequence shall be flashed at a rate of not less than 55 or more than 75 times per minute.**

10 **Type A Low-Intensity Flashing warning lights, Type C Steady-Burn warning lights, and Type D 360-degree Steady-Burn warning lights shall be maintained so as to be capable of being visible on a clear night from a distance of 3,000 feet. Type B High-Intensity Flashing warning lights shall be maintained so as to be capable of being visible on a sunny day when viewed without the sun directly on or behind the device from a distance of 1,000 feet.**

11 **Warning lights shall have a minimum mounting height of 30 inches to the bottom of the lens.**

**Support:**

12 Type A Low-Intensity Flashing warning lights are used to warn road users during nighttime hours that they are approaching or proceeding in a potentially hazardous area.

**Option:**

13 Type A warning lights may be mounted on channelizing devices.

**Support:**

14 Type B High-Intensity Flashing warning lights are used to warn road users during both daylight and nighttime hours that they are approaching a potentially hazardous area.

**Option:**

15 Type B warning lights are designed to operate 24 hours per day and may be mounted on advance warning signs or on independent supports.

16 Type C Steady-Burn warning lights and Type D 360-degree Steady-Burn warning lights may be used during nighttime hours to delineate the edge of the traveled way.

**Guidance:**

17 *When used to delineate a curve, Type C and Type D 360-degree warning lights should only be used on devices on the outside of the curve, and not on the inside of the curve.*

**Section 6F.84 Temporary Traffic Control Signals****Standard:**

01 **Temporary traffic control signals (see Section 4D.32) used to control road user movements through TTC zones and in other TTC situations shall comply with the applicable provisions of Part 4.**

01A (DE Revision) All temporary traffic control signals along state-maintained roadways shall have a signal plan approved by DelDOT Traffic.

**Support:**

02 Temporary traffic control signals are typically used in TTC zones such as temporary haul road crossings; temporary one-way operations along a one-lane, two-way highway; temporary one-way operations on bridges, reversible lanes, and intersections.

**Standard:**

03 **A temporary traffic control signal that is used to control traffic through a one-lane, two-way section of roadway shall comply with the provisions of Section 4H.02.**

**Guidance:**

04 *Where pedestrian traffic is detoured to a temporary traffic control signal, engineering judgment should be used to determine if pedestrian signals or accessible pedestrian signals (see Section 4E.09) are needed for crossing along an alternate route.*

05 *When temporary traffic control signals are used, conflict monitors typical of traditional traffic control signal operations should be used.*

**Option:**

06 Temporary traffic control signals may be portable or temporarily mounted on fixed supports.

**Guidance:**

07 *Temporary traffic control signals should only be used in situations where temporary traffic control signals are preferable to other means of traffic control, such as changing the work staging or work zone size to eliminate one-way vehicular traffic movements, using flaggers to control one-way or crossing movements, using STOP or YIELD signs, and using warning devices alone.*

**Support:**

08 Factors related to the design and application of temporary traffic control signals include the following:

- A. Safety and road user needs;
- B. Work staging and operations;
- C. The feasibility of using other TTC strategies (for example, flaggers, providing space for two lanes, or detouring road users, including bicyclists and pedestrians);
- D. Sight distance restrictions;
- E. Human factors considerations (for example, lack of driver familiarity with temporary traffic control signals);
- F. Road-user volumes including roadway and intersection capacity;
- G. Affected side streets and driveways;
- H. Vehicle speeds;
- I. The placement of other TTC devices;
- J. Parking;
- K. Turning restrictions;
- L. Pedestrians;
- M. The nature of adjacent land uses (such as residential or commercial);
- N. Legal authority;
- O. Signal phasing and timing requirements;
- P. Full-time or part-time operation;
- Q. Actuated, fixed-time, or manual operation;
- R. Power failures or other emergencies;
- S. Inspection and maintenance needs;
- T. Need for detailed placement, timing, and operation records; and
- U. Operation by contractors or by others.

09 Although temporary traffic control signals can be mounted on trailers or lightweight portable supports, fixed supports offer superior resistance to displacement or damage by severe weather, vehicle impact, and vandalism.

**Guidance:**

10 *Other TTC devices should be used to supplement temporary traffic control signals, including warning and regulatory signs, pavement markings, and channelizing devices.*

11 *Temporary traffic control signals not in use should be covered or removed.*

12 *If a temporary traffic control signal is located within 1/2 mile of an adjacent traffic control signal, consideration should be given to interconnected operation.*

**Standard:**

13 **Temporary traffic control signals shall not be located within 200 feet of a grade crossing unless the temporary traffic control signal is provided with preemption in accordance with Section 4D.27, or unless a uniformed officer or flagger is provided at the crossing to prevent vehicles from stopping within the crossing.**

**Section 6F.85 Temporary Traffic Barriers****Support:**

01 Temporary traffic barriers, including shifting portable or movable barriers, are devices designed to help prevent penetration by vehicles while minimizing injuries to vehicle occupants, and to protect workers, bicyclists, and pedestrians.

02 The four primary functions of temporary traffic barriers are:

- A. To keep vehicular traffic from entering work areas, such as excavations or material storage sites;
- B. To separate workers, bicyclists, and pedestrians from motor vehicle traffic;
- C. To separate opposing directions of vehicular traffic; and
- D. To separate vehicular traffic, bicyclists, and pedestrians from the work area such as false work for bridges and other exposed objects.

Option:

03 Temporary traffic barriers may be used to separate two-way vehicular traffic.

Guidance:

04 (DE Revision) *Paragraph deleted.*

**Standard:**

05 **Temporary traffic barriers shall be supplemented with standard delineation, pavement markings, or channelizing devices for improved daytime and nighttime visibility if they are used to channelize vehicular traffic. The delineation color shall match the applicable pavement marking color.**

Guidance:

05A (DE Revision) *Prior to installation, temporary Portland cement concrete traffic barrier should be painted white on the side adjacent to traffic. If the temporary Portland cement concrete traffic barrier is in place longer than one year, the temporary Portland cement concrete traffic barrier should be painted white on the side adjacent to traffic once per year until the barrier is no longer needed and removed from the roadway.*

Option:

05B (DE Revision) *Temporary Portland cement concrete traffic barrier manufactured with white cement may be used to eliminate the need for painting the temporary Portland cement concrete traffic barrier*

Guidance:

05C (DE Revision) *Temporary traffic barriers should be cleaned once every three months while in place on the roadway unless otherwise directed by DelDOT Traffic. Cleaning of the temporary traffic barrier during winter months should be completed in a manner that does not create ice on the roadway.*

**Standard:**

05D (DE Revision) **For enhanced conspicuity, non-directional retroreflective panels (see Figure 6F-8) shall be 6-inch wide and 12-inch high with rounded corners. The non-directional retroreflective panel shall have fluorescent orange, prismatic retroreflective sheeting on both sides.**


05E (DE Revision) **When used, non-directional retroreflective panels shall be placed at 50-foot intervals. The first panel shall be mounted within 10 feet of the leading edge of barrier.**

05F (DE Revision) **The non-directional retroreflective panels shall be attached to the temporary traffic barrier in such a manner as to prevent accidental removal. Bolts or epoxy-based adhesives shall be used.**

06 **Temporary traffic barriers, including their end treatments, shall be crashworthy. In order to mitigate the effect of striking the upstream end of a temporary traffic barrier, the end shall be installed in accordance with AASHTO's "Roadside Design Guide" (see Section 1A.11) by flaring until the end is outside the acceptable clear zone or by providing crashworthy end treatments.**

06A (DE Revision) **Beginning January 1, 2016, temporary Portland cement concrete traffic barrier shall be crashworthy in accordance with NCHRP 350 or latest edition of the "Manual for Assessing Safety Hardware" (MASH), published by AASHTO.**

**Figure 6F-8. Non-Directional Retroreflective Panel  
(Delaware Revision)**

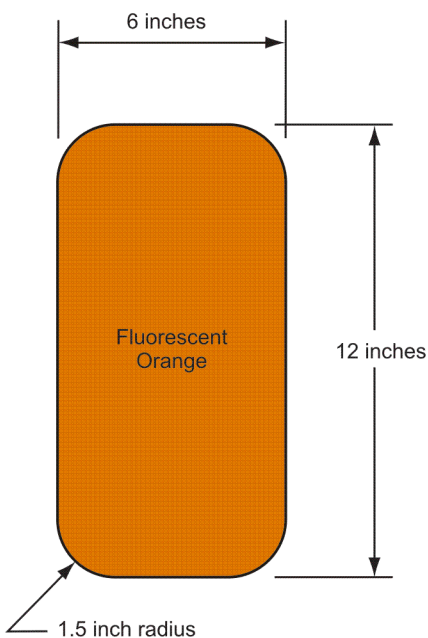

**Option:**

06B (DE Revision) Prior to January 1, 2016, temporary Portland Cement concrete traffic barrier that is not crashworthy in accordance with NCHRP 350 or the latest edition of MASH may be used on state maintained roadways if it meets or exceeds all of the following criteria:

- A. The barrier was manufactured prior to October 1, 2002
- B. The barrier is constructed of Class A concrete (as defined in the DelDOT Standard Specifications) and is adequately reinforced
- C. Has a joint system that provides a positive connection between adjacent segments that can transfer tension and moment in a vertical plane across the joint.

**Standard:**

06C (DE Revision) If temporary Portland Cement concrete traffic barrier that is not crashworthy as described in Paragraph 6A is used, the Contractor shall certify, in writing, to the Engineer and DelDOT Traffic prior to installation, that the barrier meets the above three conditions in Paragraph 6C and the joint system provided has been tested and found acceptable under NCHRP Report 230 test criteria.

06D (DE Revision) Temporary traffic barrier shall be offset a minimum of 1 foot from the edge of traveled way.

**Guidance:**

06E (DE Revision) On state-maintained roads with a posted or 85<sup>th</sup> percentile speed greater than 40 mph, the rate of taper for the flare of a traffic barrier should be 17:1. If space constraints limit the length of flare, a minimum taper rate of 11:1 should be used.

06F (DE Revision) When space permits, the leading edge of the attenuator/barrier should have a lateral offset of at least 12 feet from the traveled way.

06G (DE Revision) If unpinned barrier is used, a lateral offset of at least 5 feet should be provided between the barrier and the work area. Consideration should be given to pinning the barrier if work is performed within 5 feet of the barrier.

06H (DE Revision) *When space permits, channelizing devices should be placed along the tangent section of the traveled way for a distance equal to the buffer space measured from the intersection of the barrier and the right-hand edge of the closed travel lane (see Figure 6H-34).*

Option:

07 Warning lights or steady-burn lamps may be mounted on temporary traffic barrier installations.

Support:

08 Movable barriers are capable of being repositioned laterally using a transfer vehicle that travels along the barrier. Movable barriers enable short-term closures to be installed and removed on long-term projects. Providing a barrier-protected work space for short-term closures and providing unbalanced flow to accommodate changes in the direction of peak-period traffic flows are two of the advantages of using movable barriers.

09 Figure 6H-45 shows a temporary reversible lane using movable barriers. The notable feature of the movable barrier is that in both Phase A and Phase B, the lanes used by opposing traffic are separated by a barrier.

10 Figure 6H-34 shows an exterior lane closure using a temporary traffic barrier. Notes 7 through 9 address the option of using a movable barrier. By using a movable barrier, the barrier can be positioned to close the lane during the off-peak periods and can be relocated to open the lane during peak periods to accommodate peak traffic flows. With one pass of the transfer vehicle, the barrier can be moved out of the lane and onto the shoulder. Furthermore, if so desired, with a second pass of the transfer vehicle, the barrier could be moved to the roadside beyond the shoulder.

11 (DE Revision) More specific information on the use of temporary traffic barriers is contained in Chapters 8 and 9 of AASHTO's "Roadside Design Guide" (see Section 1A.11) and DelDOT's [Design Guidance Memorandum No. 1-21](#).

## Section 6F.86 Crash Cushions

Support:

01 (DE Revision) [In Delaware, crash cushions typically refer to sand crash cushion arrays and impact attenuators](#). Crash cushions are systems that mitigate the effects of errant vehicles that strike obstacles, either by smoothly decelerating the vehicle to a stop when hit head-on, or by redirecting the errant vehicle. The two types of crash cushions that are used in TTC zones are stationary crash cushions and truck-mounted attenuators. Crash cushions in TTC zones help protect the drivers from the exposed ends of barriers, fixed objects, shadow vehicles, and other obstacles. Specific information on the use of crash cushions can be found in AASHTO's "Roadside Design Guide" (see Section 1A.11).

**Standard:**

02 **Crash cushions shall be crashworthy. They shall also be designed for each application to stop or redirect errant vehicles under prescribed conditions. Crash cushions shall be periodically inspected to verify that they have not been hit or damaged. Damaged crash cushions shall be promptly repaired or replaced to maintain their crashworthiness.**

Support:

03 Stationary crash cushions are used in the same manner as permanent highway installations to protect drivers from the exposed ends of barriers, fixed objects, and other obstacles.

**Standard:**

04 **Stationary crash cushions shall be designed for the specific application intended.**

*Guidance:*

04A (DE Revision) *The following factors should be considered when selecting the type of crash cushion or impact attenuator:*

- A. *Speed of vehicles;*
- B. *Duration of use (maintenance);*
- C. *Width of device;*
- D. *Cross-section of roadway (pavement and slope); and*
- E. *Direction of impact.*
- F. *Runout area behind attenuator/barrier*

04B *(DE Revision)* Sand crash cushion arrays should not be used in applications that could result in a reverse strike by vehicles traveling in the opposite direction. It is acceptable to use sand crash cushion arrays if they are outside the clear zone of the opposite direction of traffic.

**Standard:**

04C **(DE Revision)** Sand crash cushions shall be designed according to manufacturer's recommendations and NCHRP 350 or MASH approved testing methods.

*Guidance:*

04D *(DE Revision)* If it is expected that sand crash cushions will be used in conditions where freezing could be expected, a suitable mixture of material should be used to preclude the ballast from freezing.

*Option:*

04E *(DE Revision)* Sand crash cushions may be used for short-duration maintenance purposes or for long-term projects where it is infeasible to install an impact attenuator.

*Guidance:*

04F *(DE Revision)* Stationary impact attenuators should be used instead of sand crash cushions for most long-term projects and, where practical, for short-duration maintenance purposes.

04G *(DE Revision)* Except for short-duration maintenance purposes, sand crash cushions should not be used without DelDOT Traffic approval.

**Standard:**

05 **Truck-mounted attenuators shall be energy-absorbing devices attached to the rear of shadow trailers or trucks. If used, the shadow vehicle with the attenuator shall be located in advance of the work area, workers, or equipment to reduce the severity of rear-end crashes from errant vehicles.**

05A **(DE Revision)** For long-term, intermediate-term, short-term, and mobile operations requiring shoulder and/or lane closures, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85th-percentile speed greater than 40 miles per hour, except as provided in Paragraphs 5B, 5C and 5E.

*Option:*

05B *(DE Revision)* For short-duration operations along roadways with a posted speed limit or 85th-percentile speed greater than 40 miles per hour, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.

05C *(DE Revision)* Truck-mounted attenuators may be omitted from specialized work vehicles, such as sweeper, vacuum, and pothole patching trucks, and other work vehicles that cannot support the installation of a truck-mounted attenuator.

05D *(DE Revision)* Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85th-percentile speed less than or equal to 40 miles per hour based on engineering judgment.

05E *(DE Revision)* If a shadow vehicle is used for mowing operations along a two-way, two-lane road, a truck-mounted attenuator may be omitted.

*Support:*

06 Trucks or trailers are often used as shadow vehicles to protect workers or work equipment from errant vehicles. These shadow vehicles are normally equipped with flashing arrows, changeable message signs, and/or high-intensity rotating, flashing, oscillating, or strobe lights located properly in advance of the workers and/or equipment that they are protecting. However, these shadow vehicles might themselves cause injuries to occupants of the errant vehicles if they are not equipped with truck-mounted attenuators.

*Guidance:*

07 *(DE Revision)* The shadow truck should be positioned a sufficient distance in advance of the workers or equipment being protected so that there will be sufficient distance, but not so much so that errant vehicles will travel around the shadow truck and strike the protected workers and/or equipment. This "roll-ahead" distance should be based on the truck-mounted attenuator manufacturer's specifications.



**Support:**

08 Chapter 9 of AASHTO's "Roadside Design Guide" (see Section 1A.11) contains additional information regarding the use of shadow vehicles.

**Guidance:**

09 *If used, the truck-mounted attenuator should be used in accordance with the manufacturer's specifications.*

**Section 6F.87 Rumble Strips****Support:**

01 Transverse rumble strips consist of intermittent, narrow, transverse areas of rough-textured or slightly raised or depressed road surface that extend across the travel lanes to alert drivers to unusual vehicular traffic conditions. Through noise and vibration they attract the driver's attention to such features as unexpected changes in alignment and to conditions requiring a stop.

02 Longitudinal rumble strips consist of a series of rough-textured or slightly raised or depressed road surfaces located along the shoulder to alert road users that they are leaving the travel lanes.

**Standard:**

03 **If it is desirable to use a color other than the color of the pavement for a longitudinal rumble strip, the color of the rumble strip shall be the same color as the longitudinal line the rumble strip supplements.**

04 **(DE Revision) If the color of a transverse rumble strip used within a travel lane is not the color of the pavement, the color of the rumble strip shall be white or black.**

**Option:**

05 Intervals between transverse rumble strips may be reduced as the distance to the approached conditions is diminished in order to convey an impression that a closure speed is too fast and/or that an action is imminent. A sign warning drivers of the onset of rumble strips may be placed in advance of any transverse rumble strip installation.

**Guidance:**

06 *Transverse rumble strips should be placed transverse to vehicular traffic movement. They should not adversely affect overall pavement skid resistance under wet or dry conditions.*

07 *In urban areas, even though a closer spacing might be warranted, transverse rumble strips should be designed in a manner that does not promote unnecessary braking or erratic steering maneuvers by road users.*

08 *Transverse rumble strips should not be placed on sharp horizontal or vertical curves.*

09 *Rumble strips should not be placed through pedestrian crossings or on bicycle routes.*

10 *Transverse rumble strips should not be placed on roadways used by bicyclists unless a minimum clear path of 4 feet is provided at each edge of the roadway or on each paved shoulder as described in AASHTO's "Guide to the Development of Bicycle Facilities" (see Section 1A.11).*

11 *Longitudinal rumble strips should not be placed on the shoulder of a roadway that is used by bicyclists unless a minimum clear path of 4 feet is also provided on the shoulder.*

12 *(DE Revision) Raised white transverse rumble strips used in a travel lane to alert motorists of a stop or other condition should be installed in accordance with Table 3J-1.*

13 *(DE Revision) Raised white transverse rumble strips should consist of a 4-inch line placed on top of a 6-inch line.*

**Section 6F.88 Screens****Support:**

01 Screens are used to block the road users' view of activities that can be distracting. Screens might improve safety and motor vehicle traffic flow where volumes approach the roadway capacity because they discourage gawking and reduce headlight glare from oncoming motor vehicle traffic.

**Guidance:**

02 *Screens should not be mounted where they could adversely restrict road user visibility and sight distance and adversely affect the reasonably safe operation of vehicles.*

Option:

03 Screens may be mounted on the top of temporary traffic barriers that separate two-way motor vehicle traffic.

*Guidance:*

04 *Design of screens should be in accordance with Chapter 9 of AASHTO's "Roadside Design Guide" (see Section 1A.11).*

## CHAPTER 6G. TYPE OF TEMPORARY TRAFFIC CONTROL ZONE ACTIVITIES

### Section 6G.01 Typical Applications

Support:

- 01 Each TTC zone is different. Many variables, such as location of work, highway type, geometrics, vertical and horizontal alignment, intersections, interchanges, road user volumes, road vehicle mix (buses, trucks, and cars), and road user speeds affect the needs of each zone. The goal of TTC in work zones is safety with minimum disruption to road users. The key factor in promoting TTC zone safety is proper judgment.
- 02 Typical applications (TAs) of TTC zones are organized according to duration, location, type of work, and highway type. Table 6H-1 is an index of these typical applications. These typical applications include the use of various TTC methods, but do not include a layout for every conceivable work situation.
- 03 Well-designed TTC plans for planned special events will likely be developed from a combination of treatments from several of the typical applications.

*Guidance:*

- 04 *For any planned special event that will have an impact on the traffic on any street or highway, a TTC plan should be developed in conjunction with and be approved by the agency or agencies that have jurisdiction over the affected roadways.*
- 05 *Typical applications should be altered, when necessary, to fit the conditions of a particular TTC zone.*

Option:

- 06 Other devices may be added to supplement the devices shown in the typical applications, while others may be deleted. The sign spacings and taper lengths may be increased to provide additional time or space for driver response.

Support:

- 07 Decisions regarding the selection of the most appropriate typical application to use as a guide for a specific TTC zone require an understanding of each situation. Although there are many ways of categorizing TTC zone applications, the four factors mentioned earlier (work duration, work location, work type, and highway type) are used to characterize the typical applications illustrated in Chapter 6H.

### Section 6G.02 Work Duration

Support:

- 01 Work duration is a major factor in determining the number and types of devices used in TTC zones. The duration of a TTC zone is defined relative to the length of time a work operation occupies a spot location.

**Standard:**

- 02 **The five categories of work duration and their time at a location shall be:**
- A. Long-term stationary is work that occupies a location more than 3 days.**
  - B. Intermediate-term stationary is work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than 1 hour.**
  - C. Short-term stationary is daytime work that occupies a location for more than 1 hour within a single daylight period.**
  - D. Short duration is work that occupies a location up to 1 hour.**
  - E. Mobile is work that moves intermittently or continuously.**

Support:

- 03 At long-term stationary TTC zones, there is ample time to install and realize benefits from the full range of TTC procedures and devices that are available for use. Generally, larger channelizing devices, temporary roadways, and temporary traffic barriers are used.

**Standard:**

- 04 **Since long-term operations extend into nighttime, retroreflective and/or illuminated devices shall be used in long-term stationary TTC zones.**

*Guidance:*

05 *Inappropriate markings in long-term stationary TTC zones should be removed and replaced with temporary markings.*

*Support:*

06 In intermediate-term stationary TTC zones, it might not be feasible or practical to use procedures or devices that would be desirable for long-term stationary TTC zones, such as altered pavement markings, temporary traffic barriers, and temporary roadways. The increased time to place and remove these devices in some cases could significantly lengthen the project, thus increasing exposure time.

**Standard:**

07 **Since intermediate-term operations extend into nighttime, retroreflective and/or illuminated devices shall be used in intermediate-term stationary TTC zones.**

*Support:*

08 (DE Revision) Most maintenance and utility operations are short-term stationary, short duration, or mobile work.

09 As compared to stationary operations, mobile and short-duration operations are activities that might involve different treatments. Devices having greater mobility might be necessary such as signs mounted on trucks. Devices that are larger, more imposing, or more visible can be used effectively and economically. The mobility of the TTC zone is important.

09A (DE Revision) Short-term stationary, short duration, and mobile operations can include, but are not limited to, both planned and unplanned maintenance activities. Unplanned maintenance activities generally consist of emergency work, such as an inoperative traffic signal, that must be performed without formal TTC planning because the safety of the travelling public may be at risk if the work is not completed in a timely manner.

*Guidance:*

10 *Safety in short-duration or mobile operations should not be compromised by using fewer devices simply because the operation will frequently change its location.*

*Option:*

11 Appropriately colored or marked vehicles with high-intensity rotating, flashing, oscillating, or strobe lights may be used in place of signs and channelizing devices for short-duration or mobile operations. These vehicles may be augmented with signs or arrow boards.

*Support:*

12 During short-duration work, it often takes longer to set up and remove the TTC zone than to perform the work. Workers face hazards in setting up and taking down the TTC zone. Also, since the work time is short, delays affecting road users are significantly increased when additional devices are installed and removed.

*Option:*

13 Considering these factors, simplified control procedures may be warranted for short-duration work. A reduction in the number of devices may be offset by the use of other more dominant devices such as high-intensity rotating, flashing, oscillating, or strobe lights on work vehicles.

13A (DE Revision) Short duration operations may only require a marked vehicle with high-intensity rotating, flashing, oscillating, or strobe lights.

*Support:*

14 Mobile operations often involve frequent short stops for activities such as litter cleanup, pothole patching, or utility operations, and are similar to short-duration operations.

*Guidance:*

15 *Warning signs and high-intensity rotating, flashing, oscillating, or strobe lights should be used on the vehicles that are participating in the mobile work.*

*Option:*

16 Flags and/or channelizing devices may additionally be used and moved periodically to keep them near the mobile work area.

17 Flaggers may be used for mobile operations that often involve frequent short stops.

*Guidance:*

17A (DE Revision) *If the work operation requires a flagger to assist work vehicles entering or exiting the work area or to periodically control traffic, flagger signs (see Section 6F.31) should be used in addition to the typical advance warning signs for each application. If used, the flagger signs should be located at the downstream end of the advance warning area, which typically corresponds with the beginning of a transition taper.*

**Support:**

18 Mobile operations also include work activities where workers and equipment move along the road without stopping, usually at slow speeds. The advance warning area moves with the work area.

*Guidance:*

19 *When mobile operations are being performed, a shadow vehicle equipped with an arrow board or a sign should follow the work vehicle, especially when vehicular traffic speeds or volumes are high. Where feasible, warning signs should be placed along the roadway and moved periodically as work progresses.*

20 (DE Revision) *Under high-volume conditions, consideration should be given to scheduling mobile operations work during off-peak hours to the extent practical.*

21 *If there are mobile operations on a high-speed travel lane of a multi-lane divided highway, arrow boards should be used.*

**Standard:**

22 **Mobile operations shall have appropriate devices on the equipment (that is, high-intensity rotating, flashing, oscillating, or strobe lights, signs, or special lighting), or shall use a separate vehicle with appropriate warning devices.**

**Option:**

23 For mobile operations that move at speeds of less than 3 mph, mobile signs or stationary signing that is periodically retrieved and repositioned in the advance warning area may be used.

23A (DE Revision) *For mobile striping operations, WET ROAD PAINT (W25-1-DE or W25-1-DE1) mobile signs may be used.*

**Section 6G.03 Location of Work****Support:**

01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 The choice of TTC needed for a TTC zone depends upon where the work is located. As a general rule, the closer the work is to road users (including bicyclists and pedestrians), the greater the number of TTC devices that are needed. Procedures are described later in this Chapter for establishing TTC zones in the following locations:

- A. Outside the shoulder,
- B. On the shoulder with no encroachment,
- C. On the shoulder with minor encroachment,
- D. Within the median, and
- E. Within the traveled way.

**Standard:**

03 **When the work space is within the traveled way, except for short-duration and mobile operations, advance warning shall provide a general message that work is taking place and shall supply information about highway conditions. TTC devices shall indicate how vehicular traffic can move through the TTC zone.**

**Section 6G.04 Modifications To Fulfill Special Needs****Support:**

01 The typical applications in Chapter 6H illustrate commonly encountered situations in which TTC devices are employed.

## Option:

02 Other devices may be added to supplement the devices provided in the typical applications, and device spacing may be adjusted to provide additional reaction time. When conditions are less complex than those depicted in the typical applications, fewer devices may be needed.

*Guidance:*

03 *When conditions are more complex, typical applications should be modified by giving particular attention to the provisions set forth in Chapter 6B and by incorporating appropriate devices and practices from the following list:*

*A. Additional devices:*

1. Signs
2. Arrow boards
3. More channelizing devices at closer spacing (see Section 6F.74 for information regarding detectable edging for pedestrians)
4. Temporary raised pavement markers
5. High-level warning devices
6. Portable changeable message signs
7. Temporary traffic control signals (including pedestrian signals and accessible pedestrian signals)
8. Temporary traffic barriers
9. Crash cushions
10. Screens
11. Rumble strips
12. More delineation

*B. Upgrading of devices:*

1. A full complement of standard pavement markings
2. Brighter and/or wider pavement markings
3. Larger and/or brighter signs
4. Channelizing devices with greater conspicuity
5. Temporary traffic barriers in place of channelizing devices

*C. Improved geometrics at detours or crossovers**D. Increased distances:*

1. Longer advance warning area
2. Longer tapers

*E. Lighting:*

1. Temporary roadway lighting
2. Steady-burn lights used with channelizing devices
3. Flashing lights for isolated hazards
4. Illuminated signs
5. Floodlights

*F. Pedestrian routes and temporary facilities**G. Bicycle diversions and temporary facilities***Section 6G.05 Work Affecting Pedestrian and Bicycle Facilities**

## Support:

01 It is not uncommon, particularly in urban areas, that road work and the associated TTC will affect existing pedestrian or bicycle facilities. It is essential that the needs of all road users, including pedestrians with disabilities, are considered in TTC zones.

02 In addition to specific provisions identified in Sections 6G.06 through 6G.14, there are a number of provisions that might be applicable for all of the types of activities identified in this Chapter.

*Guidance:*

- 03 *Where pedestrian or bicycle usage is high, the typical applications should be modified by giving particular attention to the provisions set forth in Chapter 6D, this Chapter, Section 6F.74, and in other Sections of Part 6 related to accessibility and detectability provisions in TTC zones.*
- 04 *Pedestrians should be separated from the worksite by appropriate devices that maintain the accessibility and detectability for pedestrians with disabilities.*
- 05 *Bicyclists and pedestrians should not be exposed to unprotected excavations, open utility access, overhanging equipment, or other such conditions.*
- 06 *(DE Revision) Except for short duration and mobile operations, when a highway shoulder is occupied, a SHOULDER CLOSED (W21-5a) sign should be placed in advance of the activity area. When work is performed on a paved shoulder 8 feet or more in width, channelizing devices should be placed on a taper having a length that conforms to the requirements of a shoulder taper. Signs should be placed such that they do not narrow any existing pedestrian passages to less than 48 inches.*
- 07 *Pedestrian detours should be avoided since pedestrians rarely observe them and the cost of providing accessibility and detectability might outweigh the cost of maintaining a continuous route. Whenever possible, work should be done in a manner that does not create a need to detour pedestrians from existing routes or crossings.*

**Standard:**

- 08 **Where pedestrian routes are closed, alternate pedestrian routes shall be provided.**
- 09 **(DE Revision) If the TTC zone affects the movement of pedestrians, adequate pedestrian access and walkways shall be provided. If the TTC zone affects an accessible and detectable pedestrian facility, the accessibility and detectability shall be maintained along the alternate pedestrian route.**

*Option:*

- 09A *(DE Revision) If establishing or maintaining an alternate pedestrian route is not feasible during the project, an alternate means of providing for pedestrians may be used, such as adding free bus service around the project or assigning someone the responsibility to assist pedestrians with disabilities through the project limits.*

**Section 6G.06 Work Outside of the Shoulder***Support:*

- 01 *(DE Revision) When work is being performed off the roadway (beyond the shoulders, but within the right-of-way), little or no TTC might be needed. TTC generally is not needed where work is confined to an area 10 feet or more from the edge of the traveled way. However, TTC is appropriate where distracting situations exist, such as vehicles parked on the shoulder, vehicles accessing the worksite via the highway, and equipment traveling on or crossing the roadway to perform the work operations (for example, mowing). For work beyond the shoulder, see Figures 6H-1, 6H-1A, 6H-1B, 6H-2, and 6H-5A.*

*Guidance:*

- 02 *Where the situations described in Paragraph 1 exist, a single warning sign, such as ROAD WORK AHEAD (W20-1), should be used. If the equipment travels on the roadway, the equipment should be equipped with appropriate flags, high-intensity rotating, flashing, oscillating, or strobe lights, and/or a SLOW MOVING VEHICLE (W21-4) sign.*

*Option:*

- 03 *(DE Revision) If work vehicles are on the shoulder, a SHOULDER CLOSED (W21-5a) sign may be used. For mowing operations, the signs MOWING AHEAD (W21-8) and END MOWING (G20-2-DE) may be used.*
- 04 *(DE Revision) Where the activity is spread out over a distance of more than 2 miles, the SHOULDER CLOSED (W21-5a) sign may be repeated every 1 mile.*
- 05 *A supplementary plaque with the message NEXT XX MILES (W7-3aP) may be used.*

*Guidance:*

- 06 *A general warning sign like ROAD MACHINERY AHEAD (W21-3) should be used if workers and equipment must occasionally move onto the shoulder.*



## Section 6G.07 Work on the Shoulder with No Encroachment

Support:

01 The provisions of this Section apply to short-term through long-term stationary operations.

**Standard:**

02 **When paved shoulders having a width of 8 feet or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct motor vehicle traffic to remain within the traveled way.**

*Guidance:*

03 *(DE Revision) When paved shoulders having a width of 8 feet or more are closed on [interstates](#), [freeways](#), and [expressways](#), road users should be warned about potential disabled vehicles that cannot get off the traveled way. An initial general warning sign, such as ROAD WORK AHEAD (W20-1), should be used, followed by a RIGHT or LEFT SHOULDER CLOSED (W21-5a) sign. Where the downstream end of the shoulder closure extends beyond the distance that can be perceived by road users, a supplementary plaque bearing the message NEXT XX FEET (W16-4P) or MILES (W7-3aP) should be placed below the SHOULDER CLOSED (W21-5a) sign. On multi-lane, divided highways, signs advising of shoulder work or the condition of the shoulder should be placed only on the side of the affected shoulder.*

04 *When an improved shoulder is closed on a high-speed roadway, it should be treated as a closure of a portion of the road system because road users expect to be able to use it in emergencies. Road users should be given ample advance warning that shoulders are closed for use as refuge areas throughout a specified length of the approaching TTC zone. The sign(s) should read SHOULDER CLOSED (W21-5a) with distances indicated. The work space on the shoulder should be closed off by a taper or channelizing devices with a length of 1/3 L using the formulas in Tables 6C-3 and 6C-4.*

05 *When the shoulder is not occupied but work has adversely affected its condition, the LOW SHOULDER (W8-9) or SOFT SHOULDER (W8-4) sign should be used, as appropriate.*

06 *Where the condition extends over a distance in excess of 1 mile, the sign should be repeated at 1-mile intervals.*

**Option:**

07 In addition, a supplementary plaque bearing the message NEXT XX MILES (W7-3aP) may be used. Temporary traffic barriers may be needed to inhibit encroachment of errant vehicles into the work space and to protect workers.

**Standard:**

08 **When used for shoulder work, arrow boards shall operate only in the caution mode.**

Support:

09 *(DE Revision) The typical [applications](#) for stationary work operations on shoulders [are](#) shown in [Figures 6H-3 and 6H-3A](#). Short duration or mobile work on shoulders is shown in [Figures 6H-4 and 6H-4A](#). Work on [interstate](#), [freeway](#), and [expressway](#) shoulders is shown in [Figures 6H-5 and 6H-5B](#).*

## Section 6G.08 Work on the Shoulder with Minor Encroachment

Support:

01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

*Guidance:*

02 *When work takes up part of a lane, vehicular traffic volumes, vehicle mix (buses, trucks, cars, and bicycles), speed, and capacity should be analyzed to determine whether the affected lane should be closed. Unless the lane encroachment permits a remaining lane width of 10 feet, the lane should be closed.*

03 *Truck off-tracking should be considered when determining whether the minimum lane width of 10 feet is adequate.*

## Option:

04 A lane width of 9 feet may be used for short-term stationary work on low-volume, low-speed roadways when vehicular traffic does not include longer and wider heavy commercial vehicles.

## Support:

05 (DE Revision) Figure 6H-6 illustrates a method for handling vehicular traffic where the stationary or short duration work space encroaches slightly into the traveled way [along a low-volume roadway with a posted speed limit or 85<sup>th</sup>-percentile speed of 40 mph or less](#).

**Section 6G.09 Work Within the Median**

## Support:

01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

## Guidance:

02 (DE Revision) *If work in the median of a divided highway is within 10 feet from the edge of the traveled way for either direction of travel, TTC should be used through the use of advance warning signs and channelizing devices.*

**Section 6G.10 Work Within the Traveled Way of a Two-Lane Highway**

## Support:

01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 (DE Revision) Detour signs are used to direct road users onto another roadway. At diversions, road users are directed onto a temporary roadway or alignment placed within or adjacent to the right-of-way. Typical applications for detouring or diverting road users on two-lane highways are shown in Figures 6H-7 and 6H-20. Figure 6H-7 illustrates the controls around an area where a section of roadway has been closed and a diversion has been constructed. Channelizing devices and pavement markings are used to indicate the transition to the temporary roadway.

## Guidance:

03 *When a detour is long, Detour (M4-8, M4-9) signs should be installed to remind and reassure road users periodically that they are still successfully following the detour.*

04 (DE Revision) *When an entire roadway is closed, as illustrated in Figure 6H-20, a detour should be provided and road users should be warned in advance of the closure. If local road users are allowed to use the roadway up to the closure, the ROAD CLOSED AHEAD, LOCAL TRAFFIC ONLY (R11-3a) sign should be used. The portion of the road open to local road users should have adequate signing, marking, and delineation.*

05 (DE Revision) *Detours should be signed so that road users will be able to traverse the entire detour route and back to the original roadway as shown in Figure 6H-20.*

## Support:

06 Techniques for controlling vehicular traffic under one-lane, two-way conditions are described in Section 6C.10.

## Option:

07 Flaggers may be used as shown in Figure 6H-10.

08 (DE Revision) STOP/YIELD sign control may be used on roads with low traffic volumes as shown in Figures 6H-11 and 6H-11A. [Where the opposite shoulder is suitable for carrying vehicular traffic and of adequate width, lanes may be shifted along two-lane roads with low traffic volumes as shown in Figure 6H-11B.](#)

09 A temporary traffic control signal may be used as shown in Figure 6H-12.

## Section 6G.11 Work Within the Traveled Way of an Urban Street

### Support:

- 01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.
- 02 In urban TTC zones, decisions are needed on how to control vehicular traffic, such as how many lanes are required, whether any turns need to be prohibited at intersections, and how to maintain access to business, industrial, and residential areas.
- 03 Pedestrian traffic needs separate attention. Chapter 6D contains information regarding pedestrian movements near TTC zones.

### Standard:

- 04 **If the TTC zone affects the movement of bicyclists, adequate access to the roadway or shared-use paths shall be provided (see Part 9).**
- 05 **Where transit stops are affected or relocated because of work activity, both pedestrian and vehicular access to the affected or relocated transit stops shall be provided.**

### Guidance:

- 06 *If a designated bicycle route is closed because of the work being done, a signed alternate route should be provided. Bicyclists should not be directed onto the path used by pedestrians.*
- 07 *Worksites within the intersection should be protected against inadvertent pedestrian incursion by providing detectable channelizing devices.*

### Support:

- 08 Utility work takes place both within and outside the roadway to construct and maintain services such as power, gas, light, water, or telecommunications. Operations often involve intersections, since that is where many of the network junctions occur. The work force is usually small, only a few vehicles are involved, and the number and types of TTC devices placed in the TTC zone is usually minimal.

### Standard:

- 09 **All TTC devices shall be retroreflective or illuminated if utility work is performed during nighttime hours.**

### Guidance:

- 10 *As discussed under short-duration projects, however, the reduced number of devices in utility work zones should be offset by the use of high-visibility devices, such as high-intensity rotating, flashing, oscillating, or strobe lights on work vehicles or high-level warning devices.*

### Support:

- 11 **(DE Revision)** Figures 6H-6, 6H-10, 6H-15, 6H-18, 6H-21, 6H-23, and 6H-33 are examples of typical applications for utility operations. Other typical applications might apply as well.

## Section 6G.12 Work Within the Traveled Way of a Multi-Lane, Non-Access Controlled Highway

### Support:

- 01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.
- 02 Work on multi-lane (two or more lanes of moving motor vehicle traffic in one direction) highways is divided into right-lane closures, left-lane closures, interior-lane closures, multiple-lane closures, and closures on five-lane roadways.

### Standard:

- 03 **When a lane is closed on a multi-lane road for other than a mobile operation, a transition area containing a merging taper shall be used.**

### Guidance:

- 04 *When justified by an engineering study, temporary traffic barriers (see Section 6F.70) should be used to prevent incursions of errant vehicles into hazardous areas or work space.*

**Support:**

05 Figure 6H-34 illustrates a lane closure in which temporary traffic barriers are used.

**Option:**

06 When the right lane is closed, TTC similar to that shown in Figure 6H-33 may be used for undivided or divided four-lane roads.

**Guidance:**

07 *If morning and evening peak hour vehicular traffic volumes in the two directions are uneven and the greater volume is on the side where the work is being done in the right-hand lane, consideration should be given to closing the inside lane for opposing vehicular traffic and making the lane available to the side with heavier vehicular traffic, as shown in Figure 6H-31.*

08 *If the larger vehicular traffic volume changes to the opposite direction at a different time of the day, the TTC should be changed to allow two lanes for opposing vehicular traffic by moving the devices from the opposing lane to the center line. When it is necessary to create a temporary center line that is not consistent with the pavement markings, channelizing devices should be used and closely spaced.*

08A (DE Revision) *Figure 6H-31 should not be used along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.*

**Option:**

09 When closing a left lane on a multi-lane undivided road, as vehicular traffic flow permits, the two interior lanes may be closed, as shown in Figure 6H-30, to provide drivers and workers additional lateral clearance and to provide access to the work space.

**Guidance:**

09A (DE Revision) *Figure 6H-30 should not be used along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.*

**Standard:**

10 **When only the left lane is closed on undivided roads, channelizing devices shall be placed along the center line as well as along the adjacent lane.**

**Guidance:**

11 *When an interior lane is closed, an adjacent lane should also be considered for closure to provide additional space for vehicles and materials and to facilitate the movement of equipment within the work space.*

12 *When multiple lanes in one direction are closed, a capacity analysis should be made to determine the number of lanes needed to accommodate motor vehicle traffic needs. Vehicular traffic should be moved over one lane at a time. As shown in Figure 6H-37, the tapers should be separated by a distance of 2L, with L being determined by the formulas in Tables 6C-3 and 6C-4.*

**Option:**

13 If operating speeds are 40 mph or less and the space approaching the work area does not permit moving traffic over one lane at a time, a single continuous taper may be used.

**Standard:**

14 **When a directional roadway is closed, inapplicable WRONG WAY signs and markings, and other existing traffic control devices at intersections within the temporary two-lane, two-way operations section shall be covered, removed, or obliterated.**

**Option:**

15 When half the road is closed on an undivided highway, both directions of vehicular traffic may be accommodated as shown in Figure 6H-32. When both interior lanes are closed, temporary traffic controls may be used as provided in Figure 6H-30. When a roadway must be closed on a divided highway, a median crossover may be used (see Section 6G.16).

## Support:

16 TTC for lane closures on five-lane roads is similar to other multi-lane undivided roads. Figure 6H-32 can be adapted for use on five-lane roads. Figure 6H-35 can be used on a five-lane road for short duration and mobile operations.

**Section 6G.13 Work Within the Traveled Way at an Intersection**

## Support:

01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 The typical applications for intersections are classified according to the location of the work space with respect to the intersection area (as defined by the extension of the curb or edge lines). The three classifications are near side, far side, and in-the-intersection. Work spaces often extend into more than one portion of the intersection. For example, work in one quadrant often creates a near-side work space on one street and a far-side work space on the cross street. In such instances, an appropriate TTC plan is obtained by combining features shown in two or more of the intersection and pedestrian typical applications.

03 TTC zones in the vicinity of intersections might block movements and interfere with normal road user flows. Such conflicts frequently occur at more complex signalized intersections having such features as traffic signal heads over particular lanes, lanes allocated to specific movements, multiple signal phases, signal detectors for actuated control, and accessible pedestrian signals and detectors.

*Guidance:*

04 *The effect of the work upon signal operation should be considered, and temporary corrective actions should be taken, if necessary, such as revising signal phasing and/or timing to provide adequate capacity, maintaining or adjusting signal detectors, and relocating signal heads to provide adequate visibility as described in Part 4.*

**Standard:**

04A **(DE Revision)** The provisions of the memorandum entitled “Temporary Traffic Control within Intersections”, dated March 19, 2012, or latest version thereof, shall be adhered to when working within or adjacent to an intersection.

05 **When work will occur near an intersection where operational, capacity, or pedestrian accessibility problems are anticipated, the highway agency having jurisdiction shall be contacted.**

*Guidance:*

06 *For work at an intersection, advance warning signs, devices, and markings should be used on all cross streets, as appropriate. The typical applications depict urban intersections on arterial streets. Where the posted speed limit, the off-peak 85<sup>th</sup>-percentile speed prior to the work starting, or the anticipated speed exceeds 40 mph, additional warning signs should be used in the advance warning area.*

07 *Pedestrian crossings near TTC sites should be separated from the worksite by appropriate barriers that maintain the accessibility and detectability for pedestrians with disabilities.*

## Support:

08 Near-side work spaces, as depicted in Figure 6H-21, are simply handled as a midblock lane closure. A problem that might occur with near-side lane closure is a reduction in capacity, which during certain hours of operation could result in congestion and backups.

## Option:

09 When near-side work spaces are used, an exclusive turn lane may be used for through vehicular traffic.

10 Where space is restricted in advance of near-side work spaces, as with short block spacings, two warning signs may be used in the advance warning area, and a third action-type warning or a regulatory sign (such as Keep Left) may be placed within the transition area.

## Support:

11 **(DE Revision)** Far-side work spaces, as depicted in Figure 6H-23, involve additional treatment because road users typically enter the activity area by straight-through and left- or right-turning movements.



*Guidance:*

12 *When a lane through an intersection must be closed on the far side, it should also be closed on the near-side approach to preclude merging movements within the intersection.*

*Option:*

13 If there are a significant number of vehicles turning from a near-side lane that is closed on the far side, the near-side lane may be converted to an exclusive turn lane.

*Support:*

14 (DE Revision) Figure 6H-27 provides guidance on applicable procedures for work performed within the intersection.

*Option:*

15 (DE Revision) If the work is within the intersection, any of the following strategies may be used:

- A. A small work space so that road users can move around it;
- B. Flaggers or uniformed law enforcement officers to direct road users, as shown in Figure 6H-27;
- C. Work in stages so the work space is kept to a minimum; and
- D. Road closures or upstream diversions to reduce road user volumes.

*Guidance:*

16 *Depending on road user conditions, a flagger(s) and/or a uniformed law enforcement officer(s) should be used to control road users.*

## **Section 6G.14 Work Within the Traveled Way of an Interstate, Freeway, or Expressway**

*Support:*

01 Problems of TTC might occur under the special conditions encountered where vehicular traffic must be moved through or around TTC zones on high-speed, high-volume roadways. Although the general principles outlined in the previous Sections of this Manual are applicable to all types of highways, high-speed, access-controlled highways need special attention in order to accommodate vehicular traffic while also protecting road users and workers. The road user volumes, road vehicle mix (buses, trucks, cars, and bicycles, if permitted), and speed of vehicles on these facilities require that careful TTC procedures be implemented, for example, to induce critical merging maneuvers well in advance of work spaces and in a manner that creates minimum turbulence and delay in the vehicular traffic stream. These situations often require more conspicuous devices than specified for normal rural highway or urban street use. However, the same important basic considerations of uniformity and standardization of general principles apply for all roadways.

02 Work under high-speed, high-volume vehicular traffic on a controlled access highway is complicated by the roadway design and operational features. The presence of a median that establishes separate roadways for directional vehicular traffic flow might prohibit the closing of one of the roadways or the diverting of vehicular traffic to the other roadway. Lack of access to and from adjacent roadways prohibits rerouting of vehicular traffic away from the work space in many cases. Other conditions exist where work must be limited to night hours, thereby necessitating increased use of warning lights, illumination of work spaces, and advance warning systems.

03 (DE Revision) TTC for a typical lane closure on a divided highway is shown in Figure 6H-33. Temporary traffic controls for short duration and mobile operations on multi-lane, divided highways are shown in Figures 6H-35 and 6H-35A. Mobile striping operations on multi-lane, divided highways are shown in Figures 6H-35B and 6H-35C and mobile striping operations on interstates, freeways, and expressways are shown in Figures 6H-35D, 6H-35E, 6H-35F, and 6H-35G. A typical application for shifting vehicular traffic lanes around a work space is shown in Figure 6H-36. TTC for multiple and interior lane closures on a multi-lane, divided highway is shown in Figures 6H-37 and 6H-38.

*Guidance:*

04 (DE Revision) *Closing an interior lane only on a directional roadway with three or more lanes is strongly discouraged because of worker safety and driver expectancy concerns associated with permitting high-speed traffic on both sides of the work space. When an interior lane is closed, an adjacent lane should also be considered for closure as shown in Figure 6H-37. When the capacity of the other lanes is needed based on an engineering study, the method shown in Figure 6H-38 should be used.*

**Standard:**

05 (DE Revision) **Flaggers shall not be used on Interstates, Freeways, or Expressways.**

**Option:**

06 (DE Revision) In support of emergencies or incidents, flaggers may be used to assist with the traffic control at incident scenes (see Chapter 6I).

**Section 6G.15 Two-Lane, Two-Way Traffic on One Roadway of a Normally Divided Highway****Support:**

01 Two-lane, two-way operation on one roadway of a normally divided highway is a typical procedure that requires special consideration in the planning, design, and work phases, because unique operational problems (for example, increasing the risk of head-on crashes) can arise with the two-lane, two-way operation.

**Standard:**

02 **When two-lane, two-way traffic control must be maintained on one roadway of a normally divided highway, opposing vehicular traffic shall be separated with either temporary traffic barriers (concrete safety-shape or approved alternate), channelizing devices, or a temporary raised island throughout the length of the two-way operation. The use of markings and complementary signing, by themselves, shall not be used.**

**Support:**

03 Figure 6H-39 shows the procedure for two-lane, two-way operation. Treatments for entrance and exit ramps within the two-way roadway segment of this type of work are shown in Figures 6H-40 and 6H-41.

**Section 6G.16 Crossovers****Guidance:**

01 *The following are considered good guiding principles for the design of crossovers:*

- A. *Tapers for lane drops should be separated from the crossovers, as shown in Figure 6H-39.*
- B. *Crossovers should be designed for speeds no lower than 10 mph below the posted speed, the off-peak 85<sup>th</sup>-percentile speed prior to the work starting, or the anticipated operating speed of the roadway, unless unusual site conditions require that a lower design speed be used.*
- C. *A good array of channelizing devices, delineators, and full-length, properly placed pavement markings should be used to provide drivers with a clearly defined travel path.*
- D. *The design of the crossover should accommodate all vehicular traffic, including trucks and buses.*

**Support:**

02 Temporary traffic barriers and the excessive use of TTC devices cannot compensate for poor geometric and roadway cross-section design of crossovers.

**Section 6G.17 Interchanges****Guidance:**

01 *Access to interchange ramps on limited-access highways should be maintained even if the work space is in the lane adjacent to the ramps. Access to exit ramps should be clearly marked and delineated with channelizing devices. For long-term projects, conflicting pavement markings should be removed and new ones placed. Early coordination with officials having jurisdiction over the affected cross streets and providing emergency services should occur before ramp closings.*

**Option:**

02 If access is not possible, ramps may be closed by using signs and Type 3 Barricades. As the work space changes, the access area may be changed, as shown in Figure 6H-42. A TTC zone in the exit ramp may be handled as shown in Figure 6H-43.

03 (DE Revision) When a work space interferes with an entrance ramp, a lane may need to be closed on the multi-lane, divided highway (see Figure 6H-44). A TTC zone in the entrance ramp may require shifting ramp vehicular traffic (see Figure 6H-44).



## Section 6G.18 Work in the Vicinity of a Grade Crossing

### Standard:

01 **(DE Revision)** When grade crossings exist either within or in the vicinity of a TTC zone, lane restrictions, flagging, or other operations shall not create conditions where vehicles can be queued across the tracks. If the queuing of vehicles across the tracks cannot be avoided, a uniformed law enforcement officer or flagger shall be provided at the **upstream side of the crossing to prevent vehicles from stopping within the grade crossing, considered to be 50 feet on either side of the closest and farthest rail, even if automatic warning devices are in place.**

### Support:

02 Figure 6H-46 shows work in the vicinity of a grade crossing.

03 Section 8A.08 contains additional information regarding temporary traffic control zones in the vicinity of grade crossings.

### Guidance:

04 *Early coordination with the railroad company or light rail transit agency should occur before work starts.*

## Section 6G.19 Temporary Traffic Control During Nighttime Hours

### Support:

01 Chapter 6D and Sections 6F.74 and 6G.05 contain additional information regarding the steps to follow when pedestrian or bicycle facilities are affected by the worksite.

02 Conducting highway construction and maintenance activities during night hours could provide an advantage when traditional daytime traffic control strategies cannot achieve an acceptable balance between worker and public safety, traffic and community impact, and constructability. The two basic advantages of working at night are reduced traffic congestion and less involvement with business activities. However, the two basic conditions that must normally be met for night work to offer any advantage are reduced traffic volumes and easy set up and removal of the traffic control patterns on a nightly basis.

03 Shifting work activities to night hours, when traffic volumes are lower and normal business is less active, might offer an advantage in some cases, as long as the necessary work can be completed and the worksite restored to essentially normal operating conditions to carry the higher traffic volume during non-construction hours.

04 Although working at night might offer advantages, it also includes safety issues. Reduced visibility inherent in night work impacts the performance of both drivers and workers. Because traffic volumes are lower and congestion is minimized, speeds are often higher at night necessitating greater visibility at a time when visibility is reduced. Finally, the incidence of impaired (alcohol or drugs), fatigued, or drowsy drivers might be higher at night.

05 Working at night also involves other factors, including construction productivity and quality, social impacts, economics, and environmental issues. A decision to perform construction or maintenance activities at night normally involves some consideration of the advantages to be gained compared to the safety and other issues that might be impacted.

### Guidance:

06 *Considering the safety issues inherent to night work, consideration should be given to enhancing traffic controls (see Section 6G.04) to provide added visibility and driver guidance, and increased protection for workers.*

07 *In addition to the enhancements listed in Section 6G.04, consideration should be given to providing additional lights and retroreflective markings to workers, work vehicles, and equipment.*

### Option:

08 Where reduced traffic volumes at night make it feasible, the entire roadway may be closed by detouring traffic to alternate facilities, thus removing the traffic risk from the activity area.

### Guidance:

09 *Consideration should be given to stationing uniformed law enforcement officers and lighted patrol cars at night work locations where there is a concern that high speeds or impaired drivers might result in undue risks for workers or other drivers.*

**Standard:**

10 **(DE Revision)** Except in emergency situations, flagger stations shall be illuminated at night with a minimum average horizontal luminance of 50 lux (5 foot candles).

*Guidance:*

10A *(DE Revision)* For flagging operations at night, a horizontal luminance of 50 lux (5 foot candles) can typically be achieved by a light plant featuring four 1,000 watt metal halide light fixtures, positioned within 15 feet of the flagging station at a minimum mounting height of 15 feet. At a minimum, one light plant is to be dedicated to the flagger operation. Light fixtures are to be positioned so they do not cause glare problems for vehicles approaching from any direction.

**Support:**

11 Desired illumination levels vary depending upon the nature of the task involved. An average horizontal luminance of 5 foot candles can be adequate for general activities. An average horizontal luminance of 10 foot candles can be adequate for activities around equipment. Tasks requiring high levels of precision and extreme care can require an average horizontal luminance of 20 foot candles.

**Section 6G.20 Vertical Difference****Support:**

01 **(DE Revision)** A vertical difference is created whenever a difference in grade of more than 1 inch exists:

- A. Between the traveled way and an adjacent area,
- B. Across a traveled way, or
- C. Along or between traveled ways

02 **(DE Revision)** Possible causes of vertical differences include, but are not limited to, milling or excavation for paving, repaving lifts, and utility operations.

*Guidance:*

03 *(DE Revision)* Operations should be sequenced so vertical differences greater than 2 inches do not exist across a traveled way open to traffic or between adjacent traveled ways open to traffic.

**Standard:**

04 **(DE Revision)** Vertical difference treatments shall be based on the criteria indicated in Table 6G-1.

05 **(DE Revision)** Where a fillet of wedge material is used at the edge of pavement in accordance with Table 6G-1, pavement millings, or a similar suitable material, shall be used for the wedge material.

*Guidance:*

06 *(DE Revision)* Where a fillet of wedge material is used between a traveled way and pavement box in accordance with Table 6G-1, base course material should be used for the wedge material and should be placed at no greater than the slope specified in Table 6G-1. The base course material should be compacted after placement.

**Section 6G.21 Storage of Equipment****Standard:**

01 **(DE Revision)** Each storage area shall be treated as a roadside obstacle as indicated in Table 6G-2.

02 **(DE Revision)** Vehicles and equipment shall enter and exit the work area in the same direction as adjacent traffic. The contractor's vehicle(s) and equipment shall enter and exit the roadway at interchanges or unrestricted crossovers that are open to public use. The contractor's vehicle(s) and equipment shall not U-turn across medians or at crossovers restricted for authorized and emergency vehicles only.

**Section 6G.22 Rolling Road Block Operations****Support:**

01 **(DE Revision)** Figure 6H-35H is an example of a rolling road block for limited access multilane divided roadways.

**Table 6G-1. Vertical Difference  
(Delaware Revision)**

Type of Vertical Difference	Criteria	Height (H) of Vertical Difference			
		H ≤ 1 in	1 in < H ≤ 2 in	2 in < H ≤ 6 in	H > 6 in
Longitudinal ≤ 10 ft from edge of traveled way <sup>1</sup>	Standard	No channelizing devices required	<ul style="list-style-type: none"> <li>- For differences along or between traveled ways, the UNEVEN LANES (W8-11) sign shall be used</li> <li>- For differences between the traveled way and shoulder or at the edge of pavement, the LOW SHOULDER (W8-9) sign shall be used</li> </ul>	<ul style="list-style-type: none"> <li>- No shoulder or shoulder &lt; 4 ft wide: If the vertical difference is not eliminated by the end of the work day, a 4 to 1 fillet of wedge material shall be placed or temporary traffic barrier shall be installed. During the day of construction, channelizing devices shall be used to delineate the vertical difference until the vertical difference is eliminated, a 4 to 1 fillet of wedge material is placed, or temporary traffic barrier is installed.</li> <li>- Shoulder ≥ 4 ft wide: Drums shall be used to delineate the vertical difference for up to 5 calendar days. If the vertical difference is not eliminated by the end of the 5<sup>th</sup> calendar day, a 4 to 1 fillet of wedge material shall be placed or temporary traffic barrier shall be installed.</li> <li>- The Shoulder Drop Off (W8-17) sign shall be used until the vertical difference is eliminated</li> </ul>	If the vertical difference is not eliminated by the end of the work day, a 4 to 1 fillet of wedge material shall be placed or temporary traffic barrier shall be installed.
	Guidance		<ul style="list-style-type: none"> <li>- For differences between the traveled way and shoulder or at the edge of pavement, wedge material is not required if the vertical difference exists for less than 5 calendar days. If the vertical difference is not eliminated by the end of the 5<sup>th</sup> calendar day, a 4 to 1 fillet of wedge material should be placed.</li> <li>- Throughout the duration of the vertical difference condition, drums should be placed between the traveled way and shoulder or along the edge of pavement</li> </ul>		
	Option			TTC devices and correction may be omitted for new pavement surfaces with the Safety Edge	
Longitudinal > 10 ft to ≤ 30 ft from edge of traveled way <sup>1,2</sup>	Standard	No channelizing devices required	No channelizing devices required	<ul style="list-style-type: none"> <li>- Throughout the duration of the vertical difference condition, drums shall be placed between the traveled way and shoulder or along the edge of pavement</li> <li>- If the vertical difference is within the traveled way or shoulder, the Shoulder Drop Off (W8-17) sign shall be used until the vertical difference is eliminated</li> </ul>	Throughout the duration of the vertical difference condition, drums shall be placed between the traveled way and shoulder or along the edge of pavement
	Guidance				Temporary traffic barrier should be considered
Transverse	Standard	No channelizing devices required	<ul style="list-style-type: none"> <li>- Except for roadway obstacles such as manholes and utility valves, BUMP (W8-1) or DIP (W8-2) signs shall be installed</li> <li>- A ramp of bituminous temporary roadway material shall be installed at a slope of 20 to 1 across the limits of the vertical difference, including the perimeter of an obstacle</li> </ul>	<ul style="list-style-type: none"> <li>- Except for roadway obstacles such as manholes and utility valves, BUMP (W8-1) or DIP (W8-2) signs shall be installed</li> <li>- A ramp of bituminous temporary roadway material shall be installed at a slope of 20 to 1 across the limits of the vertical difference, including the perimeter of an obstacle</li> </ul>	<ul style="list-style-type: none"> <li>- Except for roadway obstacles such as manholes and utility valves, BUMP (W8-1) or DIP (W8-2) signs shall be installed</li> <li>- A ramp of bituminous temporary roadway material shall be installed at a slope of 20 to 1 across the limits of the vertical difference, including the perimeter of an obstacle</li> </ul>

<sup>1</sup> – Per Section 1A.13, the traveled way is defined as the portion of the roadway for the movement of vehicles, exclusive of the shoulders, berms, sidewalks, and parking lanes

<sup>2</sup> – Channelizing devices are not required if the vertical difference is located behind guardrail, barrier, or vertical curb

**Table 6G-2. Storage of Equipment  
(Delaware Revision)**

Road Type	Distance (L) from Edge of Traveled Way	Posted Speed Limit or 85 <sup>th</sup> - Percentile Speed	Minimum Required Channelizing Devices
<b>Equipment and Non-flammable Materials</b>			
Interstate, Freeway, or Expressway	L ≤ 30 ft	All	Temporary traffic barrier
	L > 30 ft	All	Drums
All other roadways	0 ≤ L ≤ 10 ft	25 mph or less	Drums
		More than 25 mph	Temporary traffic barrier
	10 ft < L ≤ 30 ft	25 mph or less	None
		More than 25 mph	Drums
	L > 30 ft	All	None
<b>Flammable Materials (fuel, propane, etc.)</b>			
Interstate, Freeway, or Expressway	L ≤ 30 ft	All	Temporary traffic barrier
	L > 30 ft	All	Drums
All other roadways	L ≤ 30 ft	All	Temporary traffic barrier
	L > 30 ft	All	None

02 (DE Revision) Activities which may warrant the use of a Rolling Road Block operation include, but are not limited to: setting of bridge beams, pulling wires or cables across the roadway, placing overhead or cantilever signs and sign structures and performing traffic switches from one half of the roadway to the other half.

**Standard:**

03 (DE Revision) With the exception of emergencies, any rolling road block operation used on state maintained roadways shall be approved by DelDOT's Traffic Section prior to use and shall be performed as outlined in this Section and in Typical Application 35H.

04 (DE Revision) Rolling road block operations shall only be performed during non-peak travel periods and must be planned to not exceed periods of 15 minutes in duration.

05 (DE Revision) Prior to utilizing a rolling road block operation, a coordination meeting shall be held with all entities involved in the operation to discuss each entity's role.

06 (DE Revision) The performance of rolling road block operations shall include the use of Delaware State Police (DSP) or local police depending upon jurisdiction. Police vehicles shall be placed as shown in Figure 6H-35H.

07 (DE Revision) At a minimum, a portable changeable message sign (PCMS) shall be used a minimum of 1 mile and 2 miles in advance of the beginning of the rolling road block operation with the following message: STOPPED VEHICLES AHEAD; BE PREPARED TO STOP.

08 (DE Revision) A control vehicle shall occupy each travel lane of the route affected by the rolling road block operation. All entrance ramps within the rolling road block operation shall be temporarily closed. A drive through of the route shall be performed prior to beginning the rolling road block operation.

09 (DE Revision) Determining where to begin a rolling road block operation shall include an evaluation of all factors unique to the road system in question. At a minimum, the following items shall be considered in the evaluation:

- A. The time lapse expected for the last uncontrolled vehicle to pass by the site of the planned work.
- B. The assumed maximum time needed for the work operation to be completed.
- C. The projected travel time of the rolling road block. For example, a travel speed of 10 MPH will cover 1 mile in six minutes.
- D. The number of entrance ramps requiring closings at interchanges.
- E. The starting point for the rolling road block operation shall be in a tangent section (both horizontal and vertical) of the approach roadway with adequate sight distance.

- 10 **(DE Revision)** Upon a sufficient gap in traffic, each slow roll vehicle will pull out and occupy a travel lane with their warning lights, hazard lights and arrow board operating and with a truck-mounted attenuator in the crash attenuating position.
- 11 **(DE Revision)** The lead vehicle in the rolling road block operation shall have radio/telephone communication with the work crew. Once the need for the road closure is complete, the work crew shall notify the lead control vehicle who in turn will notify the other control vehicles. The rolling road block vehicles shall gain speed and pull over to the right side of the roadway; starting with the control vehicle occupying the left lanes first.
- 12 **(DE Revision)** If the rolling road block operation vehicles reach the work site before receiving notification that the operation has been completed, they shall slow down and/or stop until signaled that the roadway is safe to release traffic.
- 13 **(DE Revision)** Once the rolling road block operation is complete and free flow travel conditions have been re-established, the PCMS messages shall be removed by blanking the message boards or turning them away from traffic.
- Option:
- 14 **(DE Revision)** For emergency situations, truck-mounted attenuators may be omitted from control vehicles, portable changeable message signs, and law enforcement personnel may be omitted from the rolling road block operation.
- 15 **(DE Revision)** Emergency situations include but are not limited to removing debris from the roadway, removing a disabled vehicle from the roadway or other similar type of event.

### **Section 6G.23 Installing / Removing Temporary Traffic Control Devices**

Support:

- 01 **(DE Revision)** Care must be exercised when installing and removing temporary traffic control devices. Installing TTC begins and ends as a mobile operation.

**Standard:**

- 02 **(DE Revision)** A shadow vehicle with a truck-mounted attenuator shall be used to protect workers setting and removing channelized devices in accordance with Section 6F.86.

Option:

- 03 **(DE Revision)** A shadow vehicle with truck-mounted attenuator may be omitted from the operation of installing temporary warning signs in advance of the work area.

**Standard:**

- 04 **(DE Revision)** Channelizing devices shall not be installed or removed from the shadow vehicle with a truck-mounted attenuator. Channelizing devices shall be installed or removed from a work operation vehicle, and a shadow vehicle with a truck-mounted attenuator shall be used in accordance with paragraph 02 of this section.

*Guidance:*

- 05 **(DE Revision)** Stationary lane closures on a multi-lane roadway should be installed with the flow of traffic in the following sequence:
- A. Install all advance warning signs, beginning with the ROAD WORK AHEAD (W20-1) sign and ending with the END ROAD WORK (G20-2) sign. Install all signs beginning with the opposite side which will be closed (for a right lane closure; first, install all signs on the left side (shoulder) and then install all signs on the right side (shoulder).
  - B. Install shoulder taper if required.
  - C. Install arrow board on the shoulder prior to the merging taper or as close to the beginning of the merging taper as possible.
  - D. Install channelizing devices to form a merging taper. Use of a shadow vehicle (with or without a truck-mounted attenuator, depending on the type of roadway) is recommended during installation (see paragraph 02).
  - E. Install traffic control devices along the buffer space at the appropriate spacing.

- F. Continue placing devices along the work space at the appropriate spacing.*
  - G. Install devices for the termination area. Install an END ROAD WORK (G20-2) sign, if necessary.*
  - H. Review the lane closure by performing a drive-through inspection, correcting any deficiencies and documenting necessary adjustments.*
- 06 (DE Revision) *All TTC devices for a stationary lane closure on a multi-lane roadway, except advance warning signs should be removed against the flow of traffic in the following sequence:*
- A. Remove the channelizing devices starting from the end of the activity area working back to the widest part of the merging taper.*
  - B. Place the removal vehicle on the shoulder, and remove the channelizing devices from the merging taper by hand onto the work vehicle.*
  - C. Remove the arrow board.*
- 07 (DE Revision) *Stationary lane closures on two-way, two-lane roadways should be installed with the flow of traffic in the following sequence:*
- A. Install all advance warning signs, beginning with the ROAD WORK AHEAD (W20-1) sign and ending with the END ROAD WORK (G20-2) sign.*
  - B. If the lane closure is occurring during nighttime hours, set light plants at the required locations.*
  - C. Station flaggers as required by the temporary traffic control plans or Typical Applications. Flaggers should alternate traffic flow, directing motorists to the open lane.*
  - D. Install channelizing devices to close the travel lane.*
- 08 (DE Revision) *All TTC devices for a stationary lane closure on two-way, two-lane roadways, except advance warning signs should be removed against the flow of traffic in the following sequence:*
- A. Remove the channelizing devices closing the travel lane, starting from the end of the activity area working back to the beginning of the one-lane, two-way traffic taper.*
  - B. Relieve flaggers from their stations.*
  - C. Remove light plants, if used.*
- 09 (DE Revision) *Advance warning signs should be removed with the flow of traffic beginning with the ROAD WORK AHEAD (W20-1) sign and ending with the END ROAD WORK (G20-2) sign. Remove signs beginning with the lane closure side (for a right lane closure; first, remove all signs from the right side (shoulder) and then remove all signs from the left side (shoulder)).*
- 10 (DE Revision) *Workers should not enter unprotected travel lanes of interstates, freeways, or expressways, during planned activities, including crossing the roadway to access the median or shoulder on the opposite side from the protected work area.*

## **Section 6G.24 Aerial Work**

### **Standard:**

- 01 (DE Revision) **When work is being performed over a roadway open to traffic the travel lane(s) and/or shoulder directly below the work area shall be closed using the appropriate temporary traffic control for the location, duration and type of work being performed.**

### **Option:**

- 02 (DE Revision) *If it is physically improbable that materials, equipment or personnel could fall onto the open travel lanes and/or shoulder directly below the work area, the travel lanes and/or shoulder may remain open to traffic.*
- 03 (DE Revision) *Travel lanes and/or shoulders directly below an aerial work area may remain open to traffic if the aerial operation is of an emergency nature and not performing the work creates an unsafe situation for the traveling public.*

## CHAPTER 6H. TYPICAL APPLICATIONS

### Section 6H.01 Typical Applications

#### Support:

01 Chapter 6G contains discussions of typical TTC activities. This Chapter presents typical applications for a variety of situations commonly encountered. While not every situation is addressed, the information illustrated can generally be adapted to a broad range of conditions. In many instances, an appropriate TTC plan is achieved by combining features from various typical applications. For example, work at an intersection might present a near-side work zone for one street and a far-side work zone for the other street. These treatments are found in two different typical applications, while a third typical application shows how to handle pedestrian crosswalk closures. For convenience in using the typical application diagrams, Tables 6C-1 and 6C-4 are reproduced in this Chapter as Tables 6H-3 and 6H-4, respectively.

02 Procedures for establishing TTC zones vary with such conditions as road configuration, location of the work, work activity, duration of work, road user volumes, road vehicle mix (buses, trucks, cars, motorcycles, and bicycles), and road user speeds.

03 In general, the procedures illustrated represent minimum solutions for the situations depicted. Except for the notes (which are clearly classified using headings as being Standard, Guidance, Option, or Support), the information presented in the typical applications can generally be regarded as Guidance.

#### Option:

04 Other devices may be added to supplement the devices and device spacing may be adjusted to provide additional reaction time or delineation. Fewer devices may be used based on field conditions.

#### Support:

05 Figures and tables found throughout Part 6 provide information for the development of TTC plans. Also, Table 6H-3 is used for the determination of sign spacing and other dimensions for various area and roadway types.

06 (DE Revision) Table 6H-1 is an index of the typical applications. Typical applications are shown on the right-hand page with notes on the facing page to the left. The legend for the symbols used in the typical applications is provided in Table 6H-2. In many of the typical applications, sign spacings and other dimensions are indicated by letters using the criteria provided in Table 6H-3. The formulas for determining taper lengths are provided in Table 6H-4.

07 Most of the typical applications show TTC devices for only one direction.


























**Table 6H-1. Index to Typical Applications (Sheet 1 of 2)**  
**(Delaware Revision)**

Typical Application Description	Typical Application Number		
	Two-Lane Conventional Road	Multi-Lane Conventional Road	Interstate, Freeway, or Expressway
Work Outside of the Shoulder (see Section 6G.06)			
Work Beyond the Shoulder > 10 Feet from the Edge of the Traveled Way	TA-1	TA-3A	TA-5 or TA-5A
Work Beyond the Shoulder ≤ 10 Feet from the Edge of the Traveled Way	TA-3	TA-3A	TA-5 or TA-5B
Off-Roadway Mowing Operations	TA-1A	TA-1B	TA-1B
Blasting Zone	TA-2	TA-2	TA-2
Work on the Shoulder (see Sections 6G.07 and 6G.08)			
Work on the Shoulders	TA-3	TA-3A	TA-5 or TA-5B
Short Duration or Mobile Operation on a Shoulder	TA-4	TA-4A	TA-4A
Shoulder Work with Minor Encroachment	TA-6 (≤ 40 MPH) or TA-10 (> 40 MPH)	TA-33	TA-33
Work Within the Traveled Way of a Two-Lane Highway (see Section 6G.10) – also applicable to other roadway types, as noted			
Road Closed with a Diversion	TA-7	TA-7	TA-7
Roads Closed with an Off-Site Detour	TA-20	TA-20	TA-20
Overlapping Routes with a Detour	TA-20	TA-20	TA-20
Lane Closure on a Two-Lane Road Using Flaggers	TA-10	—	—
Lane Closure on a Two-Lane Road with Low Traffic Volumes	TA-11 or TA-11A	—	—
Lane Diversion on a Two-Lane Road with Low Traffic Volumes	TA-11B	—	—
Lane Closure on a Two-Lane Road Using Traffic Control Signals	TA-12	—	—
Temporary Road Closure	TA-13	—	—
Haul Road Crossing	TA-14	TA-14	—
Work in the Center of a Road with Low Traffic Volumes	TA-15	—	—
Surveying Along a Two-Lane Road	TA-16	TA-35	TA-35
Mobile Operations on a Two-Lane Road	TA-17	—	—
Mobile Striping Operations on a Two-Lane Road	TA-17A or TA-17B	—	—
Work Within the Traveled Way of an Urban Street (see Section 6G.11) – also applicable to other roadway types, as noted			
Lane Closure on a Minor Street	TA-18	—	—
Detour for One Travel Direction	TA-20	TA-20	TA-20
Detour for a Closed Street	TA-20	TA-20	TA-20
Work Within the Traveled Way at an Intersection and on Sidewalks (see Section 6G.13)			
Lane Closure on the Near Side of an Intersection	TA-21 (≤ 40 MPH) or TA-33 (> 40 MPH)	TA-21 (≤ 40 MPH) or TA-33 (> 40 MPH)	—
Turn Lane Closure on the Near Side of an Intersection	TA-21A	TA-21A	—
Right-Hand Lane Closure on the Far Side of an Intersection	TA-23 (≤ 40 MPH) or TA-33 (> 40 MPH)	TA-23 (≤ 40 MPH) or TA-33 (> 40 MPH)	—
Left-Hand Lane Closure on the Far Side of an Intersection	TA-23 (≤ 40 MPH) or TA-33 (> 40 MPH)	TA-23 (≤ 40 MPH) or TA-33 (> 40 MPH)	—
Half Road Closure on the Far Side of an Intersection	Not applicable in Delaware	Not applicable in Delaware	—
Multiple Lane Closures at an Intersection	TA-23 (≤ 40 MPH) or TA-33 (> 40 MPH)	TA-23 (≤ 40 MPH) or TA-33 (> 40 MPH)	—
Closure in the Center of an Intersection	Not applicable in Delaware	Not applicable in Delaware	—
Closure at the Side or Center of an Intersection	TA-27	TA-27	—
Sidewalk Detour or Diversion	TA-28	TA-28	—
Crosswalk Closures and Pedestrian Detours	TA-29	TA-29	—
Work Within the Traveled Way of a Multi-Lane, Non-Access Controlled Highway (see Section 6G.12) – also applicable to other roadway types, as noted			
Interior Lane Closure on a Multi-Lane Street	—	TA-30 (≤ 40 MPH) or TA-33 (> 40 MPH)	—
Lane Closure on a Street with Uneven Directional Volumes	—	TA-31 (≤ 40 MPH) or TA-33 (> 40 MPH)	—
Half Road Closure on a Multi-Lane, High-Speed Highway	—	TA-32	—
Stationary Lane Closure on a Divided Highway	—	TA-33	TA-33
Lane Closure with a Temporary Traffic Barrier	—	TA-34	TA-34
Short Duration and Mobile Operations on a Multi-Lane Road	—	TA-35 or TA-35A	TA-35 or TA-35A
Mobile Striping Operations on a Multi-Lane Road	—	TA-35B or TA-35C	TA-35D, TA-35E, TA-35F, or TA-35G

**Table 6H-1. Index to Typical Applications (Sheet 2 of 2)**  
**(Delaware Revision)**

Typical Application Description	Typical Application Number		
	Two-Lane Conventional Road	Multi-Lane Conventional Road	Interstate, Freeway, or Expressway
Work Within the Traveled Way of an Interstate, Freeway, or Expressway (see Section 6G.14) – also applicable to other roadway types, as noted			
Rolling Road Blocks on a Limited Access Multi-Lane, Divided Highway	—	—	TA-35H
Lane Shift on a Multi-Lane, Divided Highway	—	TA-36	TA-36
Double Lane Closure on a Multi-Lane, Divided Highway	—	TA-37	TA-37
Interior Lane Closure on a Multi-Lane, Divided Highway	—	TA-37 or TA-38	TA-37 or TA-38
Median Crossover on a Multi-Lane, Divided Highway	—	TA-39	TA-39
Median Crossover for an Entrance Ramp	—	TA-40	TA-40
Median Crossover for an Exit Ramp	—	TA-41	TA-41
Work in the Vicinity of an Exit Ramp	—	TA-42	TA-42
Partial Exit Ramp Closure	—	TA-43	TA-43
Work in the Vicinity of an Entrance Ramp	—	TA-44	TA-44
Temporary Reversible Lane Using Movable Barriers	—	Not applicable in Delaware	Not applicable in Delaware
Work in the Vicinity of a Grade Crossing (see Section 6G.18)			
Work in the Vicinity of a Grade Crossing	TA-46	TA-33	—

**Table 6H-2. Meaning of Symbols on Typical Application Diagrams**  
**(Delaware Revision)**

	Arrow board		Shadow vehicle
	Arrow board support or trailer (shown facing down)		Sign (shown facing left)
	Changeable message sign or support trailer		Surveyor
	Channelizing device		Temporary barrier
	Crash cushion		Temporary barrier with retroreflective enhanced conspicuity panel
	Direction of temporary traffic detour		Traffic or pedestrian signal
	Direction of traffic		Truck-mounted attenuator
	Flagger		Type 3 barricade
	High-level warning device (Flag tree)		Warning light
	Longitudinal channelizing device		Work space
	Luminaire		Work vehicle
	Pavement markings that should be removed for a long-term project		

**Table 6H-3. Meaning of Letter Codes on Typical Application Diagrams**  
**(Delaware Revision)**

Road Type	Distance Between Signs**		
	A	B	C
Urban (low speed)*	100 feet	100 feet	100 feet
Urban (high speed)*	350 feet	350 feet	350 feet
Rural	500 feet	500 feet	500 feet
Interstate / Expressway / Freeway	1,000 feet	1,640 feet	2,640 feet

\* 40 mph or less is "low speed" and over 40 mph is "high speed" on state-maintained roadways.

\*\* The column headings A, B, and C are the dimensions shown in Figures 6H-1 through 6H-46. The A dimension is the distance from the transition or point of restriction to the first sign. The B dimension is the distance between the first and second signs. The C dimension is the distance between the second and third signs. (The "first sign" is the sign in a three-sign series that is closest to the TTC zone. The "third sign" is the sign that is furthest upstream from the TTC zone.)

**Table 6H-4. Formulas for Determining Taper Length**  
**(Delaware Revision)**

Speed (S)	Taper Length (L) in feet
40 mph or less	$L = \frac{WS^2}{60}$
More than 40 mph	$L = WS$

Where: L = taper length in feet  
W = width of offset in feet  
S = posted speed limit, or off-peak 85th-percentile speed prior to work starting, or the anticipated operating speed in mph

(This Page Left Intentionally Blank)

**Notes for Figure 6H-1—Typical Application 1**  
**Work Beyond the Shoulder Greater Than 10 Feet from the Edge of the Traveled Way**  
**(Delaware Revision)**


*Guidance:*

- 1. If the work space is in the median of a divided highway, an advance warning sign should also be placed on the left side of the directional roadway.*
- 2. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*

*Option:*

3. The ROAD WORK AHEAD sign may be replaced with other appropriate signs such as the SHOULDER WORK sign. The SHOULDER WORK sign may be used for work adjacent to the shoulder.
4. The ROAD WORK AHEAD sign may be omitted where the work space is behind guardrail or barrier or more than 10 feet from the edge of the traveled way.
5. For short-term, short duration or mobile operation, all signs and channelizing devices may be eliminated if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.

**Figure 6H-1. Work Beyond the Shoulder > 10 Feet  
from the Edge of the Traveled Way (TA-1)  
(Delaware Revision)**

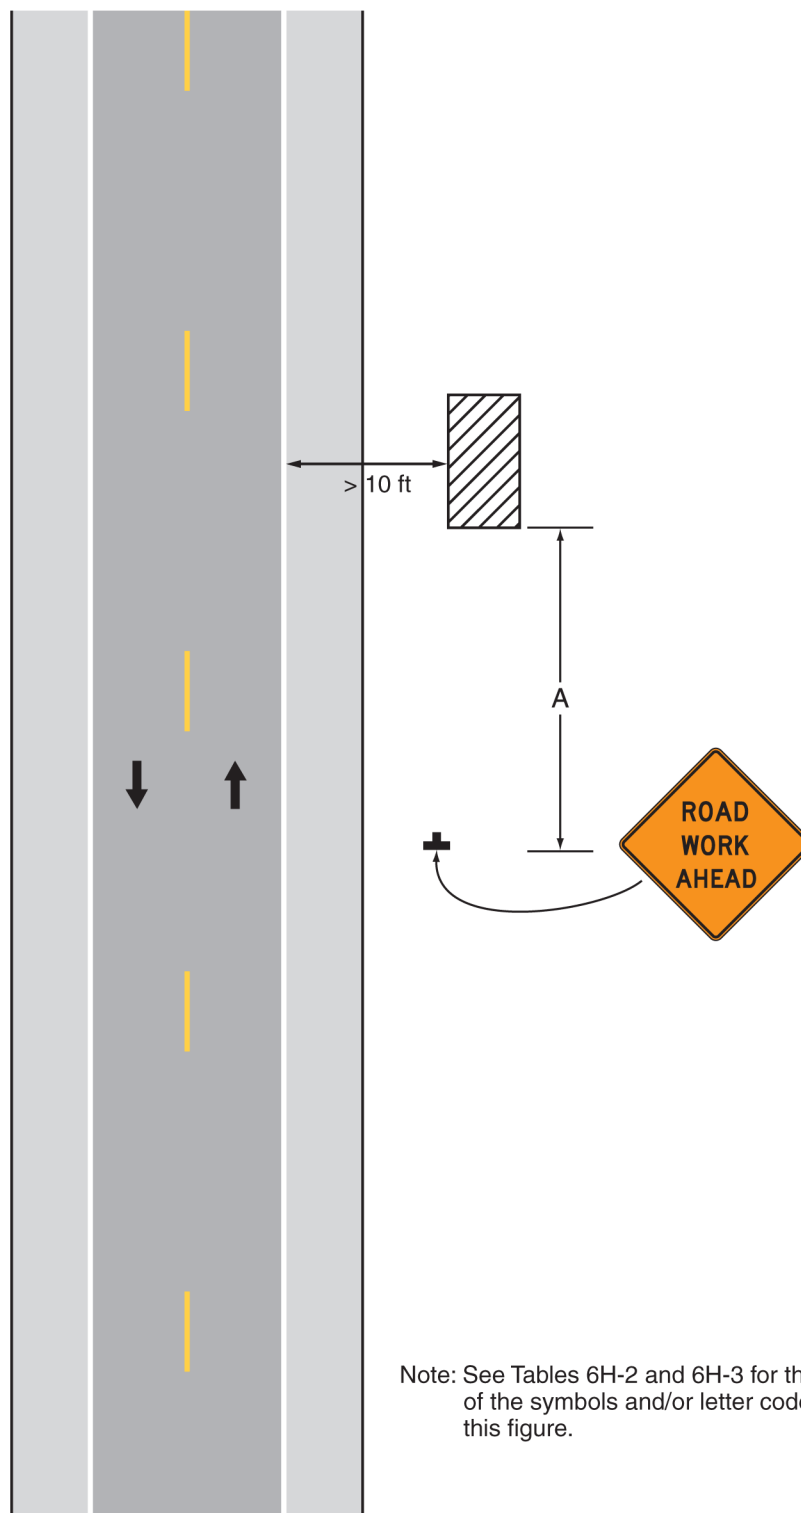

**Typical Application 1**

**Notes for Figure 6H-1A—Typical Application 1A**  
**Mowing Operations along a Two-Lane Road**  
**(Delaware Revision)**

**Standard:**


- 1. Mowing operations shall be performed during daylight hours only.**
- 2. All equipment shall be stored in accordance with Section 6G.21.**
- 3. The length of the work area shall be limited to 2 miles or less.**

*Guidance:*

- 4. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*



**Figure 6H-1A. Mowing Operations along a Two-Lane Road (TA-1A)**  
(Delaware Revision)

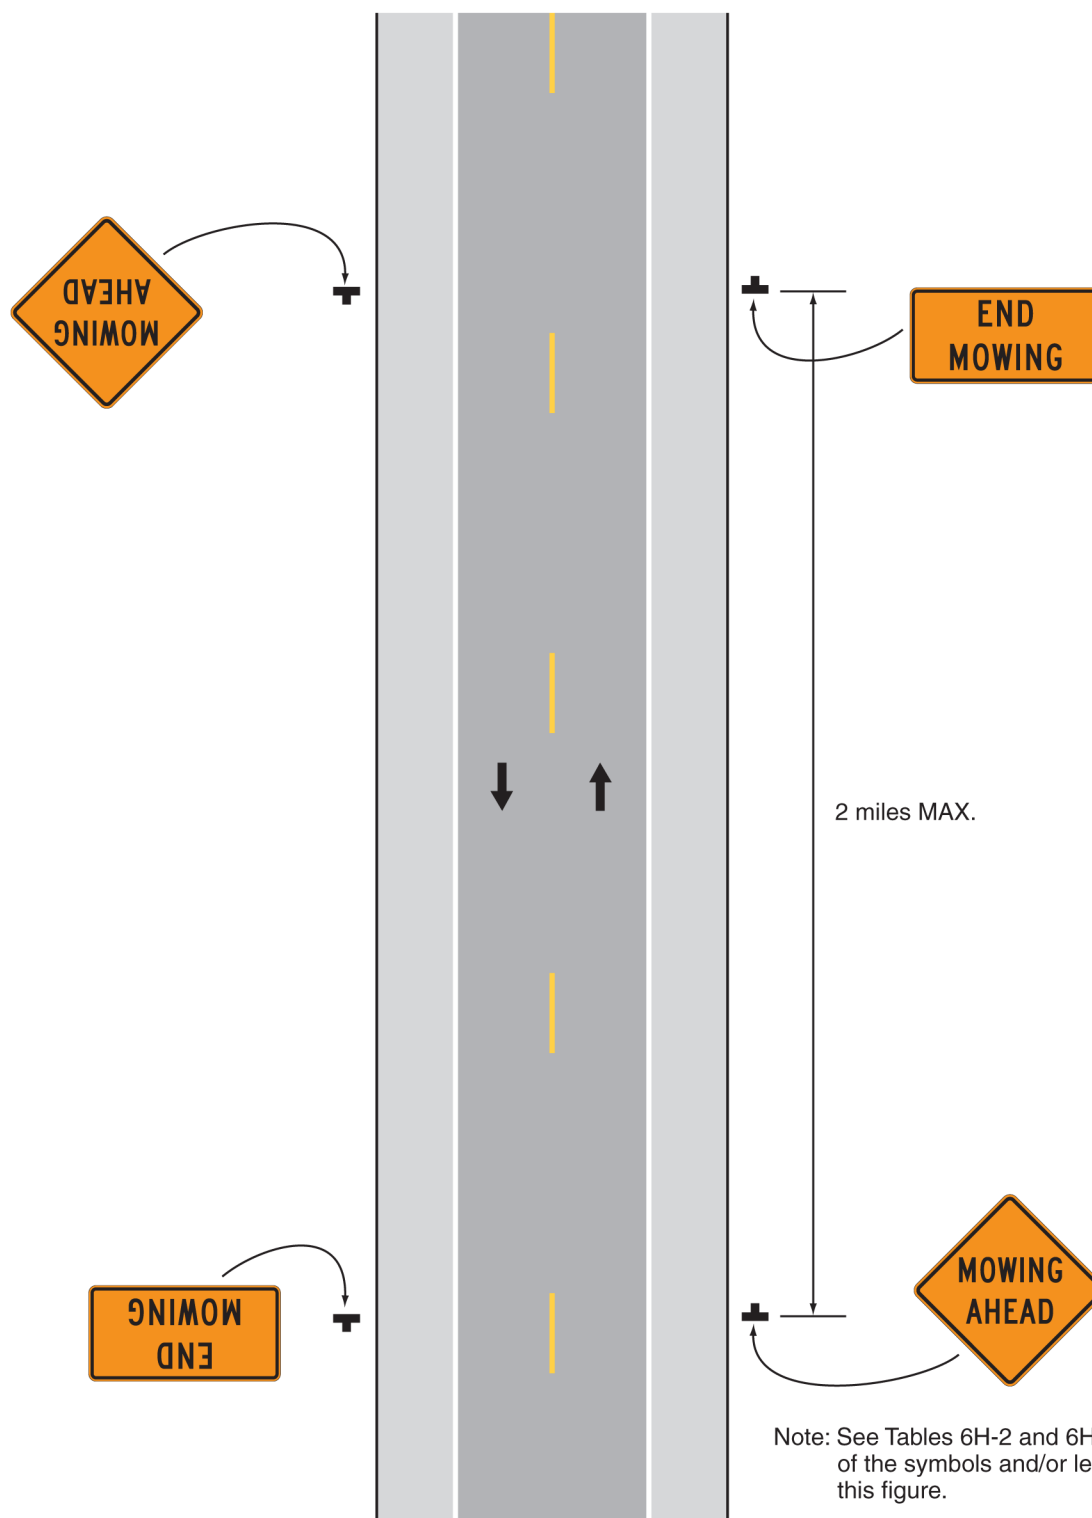

**Typical Application 1A**

**Notes for Figure 6H-1B—Typical Application 1B**  
**Mowing Operations along a Multi-Lane, Divided Highway**  
**(Delaware Revision)**


**Standard:**

- 1. Mowing operations shall be performed during daylight hours only.**
- 2. All equipment shall be stored in accordance with Section 6G.21.**
- 3. The length of the work area shall be limited to 2 miles or less.**
- 4. If the mowing operation occurs within the median of a multi-lane, divided highway, advance warning signs shall be placed for traffic approaching in both directions.**
- 5. When mowing operations are performed along multi-lane, undivided highways, advance warning signs shall be placed for traffic approaching in both directions (see Figure 6H-1A).**

*Guidance:*

- 6. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*

**Figure 6H-1B. Mowing Operations along a Multi-Lane, Divided Highway (TA-1B)**  
(Delaware Revision)

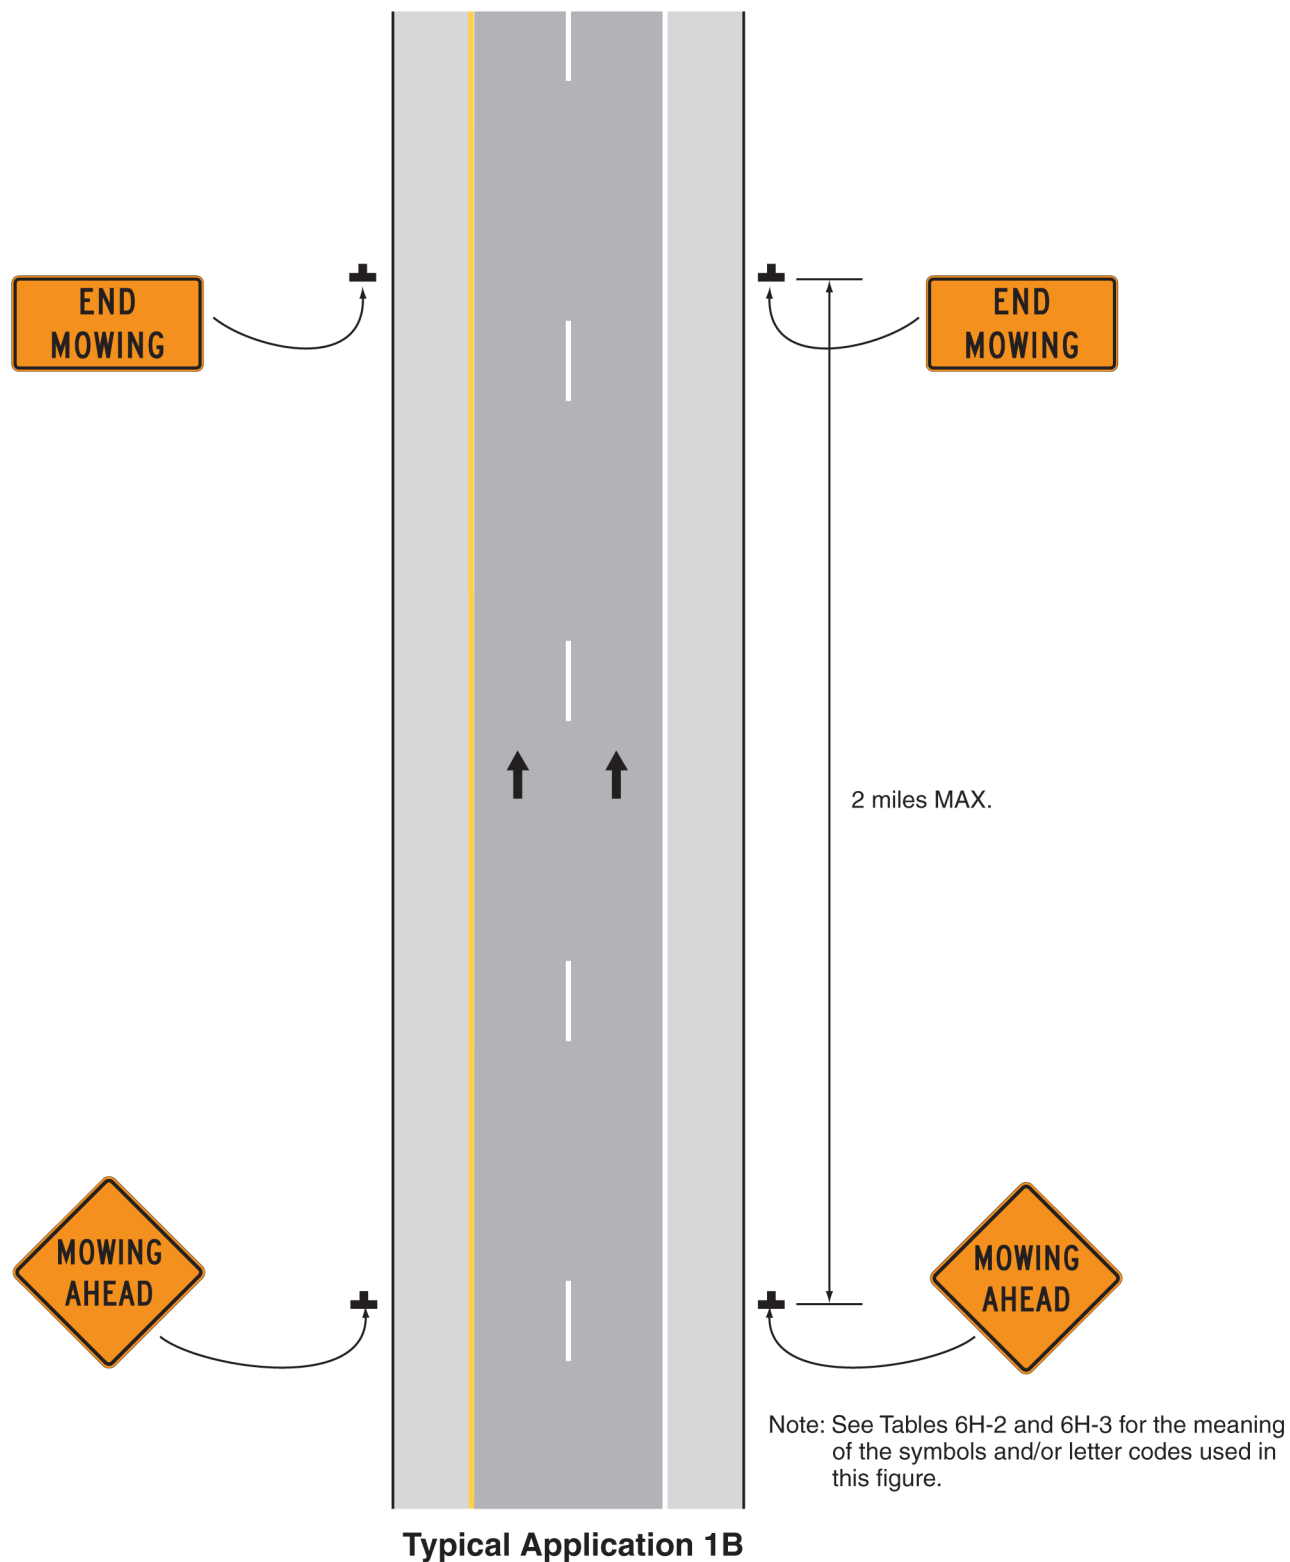

**Notes for Figure 6H-2—Typical Application 2**  
**Blasting Zone**  
**(Delaware Revision)**


**Standard:**

1. Whenever blasting caps are used within 1,000 feet of a roadway, the signing shown shall be used.
2. The signs shall be covered or removed when there are no explosives in the area or the area is otherwise secure.
3. Whenever a side road intersects the roadway between the **BLASTING ZONE AHEAD** sign and the **END BLASTING ZONE** sign, or a side road is within 1,000 feet of any blasting cap, similar signing, as on the mainline, shall be installed on the side road.
4. Prior to blasting, the blaster in charge shall determine whether road users in the blasting zone will be endangered by the blasting operation. If there is danger, road users shall not be permitted to pass through the blasting zone during blasting operations.

*Guidance:*

5. *On multi-lane, divided highways, the signs should be mounted on both sides of the directional roadways.*

**Figure 6H-2. Blasting Zone (TA-2)**  
**(Delaware Revision)**

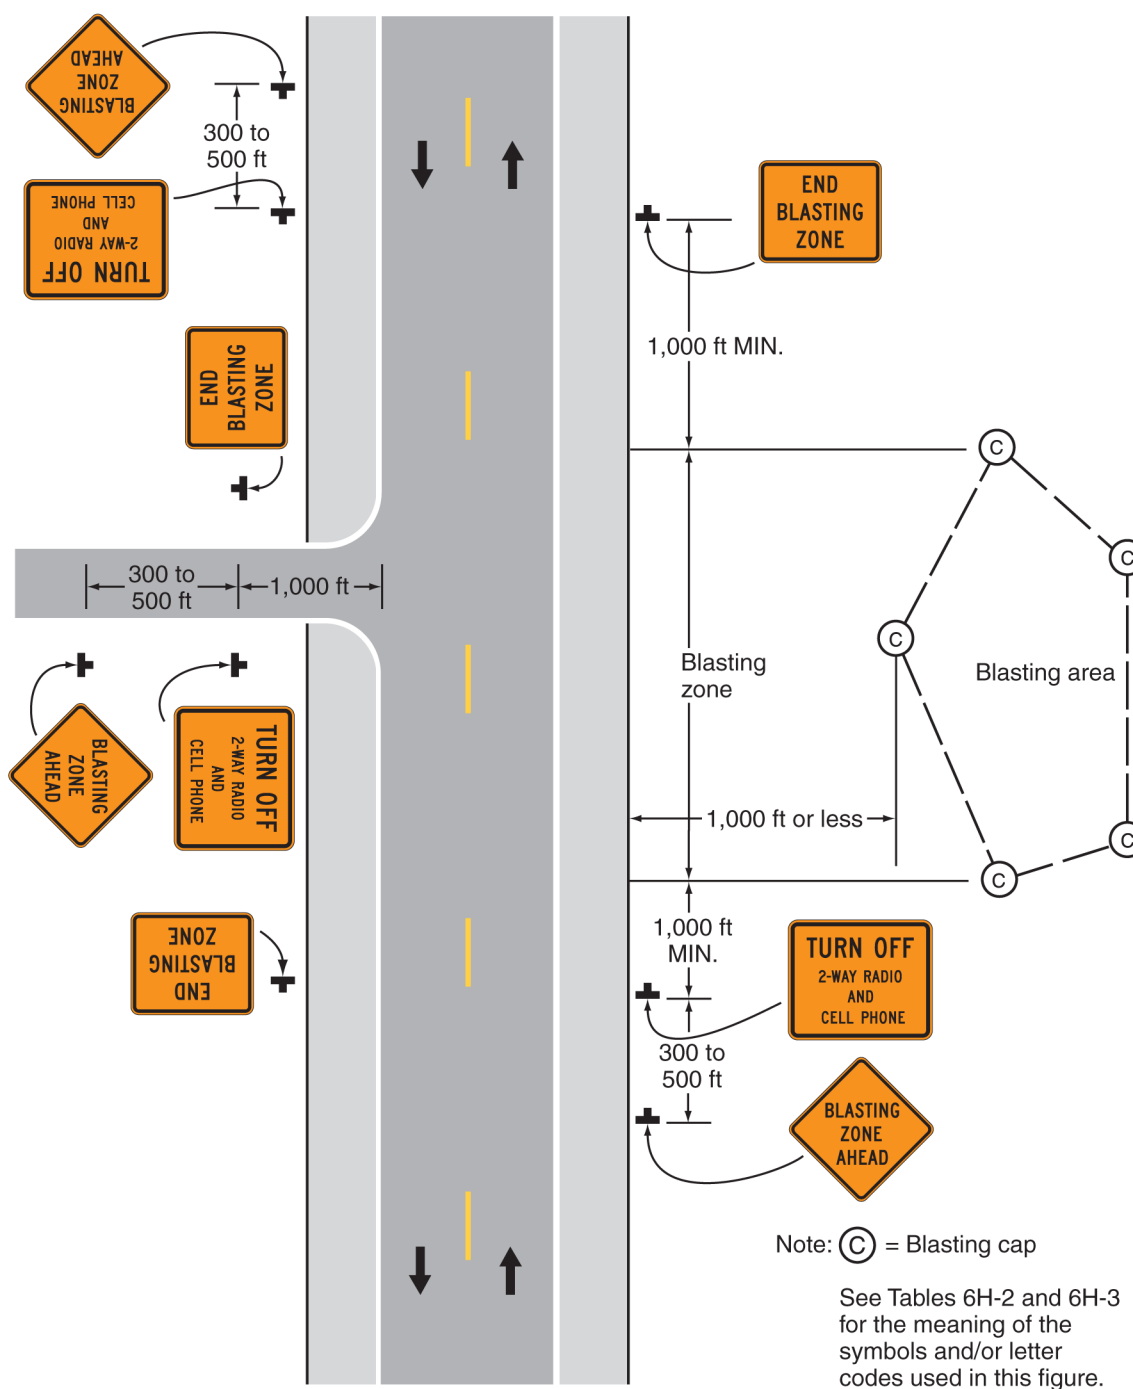

**Typical Application 2**

**Notes for Figure 6H-3—Typical Application 3**  
**Work on the Shoulder of a Two-Lane Road**  
**(Delaware Revision)**

*Guidance:*

1. A *SHOULDER CLOSED* sign should be placed on the left side of the roadway for a divided or one-way street only if the left shoulder is affected.

*Option:*

2. The *SHOULDER CLOSED* sign may be omitted from an intersecting roadway where drivers emerging from that roadway will encounter another advance warning sign prior to the activity area.

3. For short duration operations of 60 minutes or less, all signs and channelizing devices may be eliminated if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.

**Standard:**

4. When paved shoulders having a width of 8 feet or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.

5. If the shoulder closure is located within a passing zone, *ROAD WORK AHEAD* and *END ROAD WORK* signs shall be placed for traffic approaching in the opposite direction.

6. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.


*Option:*

7. If the shoulder closure is located within a no-passing zone, *ROAD WORK AHEAD* and *END ROAD WORK* signs may be placed for traffic approaching in the opposite direction based on engineering judgment.

8. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.

9. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-3. Work on the Shoulder of a Two-Lane Road (TA-3)**  
**(Delaware Revision)**

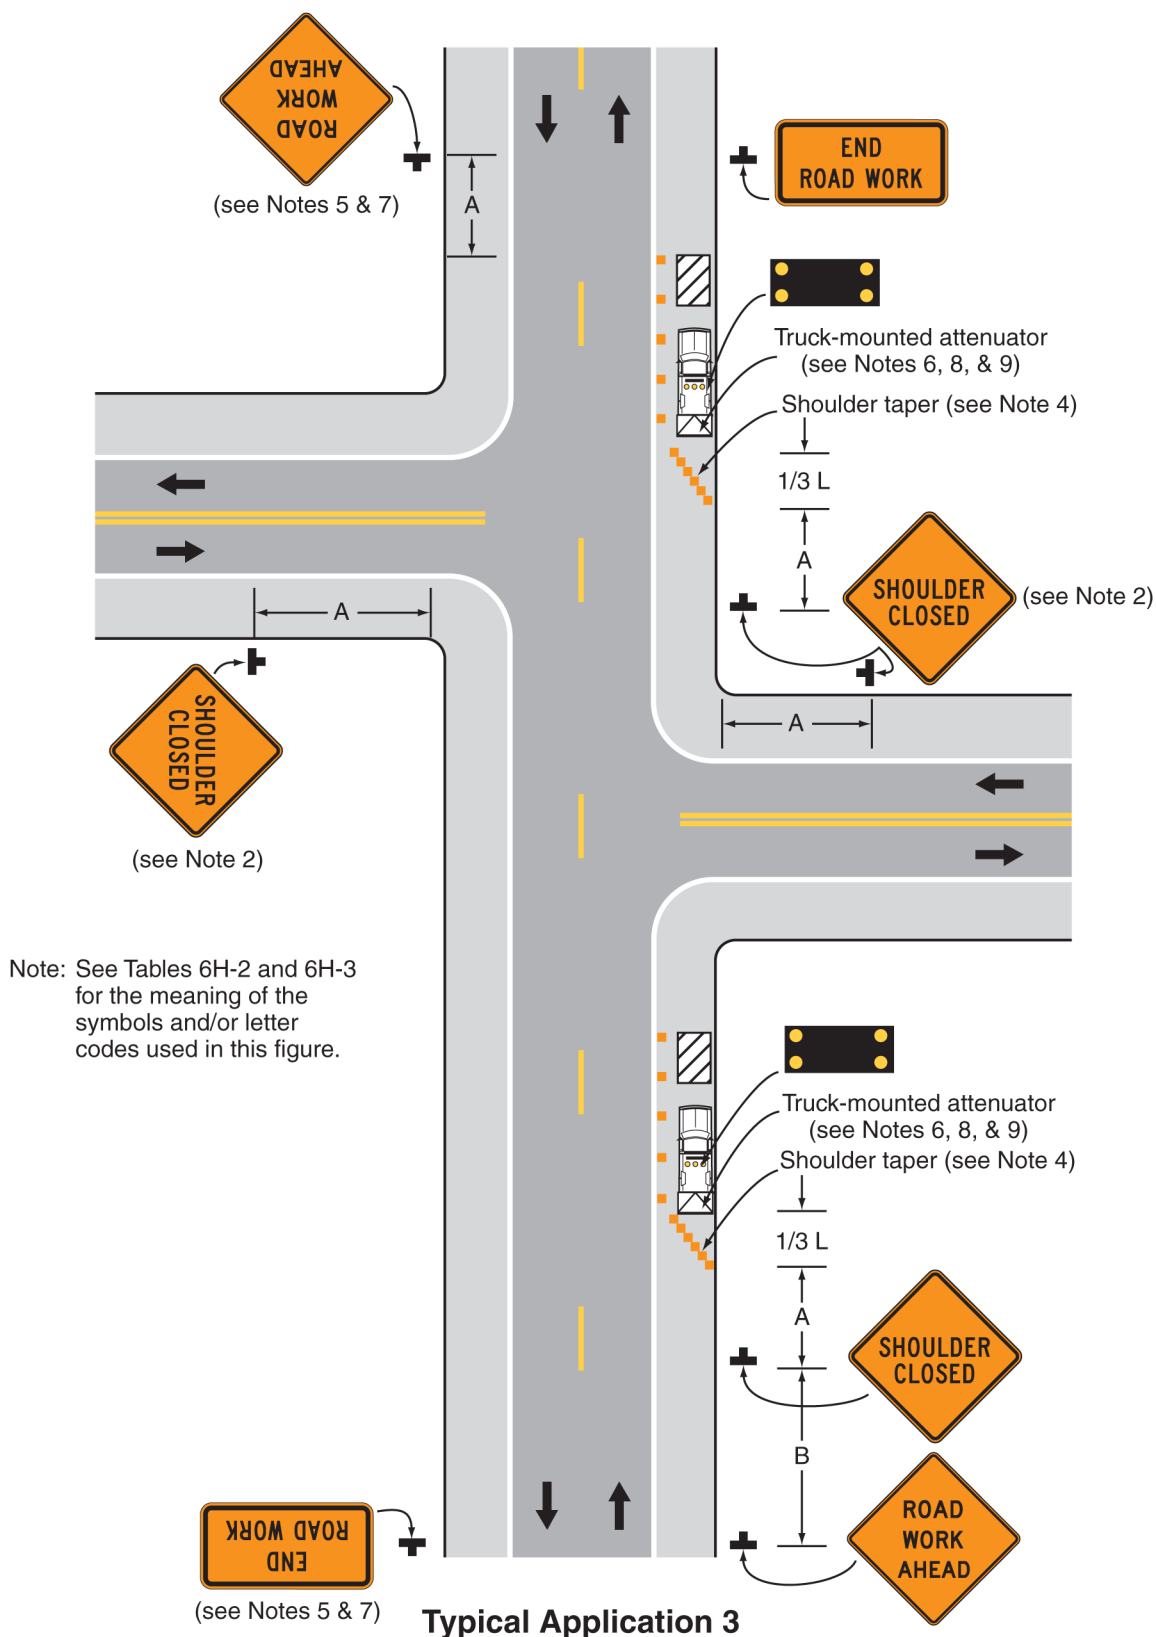



**Notes for Figure 6H-3A—Typical Application 3A**  
**Work on the Shoulder of a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

1. *A SHOULDER CLOSED sign should be placed on the left side of the roadway for a divided or one-way street only if the left shoulder is affected.*

*Option:*

2. The SHOULDER CLOSED sign may be omitted from an intersecting roadway where drivers emerging from that roadway will encounter another advance warning sign prior to the activity area.

3. For short duration operations of 60 minutes or less, all signs and channelizing devices may be eliminated if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.

**Standard:**

4. **When paved shoulders having a width of 8 feet or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.**


5. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

6. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.

7. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-3A. Work on the Shoulder of a Multi-Lane, Divided Highway (TA-3A)**  
**(Delaware Revision)**

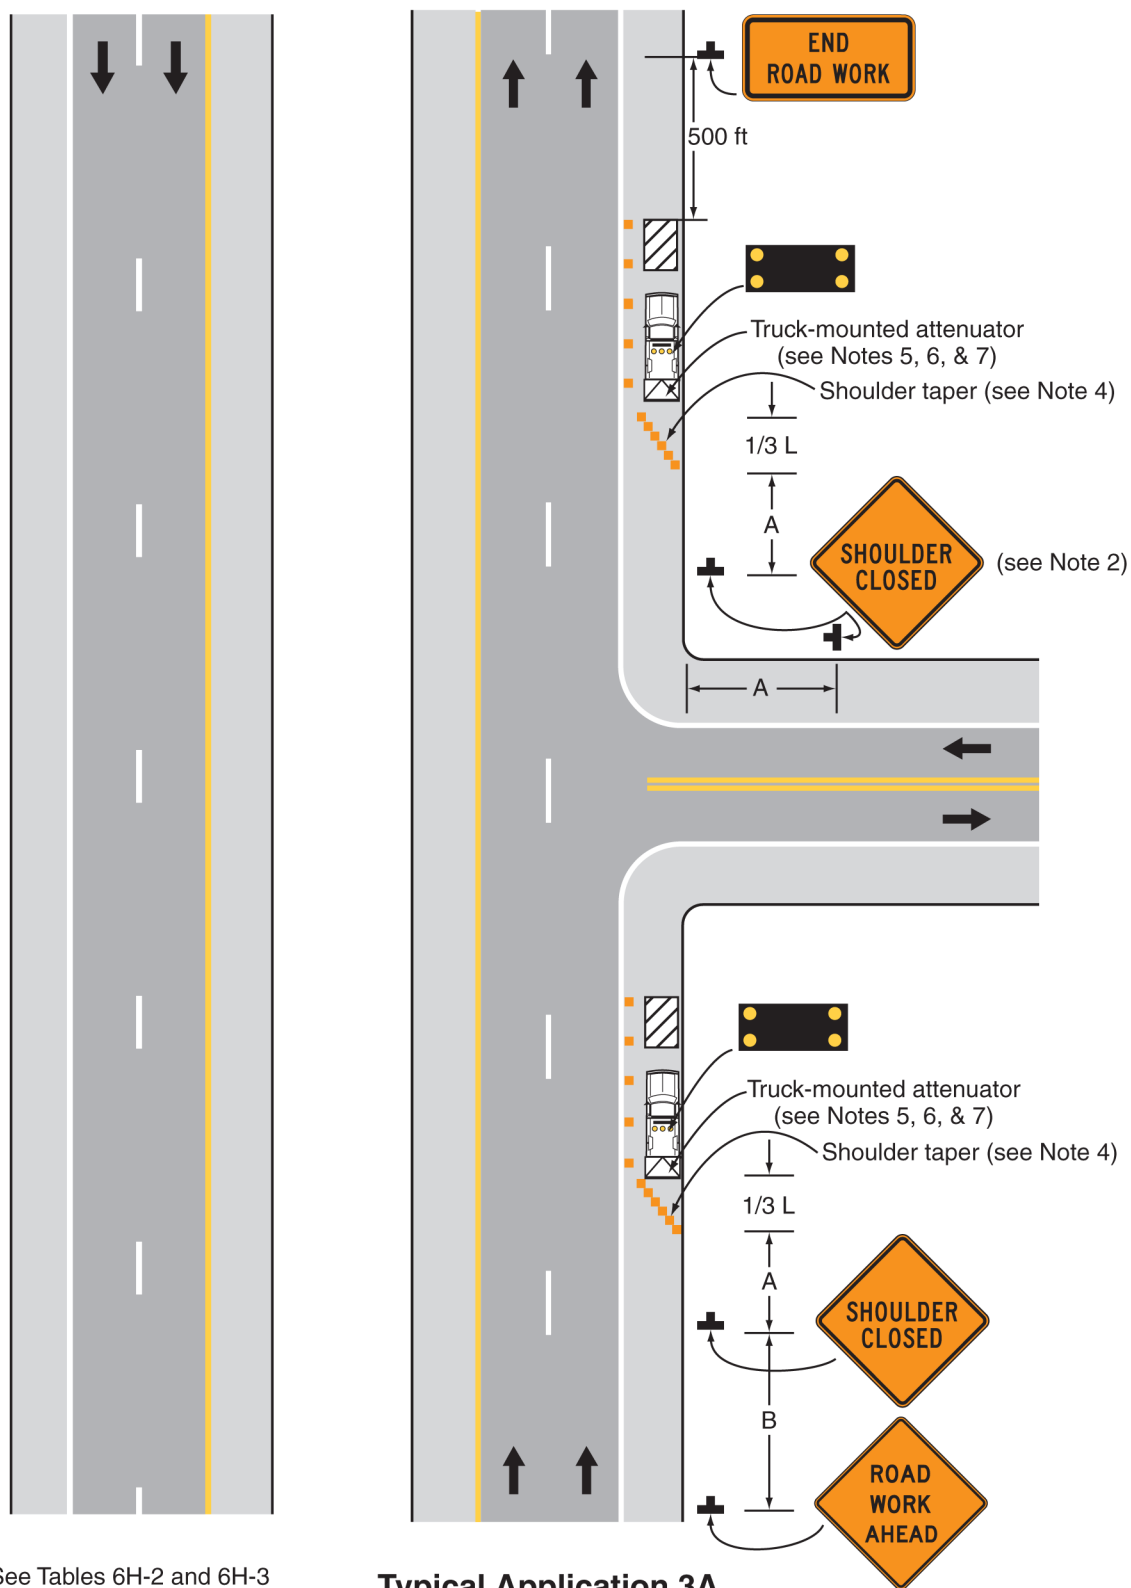

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

**Typical Application 3A**

**Notes for Figure 6H-4—Typical Application 4**  
**Short Duration or Mobile Operation on a Shoulder of a Two-Lane Road**  
**(Delaware Revision)**

*Guidance:*

1. *In those situations where multiple work locations within a limited distance make it practical to place stationary signs, the distance between the advance warning sign and the work should not exceed 5 miles.*
2. *In those situations where the distance between the advance signs and the work is 2 miles to 5 miles, a Supplemental Distance plaque should be used with the ROAD WORK AHEAD sign.*
3. *Where drivers emerging from an intersecting roadway will not encounter the shadow vehicle prior to the work area, a stationary warning sign should be placed on the intersecting road.*

*Option:*

4. The ROAD WORK NEXT XX MILES sign may be used instead of the ROAD WORK AHEAD sign if the work locations occur over a distance of more than 2 miles.
5. Stationary warning signs may be omitted for short duration or mobile operations if the work vehicle displays high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

6. **If arrow boards are used for an operation on the shoulder, the caution mode shall be used.**
7. **Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**
8. **Except as provided in Notes 10 and 11, the work and shadow vehicles shall be equipped with truck-mounted attenuators for operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

9. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
10. Truck-mounted attenuators may be omitted from specialized work vehicles, such as sweeper, vacuum, and pothole patching trucks, and other work vehicles that cannot support the installation of a truck-mounted attenuator.
11. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, truck-mounted attenuators may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.
12. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.


*Guidance:*

13. *Where adequate stopping sight distance exists to the rear, the shadow vehicle should maintain the minimum distance from the work vehicle and proceed at the same speed. The shadow vehicle should slow in advance of vertical and horizontal curves that restrict sight distance.*

*Option:*

14. The minimum distance between the work and shadow vehicles may vary according to the terrain and the manufacturer's recommendations for the truck-mounted attenuator.
15. Additional shadow vehicles may be used in both directions to provide additional warning or to reduce vehicle speeds in advance of the work area. Law enforcement vehicles may also be used for this purpose.

**Figure 6H-4. Short Duration or Mobile Operation on a  
Shoulder of a Two-Lane Road (TA-4)  
(Delaware Revision)**

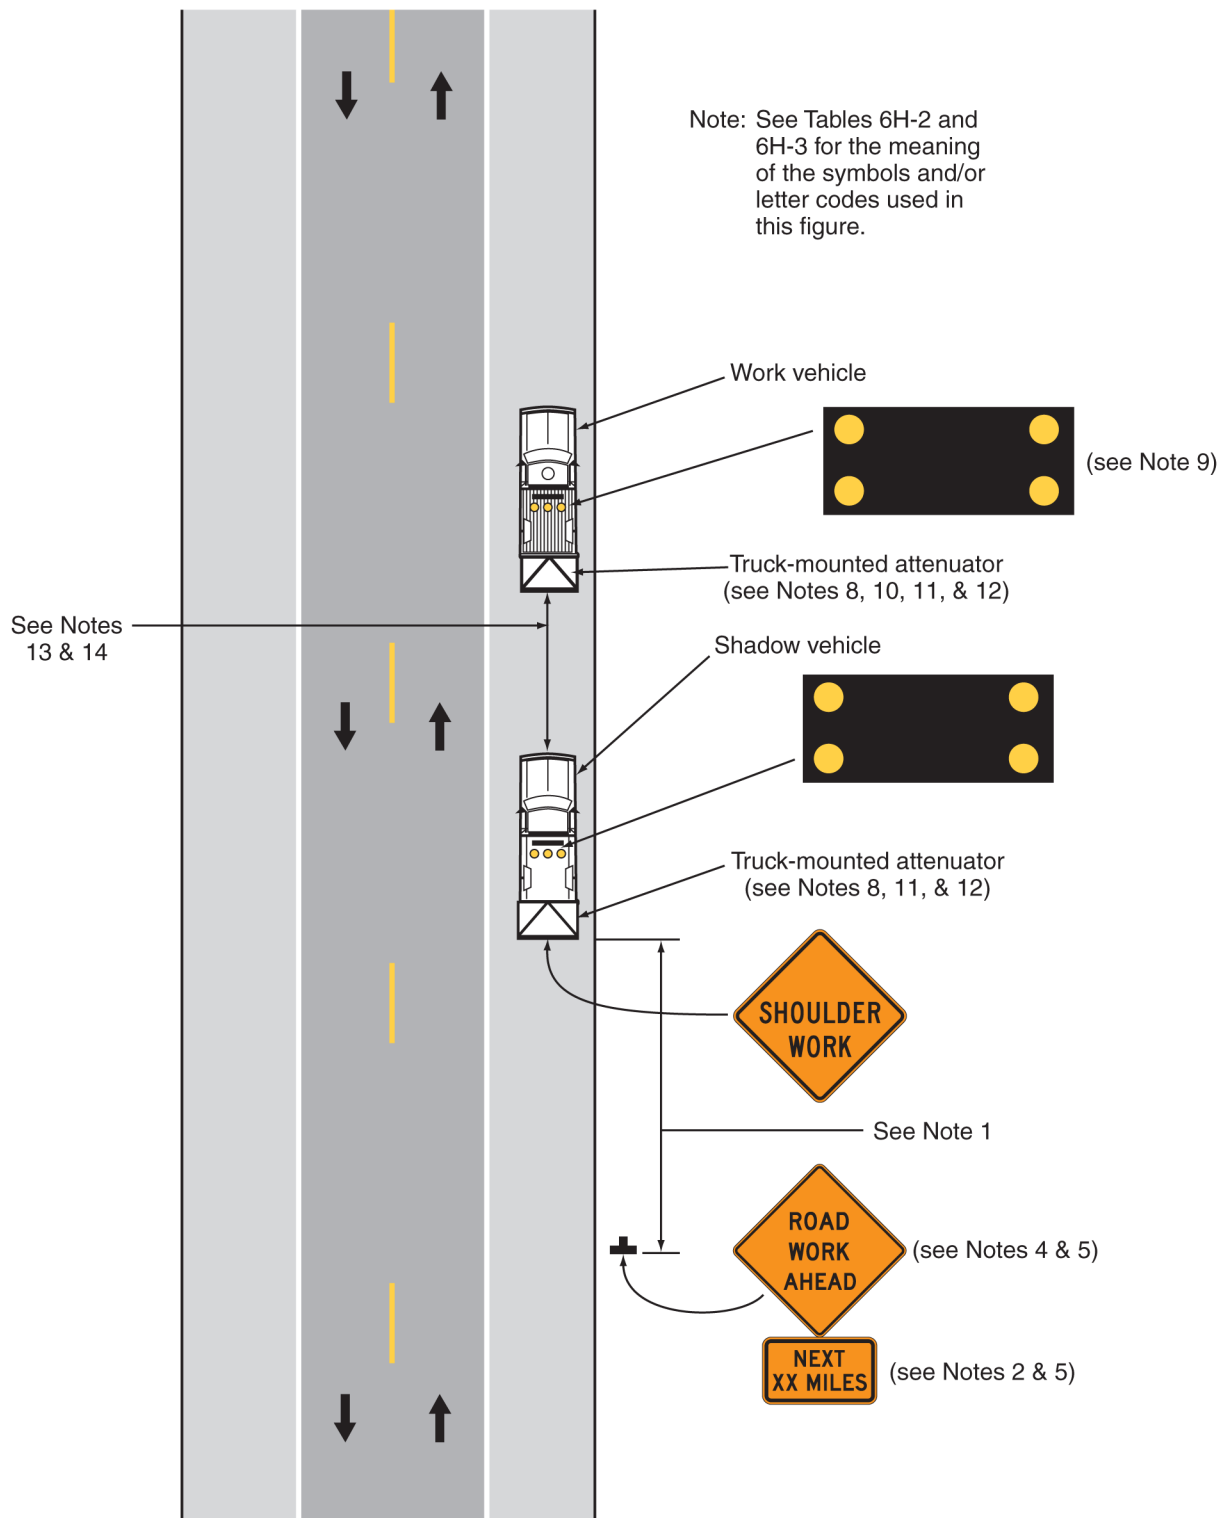

## Typical Application 4

**Notes for Figure 6H-4A—Typical Application 4A**  
**Short Duration or Mobile Operation on a Shoulder of a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

1. *In those situations where multiple work locations within a limited distance make it practical to place stationary signs, the distance between the advance warning sign and the work should not exceed 5 miles.*
2. *In those situations where the distance between the advance signs and the work is 2 miles to 5 miles, a Supplemental Distance plaque should be used with the ROAD WORK AHEAD sign.*
3. *Where drivers emerging from an intersecting roadway will not encounter the shadow vehicle prior to the work area, a stationary warning sign should be placed on the intersecting road.*

*Option:*

4. The ROAD WORK NEXT XX MILES sign may be used instead of the ROAD WORK AHEAD sign if the work locations occur over a distance of more than 2 miles.
5. Stationary warning signs may be omitted for short duration or mobile operations if the work vehicle displays high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

6. **If arrow boards are used for an operation on the shoulder, the caution mode shall be used.**
7. **Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**
8. **Except as provided in Notes 10 and 11, the work and shadow vehicles shall be equipped with truck-mounted attenuators for operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

9. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
10. Truck-mounted attenuators may be omitted from specialized work vehicles, such as sweeper, vacuum, and pothole patching trucks, and other work vehicles that cannot support the installation of a truck-mounted attenuator.
11. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, truck-mounted attenuators may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.
12. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.


*Guidance:*

13. *Where adequate stopping sight distance exists to the rear, the shadow vehicle should maintain the minimum distance from the work vehicle and proceed at the same speed. The shadow vehicle should slow in advance of vertical and horizontal curves that restrict sight distance.*

*Option:*

14. The minimum distance between the work and shadow vehicles may vary according to the terrain and the manufacturer's recommendations for the truck-mounted attenuator.
15. Additional shadow vehicles may be used in both directions to provide additional warning or to reduce vehicle speeds in advance of the work area. Law enforcement vehicles may also be used for this purpose.

**Figure 6H-4A. Short Duration or Mobile Operation on a Shoulder of a Multi-Lane, Divided Highway (TA-4A)**  
**(Delaware Revision)**

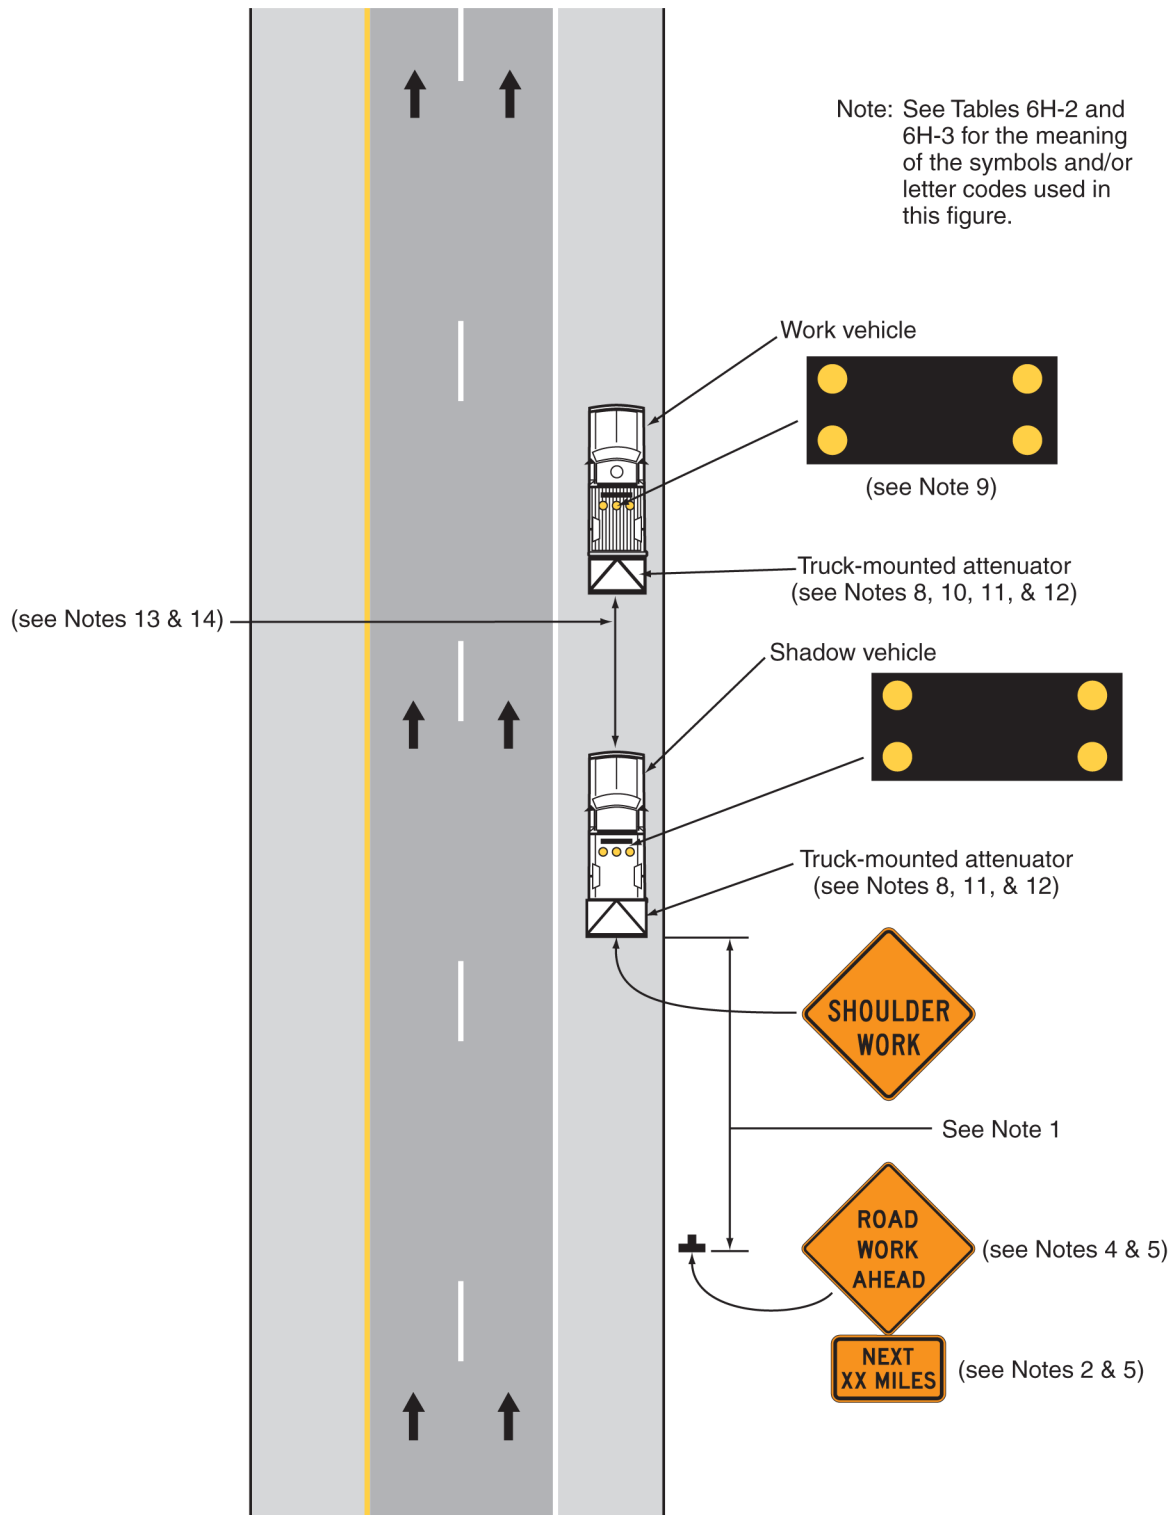

**Typical Application 4A**

**Notes for Figure 6H-5—Typical Application 5****Shoulder Closure on an Interstate, Freeway, or Expressway with a Temporary Traffic Barrier  
(Delaware Revision)***Guidance:*

1. *RIGHT (or LEFT) SHOULDER CLOSED signs should be used on limited-access highways where there is no opportunity for disabled vehicles to pull off the roadway.*
2. *If drivers cannot see a pull-off area beyond the closed shoulder, information regarding the length of the shoulder closure should be provided in feet or miles, as appropriate.*
3. *Where drivers emerging from an intersecting roadway or entrance ramp will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road or entrance ramp.*
4. *The use of a temporary traffic barrier should be based on engineering judgment.*

**Standard:**


- 5. If used, the temporary traffic barrier and retroreflective enhanced conspicuity panels shall comply with the provisions of Section 6F.85.**

*Option:*

6. The barrier shown in this typical application is an example of one method that may be used to close a shoulder of a long-term project.



**Figure 6H-5. Shoulder Closure on an Interstate, Freeway, or Expressway with a Temporary Traffic Barrier (TA-5)**  
**(Delaware Revision)**

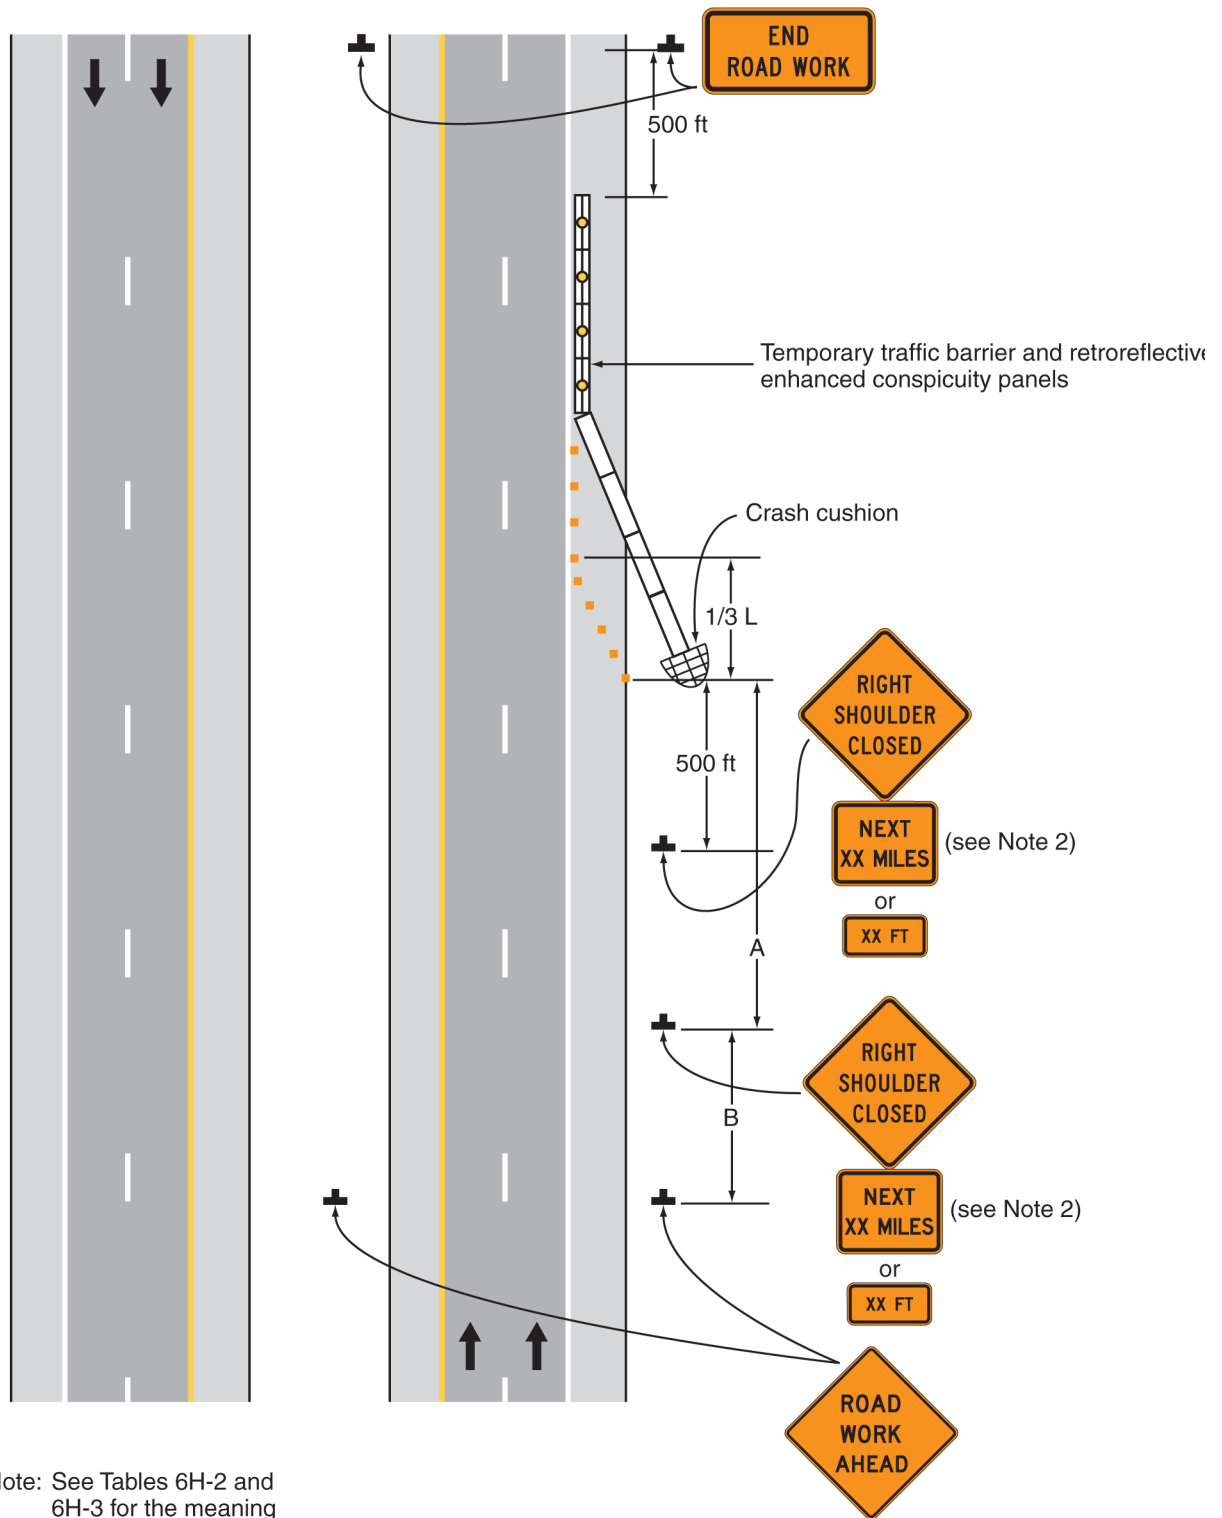

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

### Typical Application 5

**Notes for Figure 6H-5A—Typical Application 5A**  
**Shoulder Closure on an Interstate, Freeway, or Expressway for Work Beyond the Shoulder**  
**Greater Than 10 Feet from the Edge of the Traveled Way**  
**(Delaware Revision)**

*Guidance:*

1. *RIGHT (or LEFT) SHOULDER CLOSED signs should be used on limited-access highways where there is no opportunity for disabled vehicles to pull off the roadway.*
2. *If drivers cannot see a pull-off area beyond the closed shoulder, information regarding the length of the shoulder closure should be provided in feet or miles, as appropriate.*
3. *Where drivers emerging from an intersecting roadway or entrance ramp will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road or entrance ramp.*


**Standard:**

4. **When paved shoulders having a width of 8 feet or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.**
5. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

6. *For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.*

**Figure 6H-5A. Shoulder Closure on an Interstate, Freeway, or Expressway for Work > 10 Feet from the Edge of the Traveled Way (TA-5A)**  
**(Delaware Revision)**

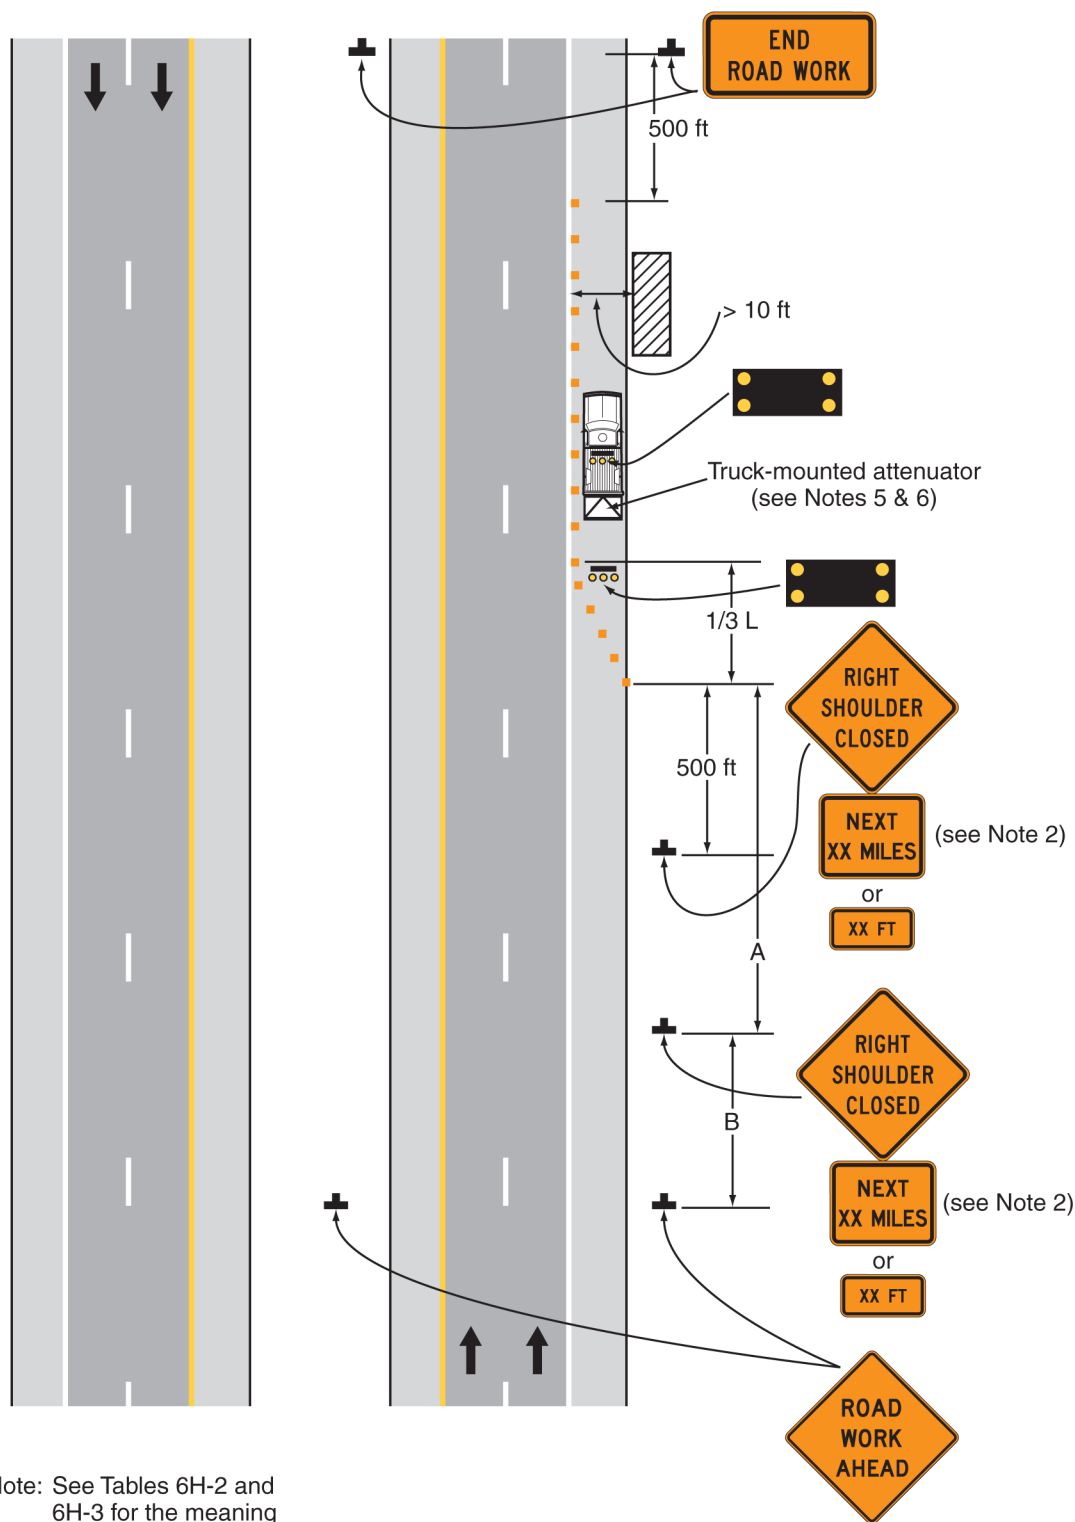

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

**Typical Application 5A**

**Notes for Figure 6H-5B—Typical Application 5B**  
**Stationary Lane Closure for Shoulder Work Less Than or Equal to**  
**10 Feet from the Edge of the Traveled Way on an Interstate, Freeway, or Expressway**  
**(Delaware Revision)**

**Standard:**

1. This TTC zone application also shall be used when work is being performed in the median or left shoulder of an interstate, freeway, or expressway. In this case, the LEFT LANE CLOSED signs and the corresponding Lane Ends (or MERGE RIGHT) signs shall be substituted.
2. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.

*Guidance:*

3. *When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*

**Support:**

4. Where conditions permit, restricting all vehicles, equipment, workers, and their activities to one side of the roadway might be advantageous.


**Standard:**

5. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
6. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.

**Option:**

7. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.

**Figure 6H-5B. Stationary Lane Closure for Shoulder Work  $\leq 10$  Feet from the Edge of the Traveled Way on an Interstate, Freeway, or Expressway (TA-5B)**  
**(Delaware Revision)**

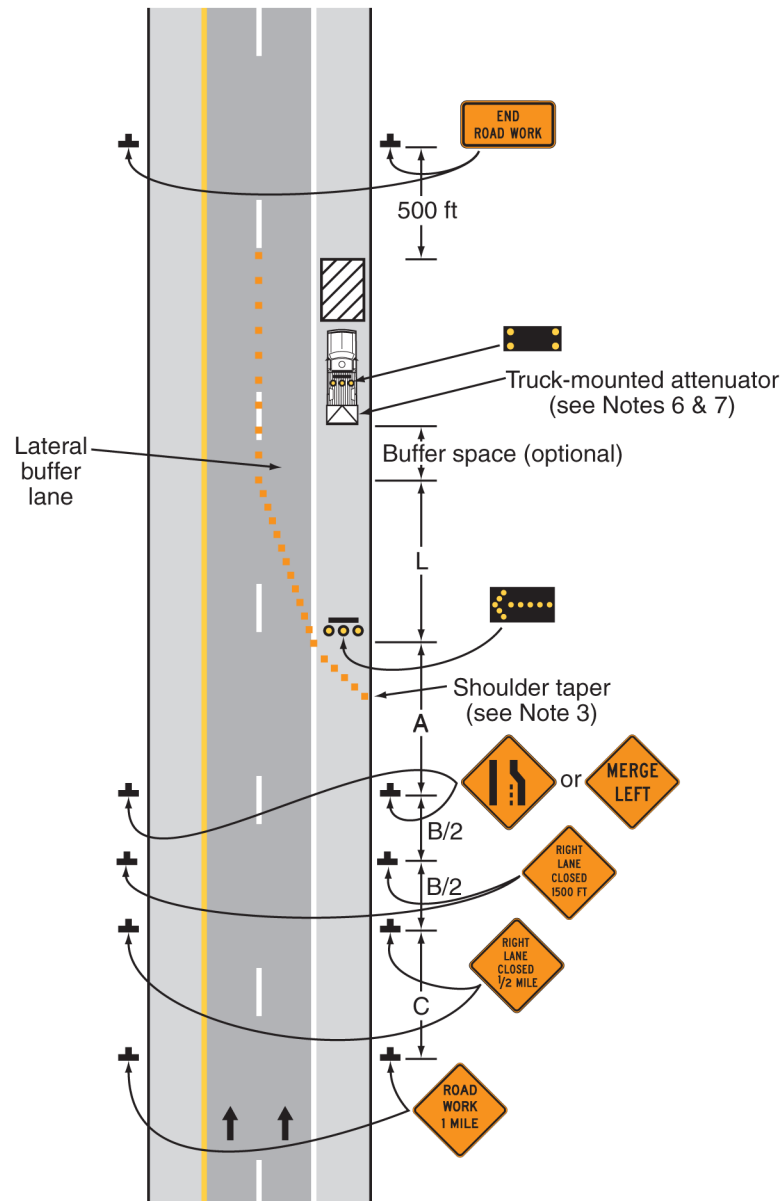

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

### Typical Application 5B

**Notes for Figure 6H-6—Typical Application 6**  
**Shoulder Work with Minor Encroachment on a Two-Lane, Low-Speed Road ( $\leq 40$  MPH)**  
**(Delaware Revision)**

**Standard:**

**1. This TTC zone application shall be limited to minor roads with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph. For higher-speed traffic conditions, a lane closure shall be used (see Figure 6H-10).**

*Guidance:*

*2. All lanes should be a minimum of 10 feet in width as measured to the near face of the channelizing devices. Except as provided in Note 3, a lane closure (see Figure 6H-10) should be used when the operations cannot accommodate the minimum 10-foot travel lane.*

**Option:**

3. For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 9 feet may be used.
4. Where the opposite shoulder is suitable for carrying vehicular traffic and of adequate width, lanes may be shifted by use of closely-spaced channelizing devices, provided that the minimum lane width of 10 feet is maintained (see Figure 6H-11B).
5. Additional advance warning may be appropriate, such as a ROAD NARROWS sign.
6. Temporary traffic barriers may be used along the work space.
7. The shadow vehicle may be omitted if a taper and channelizing devices are used.
8. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.


**Standard:**

**9. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**

*Guidance:*

*10. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*

**Figure 6H-6. Shoulder Work with Minor Encroachment on a Two-Lane, Low-Speed Road ( $\leq 40$  MPH) (TA-6)**  
**(Delaware Revision)**

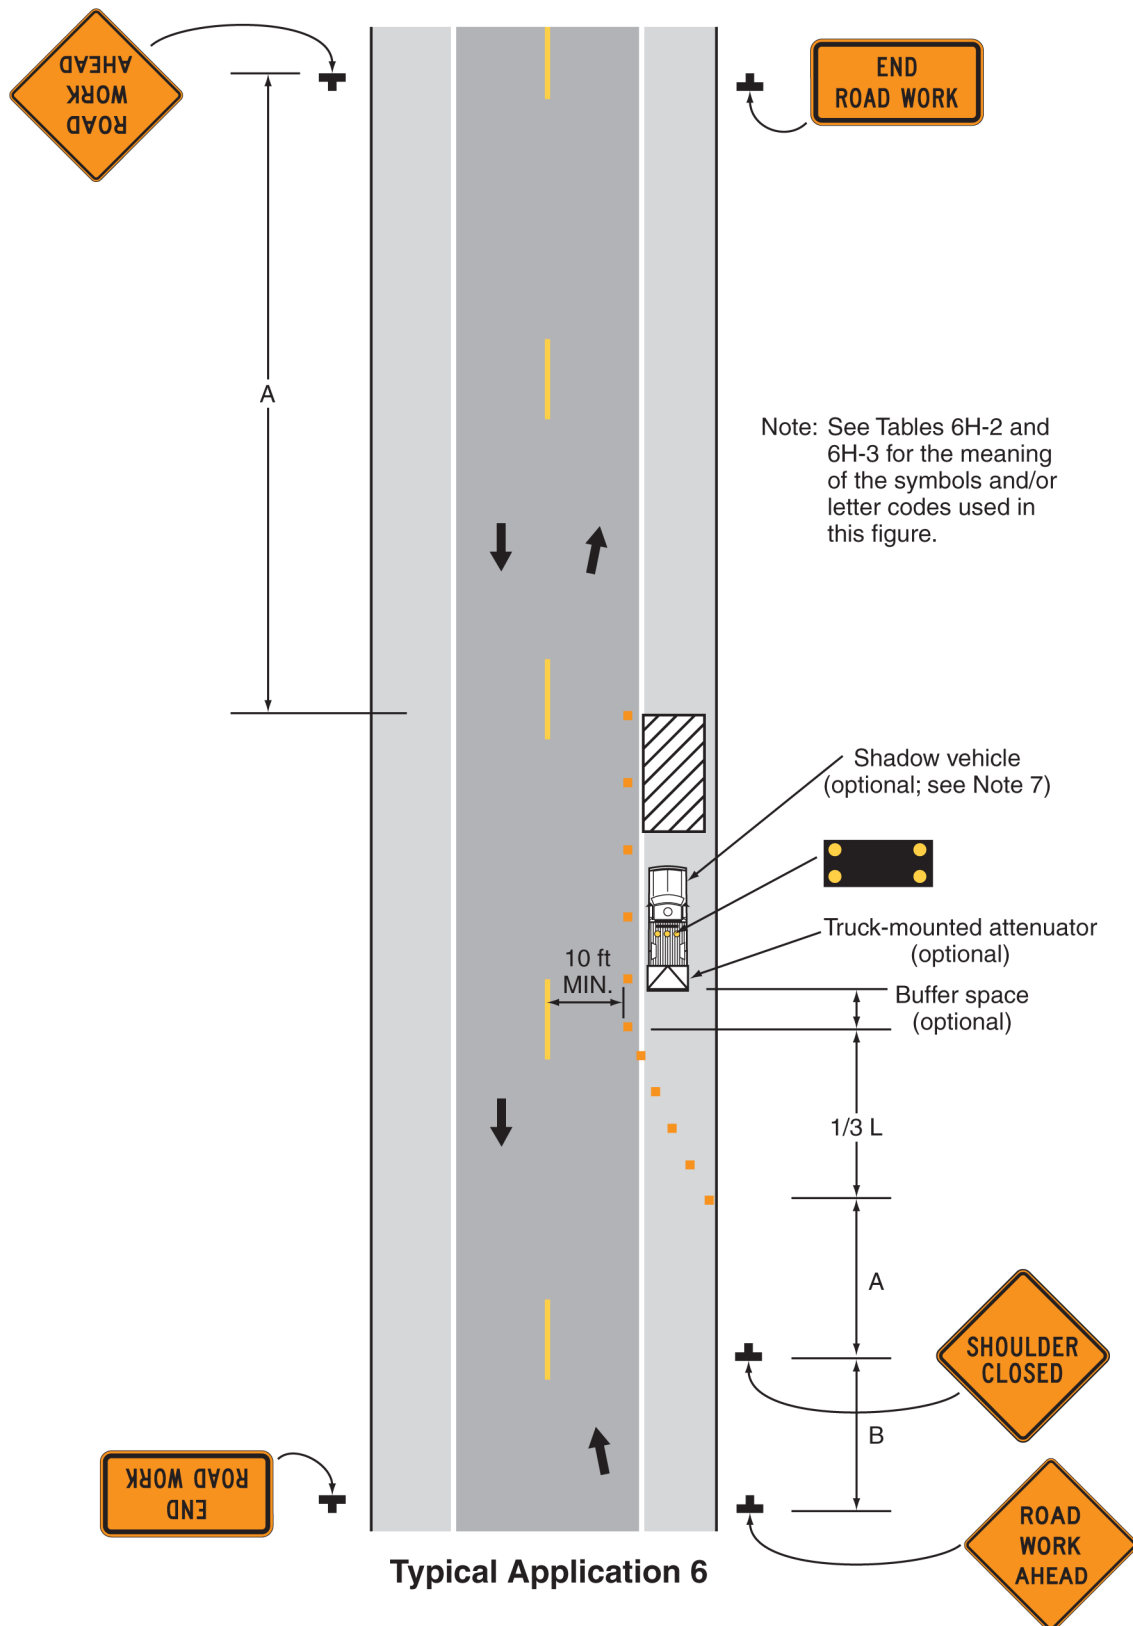



**Notes for Figure 6H-7—Typical Application 7**  
**Road Closure with a Diversion**  
**(Delaware Revision)**

**Standard:**

- 1. Pavement markings no longer applicable to the traffic pattern of the roadway shall be removed or obliterated before any new traffic patterns are open to traffic.**
- 2. Temporary barriers and end treatments shall be crashworthy.**


*Guidance:*

- 3. A shifting taper length of L is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*
- 4. Shift areas should be illuminated at night, except in emergencies.*
- 5. If the tangent distance along the temporary diversion is more than 600 feet, a Reverse Curve sign, left first, should be used instead of the Double Reverse Curve sign, and a second Reverse Curve sign, right first, should be placed in advance of the second reverse curve back to the original alignment.*
- 6. When the tangent section of the diversion is more than 600 feet, and the diversion has sharp curves with recommended speeds of 30 mph or less, Reverse Turn signs should be used.*
- 7. Advisory Speed plaques should be used only when the advisory speed is less than the posted speed limit.*
- 8. Where the temporary pavement and old pavement are different colors, the temporary pavement should start on the tangent of the existing pavement and end on the tangent of the existing pavement.*

*Option:*

- 9. On sharp curves, large arrow signs may be used in addition to other advance warning signs.*
- 10. Delineators or channelizing devices may be used along the diversion.*
- 11. Changes in alignment may be accomplished using horizontal curves designed for normal highway speeds in accordance with the DelDOT Road Design Manual.*

**Figure 6H-7. Road Closure with a Diversion (TA-7)**  
**(Delaware Revision)**

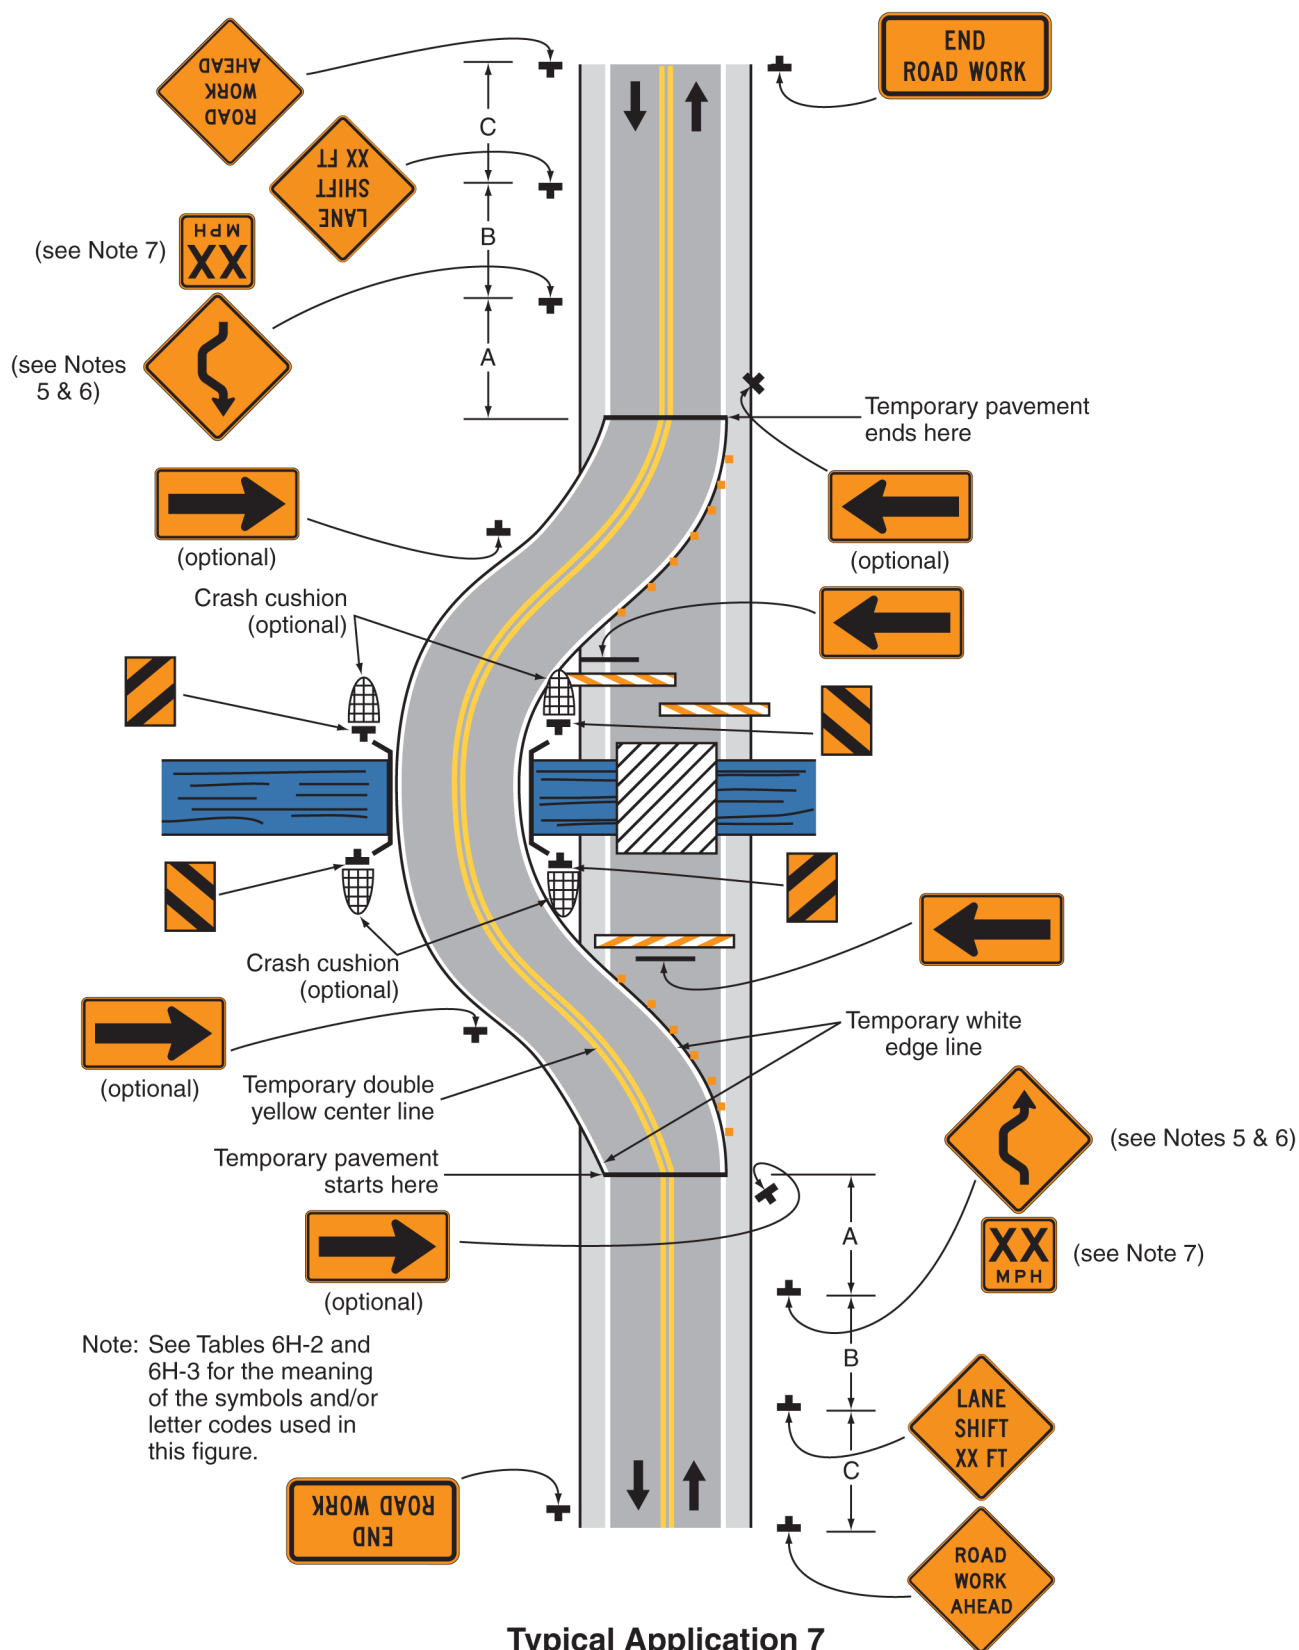

**Notes for Figure 6H-8—Typical Application 8**  
**Road Closure with an Off-Site Detour**  
**(Delaware Revision)**

Support:

1. The TTC zone application for detouring or diverting road users is shown in Figure 6H-20.

**Figure 6H-8. Road Closure with an Off-Site Detour (see TA-20)**  
**(Delaware Revision)**

**Notes for Figure 6H-9—Typical Application 9**  
**Overlapping Routes with a Detour**  
**(Delaware Revision)**

Support:

1. The TTC zone application for detouring or diverting road users is shown in Figure 6H-20.

**Figure 6H-9. Overlapping Routes with a Detour (see TA-20)**  
**(Delaware Revision)**

**Notes for Figure 6H-10—Typical Application 10**  
**Lane Closure on a Two-Lane Road Using Flaggers**  
**(Delaware Revision)**

**Option:**

1. For low-volume situations with short work zones on straight roadways where the flagger is visible to road users approaching from both directions, a single flagger, positioned to be visible to road users approaching from both directions, may be used (see Chapter 6E).
2. The ROAD WORK AHEAD and the END ROAD WORK signs may be omitted for short-duration operations.
3. A BE PREPARED TO STOP sign may be added to the sign series.

**Guidance:**

4. *The buffer space should be extended so that the two-way traffic taper is placed before a horizontal (or crest vertical) curve to provide adequate sight distance for the flagger and a queue of stopped vehicles.*

**Standard:**

5. **At night, flagger stations shall be illuminated, except in emergencies.**

**Guidance:**

6. *When used, the BE PREPARED TO STOP sign should be located between the Flagger symbol (or FLAGGER AHEAD) sign and the ONE LANE ROAD sign.*
7. *Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*
8. *When a grade crossing exists within or upstream of the transition area and it is anticipated that queues resulting from the lane closure might extend through the grade crossing, the TTC zone should be extended so that the transition area precedes the grade crossing (see Figure 6H-46).*
9. *When a grade crossing equipped with active warning devices exists within the activity area, provisions should be made for keeping flaggers informed as to the activation status of these warning devices (see Figure 6H-46).*
10. *When a grade crossing exists within the activity area, drivers operating on the left-hand side of the normal center line should be provided with comparable warning devices as for drivers operating on the right-hand side of the normal center line (see Figure 6H-46).*
11. *Early coordination with the railroad company or light rail transit agency should occur before work starts (see Figure 6H-46).*

**Option:**

12. A flagger or a uniformed law enforcement officer may be used at the upstream side of the grade crossing to minimize the probability that vehicles are stopped within 50 feet of the grade crossing, measured from both sides of the outside rails (see Figure 6H-46).


**Standard:**

13. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

**Option:**

14. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
15. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-10. Lane Closure on a Two-Lane Road Using Flaggers (TA-10)**  
**(Delaware Revision)**

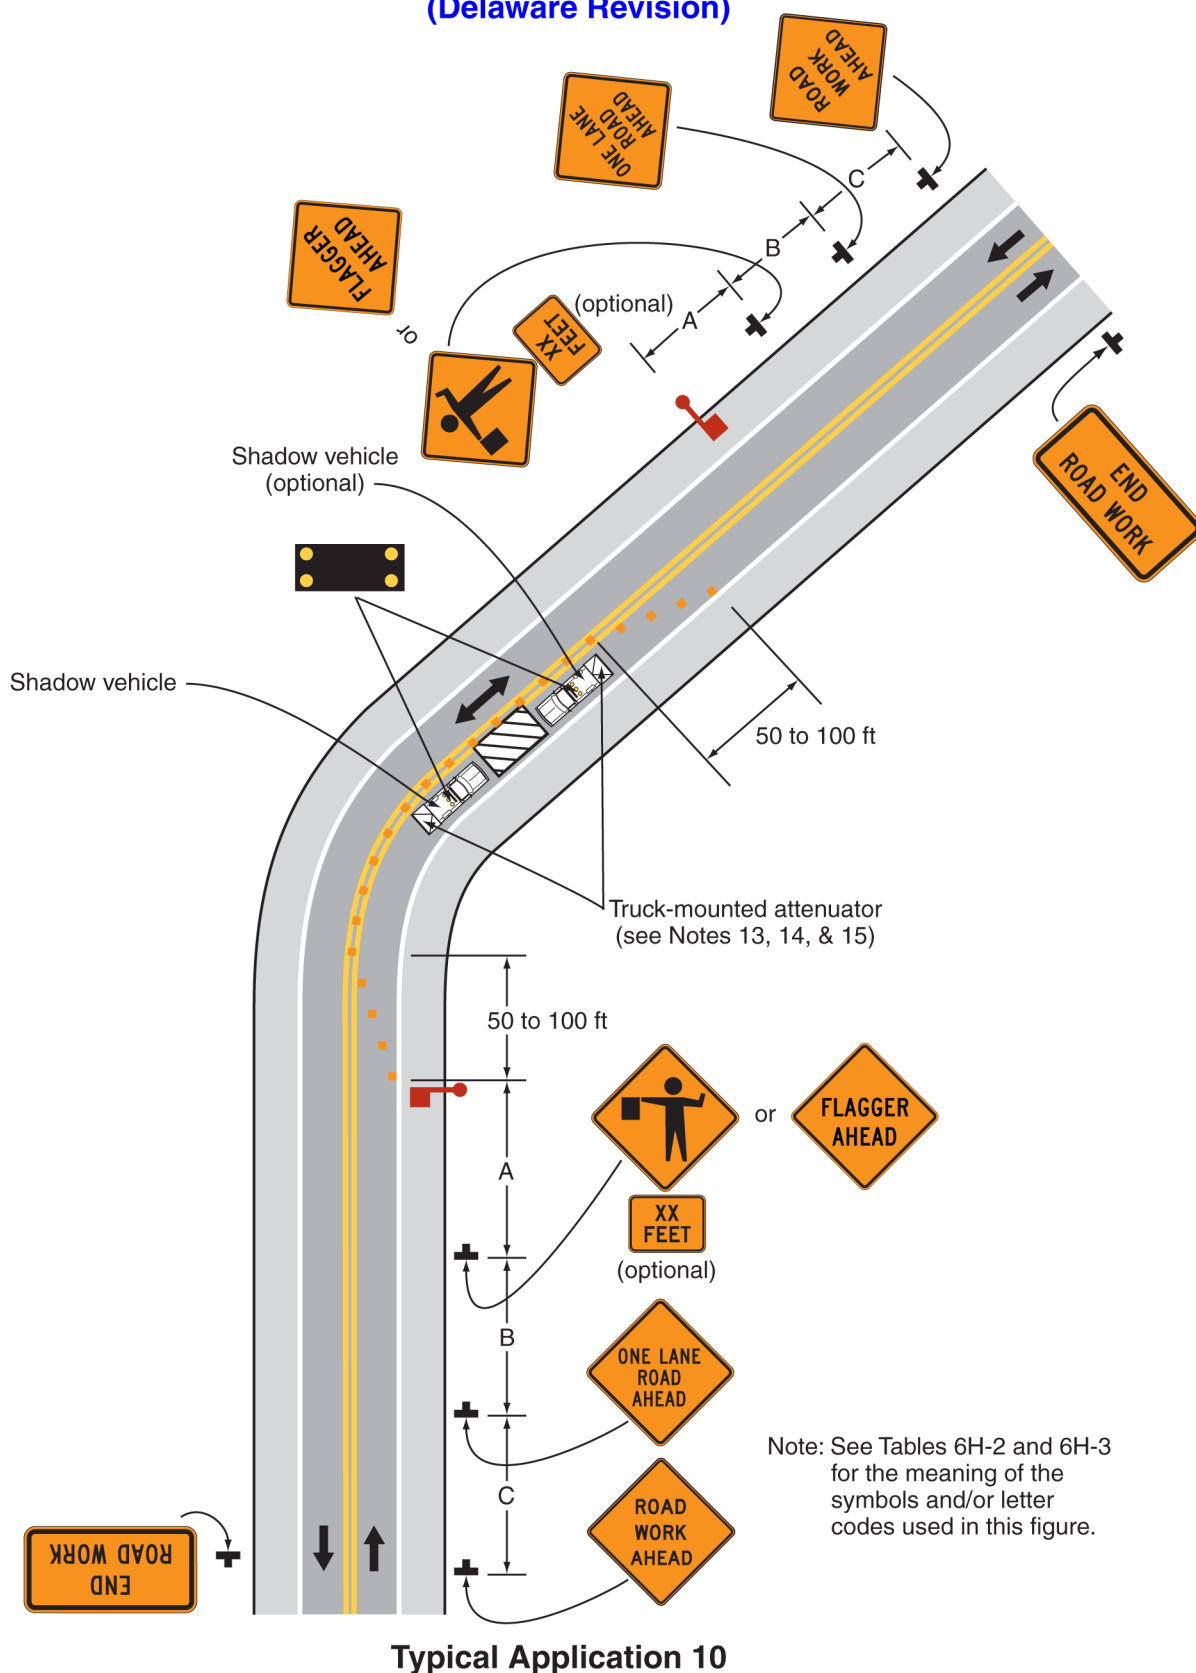

**Notes for Figure 6H-11—Typical Application 11**  
**Lane Closure on a Two-Lane Road with Low Traffic Volumes Using a YIELD Sign**  
**(Delaware Revision)**

**Option:**

1. This TTC zone application may be used as an alternate to the TTC application shown in Figure 6H-10 (using flaggers) when the following conditions exist:
  - a. Vehicular traffic volume is such that sufficient gaps exist for vehicular traffic that must yield.
  - b. Road users from both directions are able to see approaching vehicular traffic through and beyond the worksite and have sufficient visibility of approaching vehicles.

**Standard:**

- 2. This TTC zone application shall require approval from DelDOT Traffic.**

*Guidance:*


- 3. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road and all-way stop control or temporary traffic control signals should be considered (see Figures 6H-11A and 6H-12).*
- 4. All lanes should be a minimum of 10 feet in width as measured to the edge line or near face of the channelizing devices. Except as provided in Note 7, a flagger-controlled lane closure (see Figure 6H-10) should be used when the operations cannot accommodate the minimum 10-foot travel lane.*
- 5. A yield line should be installed on the yield-controlled approach for long-term and intermediate-term closures. Existing conflicting pavement markings and raised pavement marker reflectors within the transition and activity areas should be removed.*
- 6. Where no-passing lines are not already in place, they should be added.*

**Option:**

7. For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 9 feet may be used.
8. Removable pavement markings may be used.



**Figure 6H-11. Lane Closure on a Two-Lane Road with Low Traffic Volumes Using a YIELD Sign (TA-11)**  
**(Delaware Revision)**

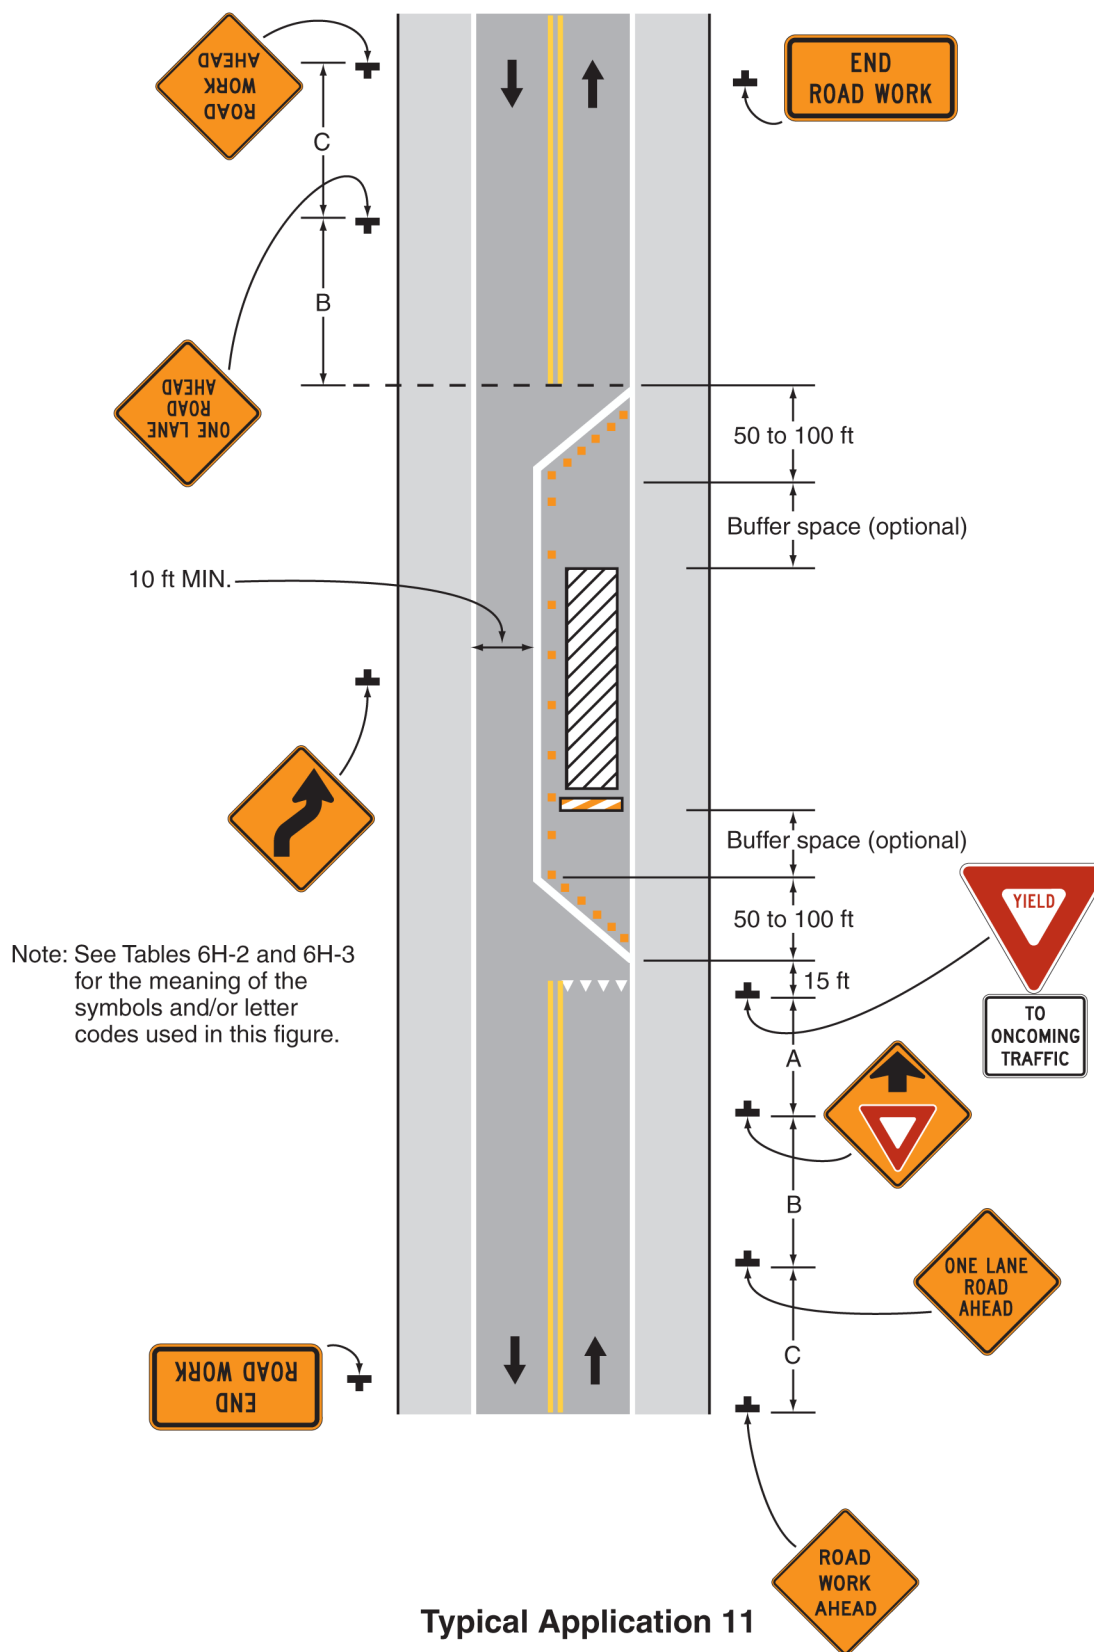

**Notes for Figure 6H-11A—Typical Application 11A**  
**Lane Closure on a Two-Lane Road with Low Traffic Volumes Using STOP Signs**  
**(Delaware Revision)**

*Guidance:*

1. *This TTC zone application should be used as an alternate to the TTC applications shown in Figures 6H-10 and 6H-11 based on engineering judgment.*

**Standard:**

**2. This TTC zone application shall require approval from DelDOT Traffic.**


*Guidance:*

3. *Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*
4. *All lanes should be a minimum of 10 feet in width as measured to the edge line or near face of the channelizing devices. Except as provided in Note 6, a flagger-controlled lane closure (see Figure 6H-10) should be used when the operations cannot accommodate the minimum 10-foot travel lane.*
5. *Stop lines should be installed for long-term and intermediate-term closures. Existing conflicting pavement markings and raised pavement marker reflectors within the transition and activity areas should be removed.*
6. *Where no-passing lines are not already in place, they should be added.*

**Option:**

7. *For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 9 feet may be used.*
8. *Removable pavement markings may be used.*

**Figure 6H-11A. Lane Closure on a Two-Lane Road with Low Traffic Volumes Using STOP Signs (TA-11A)**  
(Delaware Revision)

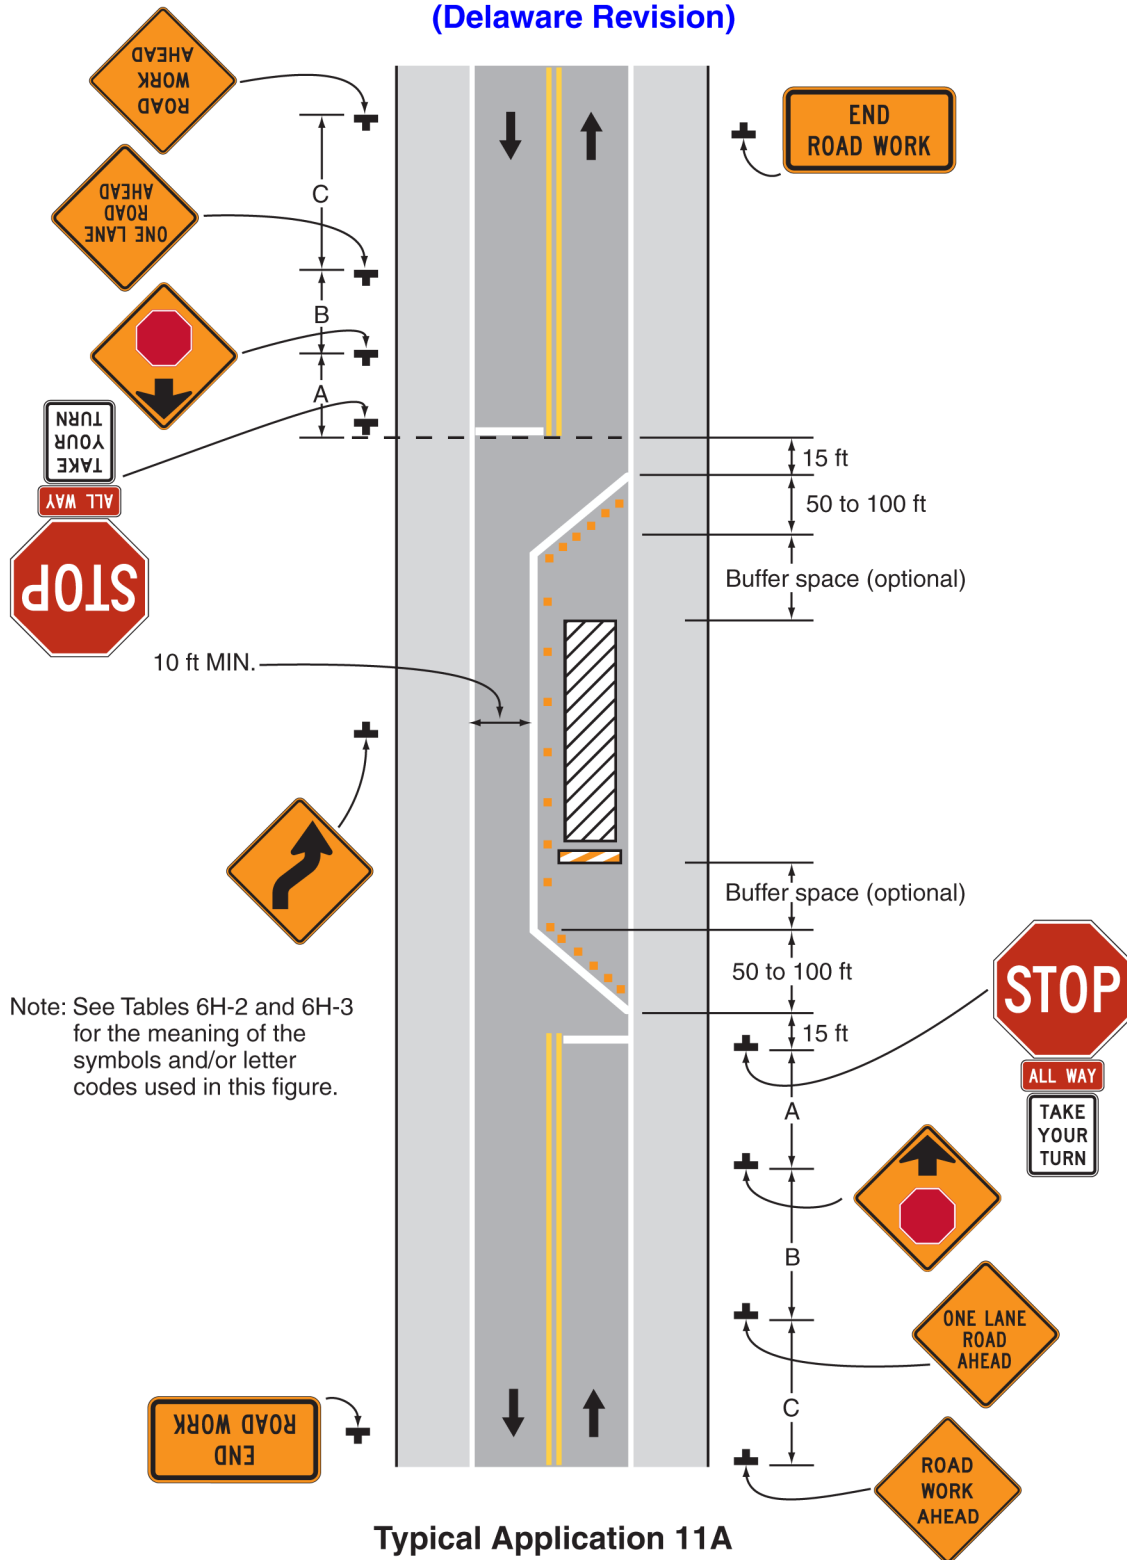

**Notes for Figure 6H-11B—Typical Application 11B**  
**Lane Diversion on a Two-Lane Road with Low Traffic Volumes**  
**(Delaware Revision)**

Option:

1. Where the opposite shoulder is suitable for carrying vehicular traffic and of adequate width, lanes may be shifted by use of closely-spaced channelizing devices.

*Guidance:*

2. *All lanes should be a minimum of 10 feet in width as measured to the near face of the channelizing devices. Except as provided in Note 8, a lane closure (see Figure 6H-10) should be used when the operations cannot accommodate the minimum 10-foot travel lane.*
3. *A shifting taper length of L is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*
4. *Shift areas should be illuminated at night, except in emergencies.*
5. *If the tangent distance along the temporary diversion is less than 600 feet, Double Reverse Curve signs should be used instead of the upstream Reverse Curve signs and the downstream Reverse Curve signs should be omitted.*
6. *If the design speed of the shifting taper is 30 mph or less, Reverse Turn signs should be used.*
7. *Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*

Option:

8. For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 9 feet may be used.

**Standard:**


- 9. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

Option:

10. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
11. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-11B. Lane Diversion on a Two-Lane Road with Low Traffic Volumes (TA-11B)**

**(Delaware Revision)**

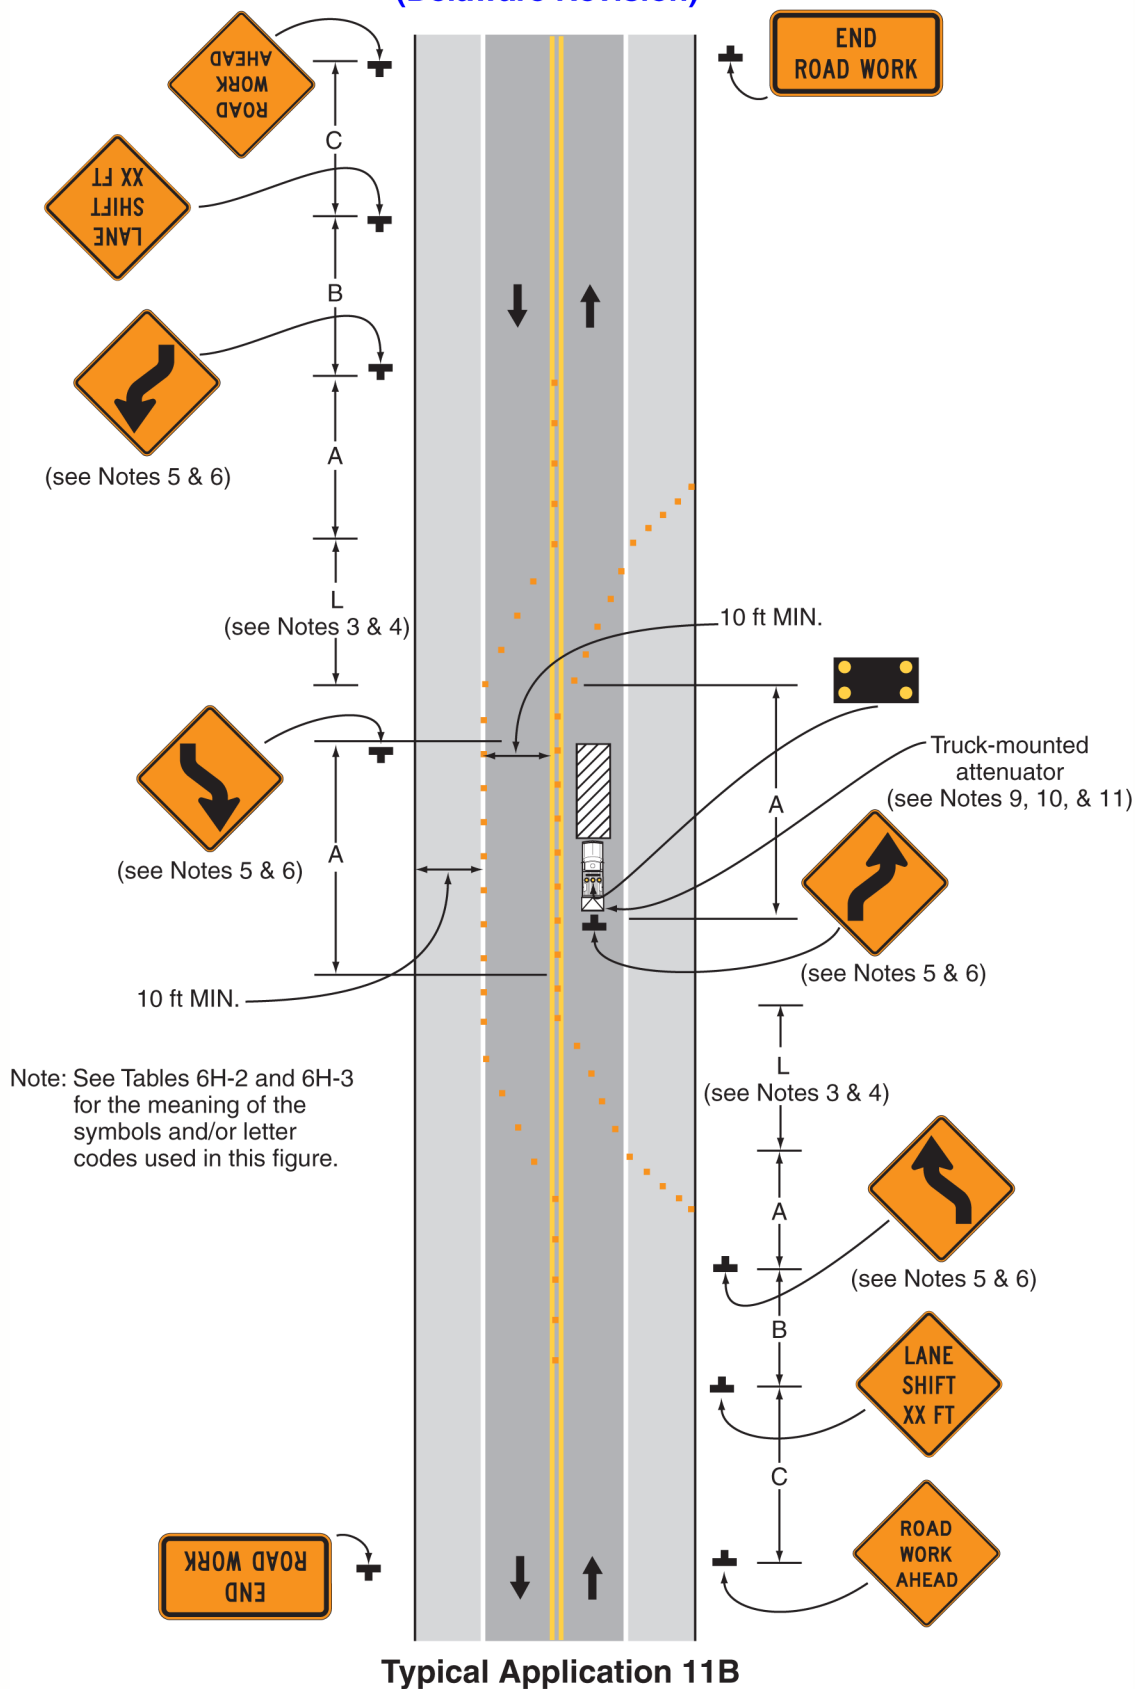

**Notes for Figure 6H-12—Typical Application 12**  
**Lane Closure on a Two-Lane Road Using Traffic Control Signals**  
**(Delaware Revision)**

**Standard:**

- 1. All temporary traffic control signals along state-maintained roadways shall have a signal plan approved by DelDOT Traffic.**
- 2. Temporary traffic control signals shall be installed and operated in accordance with the provisions of Part 4. Temporary traffic control signals shall meet the physical display and operational requirements of conventional traffic control signals.**
- 3. Temporary traffic control signal timing shall be established by authorized officials. Durations of red clearance intervals shall be adequate to clear the one-lane section of conflicting vehicles.**
- 4. When the temporary traffic control signal is changed to the flashing mode, either manually or automatically, red signal indications shall be flashed to both approaches.**
- 5. Stop lines shall be installed with temporary traffic control signals for intermediate and long-term closures. Existing conflicting pavement markings and raised pavement marker reflectors between the activity area and the stop line shall be removed. After the temporary traffic control signal is removed, the stop lines and other temporary pavement markings shall be removed and the permanent pavement markings restored.**
- 6. Safeguards shall be incorporated to avoid the possibility of conflicting signal indications at each end of the TTC zone.**

*Guidance:*

- 7. The primary signal faces controlling vehicular traffic should be located overhead.*
- 8. Where no-passing lines are not already in place, they should be added.*
- 9. Adjustments in the location of the advance warning signs should be made as needed to accommodate the horizontal or vertical alignment of the roadway, recognizing that the distances shown for sign spacings are minimums. Adjustments in the height of the signal heads should be made as needed to conform to the vertical alignment.*
- 10. All lanes should be a minimum of 10 feet in width as measured to the edge line or near face of the channelizing devices. Except as provided in Note 12, a flagger-controlled lane closure (see Figure 6H-10) should be used when the operations cannot accommodate the minimum 10-foot travel lane.*


**Option:**

- 11. Removable pavement markings may be used.**
- 12. For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 9 feet may be used.**

**Support:**

- 13. Temporary traffic control signals are preferable to flaggers for long-term projects and other activities that would require flagging at night.**
- 14. The maximum length of activity area for one-way operation under temporary traffic control signal control is determined by the capacity required to handle the peak demand.**

**Figure 6H-12. Lane Closure on a Two-Lane Road Using Traffic Control Signals (TA-12)**  
**(Delaware Revision)**

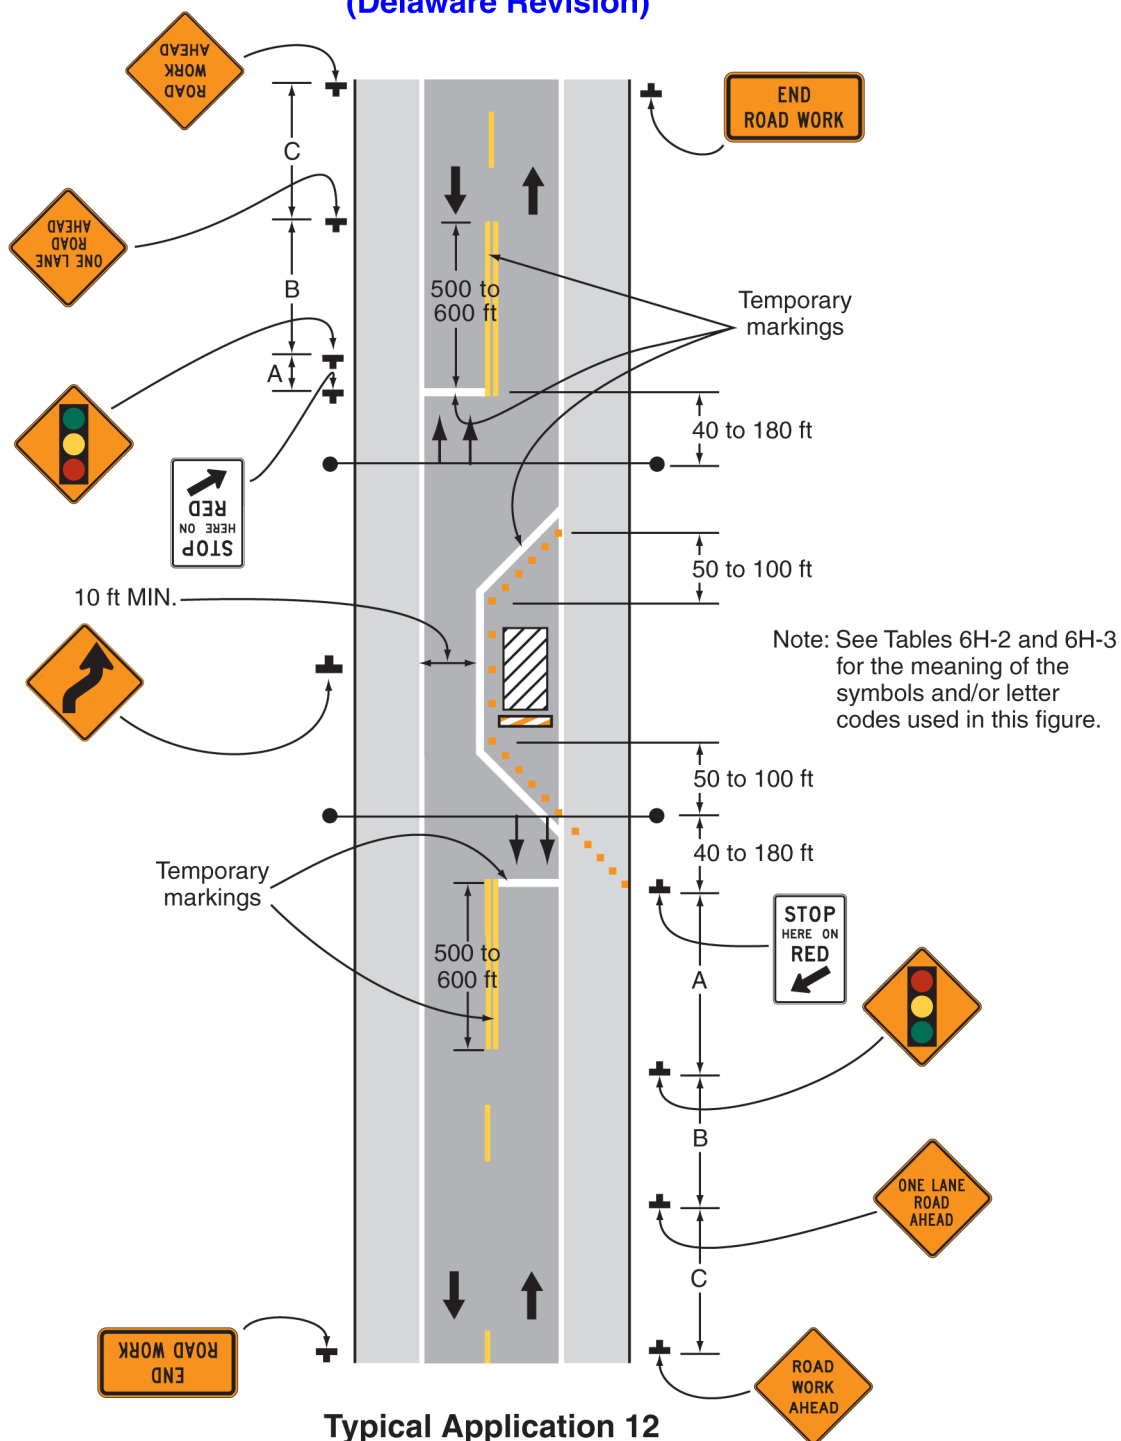

**Notes for Figure 6H-13—Typical Application 13**  
**Temporary Road Closure**  
**(Delaware Revision)**

Support:

1. Conditions represented are a planned closure not exceeding 20 minutes during off-peak hours.

**Standard:**

- 2. A flagger or uniformed law enforcement officer shall be used for this application. The flagger, if used for this application, shall follow the procedures provided in Sections 6E.07 and 6E.08.**

*Guidance:*

- 3. The uniformed law enforcement officer, if used for this application, should follow the procedures provided in Sections 6E.07 and 6E.08.*

Option:


4. A BE PREPARED TO STOP sign may be added to the sign series.

*Guidance:*

- 5. When used, the BE PREPARED TO STOP sign should be located before the Flagger symbol (or FLAGGER AHEAD) sign.*



**Figure 6H-13. Temporary Road Closure (TA-13)**  
**(Delaware Revision)**

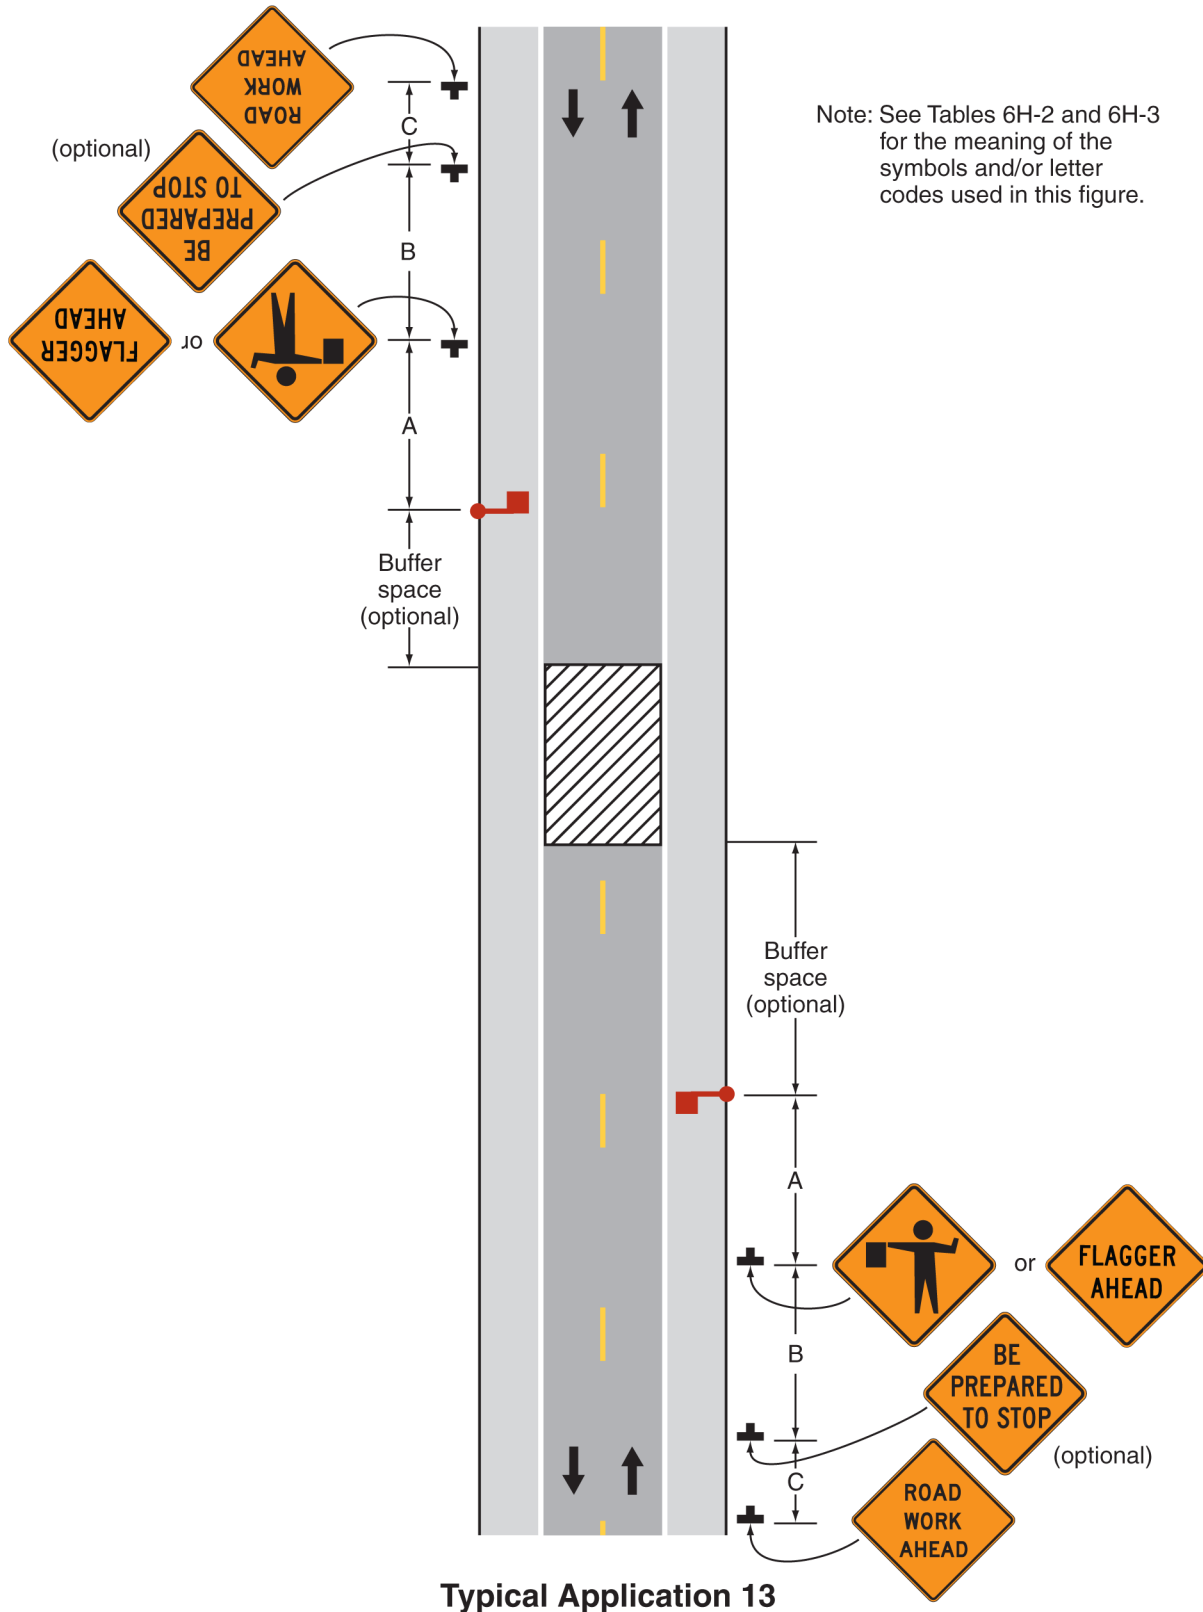

**Notes for Figure 6H-14—Typical Application 14**  
**Haul Road Crossing**  
**(Delaware Revision)**

*Guidance:*

1. *Floodlights should be used to illuminate haul road crossings where existing light is inadequate.*
2. *Where no-passing lines are not already in place, they should be added.*

**Standard:**

3. **The traffic control method selected shall be used in both directions.**

**Flagging Method**

4. **When a road used exclusively as a haul road is not in use, the haul road shall be closed with Type 3 Barricades and the Flagger symbol (or FLAGGER AHEAD) signs covered.**
5. **The flagger shall follow the procedures provided in Sections 6E.07 and 6E.08.**
6. **At night, flagger stations shall be illuminated, except in emergencies.**



**Signalized Method**

7. **All temporary traffic control signals along state-maintained roadways shall have a signal plan approved by DelDOT Traffic.**
8. **When a road used exclusively as a haul road is not in use, the haul road shall be closed with Type 3 Barricades. The signals shall either flash yellow on the main road or be covered, and the Signal Ahead and STOP HERE ON RED signs shall be covered or hidden from view.**
9. **The temporary traffic control signals shall control both the highway and the haul road and shall meet the physical display and operational requirements of conventional traffic control signals as described in Part 4. Traffic control signal timing shall be established by authorized officials.**
10. **Stop lines shall be used on existing highway with temporary traffic control signals.**
11. **Existing conflicting pavement markings between the stop lines shall be removed. After the temporary traffic control signal is removed, the stop lines and other temporary pavement markings shall be removed and the permanent pavement markings restored.**

*Guidance:*

12. *If the signalized method is used, the primary signal faces controlling vehicular traffic should be located overhead.*

**Figure 6H-14. Haul Road Crossing (TA-14)**  
**(Delaware Revision)**

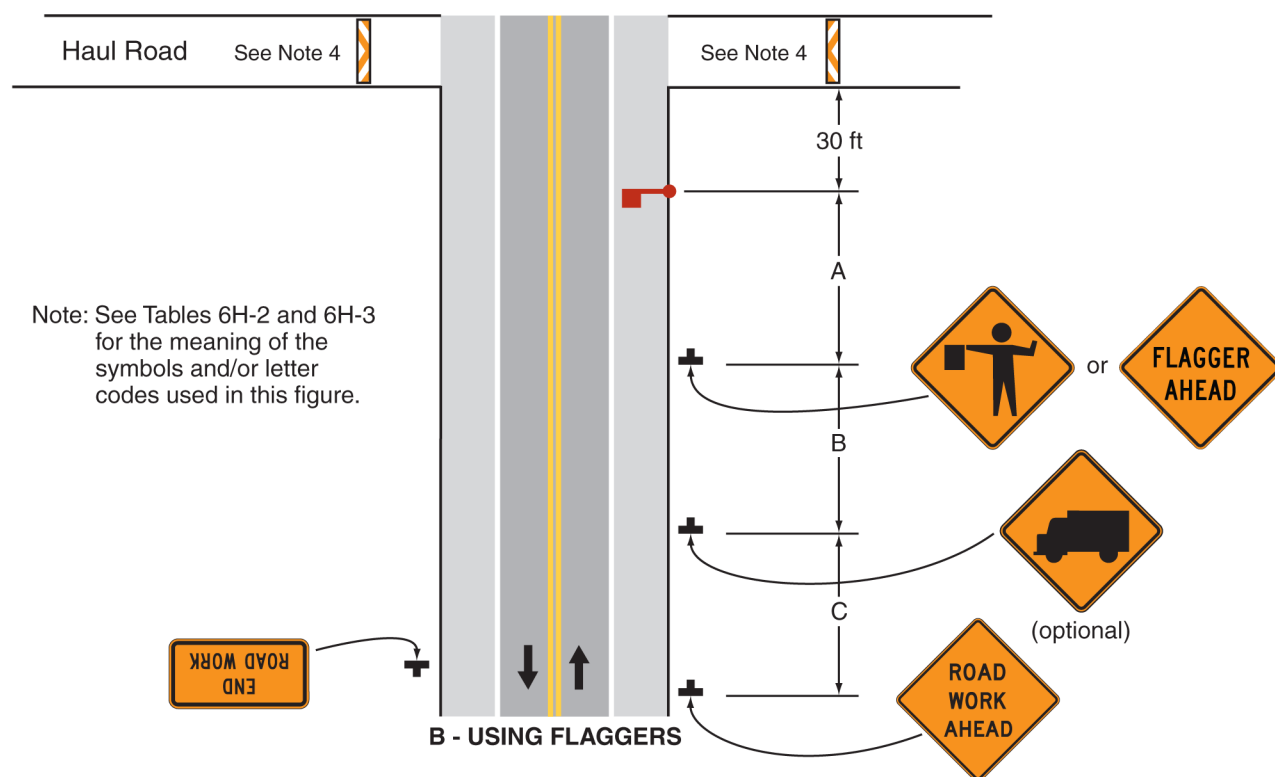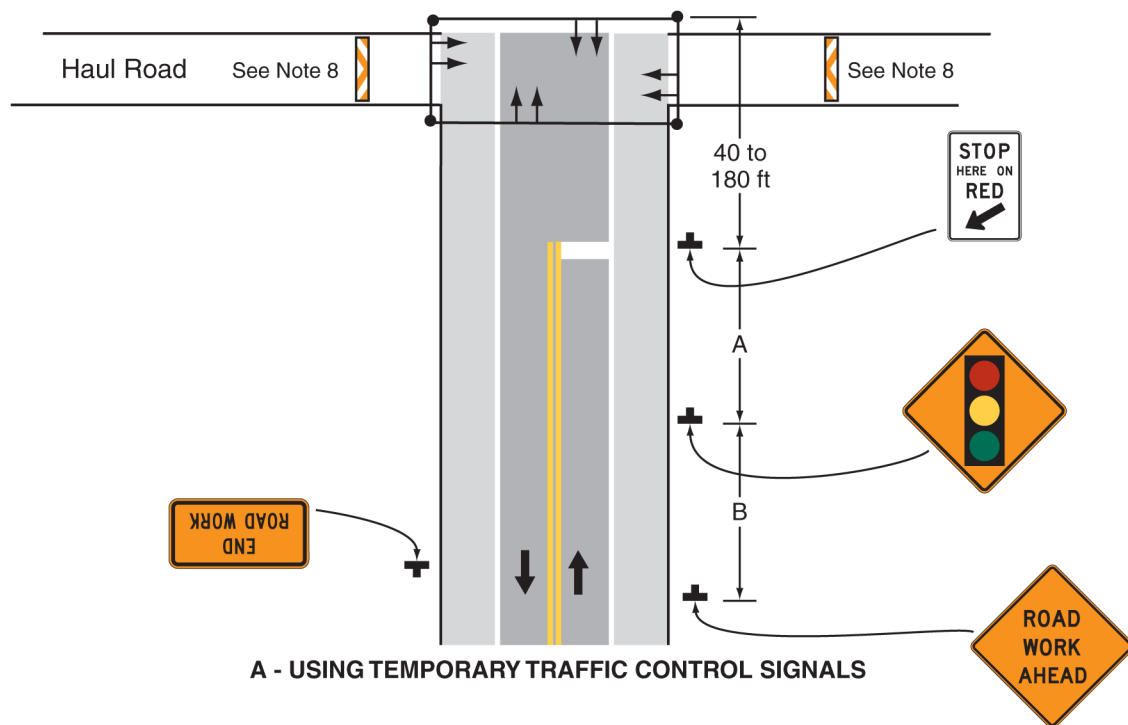

**Typical Application 14**

**Notes for Figure 6H-15—Typical Application 15**  
**Work in the Center of a Road with Low Traffic Volumes**  
**(Delaware Revision)**

*Guidance:*

1. *The lanes on either side of the center work space should have a minimum width of 10 feet as measured from the near edge of the channelizing devices to the edge of the pavement or the outside edge of the paved shoulder.*
2. *A shifting taper length of L is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*
3. *Shift areas should be illuminated at night, except in emergencies.*
4. *If the design speed of the shifting taper is 30 mph or less, Double Reverse Turn signs should be used.*
5. *Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*

*Option:*

6. A lane width of 9 feet may be used for short-term stationary work on low-volume, low-speed roadways when motor vehicle traffic does not include longer and wider heavy commercial vehicles.


**Standard:**

- 7. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

8. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
9. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-15. Work in the Center of a Road with Low Traffic Volumes (TA-15)**  
**(Delaware Revision)**

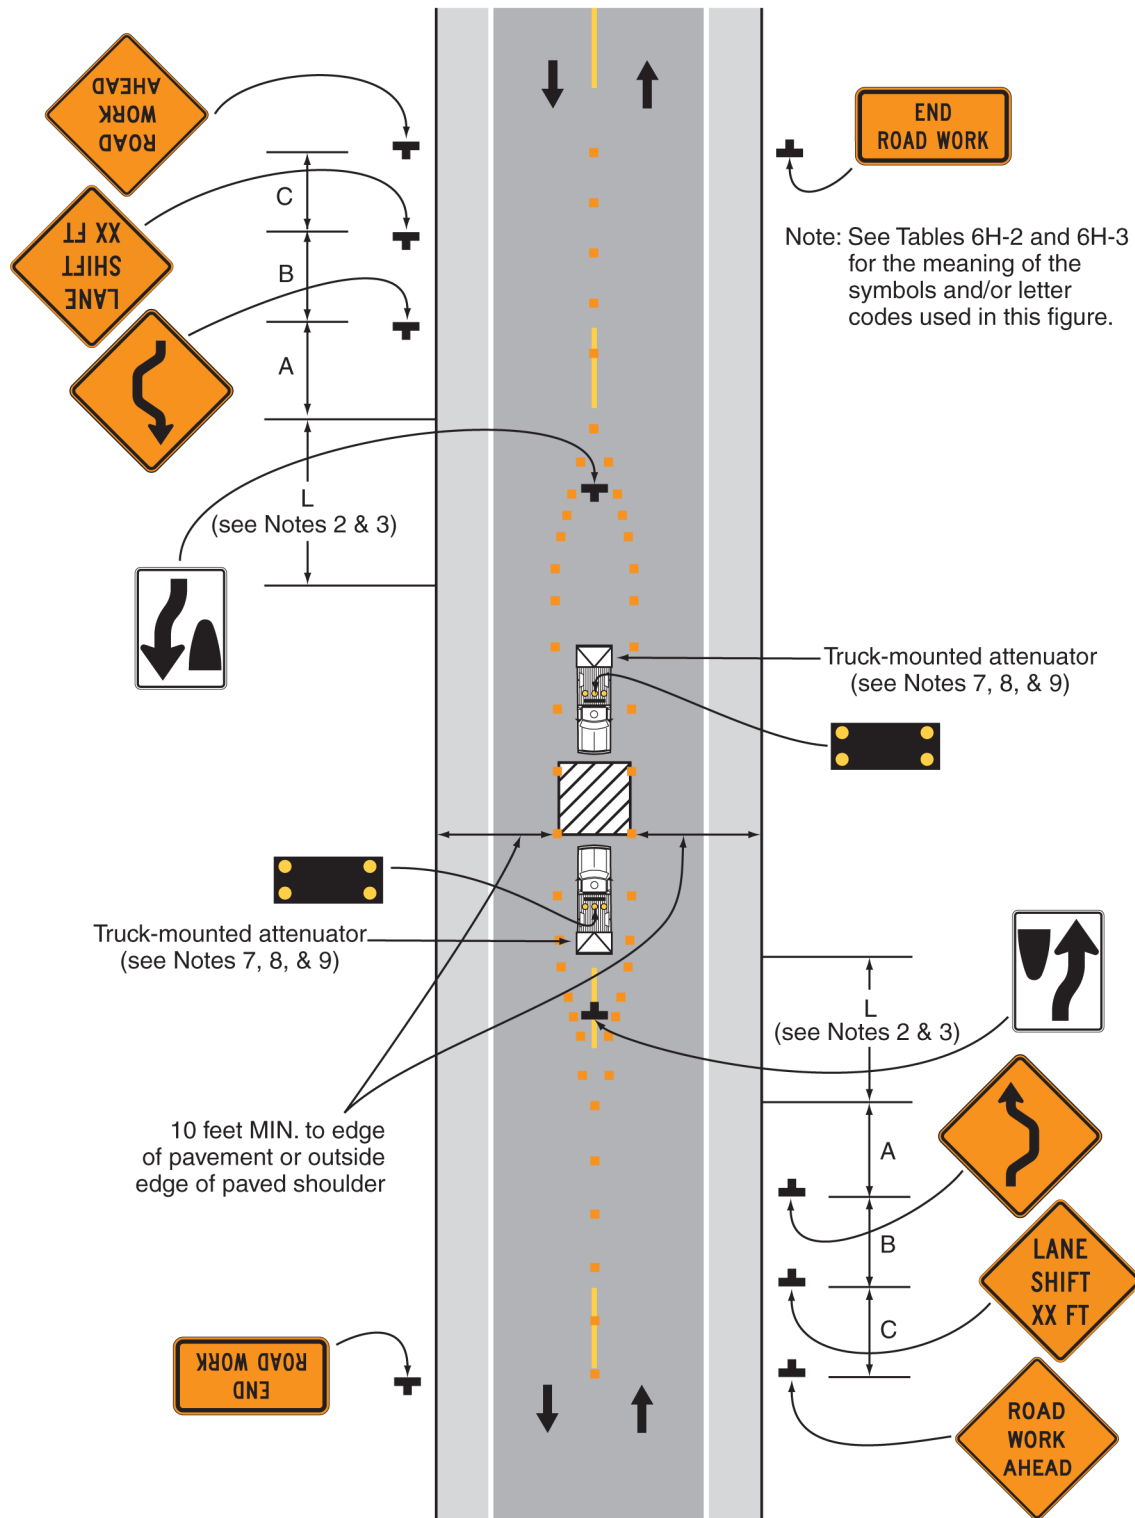

**Notes for Figure 6H-16—Typical Application 16**  
**Surveying Along a Two-Lane Road**  
**(Delaware Revision)**

**Standard:**

- 1. The length of the work area shall be limited to a half day's surveying operation or 1 mile, whichever is less.**
- 2. The flaggers shall be in sight of each other or in communication with each other at all times.**

*Guidance:*

- 3. Where a side road or major access point, such as a commercial, industrial, or subdivision entrance, intersects the work zone, additional flagger(s) should be located in the vicinity of the intersection(s).*
- 4. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*

*Option:*

5. Additional shadow vehicles to warn and reduce the speed of oncoming or opposing vehicular traffic may be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph. Law enforcement vehicles may be used for this purpose.
6. ROAD WORK AHEAD signs may be used in place of the SURVEY CREW signs.
7. A BE PREPARED TO STOP sign may be added to the sign series.

*Guidance:*

- 8. When used, the BE PREPARED TO STOP sign should be located before the Flagger symbol (or FLAGGER AHEAD) sign.*

**Standard:**

- 9. For short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**


*Option:*

10. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
11. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

*Guidance:*

- 12. For surveying operations along multi-lane roads, the off-roadway surveying operations should be completed first and then the applicable typical application for a shoulder closure (TA-4A) or lane closure (TA-35) should be used with the exception of the use of SURVEY WORK signs.*

**Figure 6H-16. Surveying Along a Two-Lane Road (TA-16)**  
**(Delaware Revision)**

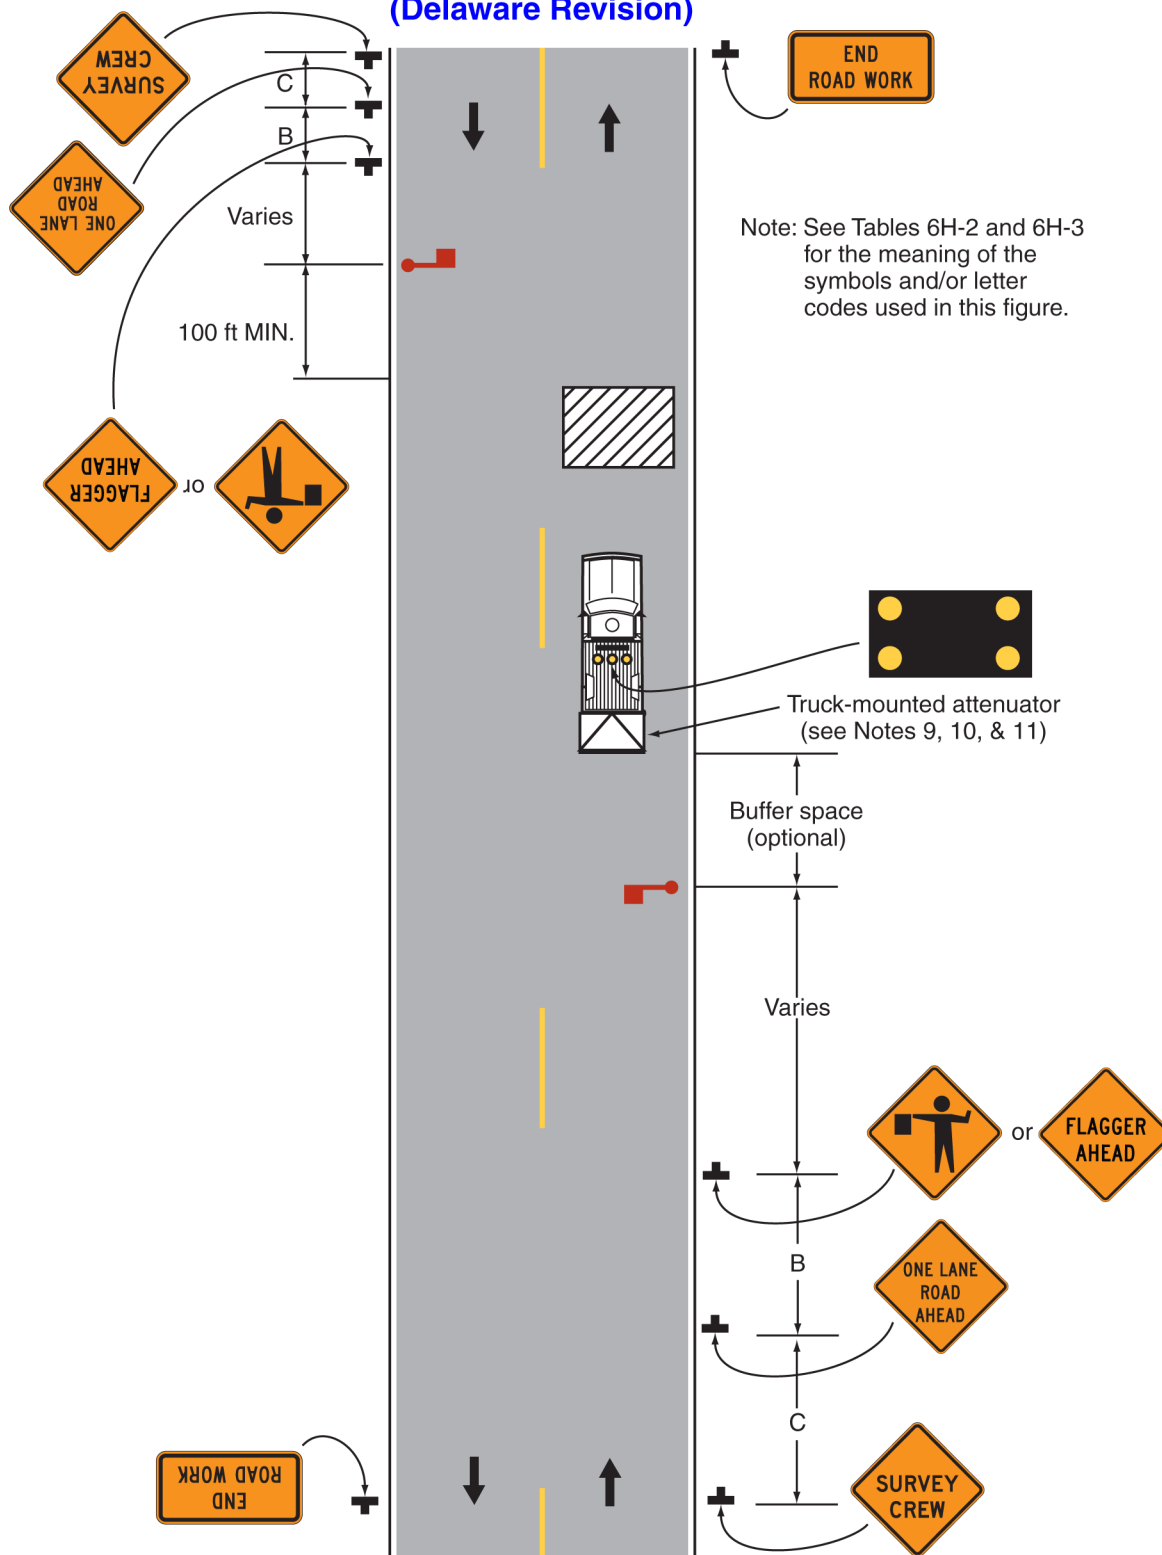

**Typical Application 16**

**Notes for Figure 6H-17—Typical Application 17**  
**Mobile Operations on a Two-Lane Road**  
**(Delaware Revision)**

**Standard:**

- 1. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.**
- 2. Shadow and work vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.**
- 3. If an arrow board is used, it shall be used in the caution mode.**

*Guidance:*

- 4. Where drivers emerging from an intersecting roadway will not encounter the shadow vehicle prior to the work area, a stationary warning sign should be placed on the intersecting road.*
- 5. Where practical and when needed, the work and shadow vehicles should pull over periodically to allow vehicular traffic to pass.*
- 6. Whenever adequate stopping sight distance exists to the rear, the shadow vehicle should maintain the minimum distance from the work vehicle and proceed at the same speed. The shadow vehicle should slow down in advance of vertical or horizontal curves that restrict sight distance.*

*Option:*

7. The minimum distance between the work and shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
8. Additional shadow vehicles to warn and reduce the speed of oncoming or opposing vehicular traffic may be used. Law enforcement vehicles may be used for this purpose.
9. If the work and shadow vehicles cannot pull over to allow vehicular traffic to pass frequently, a DO NOT PASS sign may be placed on the rear of the vehicle blocking the lane.
10. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.

*Support:*

11. Shadow vehicles are used to warn motor vehicle traffic of the operation ahead.

**Standard:**


- 12. Except as provided in Note 13, the work and shadow vehicles shall be equipped with truck-mounted attenuators for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

13. Truck-mounted attenuators may be omitted from specialized work vehicles, such as sweeper, vacuum, and pothole patching trucks, and other work vehicles that cannot support the installation of a truck-mounted attenuator.
14. Truck-mounted attenuators may be used for mobile operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.



**Figure 6H-17. Mobile Operations on a Two-Lane Road (TA-17)**  
**(Delaware Revision)**

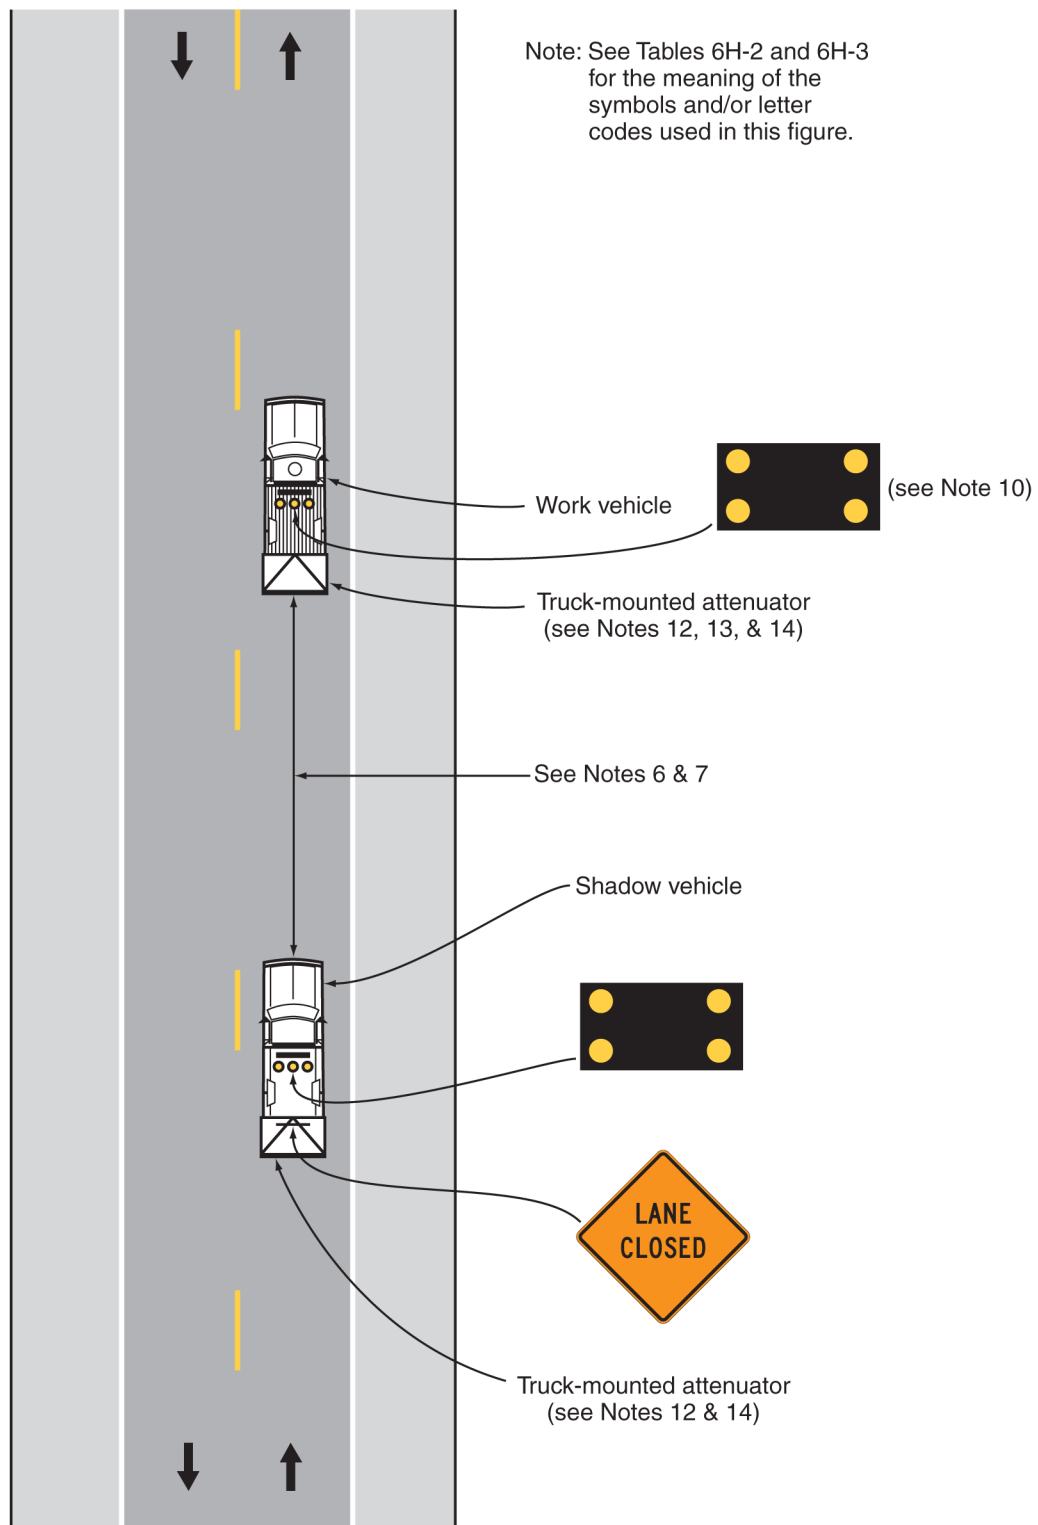

**Typical Application 17**

**Notes for Figure 6H-17A—Typical Application 17A**  
**Mobile Striping Operations on a Two-Lane Road with a Single Convoy**  
**(Delaware Revision)**

**Standard:**

1. Except as provided in Figure 6H-17B (separate cone recovery convoy), a minimum of five vehicles shall be used for the mobile striping operation convoy.
2. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
3. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
4. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
5. If an arrow board is used, it shall be used in the caution mode.

*Guidance:*

6. *Where drivers emerging from an intersecting roadway will not encounter a shadow vehicle prior to the work area, a stationary warning sign should be placed on the intersecting road.*
7. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

*Option:*

8. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
9. Additional shadow vehicles to warn and reduce the speed of oncoming or opposing vehicular traffic may be used. Law enforcement vehicles may be used for this purpose.
10. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.

*Support:*

11. Shadow vehicles are used to warn motor vehicle traffic of the operation ahead.


**Standard:**

12. **Shadow Vehicles 1 and 4 shall be equipped with truck-mounted attenuators for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

13. Truck-mounted attenuators may be used for mobile operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-17A. Mobile Striping Operations on a Two-Lane Road with a Single Convoy (TA-17A)**  
**(Delaware Revision)**

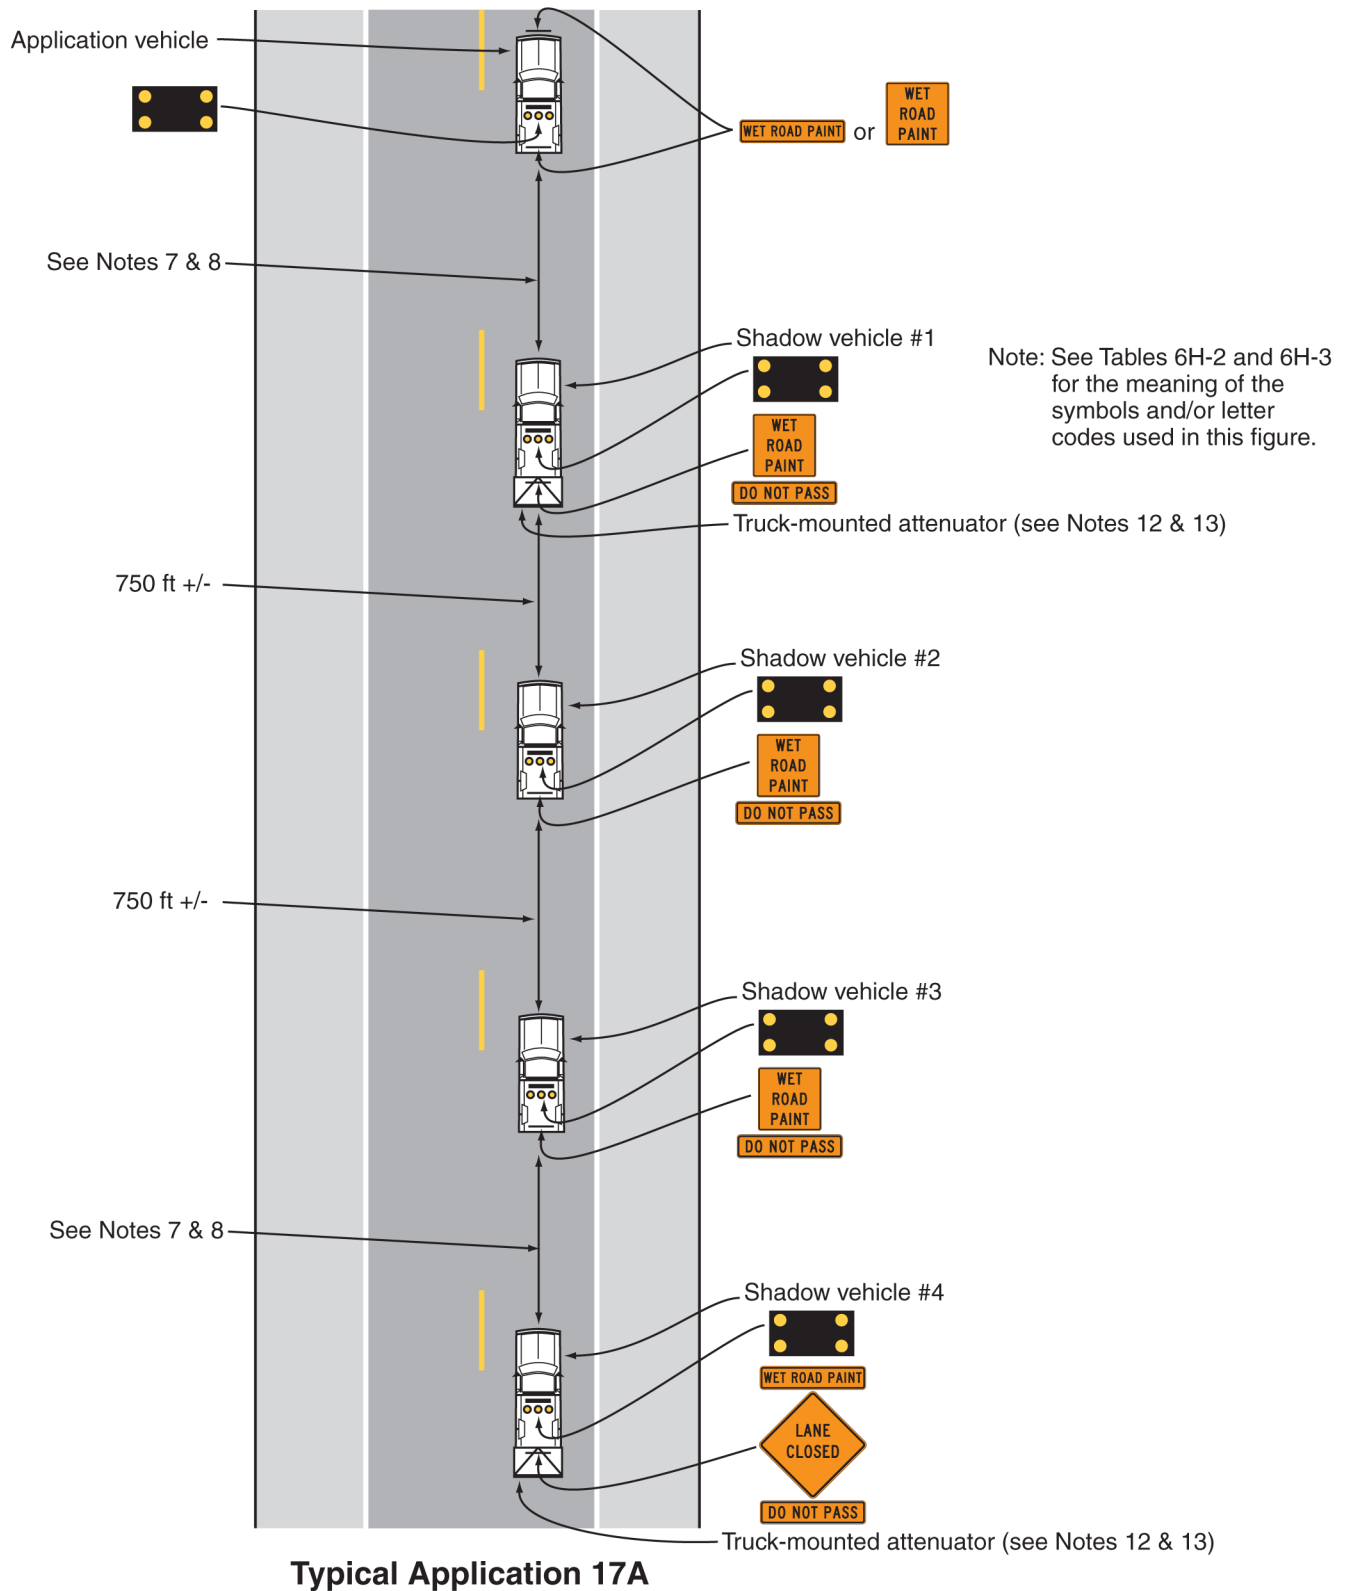

**Notes for Figure 6H-17B—Typical Application 17B**  
**Mobile Striping Operations on a Two-Lane Road with a Separate Cone Recovery Convoy**  
**(Delaware Revision)**

**Standard:**

1. A minimum of three vehicles shall be used for the initial mobile striping application convoy and a minimum of two vehicles shall be used for the cone recovery convoy.
2. The cone recovery convoy shall operate in accordance with Figure 6H-17.
3. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
4. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
5. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
6. If an arrow board is used, it shall be used in the caution mode.

*Guidance:*

7. *The cone recovery should occur within 1 hour of the initial application or within the corresponding drying time based on ambient temperatures.*
8. *Where drivers emerging from an intersecting roadway will not encounter a shadow vehicle prior to the work area, a stationary warning sign should be placed on the intersecting road.*
9. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

*Option:*

10. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
11. Additional shadow vehicles to warn and reduce the speed of oncoming or opposing vehicular traffic may be used. Law enforcement vehicles may be used for this purpose.
12. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.

*Support:*

13. Shadow vehicles are used to warn motor vehicle traffic of the operation ahead.


**Standard:**

14. **Shadow Vehicle 2 shall be equipped with a truck-mounted attenuator for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

15. Truck-mounted attenuators may be used for mobile operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.
16. Retroreflective cones may be used to supplement mobile striping operations to protect the painted lines.

**Figure 6H-17B. Mobile Striping Operations on a Two-Lane Road with a Separate Cone Recovery Convoy (TA-17B)**  
**(Delaware Revision)**

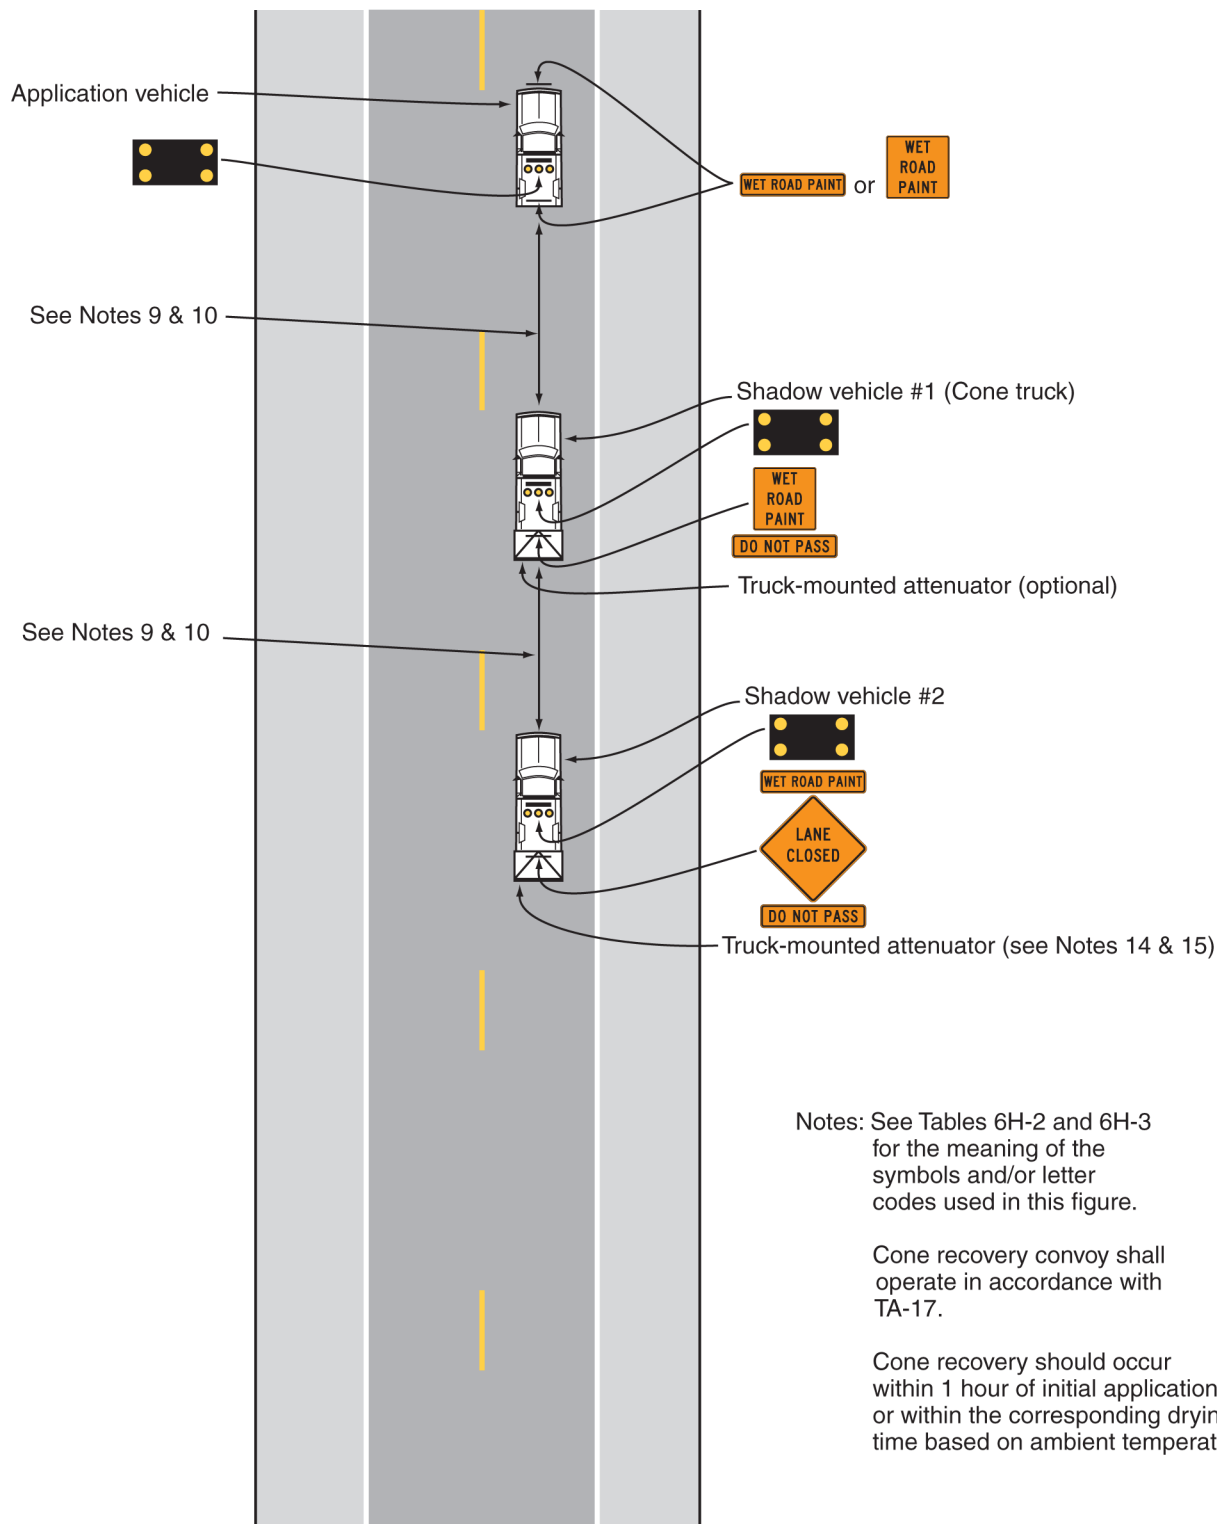

**Typical Application 17B**

**Notes for Figure 6H-18—Typical Application 18**  
**Lane Closure on a Minor Street**  
**(Delaware Revision)**

**Standard:**

**1. This TTC zone application shall be used only for low-speed facilities having low traffic volumes, such as subdivision streets.**

**Option:**

**2. Where the work space is short, where road users can see the roadway beyond, and where volume is low, vehicular traffic may be self-regulating.**

**Standard:**


**3. Where vehicular traffic cannot effectively self-regulate, one or two flaggers shall be used as illustrated in Figure 6H-10.**

**Option:**

**4. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.**

**5. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.**

**Figure 6H-18. Lane Closure on a Minor Street (TA-18)**  
**(Delaware Revision)**

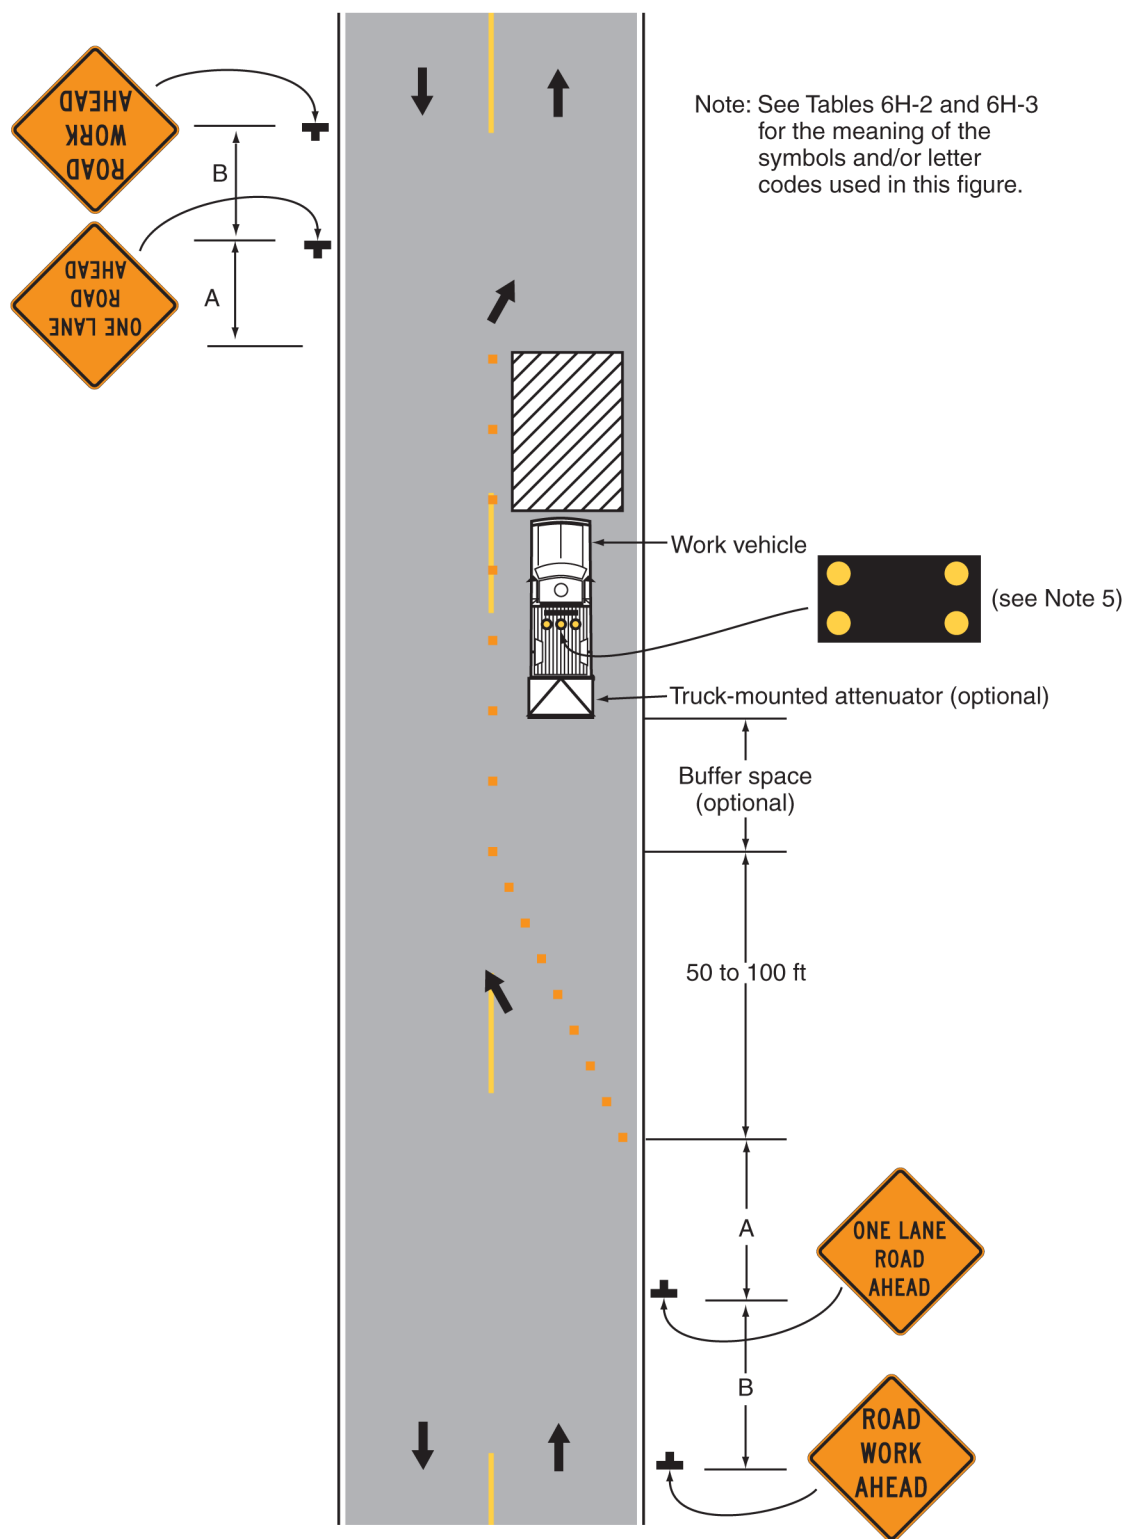

## Typical Application 18

**Notes for Figure 6H-19—Typical Application 19**  
**Detour for One Travel Direction**  
**(Delaware Revision)**

Support:

1. The TTC zone application for detouring or diverting road users is shown in Figure 6H-20.



**Figure 6H-19. Detour for One Travel Direction (see TA-20)**  
**(Delaware Revision)**

**Notes for Figure 6H-20—Typical Application 20**  
**Detour for a Closed Street**  
**(Delaware Revision)**

**Standard:**

- 1. All detours affecting state-maintained roadways shall have a detour plan approved by DelDOT Traffic.**
- 2. Before a road is closed to traffic, all necessary detour signs shall be in place along the corresponding detour route.**

*Guidance:*

- 3. Under emergency conditions, personnel should be provided to ensure a safe roadway closure until proper devices are in place.*
- 4. Proper devices should be in place within 24 hours of the start of the emergency operation.*
- 5. Regulatory traffic control devices should be modified as needed for the duration of the detour.*
- 6. On multi-lane streets, Detour signs with an Advance Turn Arrow should be used in advance of a turn.*
- 7. On multi-lane, divided highways, Detour signs should be mounted on both sides of the directional roadway where adequate lateral clearance is available on the left-hand side of the roadway to accommodate the additional signs.*
- 8. For complex or overlapping detours associated with unnumbered routes, a Street Name sign should be mounted with the Detour sign.*
- 9. Route Sign Directional assemblies should be used for long-term detours associated with numbered routes.*
- 10. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the road closure, additional signs should be placed on the intersecting road.*


**Option:**

11. If the road is opened for some distance beyond the intersection and/or there are significant origin/destination points beyond the intersection, the ROAD CLOSED and DETOUR signs on Type 3 Barricades may be located at the edge of the traveled way.
12. Detour signs may be located on the far side of intersections. A Detour sign with an advance arrow may be used in advance of a turn.
13. A Street Name sign may be mounted with the Detour sign. The Street Name sign may be either white on green or black on orange.
14. Cardinal direction plaques may be used with route signs.
15. Additional temporary traffic control devices may be used for detours and road closures on multi-lane, divided highways based on engineering judgment.

**Standard:**

- 16. When used, the Street Name sign shall be placed above the Detour sign.**
- 17. Type 3 Barricades used at the point of the road closure shall extend entirely across the closed portion of the roadway, including any corresponding shoulders.**

**Figure 6H-20. Detour for a Closed Street (TA-20)**  
**(Delaware Revision)**

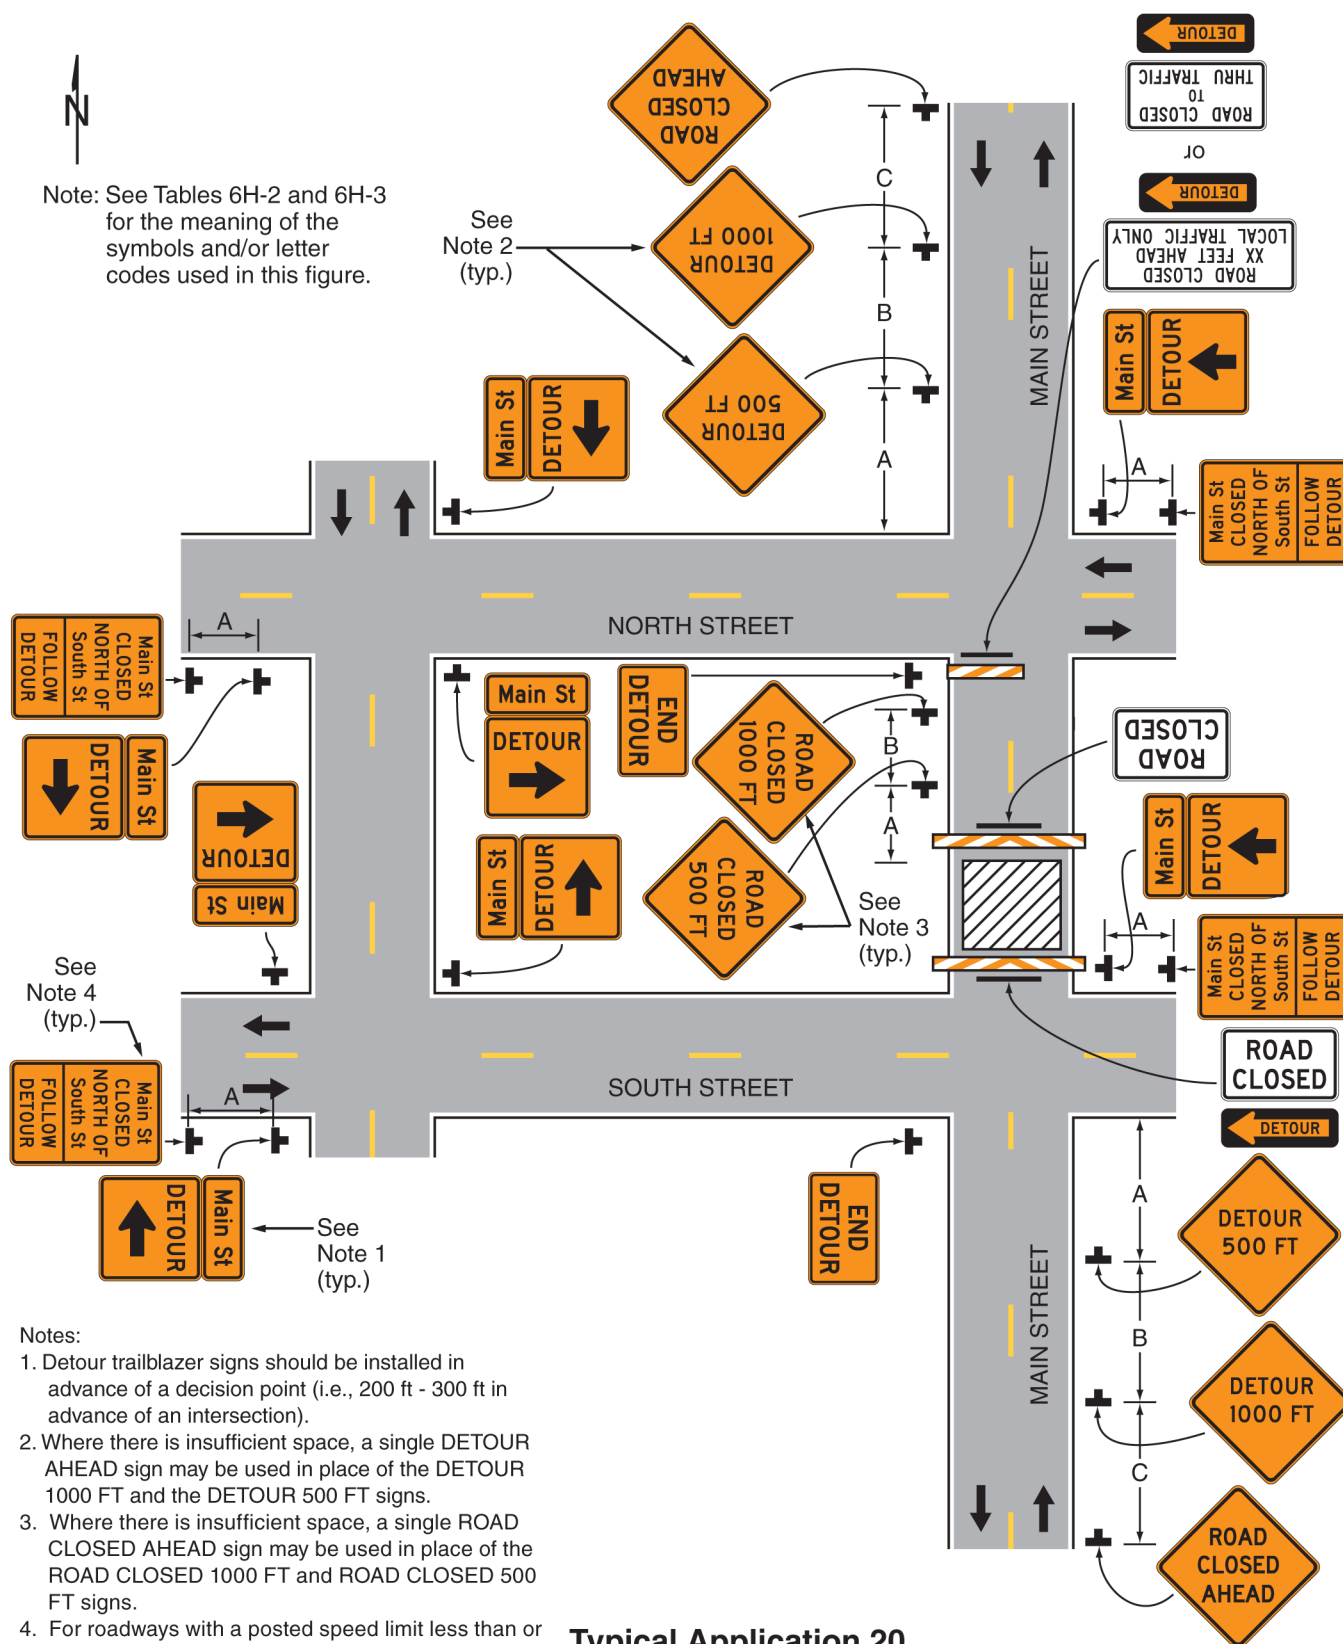

## Typical Application 20

**Notes for Figure 6H-21—Typical Application 21****Lane Closure on the Near Side of an Intersection on an Undivided, Low-Speed Road ( $\leq 40$  MPH)  
(Delaware Revision)****Standard:**

1. This TTC zone application also shall be used when work is being performed in the left-hand lane. In this case, the LEFT LANE CLOSED sign and the corresponding Lane Ends (or MERGE RIGHT) sign shall be substituted.
2. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.


*Guidance:*

3. *This TTC zone application should be limited to urban intersections with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph. For higher-speed traffic conditions, additional warning signs should be used in the advance warning area (see Figure 6H-33).*
4. *If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6H-29.*
5. *When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*
6. *Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*
7. *Along divided highways, advance warning signs should be omitted from the opposing direction and downstream intersecting roadways.*

**Option:**

8. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-21. Lane Closure on the Near Side of an Intersection  
on an Undivided, Low-Speed Road ( $\leq 40$  MPH) (TA-21)**  
(Delaware Revision)

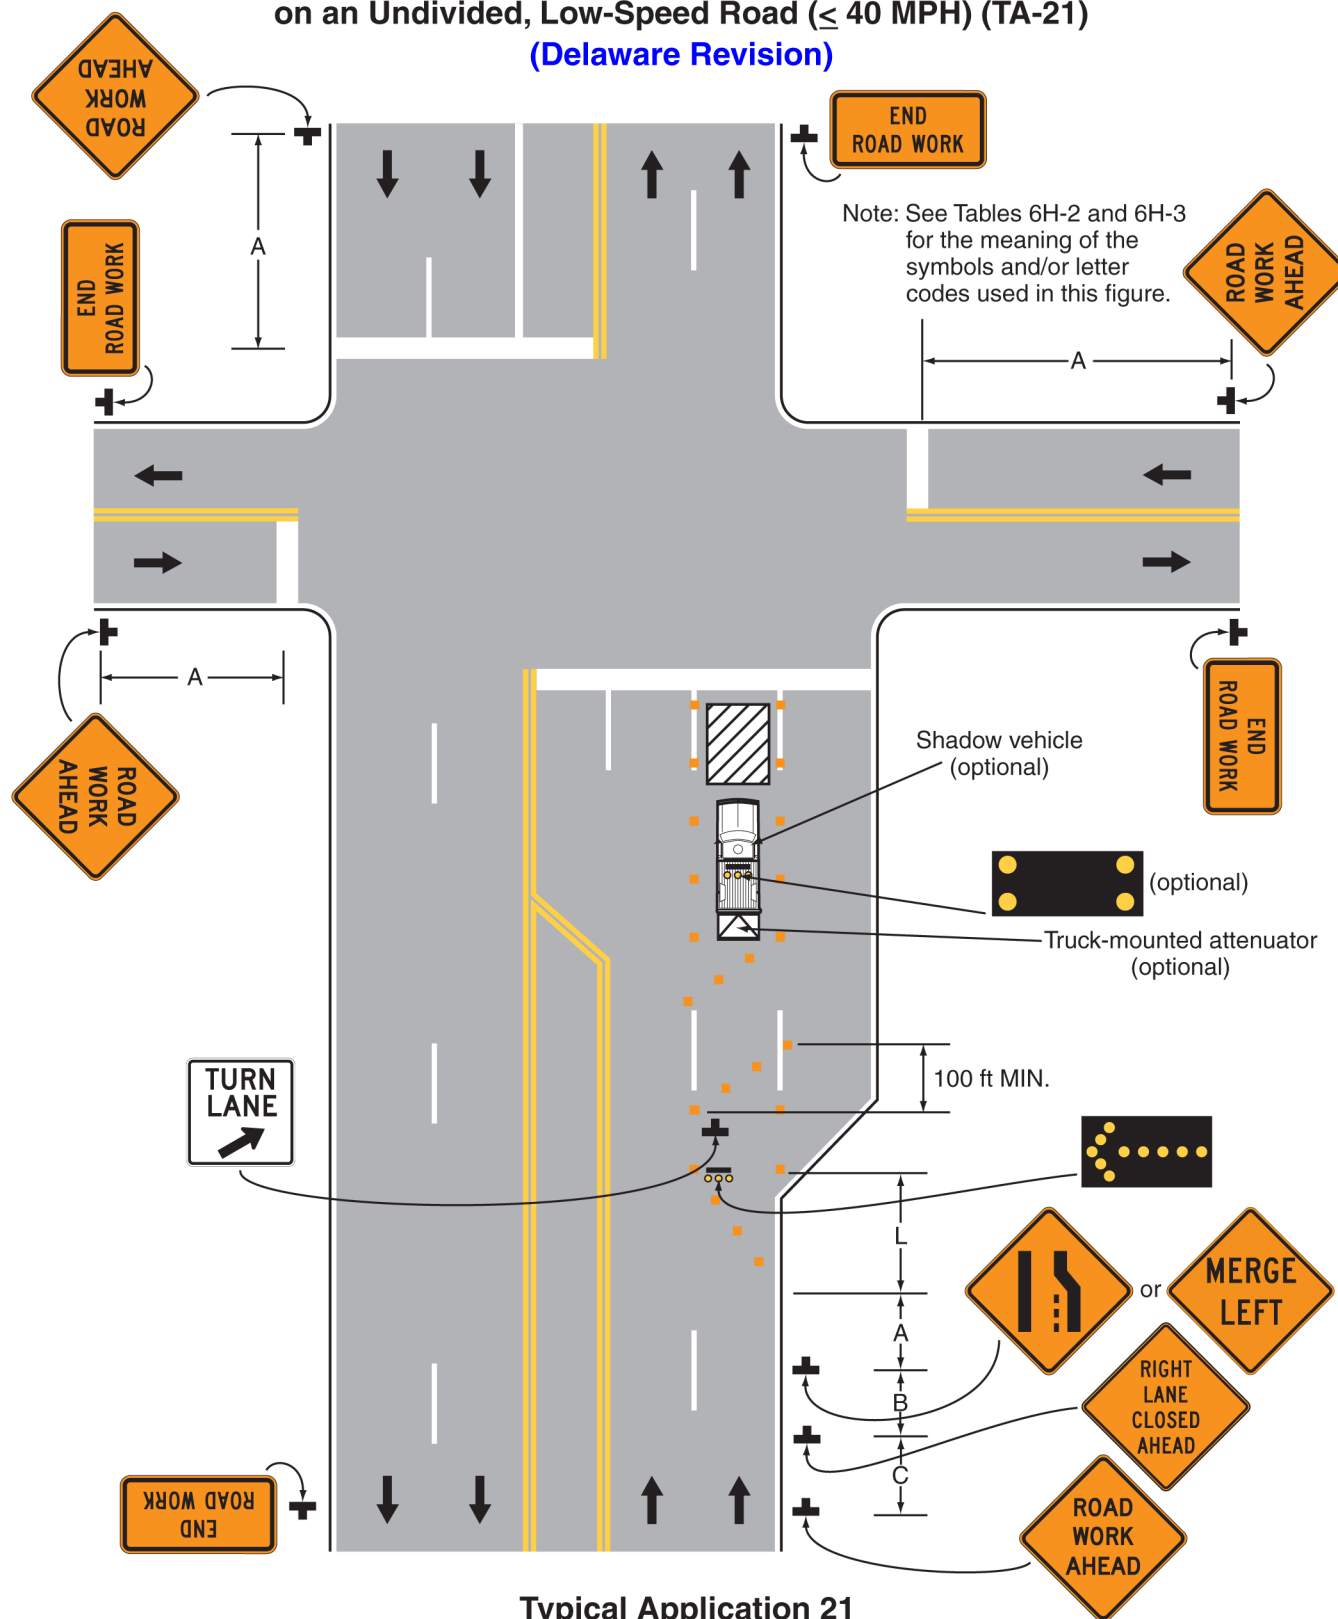

**Notes for Figure 6H-21A—Typical Application 21A**  
**Turn Lane Closure on the Near Side of an Intersection on an Undivided, Low-Speed Road**  
**(≤ 40 MPH)**  
**(Delaware Revision)**

**Standard:**

- 1. This TTC zone application also shall be used when work is being performed in the left-hand turn lane. In this case, the LEFT TURN LANE CLOSED sign shall be substituted.**
- 2. An arrow board shall be used when a turn lane is closed. When more than one turn lane is closed, a separate arrow board shall be used for each closed turn lane.**
- 3. When paved shoulders having a width of 8 feet or more are closed, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.**
- 4. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Guidance:*


- 5. If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6H-29.*
- 6. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*
- 7. Along divided highways, advance warning signs should be omitted from the opposing direction and downstream intersecting roadways.*

**Option:**

- 8. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.**
- 9. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.**

**Figure 6H-21A. Turn Lane Closure on the Near Side of an Intersection on an Undivided, Low-Speed Road ( $\leq 40$  MPH) (TA-21A)**

**(Delaware Revision)**

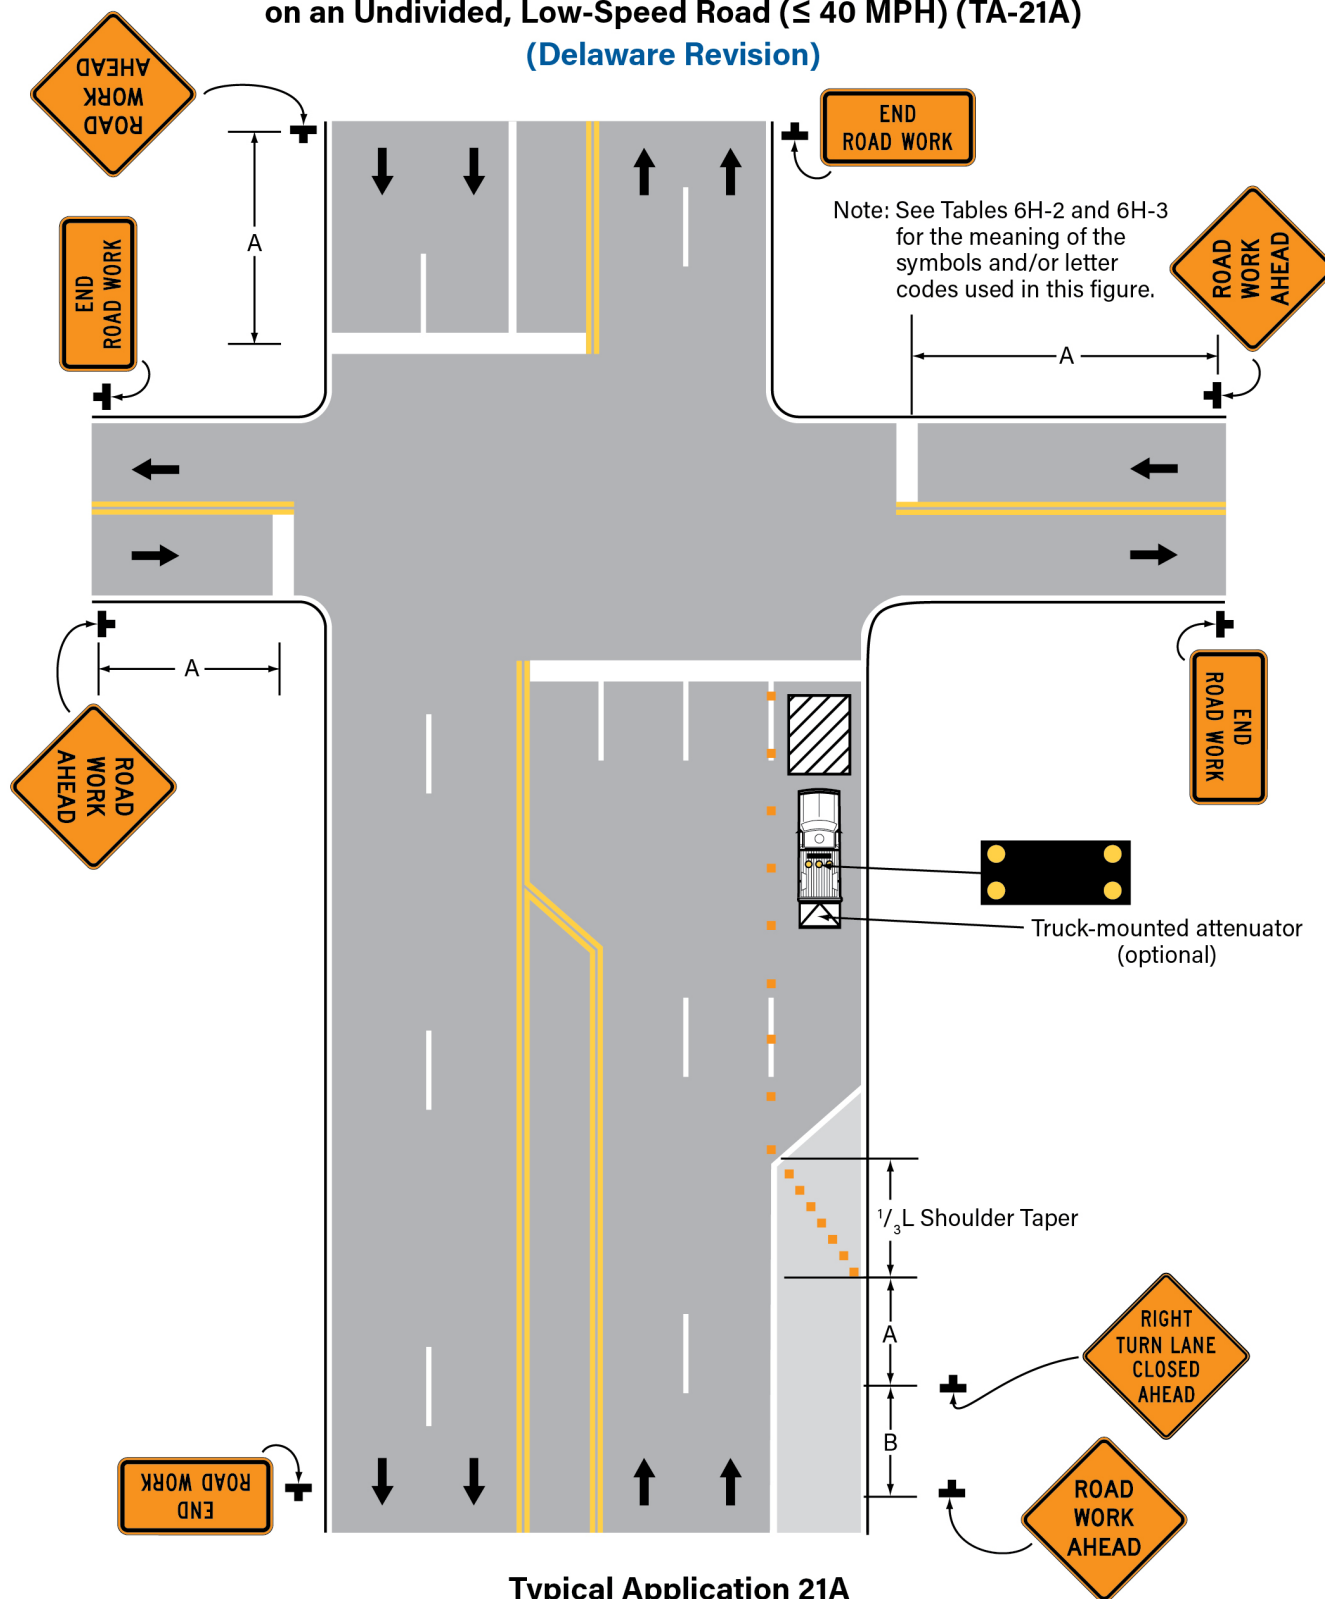

**Notes for Figure 6H-22—Typical Application 22**  
**Right-Hand Lane Closure on the Far Side of an Intersection**  
**(Delaware Revision)**

Support:

1. The TTC zone application for a lane closure on the far side of an intersection is shown in Figure 6H-23.



**Figure 6H-22. Right-Hand Lane Closure on the Far Side of an Intersection (see TA-23)**  
**(Delaware Revision)**

**Notes for Figure 6H-23—Typical Application 23**  
**Lane Closure on the Far Side of an Intersection**  
**on an Undivided, Low-Speed Road ( $\leq 40$  MPH)**  
**(Delaware Revision)**

**Standard:**

- 1. This TTC zone application also shall be used when work is being performed in the left-hand lane. In this case, the LEFT LANE CLOSED sign and the corresponding Lane Ends (or MERGE RIGHT) sign shall be substituted.**
- 2. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**

*Guidance:*

- 3. This TTC zone application should be limited to urban intersections with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph. For higher-speed traffic conditions, additional warning signs should be used in the advance warning area (see Figure 6H-33).*
- 4. If the work space extends across a crosswalk, the crosswalk should be closed using the information and devices shown in Figure 6H-29.*
- 5. When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*
- 6. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*
- 7. Along divided highways, advance warning signs should be omitted from the opposing direction.*


**Option:**

- 8. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.**

**Support:**

- 9. The normal procedure is to close on the near side of the intersection any lane that is not carried through the intersection.**

**Figure 6H-23. Lane Closure on the Far Side of an Intersection on an Undivided, Low-Speed Road ( $\leq 40$  MPH) (TA-23)**  
**(Delaware Revision)**

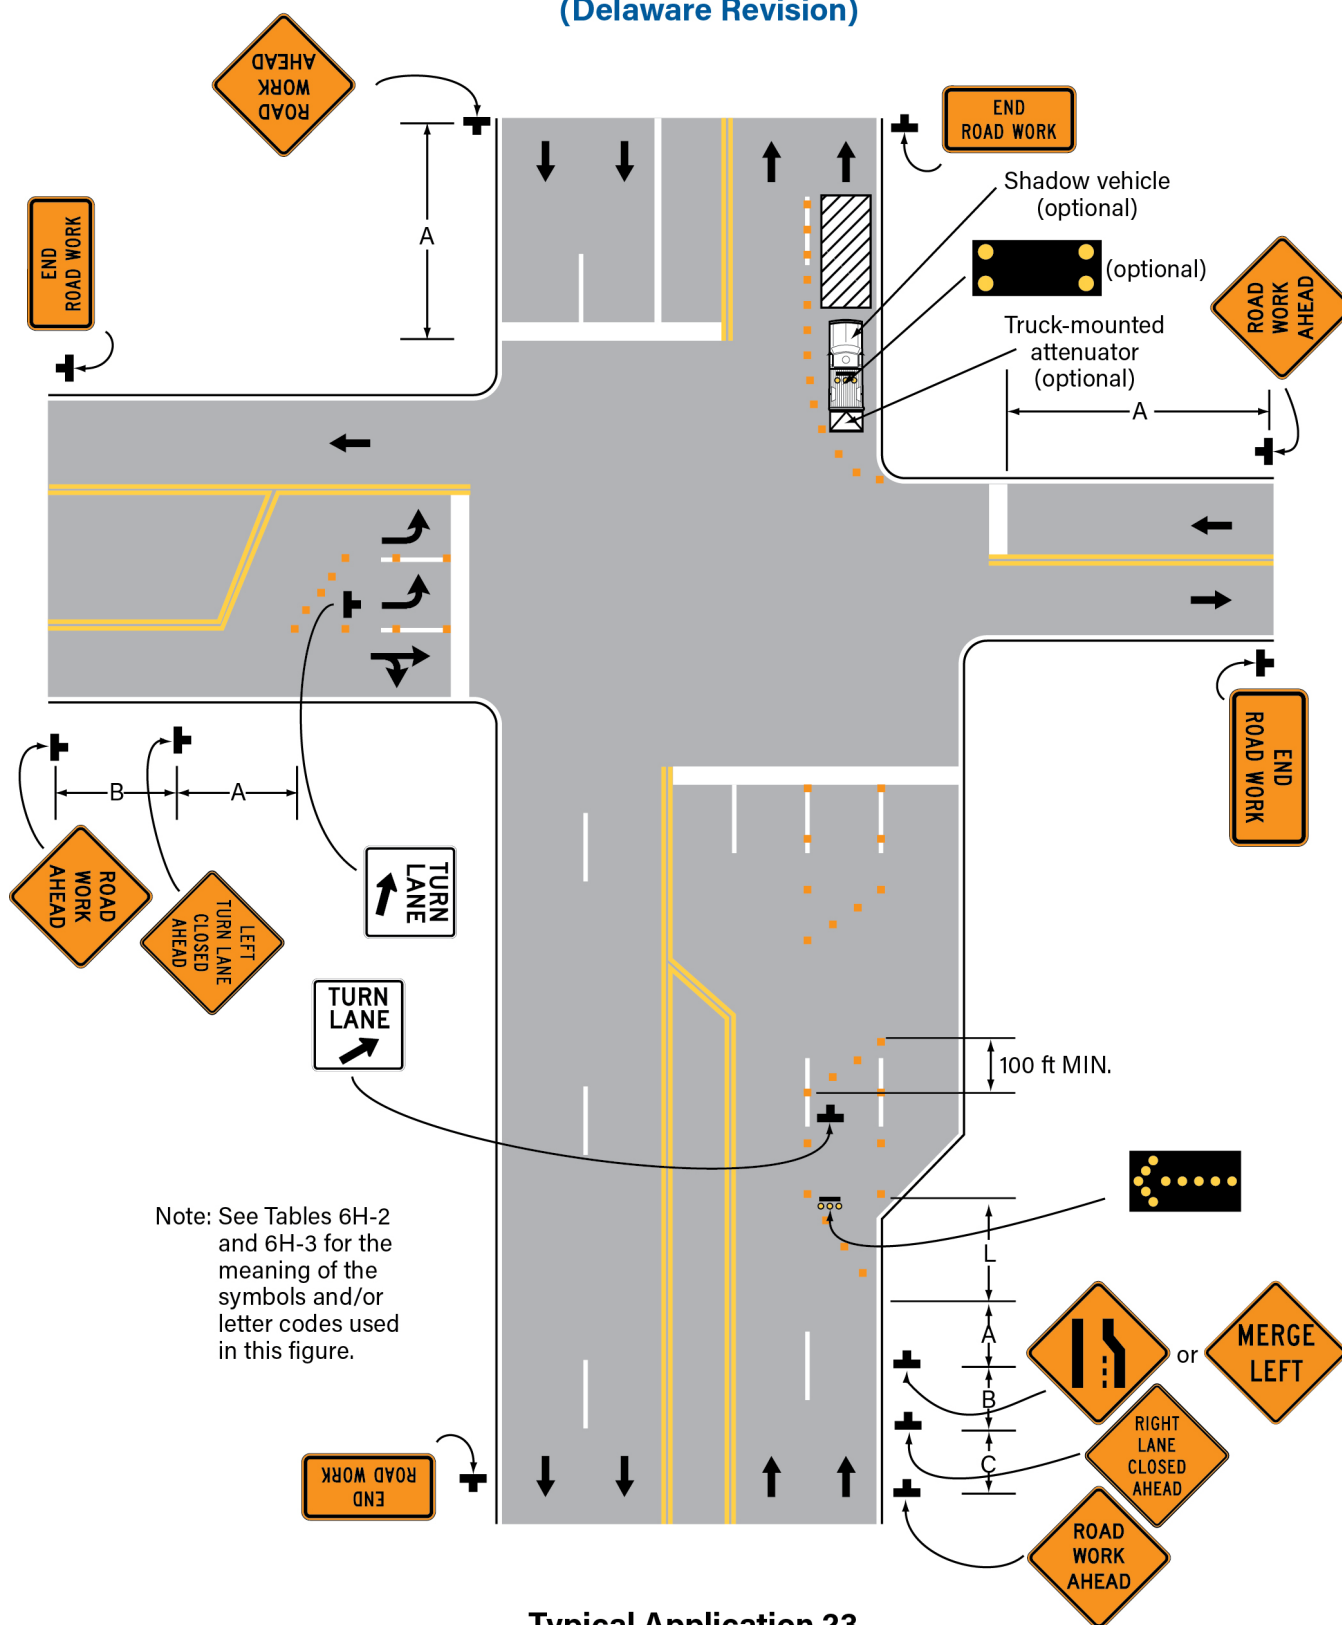

**Notes for Figure 6H-24—Typical Application 24**  
**Half Road Closure on the Far Side of an Intersection**  
**(Not Applicable in Delaware)**

**Figure 6H-24. Half Road Closure on the Far Side of an Intersection (TA-24)**  
**(Not Applicable in Delaware)**

**Notes for Figure 6H-25—Typical Application 25**  
**Multiple Lane Closures at an Intersection**  
**(Delaware Revision)**

Support:

1. The TTC zone application for closing multiple lanes at an intersection is shown in Figure 6H-23.

**Figure 6H-25. Multiple Lane Closures at an Intersection (see TA-23)**  
**(Delaware Revision)**

**Notes for Figure 6H-26—Typical Application 26**  
**Closure in the Center of an Intersection**  
**(Not Applicable in Delaware)**

**Figure 6H-26. Closure in the Center of an Intersection (TA-26)**  
**(Not Applicable in Delaware)**

**Notes for Figure 6H-27—Typical Application 27**  
**Closure at the Side or Center of an Intersection**  
**(Delaware Revision)**

*Guidance:*

- 1. The situation depicted can be simplified by closing one or more of the intersection approaches. If this cannot be done, and/or when capacity is a problem, through vehicular traffic should be directed to other roads or streets based on a detour plan approved by DelDOT Traffic and in accordance with Figure 6H-20.*
- 2. Depending on road user conditions, flagger(s) or uniformed law enforcement officer(s) should be used to direct road users within the intersection (see Section 6E.07 for flagger procedures).*

**Standard:**

- 3. At night, flagger and uniformed law enforcement officer stations shall be illuminated, except in emergencies.**

*Option:*


4. A BE PREPARED TO STOP sign may be added to the sign series.

*Guidance:*

- 5. When used, the BE PREPARED TO STOP sign should be located before the Flagger symbol (or FLAGGER AHEAD) sign.*



**Figure 6H-27. Closure at the Side or Center of an Intersection (TA-27)**  
**(Delaware Revision)**

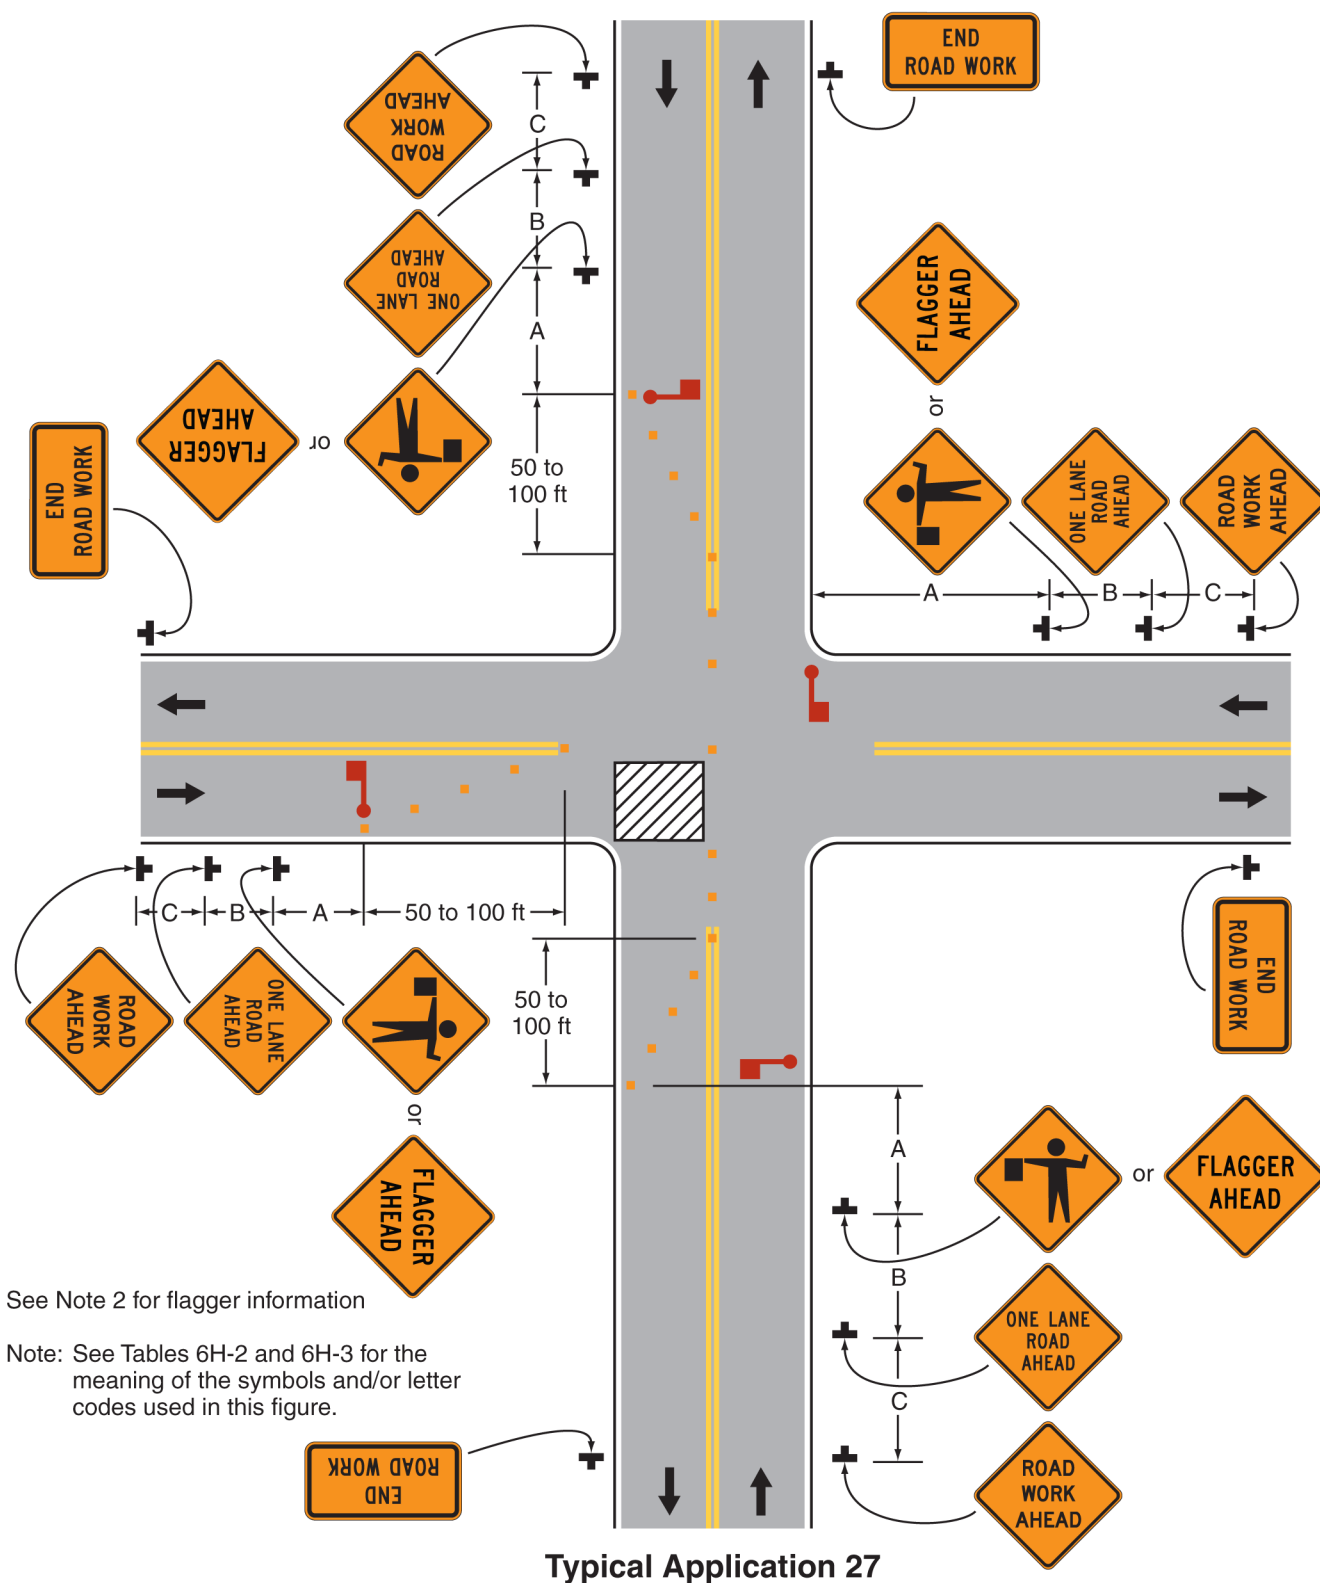

**Notes for Figure 6H-28—Typical Application 28**  
**Sidewalk Detour or Diversion**  
**(Delaware Revision)**

**Standard:**

- 1. When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.**
- 2. Pedestrian detours along state-maintained roadways shall have a pedestrian detour plan approved by DelDOT Traffic.**


*Guidance:*

- 3. Where high speeds are anticipated, a temporary traffic barrier and, if necessary, a crash cushion should be used to separate the temporary sidewalks from vehicular traffic.*
- 4. Audible information devices should be considered where midblock closings and changed crosswalk areas cause inadequate communication to be provided to pedestrians who have visual disabilities.*

*Option:*

- 5. Street lighting may be considered.*
- 6. If establishing or maintaining an alternate pedestrian route is not feasible during the project, an alternate means of providing for pedestrians may be used, such as adding free bus service around the project or assigning someone the responsibility to assist pedestrians with disabilities through the project limits.*

**Figure 6H-28. Sidewalk Detour or Diversion (TA-28)**  
**(Delaware Revision)**

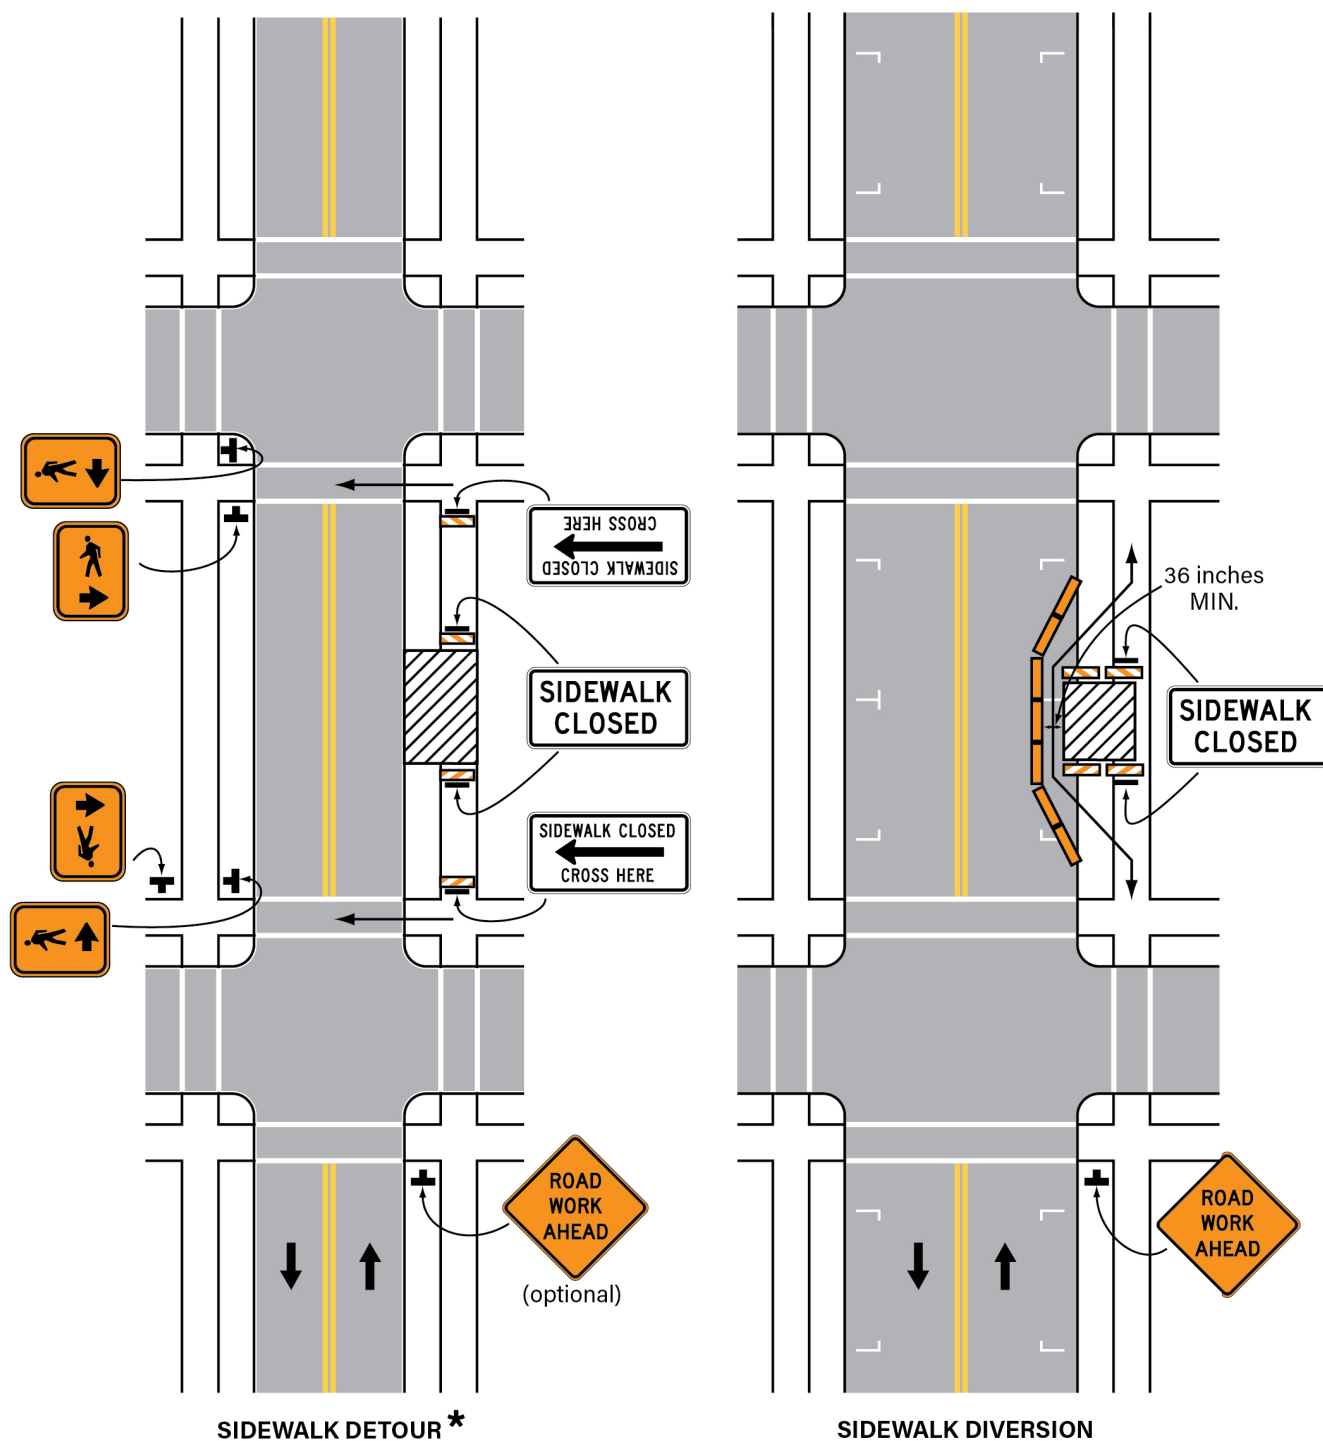

**Typical Application 28**

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

\* Preferred application on state-maintained roadways

**Notes for Figure 6H-29—Typical Application 29**  
**Crosswalk Closures and Pedestrian Detours**  
**(Delaware Revision)**

**Standard:**

- 1. When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.**
- 2. Pedestrian detours along state-maintained roadways shall have a pedestrian detour plan approved by DelDOT Traffic.**
- 3. Temporary midblock crosswalks across uncontrolled approaches are discouraged and shall not be used on state-maintained roadways unless approved by DelDOT Traffic.**
- 4. If approved by DelDOT Traffic, temporary midblock crosswalks across uncontrolled approaches shall be installed based on the requirements and guidelines in Parts 2 and 3.**
- 5. Curb parking shall be prohibited for at least 50 feet in advance of the temporary midblock crosswalk.**


*Guidance:*

- 6. Audible information devices should be considered where midblock closings and changed crosswalk areas cause inadequate communication to be provided to pedestrians who have visual disabilities.*
- 7. Pedestrian traffic signal displays controlling closed crosswalks should be covered or deactivated.*

*Option:*

8. Street lighting may be considered.
9. In order to maintain the systematic use of the fluorescent yellow-green background for pedestrian, bicycle, and school warning signs in a jurisdiction, the fluorescent yellow-green background for pedestrian, bicycle, and school warning signs may be used in TTC zones.
10. If establishing or maintaining an alternate pedestrian route is not feasible during the project, an alternate means of providing for pedestrians may be used, such as adding free bus service around the project or assigning someone the responsibility to assist pedestrians with disabilities through the project limits.

**Figure 6H-29. Crosswalk Closures and Pedestrian Detours (TA-29)**  
**(Delaware Revision)**

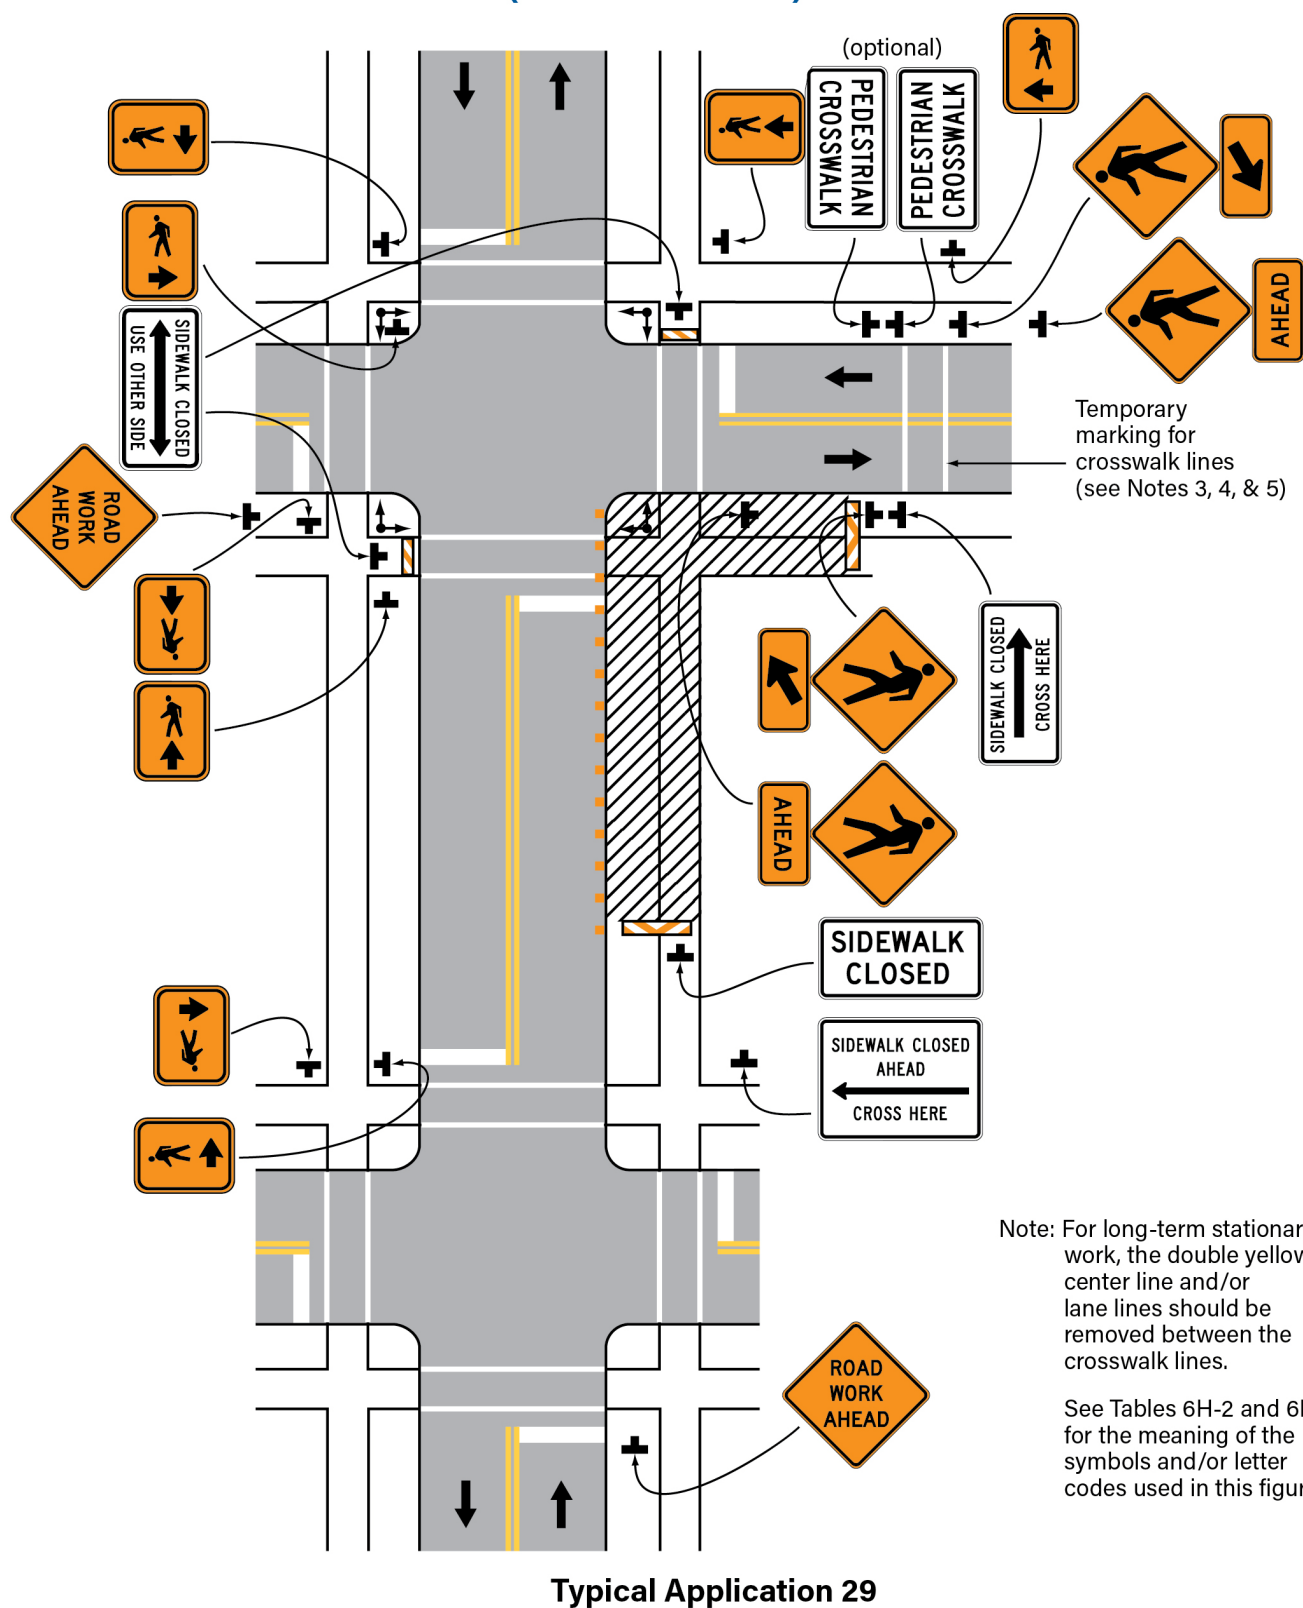

**Notes for Figure 6H-30—Typical Application 30**  
**Interior Lane Closure on a Multi-Lane, Undivided, Low-Speed Road ( $\leq 40$  MPH)**  
**(Delaware Revision)**

*Guidance:*

1. *This TTC zone application should be limited to low-speed, low-volume urban streets with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph. For higher-speed traffic conditions, additional warning signs should be used in the advance warning area (see Figure 6H-33).*

*Option:*

2. The closure of the adjacent interior lane in the opposing direction may not be necessary, depending upon the activity being performed and the work space needed for the operation.

**Standard:**

3. **When only the left lane is closed on undivided roads, channelizing devices shall be placed along the center line as well as along the adjacent lane.**

4. **When a side road intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

5. **An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**


6. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

7. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.

8. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-30. Interior Lane Closure on a Multi-Lane, Undivided, Low-Speed Road ( $\leq 40$  MPH) (TA-30)**  
(Delaware Revision)

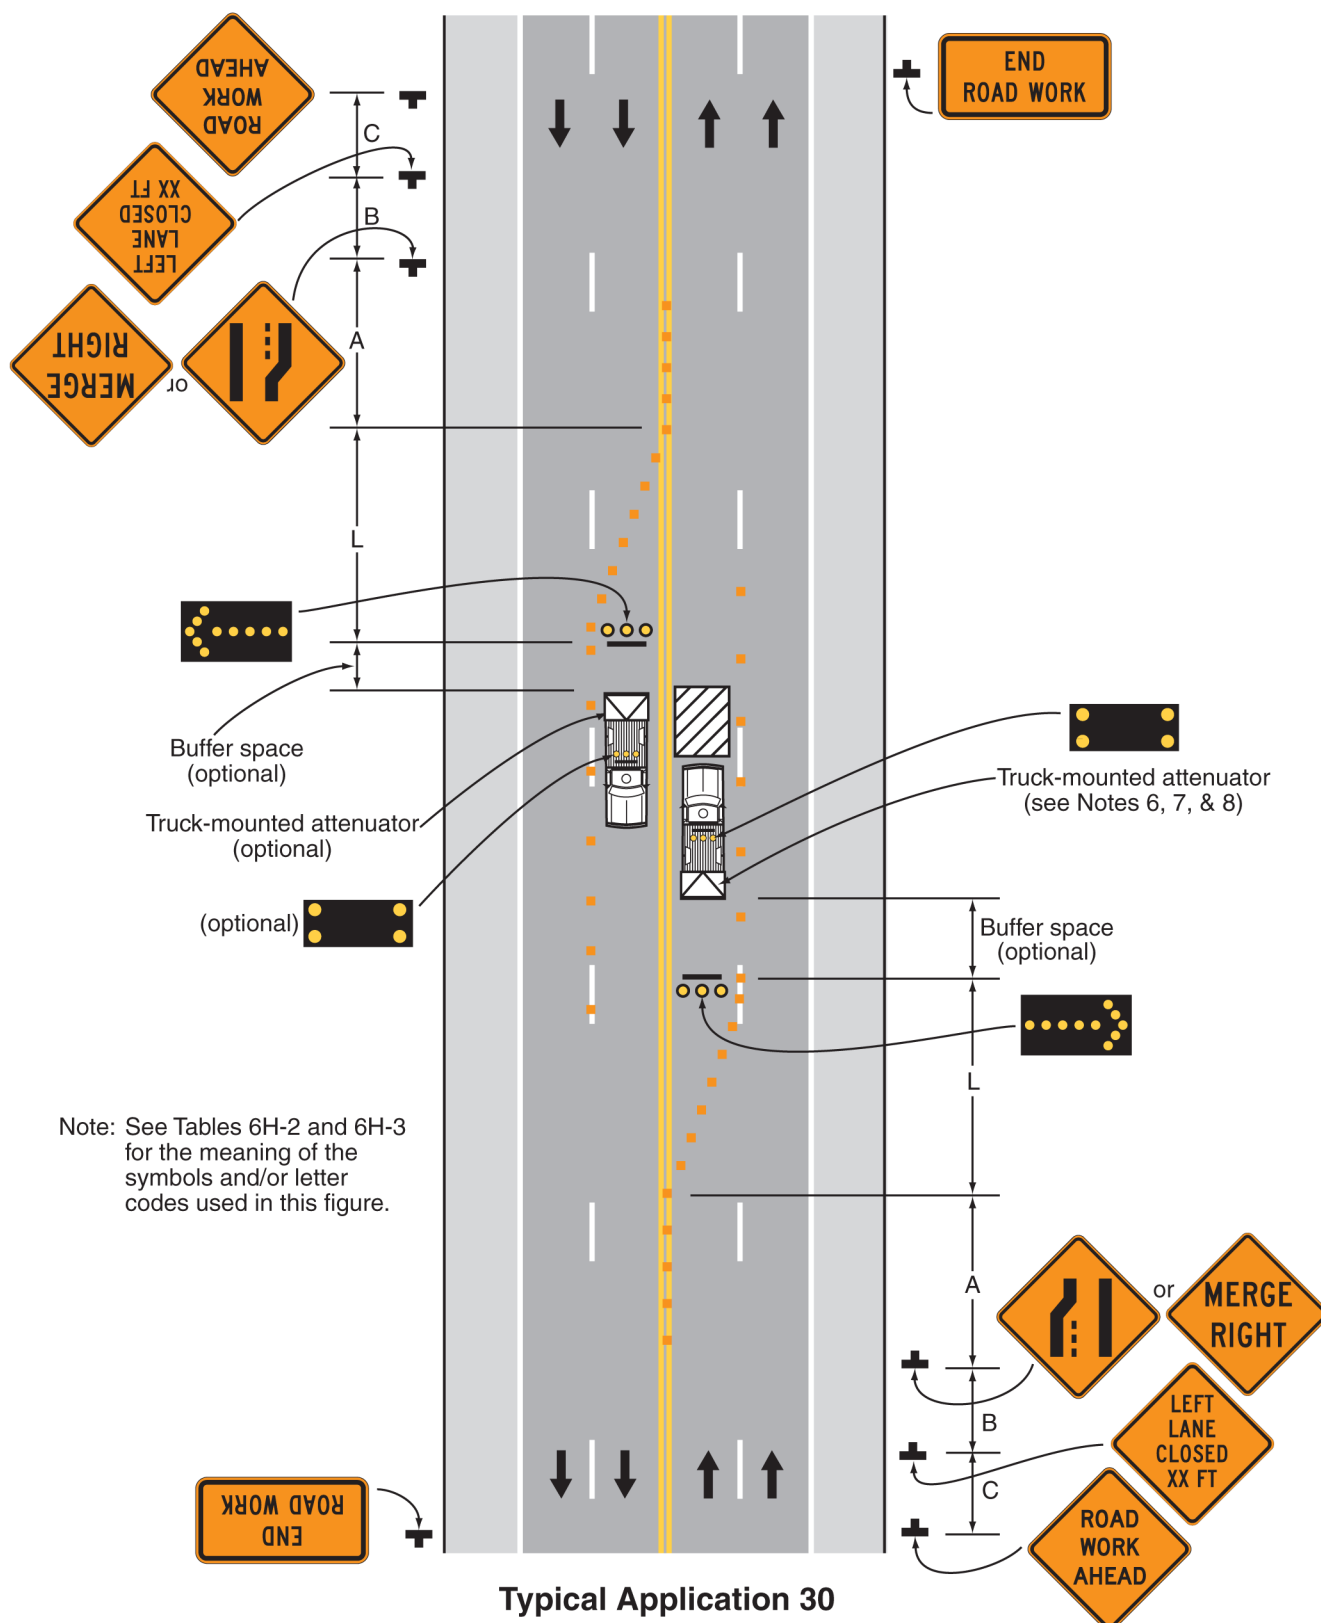

**Notes for Figure 6H-31—Typical Application 31**  
**Lane Closure on a Multi-Lane, Undivided, Low-Speed Road ( $\leq 40$  MPH)**  
**with Uneven Directional Volumes**  
**(Delaware Revision)**

**Standard:**

**1. This TTC zone application shall be used only when the vehicular traffic volume indicates that two lanes of vehicular traffic shall be maintained in the direction of travel for which one lane is closed.**

**Option:**

2. The procedure may be used during a peak period of vehicular traffic and then changed to provide two lanes in the other direction for the other peak.

**Guidance:**

3. *This TTC zone application should be limited to low-speed, low-volume urban streets with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph. For higher-speed traffic conditions, additional warning signs should be used in the advance warning area (see Figure 6H-33).*

4. *Conflicting pavement markings should be removed for long-term projects. For short-term and intermediate-term projects where this is not practical, the channelizing devices in the area where the pavement markings conflict should be placed at a maximum spacing of  $1/2 S$  feet where  $S$  is the speed in mph. Temporary markings should be installed where needed.*

**Option:**

5. For short-term stationary work, lanes may be delineated by channelizing devices or removable pavement markings instead of temporary markings.

**Guidance:**

6. *A shifting taper length of  $L$  is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*

7. *Shift areas should be illuminated at night, except in emergencies.*

8. *If the lane shift has curves with recommended speeds of 30 mph or less, Reverse Turn signs should be used.*

9. *If the tangent distance along the temporary diversion is less than 600 feet, a Double Reverse Curve sign should be used instead of the upstream Two Lane Reverse Curve sign and the downstream Two Lane Reverse Curve sign should be omitted.*

**Standard:**

**10. The number of lanes illustrated on the Reverse Curve or Double Reverse Curve signs shall be the same as the number of through lanes available to road users, and the direction of the reverse curves shall be appropriately illustrated.**

**Option:**

11. A longitudinal buffer space may be used in the activity area to separate opposing vehicular traffic.

12. Where two or more lanes are being shifted, a W1-4 (or W1-3) sign with an ALL LANES (W24-1cP) plaque (see Figure 6F-4) may be used instead of a sign that illustrates the number of lanes.

13. Where more than three lanes are being shifted, the Reverse Curve (or Turn) sign may be rectangular.

**Standard:**

**14. When a side road intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

**15. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**

**16. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**


**Option:**

17. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.

18. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.



**Figure 6H-31. Lane Closure on a Multi-Lane, Undivided, Low-Speed Road ( $\leq 40$  MPH) with Uneven Directional Volumes (TA-31)**  
(Delaware Revision)

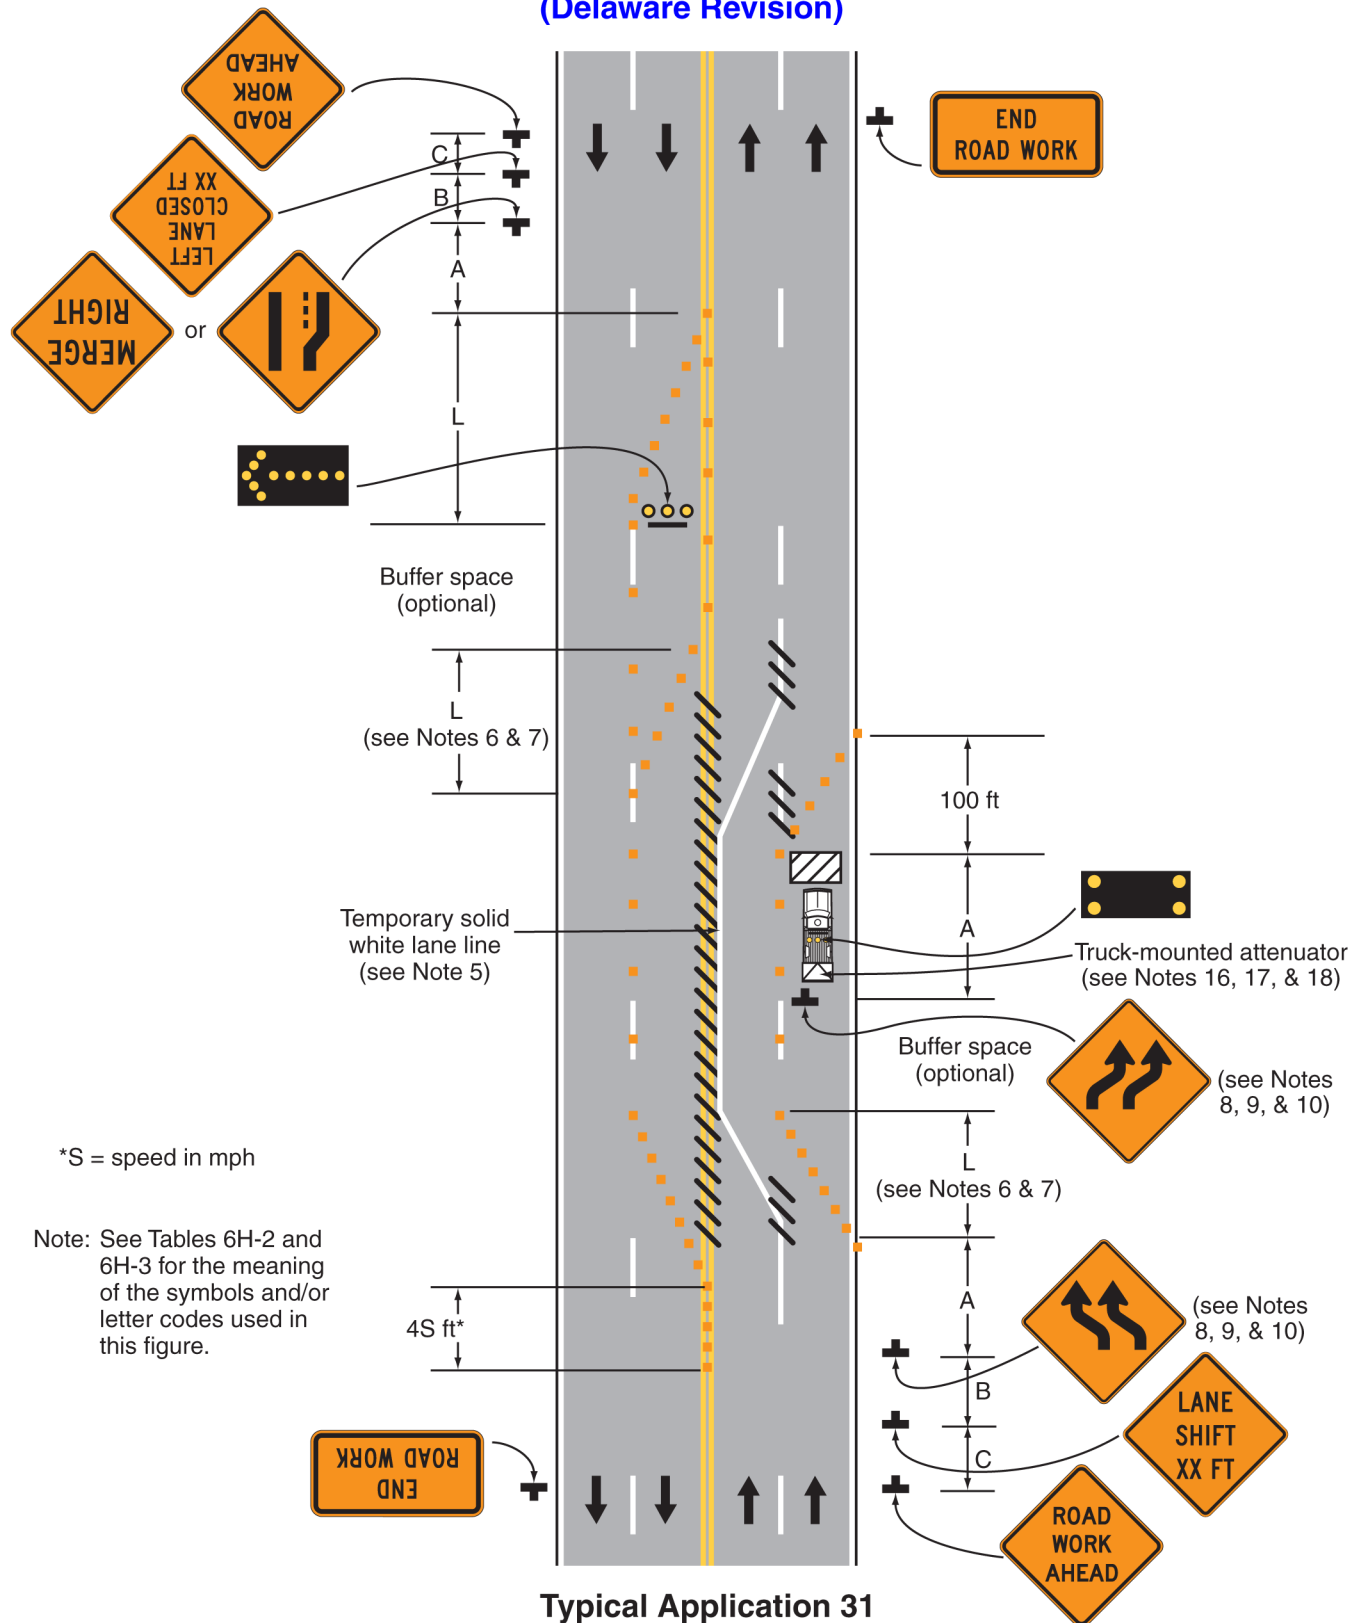

**Notes for Figure 6H-32—Typical Application 32**  
**Half Road Closure on a Multi-Lane, Undivided, High-Speed Roadway (> 40 MPH)**  
**(Delaware Revision)**

**Standard:**

- 1. Pavement markings no longer applicable shall be removed or obliterated as soon as practical. Except for intermediate-term and short-term situations, temporary markings shall be provided to clearly delineate the temporary travel path. For short-term and intermediate-term situations where it is not feasible to remove and restore pavement markings, channelization shall be made dominant by using a very close device spacing, such as 10 to 20 feet.**
- 2. When a side road intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**
- 3. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**

*Guidance:*

- 4. When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*
- 5. A shifting taper length of L is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*
- 6. Shift areas should be illuminated at night, except in emergencies.*
- 7. If the lane shift has curves with recommended speeds of 30 mph or less, Reverse Turn signs should be used.*
- 8. If the tangent distance along the temporary diversion is less than 600 feet, a Double Reverse Curve sign should be used instead of the upstream Reverse Curve sign and the downstream Reverse Curve sign should be omitted.*
- 9. Advisory Speed plaques should be used only when the advisory speed is less than the posted speed limit.*

**Standard:**


- 10. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

11. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
12. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.
13. A longitudinal buffer space may be used in the activity area.

**Figure 6H-32. Half Road Closure on a Multi-Lane, Undivided, High-Speed Roadway (> 40 MPH) (TA-32)**

**(Delaware Revision)**

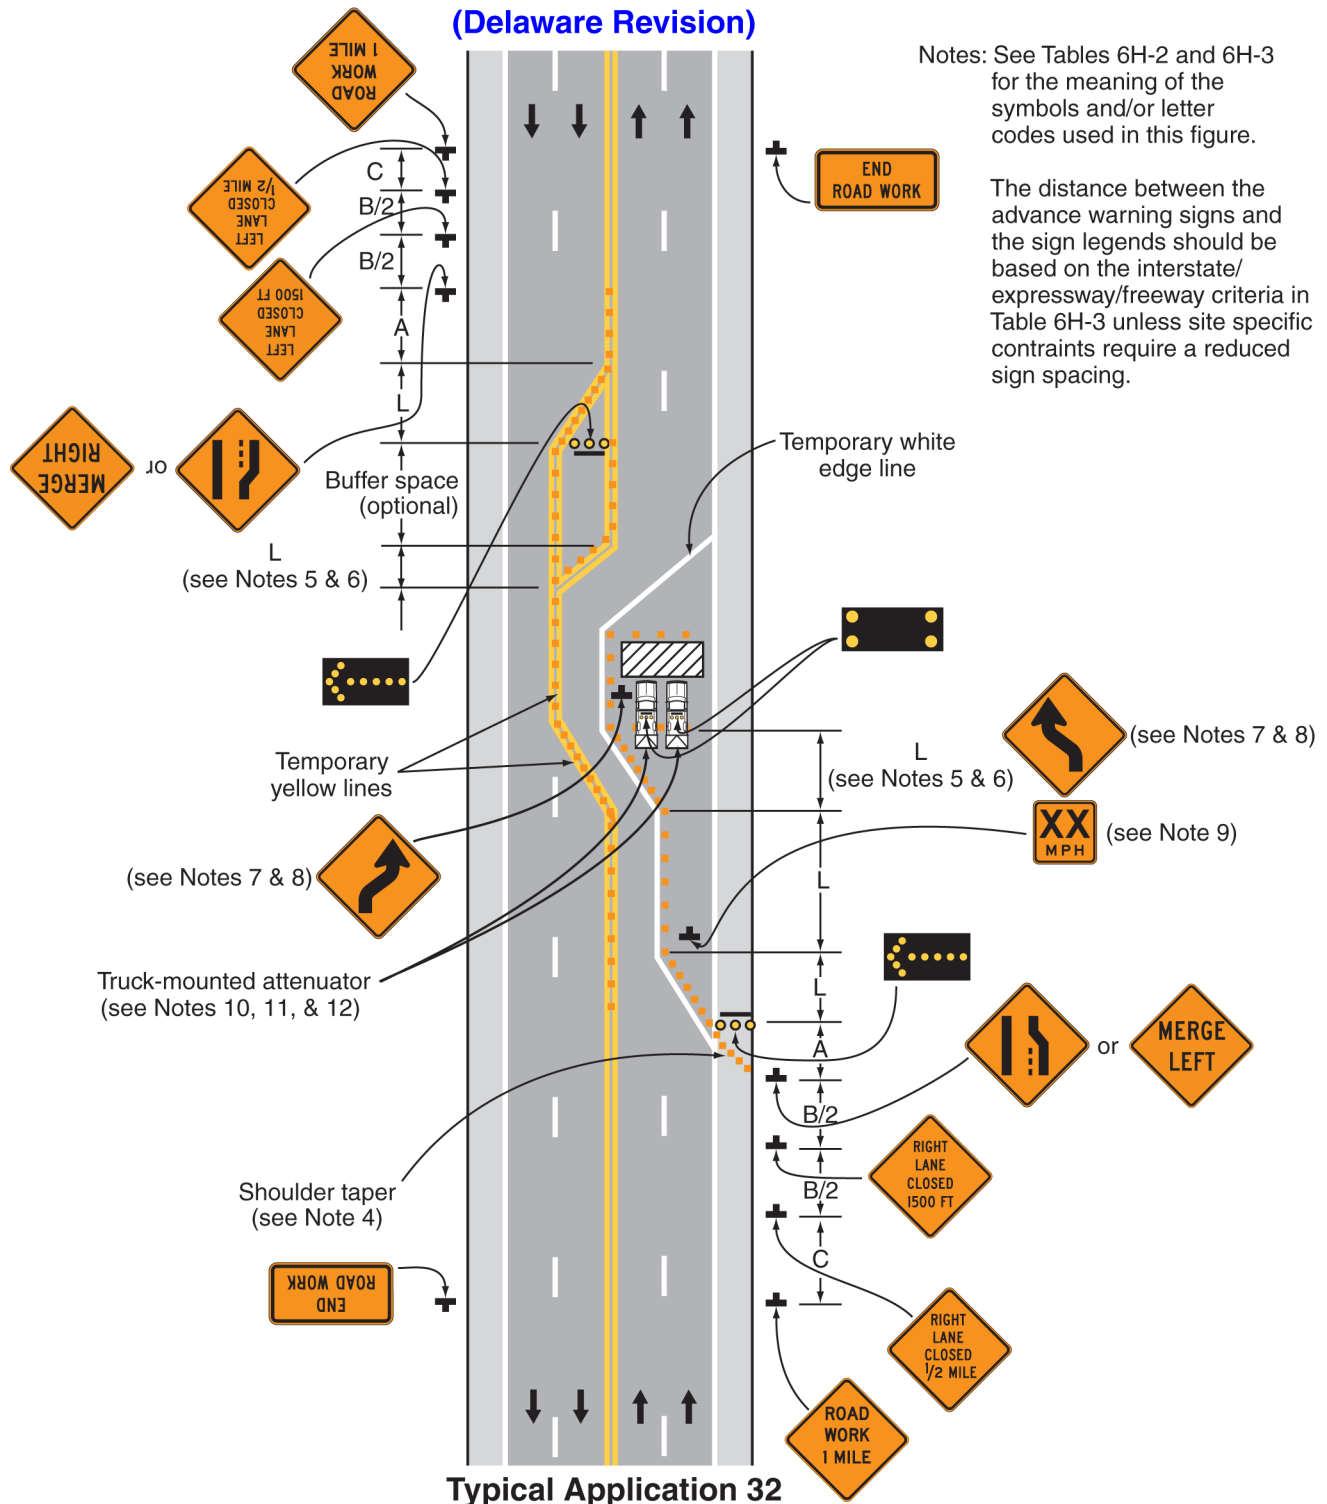

**Notes for Figure 6H-33—Typical Application 33**  
**Stationary Lane Closure on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

**Standard:**

- 1. This TTC zone application also shall be used when work is being performed in the lane adjacent to the median on a multi-lane, divided highway. In this case, the LEFT LANE CLOSED signs and the corresponding Lane Ends (or MERGE RIGHT) signs shall be substituted.**
- 2. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

*Guidance:*

- 3. When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*
- 4. On multi-lane, undivided roads and multi-lane, divided highways with narrow medians, the advance warning signs on the left-hand side of the directional roadway should be eliminated.*

**Support:**

- 5. Where conditions permit, restricting all vehicles, equipment, workers, and their activities to one side of the roadway might be advantageous.**

**Standard:**

- 6. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**
- 7. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

**Option:**

- 8. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.**
- 9. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.**

*Guidance:*

- 10. When a grade crossing exists within or upstream of the transition area and it is anticipated that queues resulting from the lane closure might extend through the grade crossing, the TTC zone should be extended so that the transition area precedes the grade crossing (see Figure 6H-46).*
- 11. Early coordination with the railroad company or light rail transit agency should occur before work starts (see Figure 6H-46).*


**Option:**

- 12. A flagger or a uniformed law enforcement officer may be used at the upstream side of the grade crossing to minimize the probability that vehicles are stopped within 50 feet of the grade crossing, measured from both sides of the outside rails (see Figure 6H-46).**

*Guidance:*

- 13. When a grade crossing equipped with active warning devices exists within the activity area, provisions should be made for keeping flaggers informed as to the activation status of these warning devices (see Figure 6H-46).*

**Figure 6H-33. Stationary Lane Closure on a Multi-Lane, Divided Highway (TA-33)**  
**(Delaware Revision)**

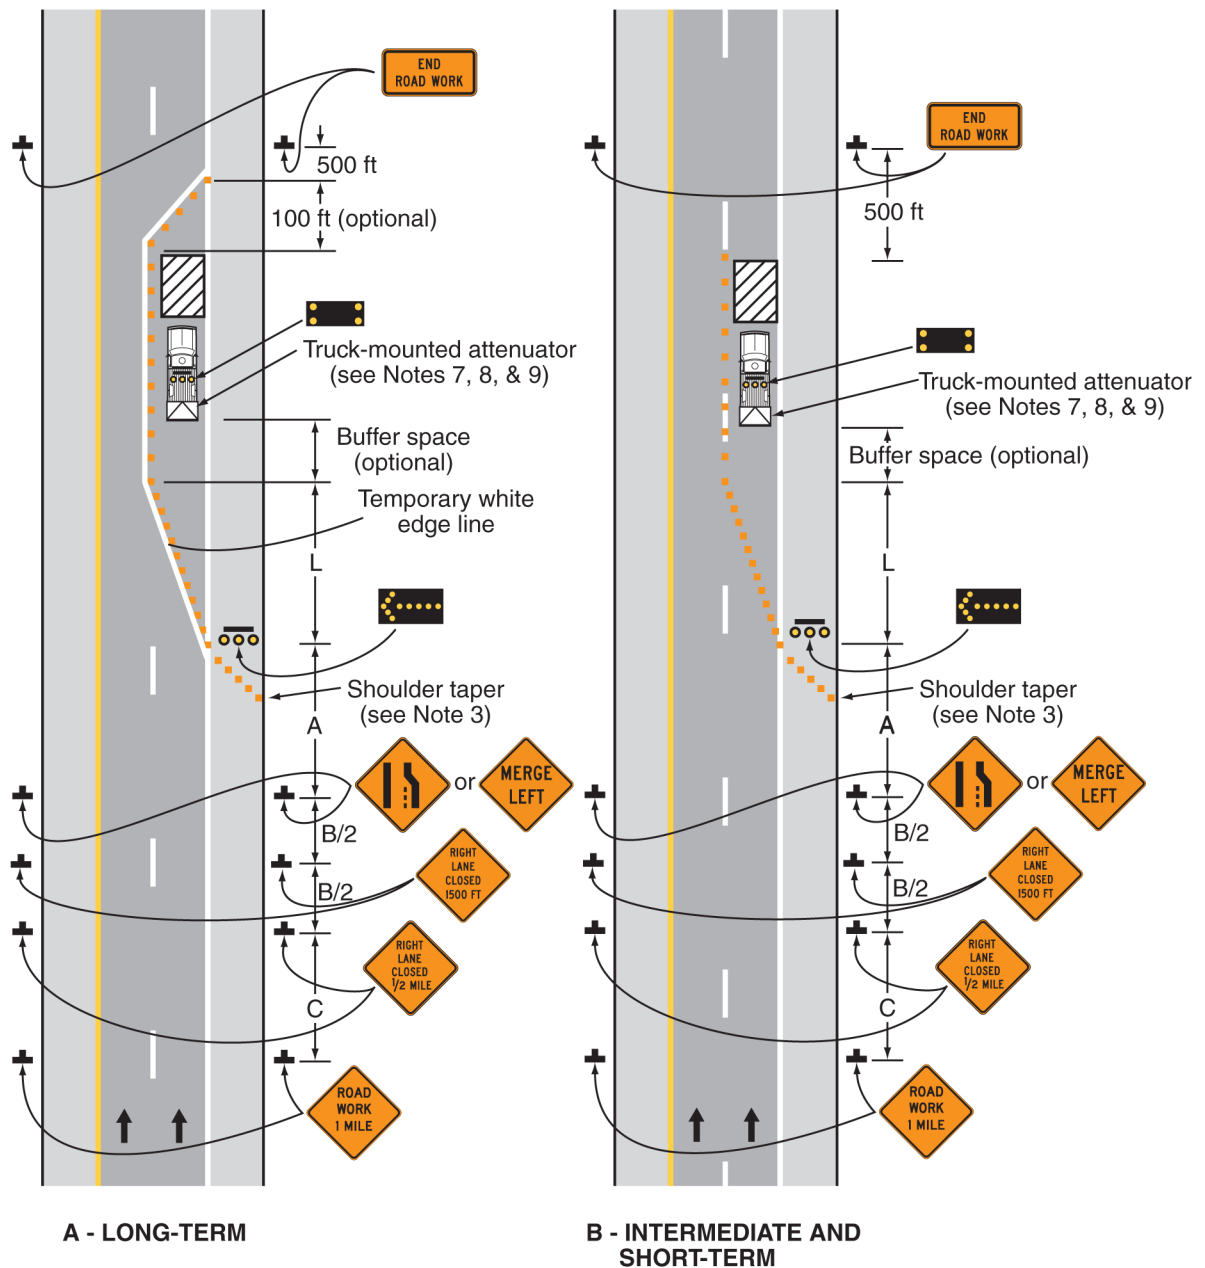

### Typical Application 33

Notes: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

The distance between the advance warning signs and the sign legends should be based on the interstate/expressway/freeway criteria in Table 6H-3 unless site specific constraints require a reduced sign spacing.

**Notes for Figure 6H-34—Typical Application 34**  
**Lane Closure on a Multi-Lane, Divided Highway with a Temporary Traffic Barrier**  
**(Delaware Revision)**

**Standard:**

- 1. This TTC zone application also shall be used when work is being performed in the lane adjacent to the median on a multi-lane, divided highway. In this case, the LEFT LANE CLOSED signs and the corresponding Lane Ends (or MERGE RIGHT) signs shall be substituted.**
- 2. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

*Guidance:*

- 3. When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*
- 4. On multi-lane, undivided roads and multi-lane, divided highways with narrow medians, the advance warning signs on the left-hand side of the directional roadway should be eliminated.*
- 5. For long-term lane closures on facilities with permanent edge lines, a temporary edge line should be installed from the upstream end of the merging taper to the downstream end of the downstream taper, and conflicting pavement markings should be removed.*
- 6. The use of a barrier should be based on engineering judgment.*

**Standard:**

- 7. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**
- 8. If used, the temporary traffic barrier and retroreflective enhanced conspicuity panels shall comply with the provisions of Section 6F.85.**
- 9. The barrier shall not be placed along the merging taper. The lane shall first be closed using channelizing devices and pavement markings.**

*Option:*

- 10. The barrier shown in this TTC zone application is an example of one method that may be used to close a lane for a long-term project. If the work activity permits, a movable barrier may be used and relocated to the shoulder during non-work periods or peak-period vehicular traffic conditions, as appropriate.*


**Standard:**

- 11. If a movable barrier is used, the temporary white edge line shown in the TTC zone application shall not be used. During the period when the right-hand lane is opened, the sign legends and the channelization shall be changed to indicate that only the shoulder is closed, as illustrated in Figure 6H-5. The arrow board, if used, shall be placed at the downstream end of the shoulder taper and shall display the caution mode.**

*Guidance:*

- 12. If a movable barrier is used, the shift should be performed in the following manner. When closing the lane, the lane should be initially closed with channelizing devices placed along a merging taper using the same information employed for a stationary lane closure. The lane closure should then be extended with the movable-barrier transfer vehicle moving with vehicular traffic. When opening the lane, the movable-barrier transfer vehicle should travel against vehicular traffic from the termination area to the transition area. The merging taper should then be removed using the same information employed for a stationary lane closure.*

**Figure 6H-34. Lane Closure on a Multi-Lane, Divided Highway with a Temporary Traffic Barrier (TA-34)**  
(Delaware Revision)

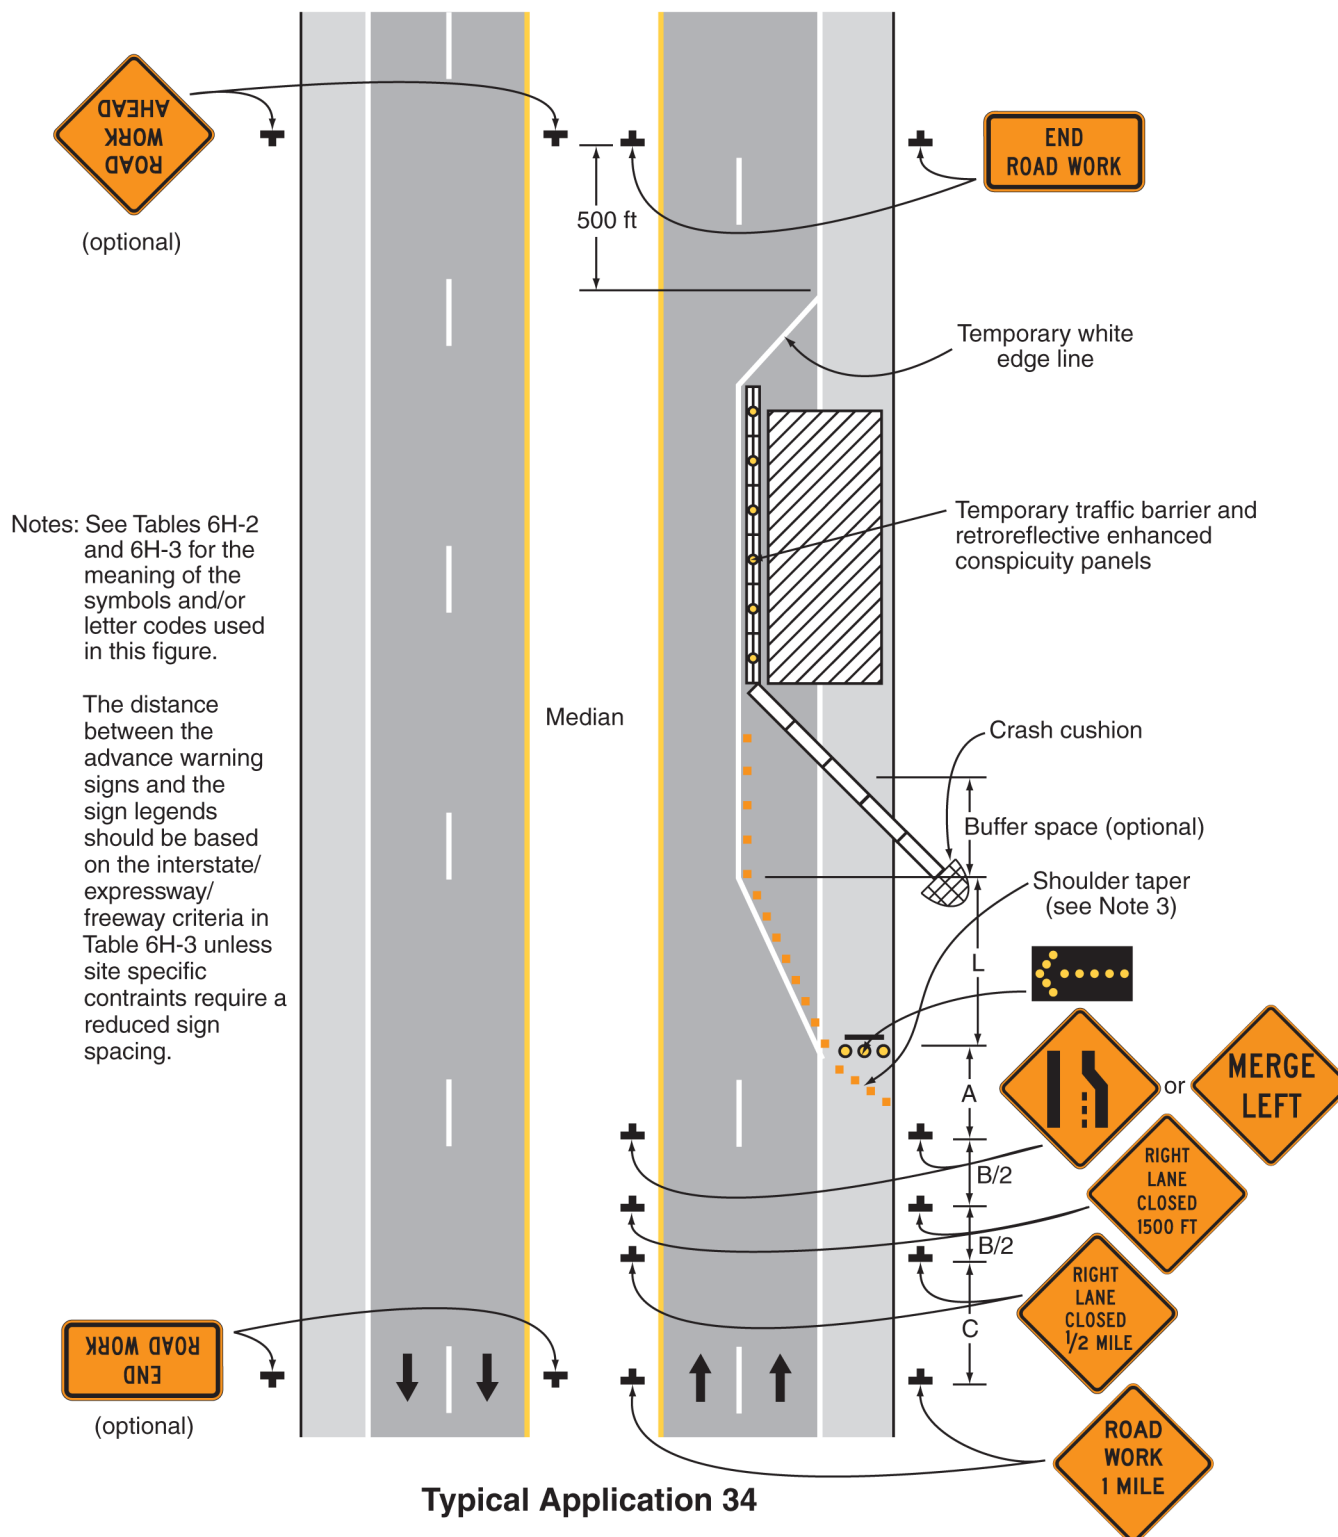



**Notes for Figure 6H-35—Typical Application 35**  
**Short Duration and Mobile Operations on a Multi-Lane, Divided Highway**  
**with a Single Lane Closure**  
**(Delaware Revision)**

**Standard:**

1. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
2. If used, vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
3. Shadow and work vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
4. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
5. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.

*Guidance:*

6. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.*
7. *Work should normally be accomplished during off-peak hours to the extent practical.*
8. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

*Option:*

9. The minimum distance between the shadow vehicles may vary according to terrain and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
10. Shadow Vehicle 4 may be used where adequate shoulder width is available to display a portable changeable message sign.

*Guidance:*

11. *If used, Shadow Vehicle 4 should be located upstream of queued traffic to advise motorists of the potential for stopped vehicles.*

**Standard:**


12. Except as provided in Notes 14 and 15 or as denoted as optional in Figure 6H-35, the work and shadow vehicles shall be equipped with truck-mounted attenuators for operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.

*Option:*

13. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
14. Truck-mounted attenuators may be omitted from specialized work vehicles, such as sweeper, vacuum, and pothole patching trucks, and other work vehicles that cannot support the installation of a truck-mounted attenuator.
15. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, truck-mounted attenuators may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.
16. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.



**Figure 6H-35. Short Duration and Mobile Operations on a Multi-Lane, Divided Highway with a Single Lane Closure (TA-35)**  
(Delaware Revision)

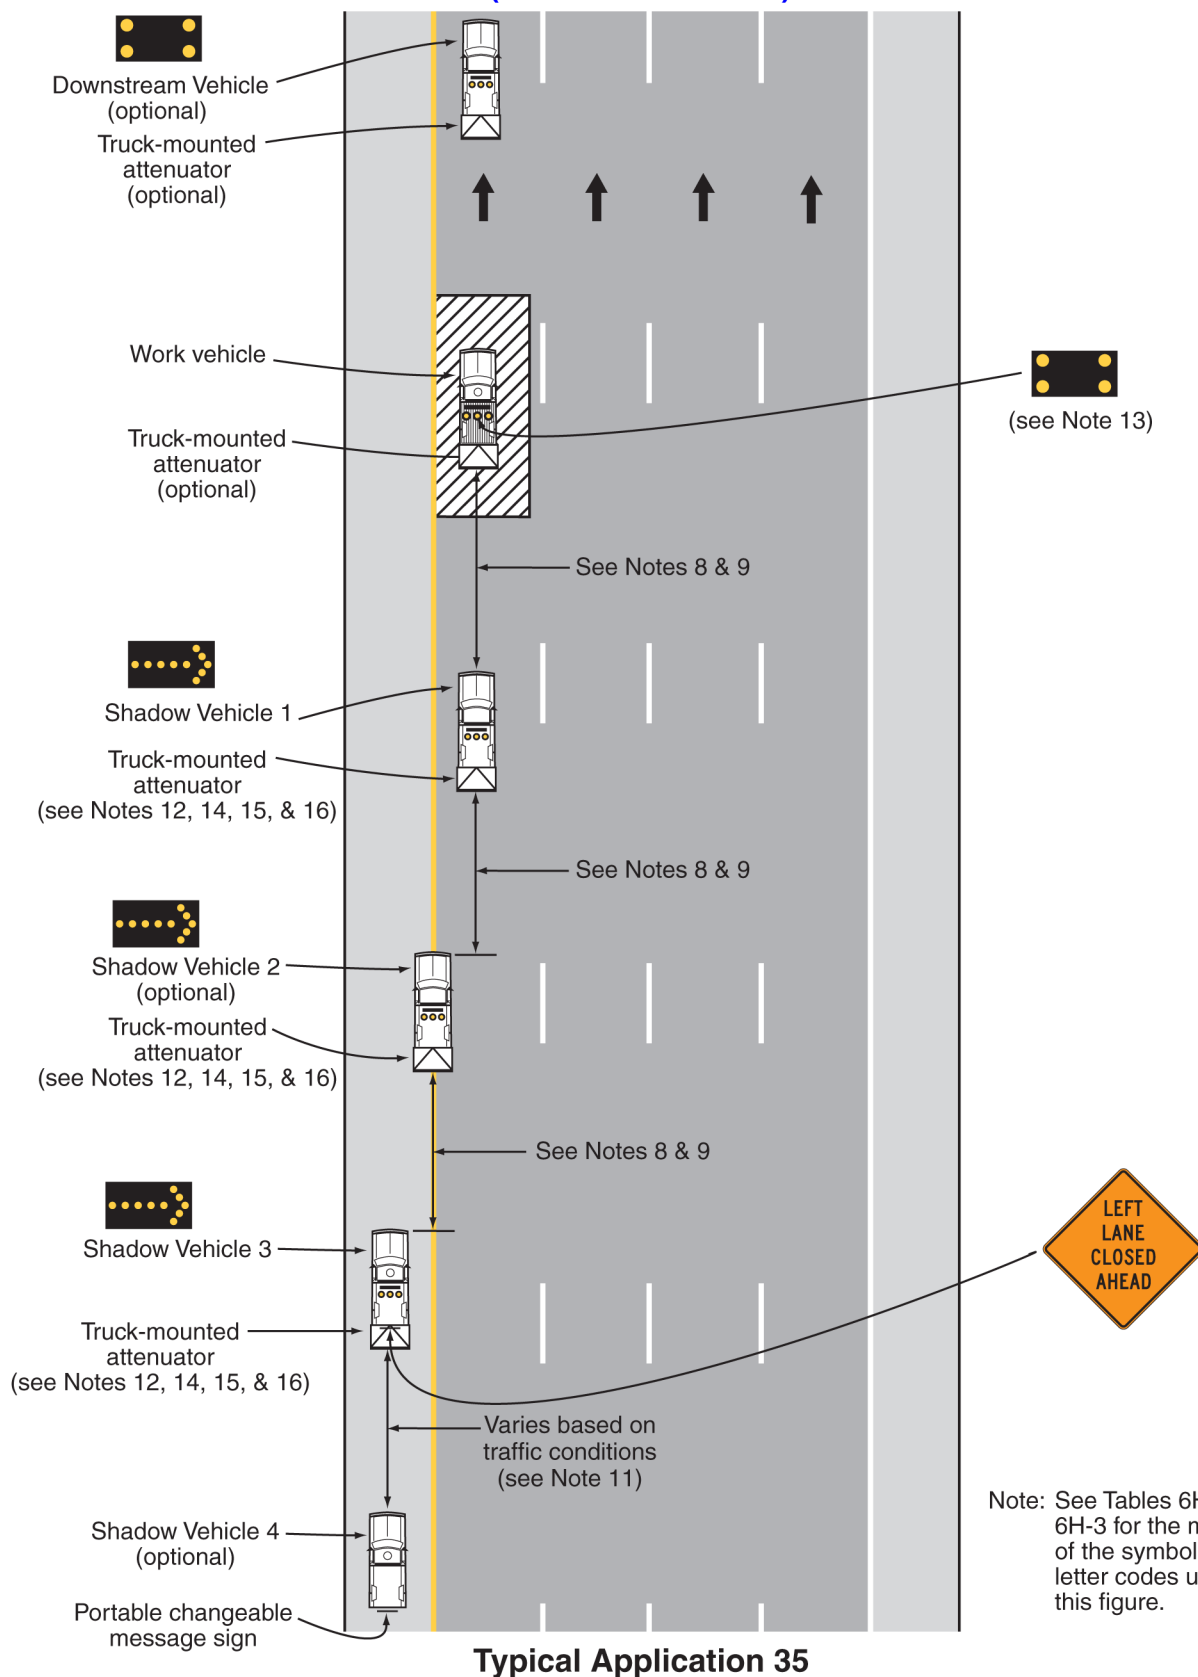

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

**Notes for Figure 6H-35A—Typical Application 35A**  
**Short Duration and Mobile Operations on a Multi-Lane, Divided Highway**  
**with a Double Lane Closure**  
**(Delaware Revision)**

**Standard:**

1. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
2. If used, vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
3. Shadow and work vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
4. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
5. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.

*Guidance:*

6. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.*
7. *Work should normally be accomplished during off-peak hours to the extent practical.*
8. *Shadow Vehicle 1A should be used for stationary short duration operations only.*
9. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

**Option:**

10. The minimum distance between the shadow vehicles may vary according to terrain and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
11. Shadow Vehicle 6 may be used where adequate shoulder width is available to display a portable changeable message sign.

*Guidance:*

12. *If used, Shadow Vehicle 6 should be located upstream of queued traffic to advise motorists of the potential for stopped vehicles.*

**Standard:**


13. Except as provided in Notes 15 and 16 or as denoted as optional in Figure 6H-35A, the work and shadow vehicles shall be equipped with truck-mounted attenuators for operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.

**Option:**

14. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
15. Truck-mounted attenuators may be omitted from specialized work vehicles, such as sweeper, vacuum, and pothole patching trucks, and other work vehicles that cannot support the installation of a truck-mounted attenuator.
16. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, truck-mounted attenuators may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used or if the shoulder width is less than the width of a truck-mounted attenuator.
17. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-35A. Short Duration and Mobile Operations on a Multi-Lane, Divided Highway with a Double Lane Closure (TA-35A)**

**(Delaware Revision)**

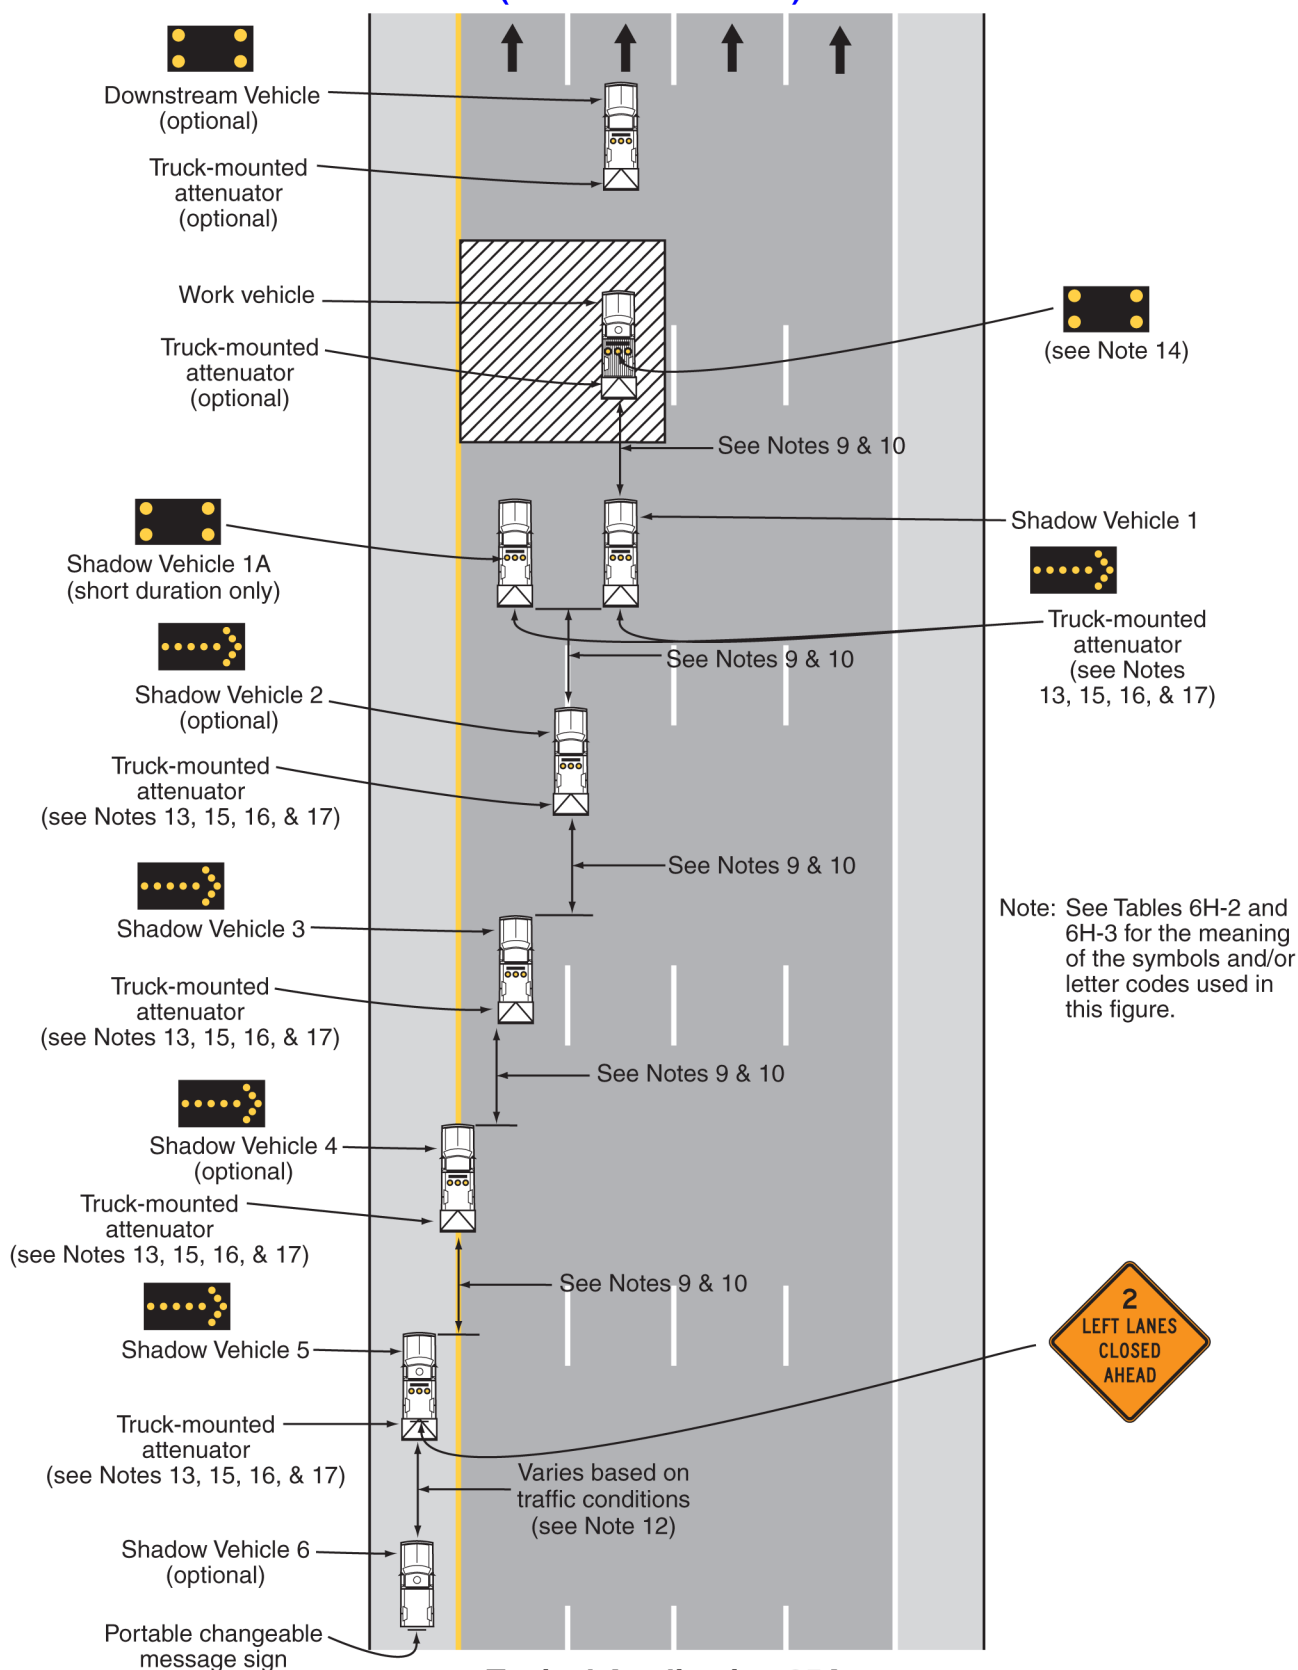

**Typical Application 35A**

**Notes for Figure 6H-35B—Typical Application 35B**  
**Mobile Striping Operations on a Multi-Lane, Divided Highway with a Single Convoy**  
**(Delaware Revision)**

**Standard:**

1. Except as provided in Figure 6H-35C (separate cone recovery convoy), a minimum of five vehicles shall be used for the mobile striping operation convoy.
2. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
3. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
4. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
5. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
6. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
7. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.

*Guidance:*

8. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.*
9. *Work should normally be accomplished during off-peak hours to the extent practical.*
10. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

**Option:**

11. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
12. Additional shadow vehicles to warn and reduce the speed of oncoming or opposing vehicular traffic may be used. Law enforcement vehicles may be used for this purpose.
13. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.


**Standard:**

14. **Shadow Vehicles 1 and 3 shall be equipped with truck-mounted attenuators for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**
15. **Where the shoulder width cannot accommodate a shadow vehicle, Shadow Vehicle 4 shall be equipped with a truck-mounted attenuator and positioned in the adjacent travel lane.**

**Option:**

16. Truck-mounted attenuators may be used for mobile operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-35B. Mobile Striping Operations on a Multi-Lane, Divided Highway with a Single Convoy (TA-35B)**  
(Delaware Revision)

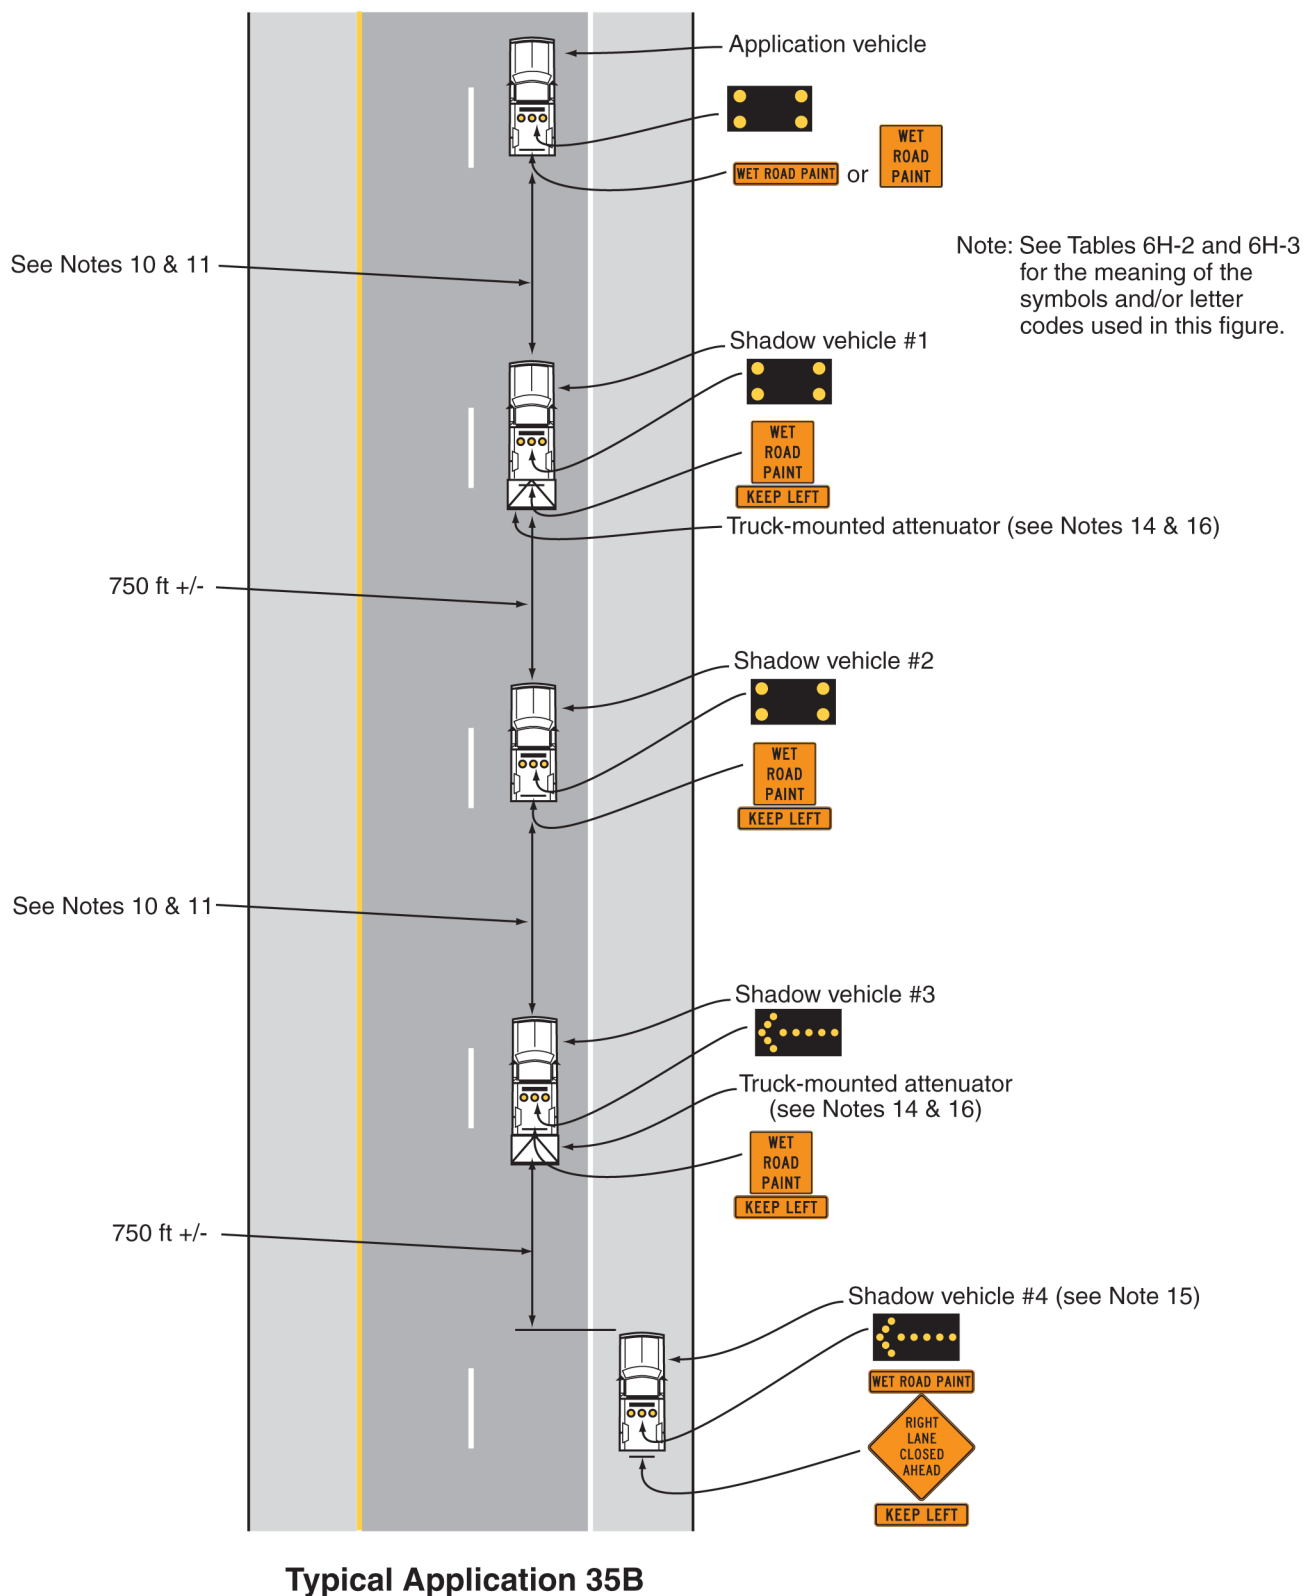

**Notes for Figure 6H-35C—Typical Application 35C**  
**Mobile Striping Operations on a Multi-Lane, Divided Highway**  
**with a Separate Cone Recovery Convoy**  
**(Delaware Revision)**

**Standard:**

1. A minimum of three vehicles shall be used for the initial mobile striping application convoy and a minimum of three vehicles shall be used for the cone recovery convoy.
2. The cone recovery convoy shall operate in accordance with Figure 6H-35.
3. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
4. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
5. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
6. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
7. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
8. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.

*Guidance:*

9. *The cone recovery should occur within 1 hour of the initial application or within the corresponding drying time based on ambient temperatures.*
10. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.*
11. *Work should normally be accomplished during off-peak hours to the extent practical.*
12. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

*Option:*

13. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
14. Additional shadow vehicles to warn and reduce the speed of oncoming or opposing vehicular traffic may be used. Law enforcement vehicles may be used for this purpose.
15. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.


**Standard:**

16. **Shadow Vehicle 2 shall be equipped with a truck-mounted attenuator for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

17. Truck-mounted attenuators may be used for mobile operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-35C. Mobile Striping Operations on a Multi-Lane, Divided Highway with a Separate Cone Recovery Convoy (TA-35C)**  
**(Delaware Revision)**

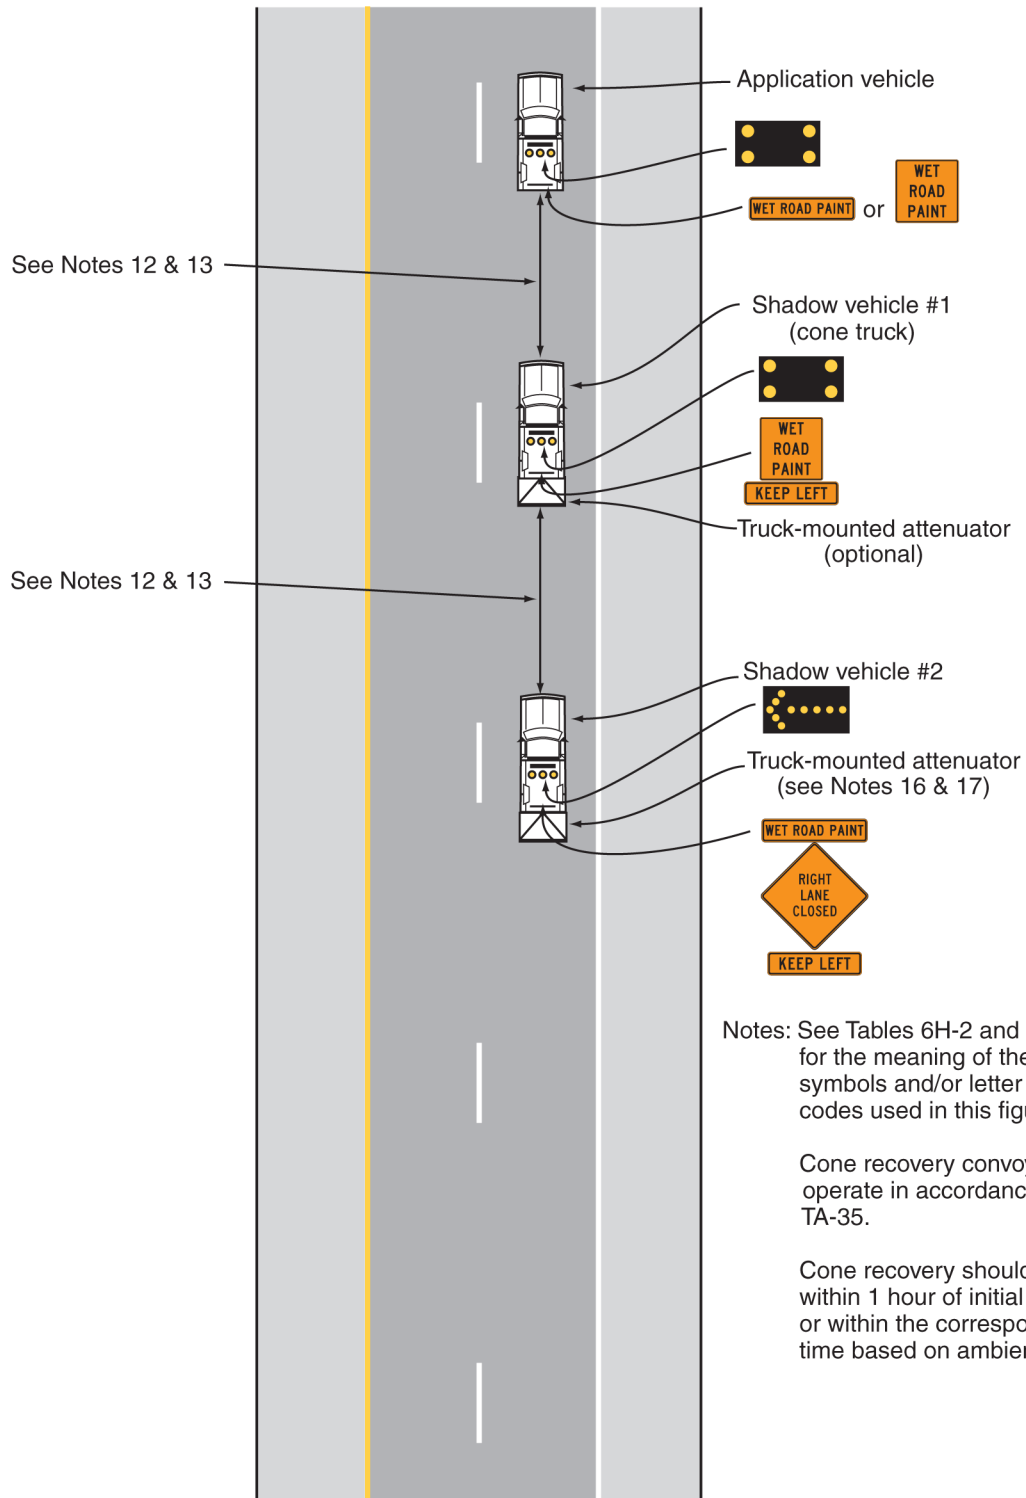

**Typical Application 35C**

**Notes for Figure 6H-35D—Typical Application 35D**  
**Mobile Striping Operations on an Interstate, Freeway, or Expressway**  
**with a Single Lane Closure and a Single Convoy**  
**(Delaware Revision)**

**Standard:**

1. Except as provided in Figure 6H-35E (separate cone recovery convoy), a minimum of six vehicles shall be used for the mobile striping operation convoy.
2. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
3. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
4. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
5. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
6. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
7. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.
8. A law enforcement vehicle shall supplement the convoy on interstates, freeways, and expressways.

*Guidance:*

9. *Closing an interior lane only on a directional roadway with three or more lanes is strongly discouraged because of worker safety and driver expectancy concerns associated with permitting high-speed traffic on both sides of the work space. When an interior lane is closed, an adjacent lane should also be considered for closure.*
10. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.*
11. *Work should normally be accomplished during off-peak hours to the extent practical.*
12. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

**Option:**

13. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
14. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
15. Shadow Vehicle 7 may be used where adequate shoulder width is available to display a portable changeable message sign.

*Guidance:*


16. *If used, Shadow Vehicle 7 should be located upstream of queued traffic to advise motorists of the potential for stopped vehicles.*

**Standard:**

17. Shadow Vehicles 1, 2, 3, and 4 shall be equipped with truck-mounted attenuators for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph. If used, Shadow Vehicle 5 shall also be equipped with a truck-mounted attenuator.
18. Where the shoulder width cannot accommodate a shadow vehicle, Shadow Vehicle 6 shall be equipped with a truck-mounted attenuator and positioned in the adjacent travel lane.



**Figure 6H-35D. Mobile Striping Operations on an Interstate, Freeway, or Expressway with a Single Lane Closure and a Single Convoy (TA-35D)**  
(Delaware Revision)

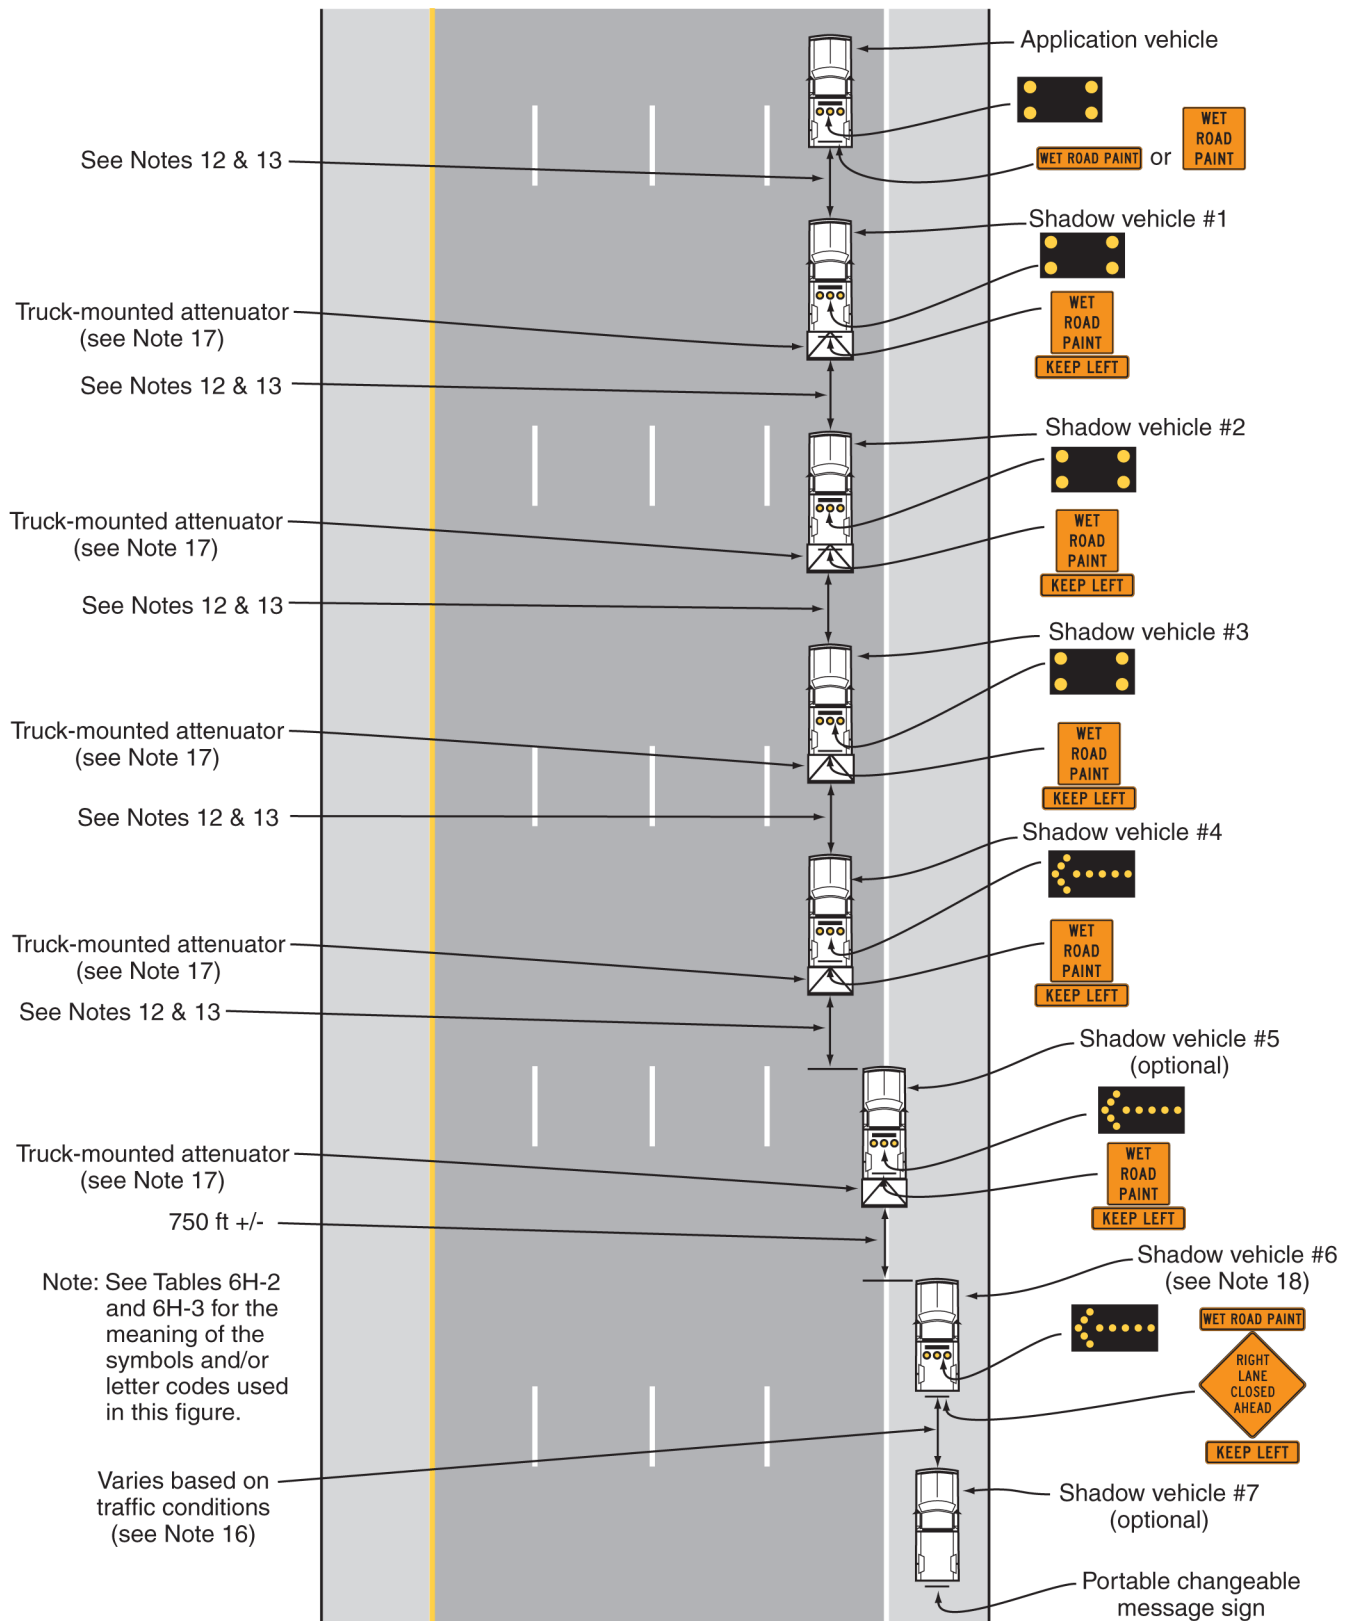

**Typical Application 35D**

**Notes for Figure 6H-35E—Typical Application 35E**  
**Mobile Striping Operations on an Interstate, Freeway, or Expressway**  
**with a Single Lane Closure and a Separate Cone Recovery Convoy**  
**(Delaware Revision)**

**Standard:**

1. A minimum of three vehicles shall be used for the initial mobile striping application convoy and a minimum of three vehicles shall be used for the cone recovery convoy.
2. The cone recovery convoy shall operate in accordance with Figure 6H-35.
3. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
4. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
5. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
6. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
7. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
8. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.
9. A law enforcement vehicle shall supplement the convoys on interstates, freeways, and expressways.

*Guidance:*

10. The cone recovery should occur within 1 hour of the initial application or within the corresponding drying time based on ambient temperatures.
11. Closing an interior lane only on a directional roadway with three or more lanes is strongly discouraged because of worker safety and driver expectancy concerns associated with permitting high-speed traffic on both sides of the work space. When an interior lane is closed, an adjacent lane should also be considered for closure.
12. Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.
13. Work should normally be accomplished during off-peak hours to the extent practical.
14. Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.

**Option:**

15. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
16. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
17. Shadow Vehicle 3 may be used where adequate shoulder width is available to display a portable changeable message sign.


*Guidance:*

18. If used, Shadow Vehicle 3 should be located upstream of queued traffic to advise motorists of the potential for stopped vehicles.

**Standard:**

19. Shadow Vehicle 2 shall be equipped with a truck-mounted attenuator for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.

**Figure 6H-35E. Mobile Striping Operations on an Interstate, Freeway, or Expressway with a Single Lane Closure and a Separate Cone Recovery Convoy (TA-35E)**  
(Delaware Revision)

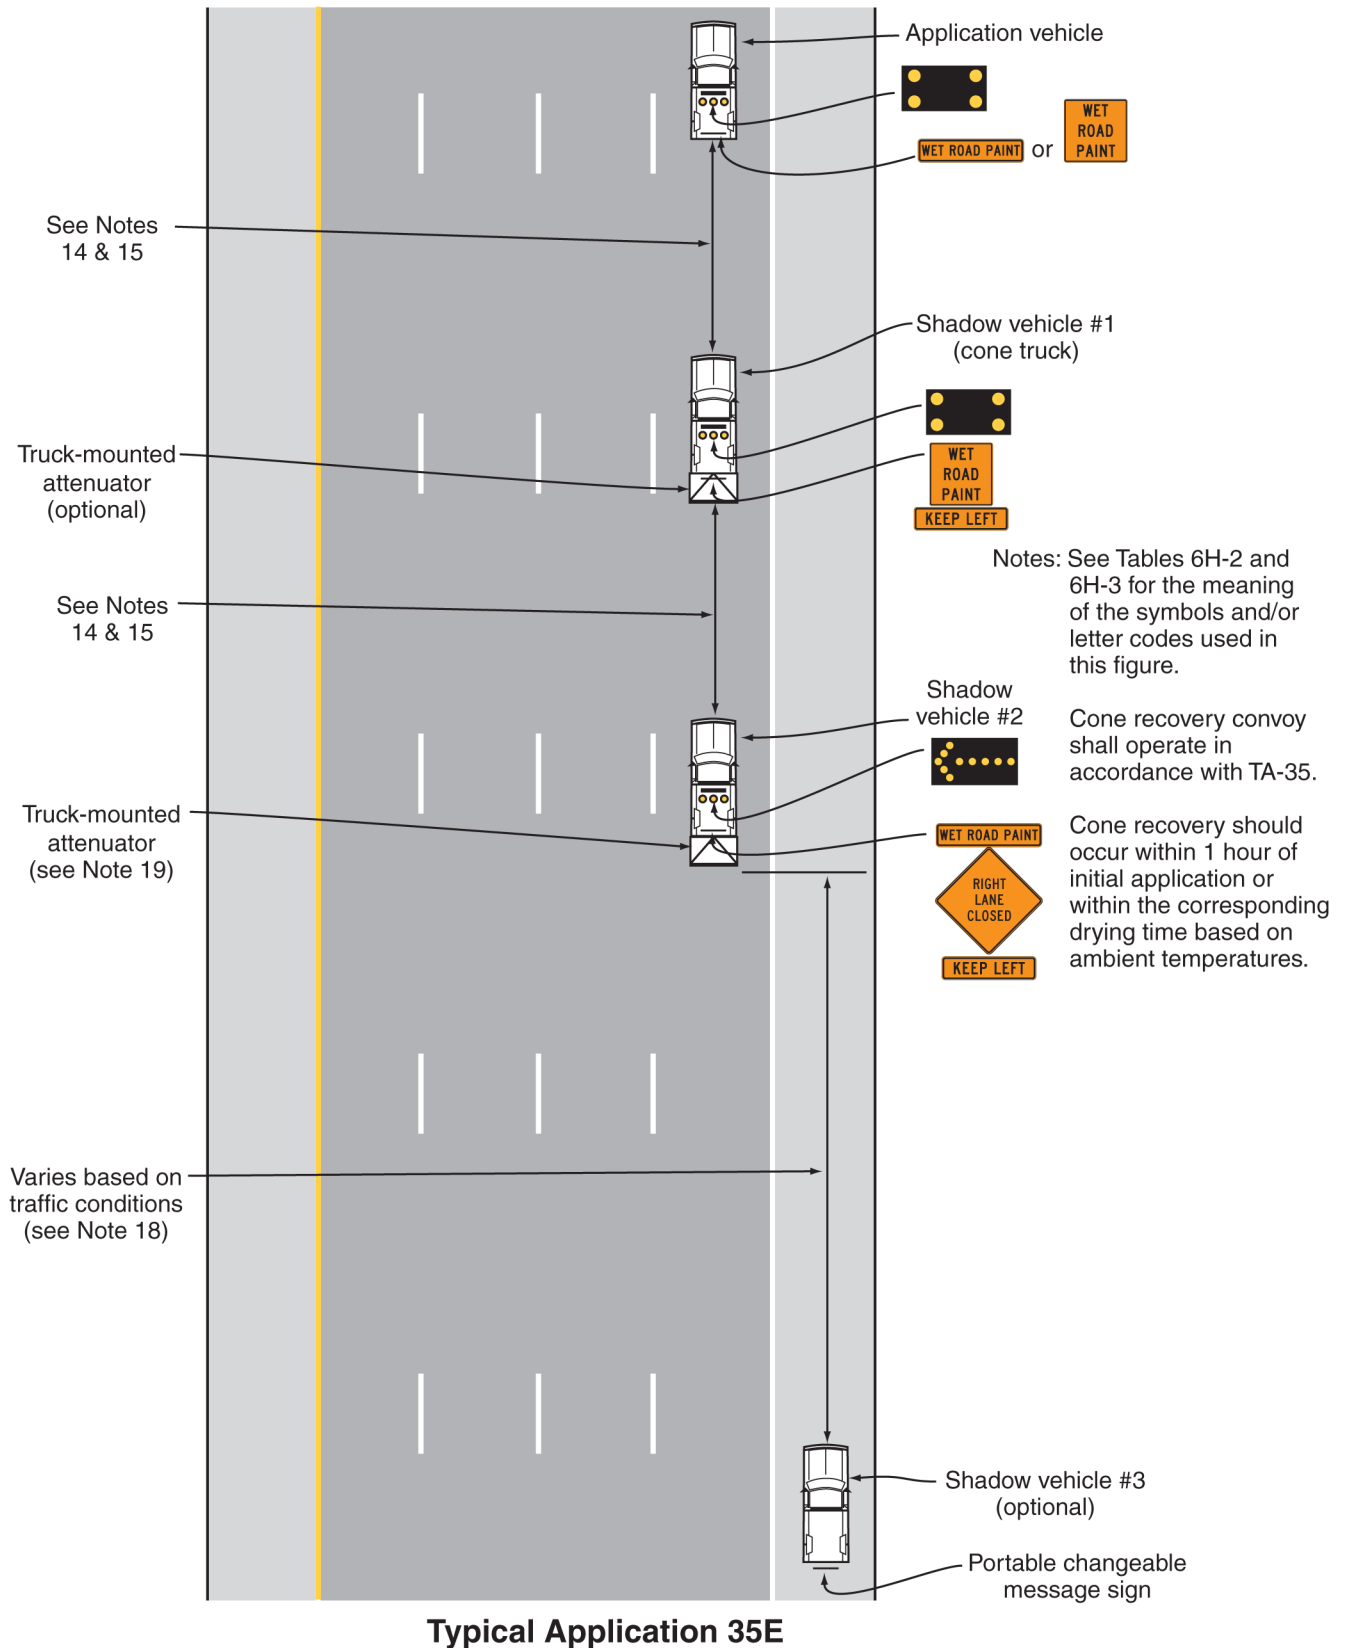

**Notes for Figure 6H-35F—Typical Application 35F**  
**Mobile Striping Operations on an Interstate, Freeway, or Expressway**  
**with a Double Lane Closure and a Single Convoy**  
**(Delaware Revision)**

**Standard:**

1. Except as provided in Figure 6H-35G (separate cone recovery convoy), a minimum of six vehicles shall be used for the mobile striping operation convoy.
2. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
3. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
4. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
5. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
6. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
7. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.
8. A law enforcement vehicle shall supplement the convoy on interstates, freeways, and expressways.

*Guidance:*

9. *Closing an interior lane only on a directional roadway with three or more lanes is strongly discouraged because of worker safety and driver expectancy concerns associated with permitting high-speed traffic on both sides of the work space. When an interior lane is closed, an adjacent lane should also be considered for closure.*
10. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.*
11. *Work should normally be accomplished during off-peak hours to the extent practical.*
12. *Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.*

**Option:**

13. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
14. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
15. Shadow Vehicle 7 may be used where adequate shoulder width is available to display a portable changeable message sign.


*Guidance:*

16. *If used, Shadow Vehicle 7 should be located upstream of queued traffic to advise motorists of the potential for stopped vehicles.*

**Standard:**

17. Shadow Vehicles 1, 2, 3, and 4 shall be equipped with truck-mounted attenuators for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph. If used, Shadow Vehicle 5 shall also be equipped with a truck-mounted attenuator.
18. Where the shoulder width cannot accommodate a shadow vehicle, Shadow Vehicle 6 shall be equipped with a truck-mounted attenuator and positioned in the adjacent travel lane.

**Figure 6H-35F. Mobile Striping Operations on an Interstate, Freeway, or Expressway with a Double Lane Closure and a Single Convoy (TA-35F)**  
(Delaware Revision)

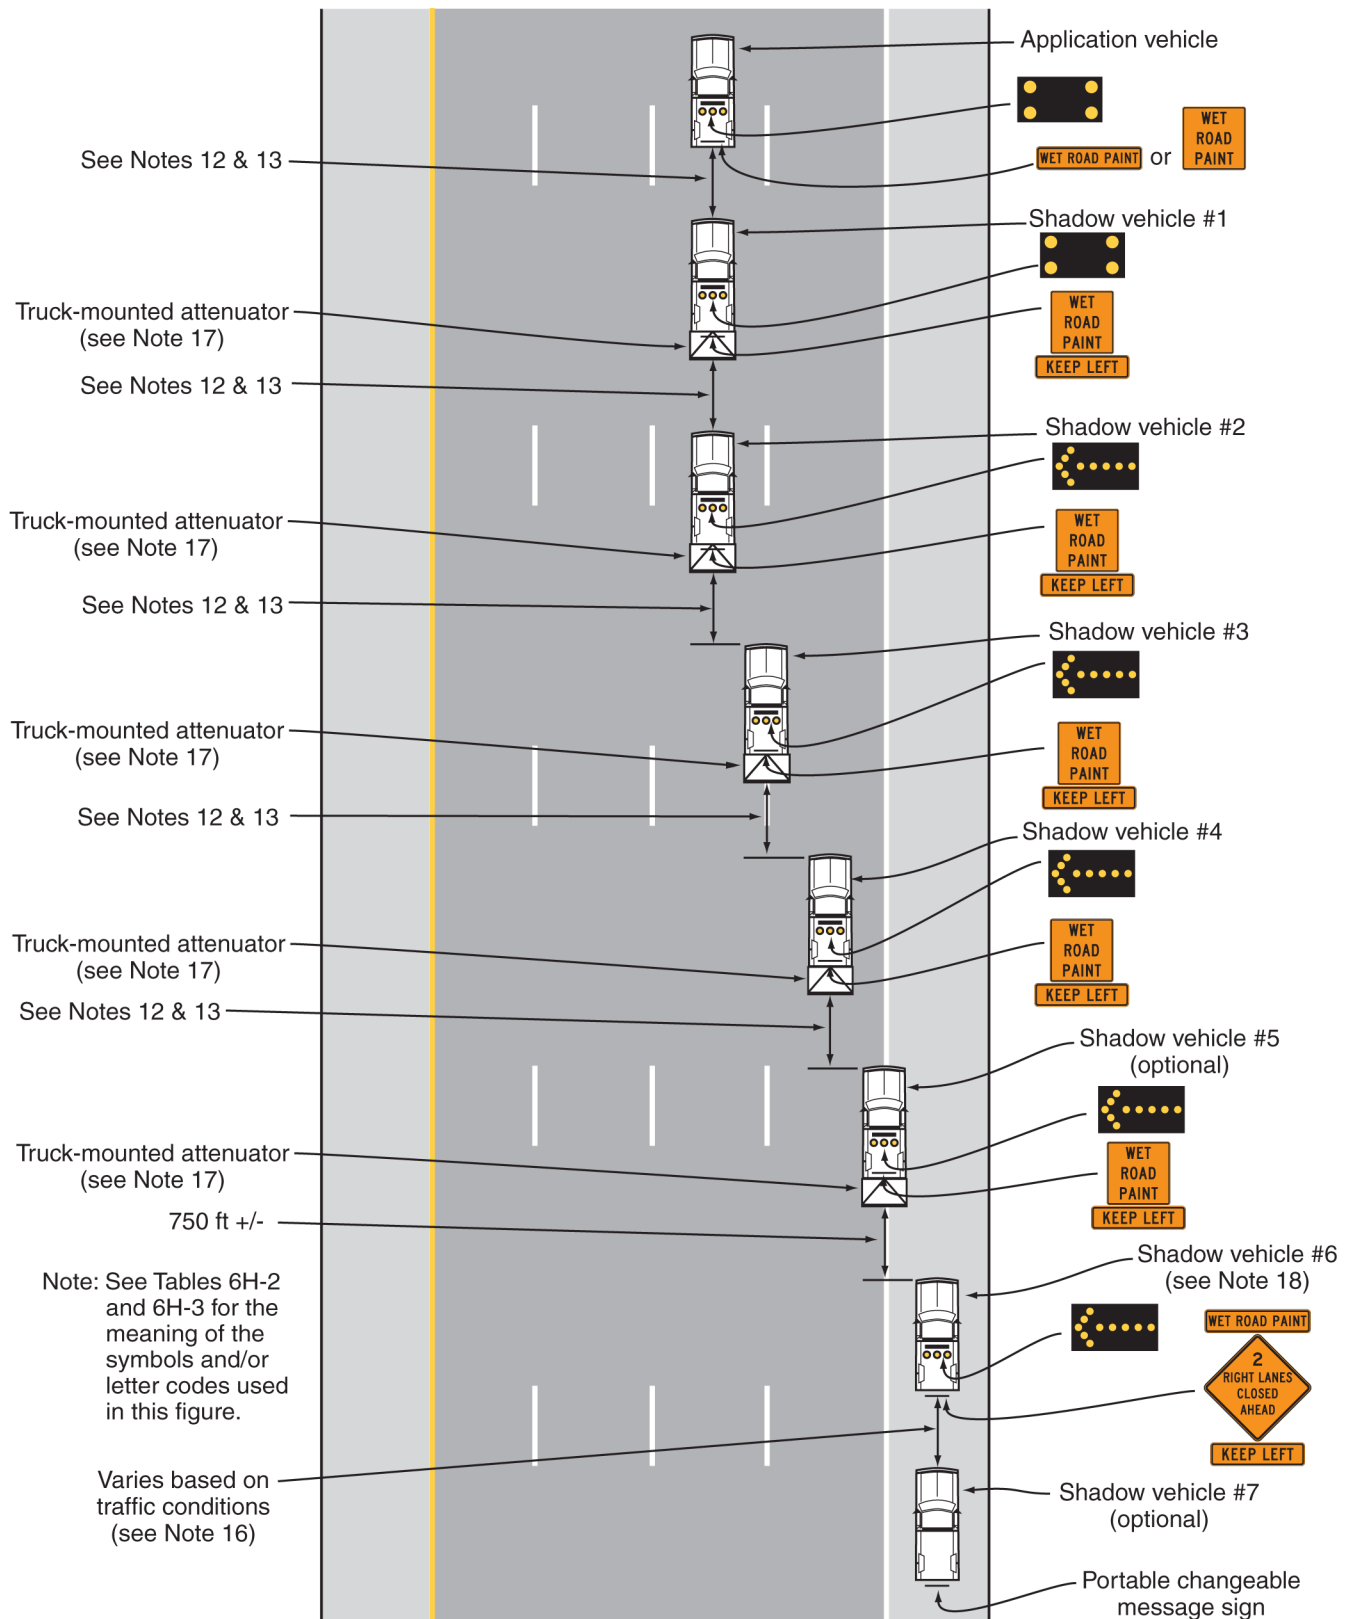

**Typical Application 35F**

**Notes for Figure 6H-35G—Typical Application 35G**  
**Mobile Striping Operations on an Interstate, Freeway, or Expressway**  
**with a Double Lane Closure and a Separate Cone Recovery Convoy**  
**(Delaware Revision)**

**Standard:**

1. A minimum of four vehicles shall be used for the initial mobile striping application convoy and a minimum of four vehicles shall be used for the cone recovery convoy.
2. The cone recovery convoy shall operate in accordance with Figure 6H-35A.
3. Arrow boards on the shadow vehicles shall, at a minimum, be Type B, with a size of 60 x 30 inches.
4. Flags and/or flashing lights shall be mounted on the gun carriages whenever the carriages extend 1 foot or more beyond the width of the application vehicle.
5. Vehicle-mounted signs shall be mounted in a manner such that they are not obscured by equipment or supplies. Sign legends on vehicle-mounted signs shall be covered or turned from view when work is not in progress.
6. Shadow and application vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
7. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.
8. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.
9. A law enforcement vehicle shall supplement the convoys on interstates, freeways, and expressways.

*Guidance:*

10. The cone recovery should occur within 1 hour of the initial application or within the corresponding drying time based on ambient temperatures.
11. Closing an interior lane only on a directional roadway with three or more lanes is strongly discouraged because of worker safety and driver expectancy concerns associated with permitting high-speed traffic on both sides of the work space. When an interior lane is closed, an adjacent lane should also be considered for closure.
12. Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.
13. Work should normally be accomplished during off-peak hours to the extent practical.
14. Whenever adequate stopping sight distance exists to the rear, the shadow vehicles should maintain the minimum distance from the preceding vehicle and proceed at the same speed. The shadow vehicles should slow down in advance of vertical or horizontal curves that restrict sight distance.

**Option:**

15. The minimum distance between the shadow vehicles may vary according to terrain, paint drying time, and other factors, such as the manufacturer's recommendations for the truck-mounted attenuator.
16. Arrow boards may be omitted from work vehicles that cannot support the installation of an arrow board.
17. Shadow Vehicle 4 may be used where adequate shoulder width is available to display a portable changeable message sign.


*Guidance:*

18. If used, Shadow Vehicle 4 should be located upstream of queued traffic to advise motorists of the potential for stopped vehicles.

**Standard:**

19. Shadow Vehicles 2 and 3 shall be equipped with truck-mounted attenuators for mobile operations on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.

**Figure 6H-35G. Mobile Striping Operations on an Interstate, Freeway, or Expressway with a Double Lane Closure and a Separate Cone Recovery Convoy (TA-35G)**  
(Delaware Revision)

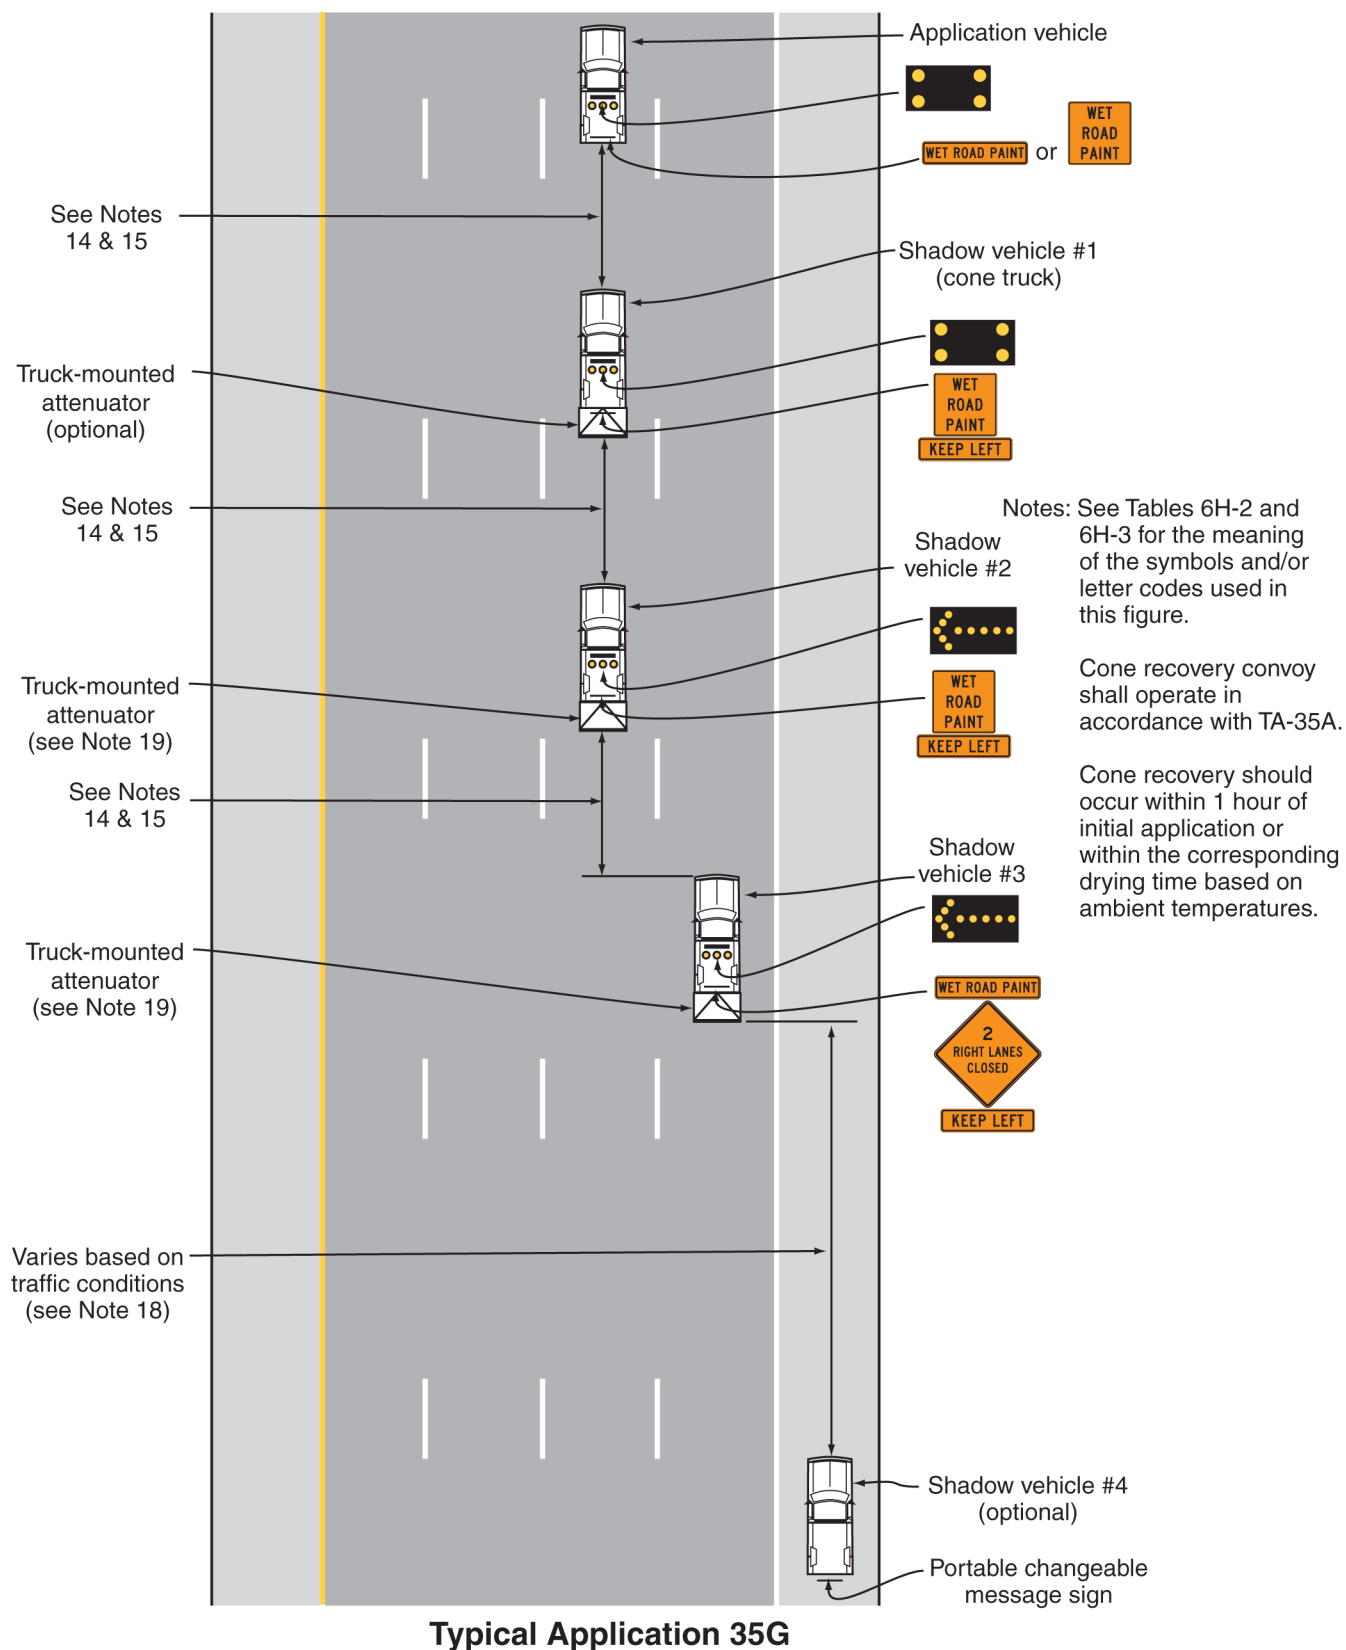

**Notes for Figure 6H-35H—Typical Application 35H**  
**Rolling Road Blocks on a Limited Access Multi-Lane, Divided Highway**  
**(Delaware Revision)**

**Standard:**

1. Rolling Road Block operations shall be approved by DelDOT's Traffic Section prior to use and shall be performed as outlined in Section 6G.22.
2. Arrow boards on the "control" vehicles and "chaser" vehicle shall, at a minimum, be Type B, with a size of 60 x 30 inches and shall be operated in the four-corner caution mode.
3. "Control" and "chaser" vehicles shall display high-intensity rotating, flashing, oscillating, or strobe lights.
4. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.

*Guidance:*

5. *Vehicles used for these operations should be made highly visible with appropriate equipment, such as signs or arrow boards.*

**Standard:**

6. All "control" vehicles shall be equipped with truck-mounted attenuators for rolling road block operations.

*Option:*


7. A truck-mounted attenuator may be omitted from the "chaser" vehicle for rolling road block operations.

**Standard:**

8. Law enforcement vehicles used for the Rolling Road Block operation shall display full emergency lighting and shall be equipped with an external light bar on the roof of the vehicle.



**Figure 6H-35H. Rolling Road Blocks on a Limited Access Multi-Lane, Divided Highway (TA-35H)**  
**(Delaware Revision)**

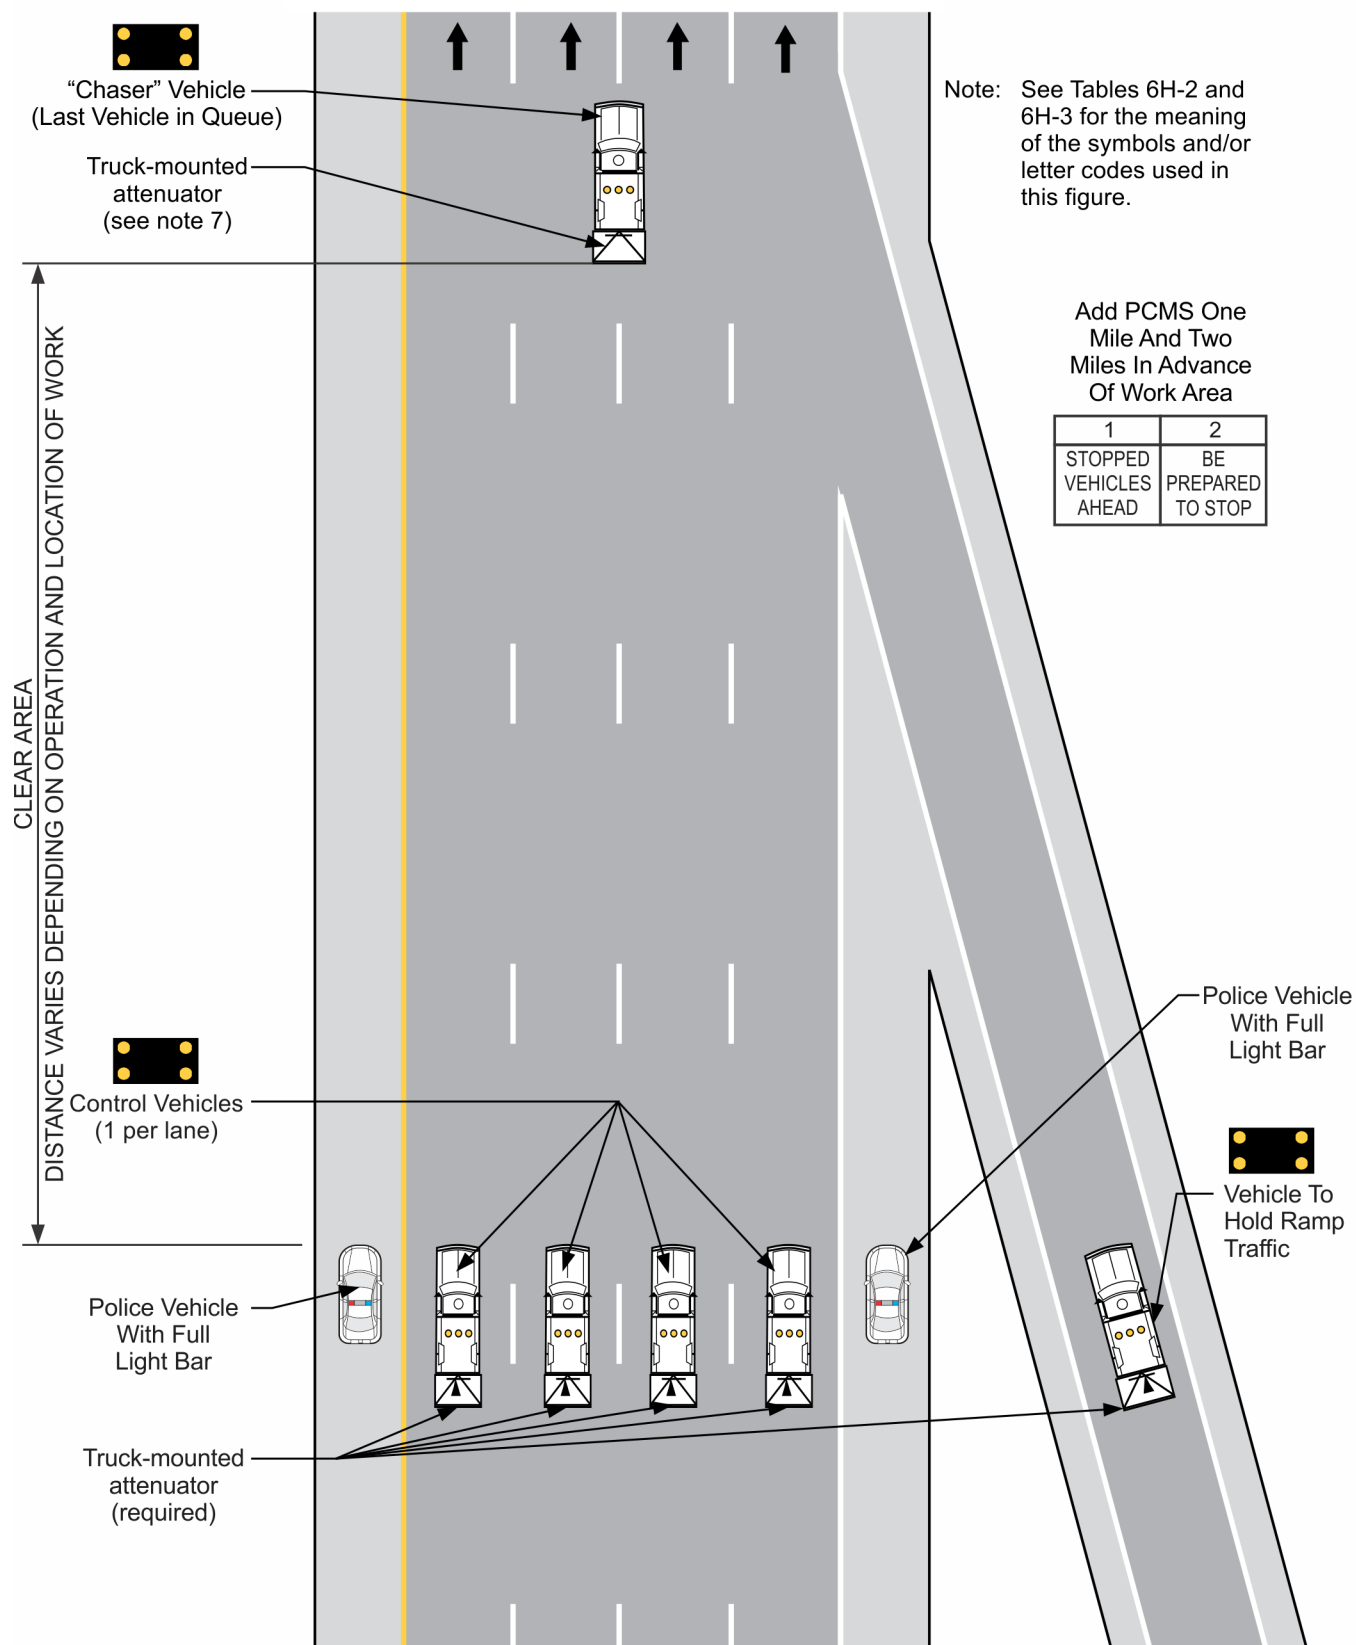

**Notes for Figure 6H-36—Typical Application 36**  
**Lane Shift on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

1. *The lane shift should be used when the work space extends into either the right-hand or left-hand lane of a divided highway and it is not practical, for capacity reasons, to reduce the number of available lanes.*
2. *If the shoulder cannot adequately accommodate trucks, trucks should be directed to use the travel lanes.*
3. *The use of a barrier should be based on engineering judgment.*

*Option:*

4. The barrier shown in this typical application is an example of one method that may be used to close a shoulder for a long-term project requiring a lane shift.

**Standard:**

5. **If used, the temporary traffic barrier and retroreflective enhanced conspicuity panels shall comply with the provisions of Section 6F.85.**
6. **The barrier shall not be placed along the shifting taper. The lane shall first be shifted using channelizing devices and pavement markings.**
7. **When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

*Guidance:*

8. *A warning sign should be used to show the changed alignment.*
9. *If the tangent distance along the temporary diversion is less than 600 feet, Double Reverse Curve signs should be used instead of the upstream Reverse Curve signs and the downstream Reverse Curve signs should be omitted.*
10. *Advisory Speed plaques should be used only when the advisory speed is less than the posted speed limit.*

**Standard:**

11. **The number of lanes illustrated on the Reverse Curve signs shall be the same as the number of through lanes available to road users, and the direction of the reverse curves shall be appropriately illustrated.**

*Option:*

12. Where two or more lanes are being shifted, a W1-4 (or W1-3) sign with an ALL LANES (W24-1cP) plaque (see Figure 6F-4) may be used instead of a sign that illustrates the number of lanes.
13. Where more than three lanes are being shifted, the Reverse Curve (or Turn) sign may be rectangular.

**Standard:**

14. **The minimum width of the shoulder lane shall be 10 feet.**
15. **For long-term stationary work, existing conflicting pavement markings shall be removed and temporary markings shall be installed before traffic patterns are changed.**


*Option:*

16. For short-term stationary work, lanes may be delineated by channelizing devices or removable pavement markings instead of temporary markings.

*Guidance:*

17. *A shifting taper length of L is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*
18. *Shift areas should be illuminated at night, except in emergencies.*

**Figure 6H-36. Lane Shift on a Multi-Lane, Divided Highway (TA-36)**  
**(Delaware Revision)**

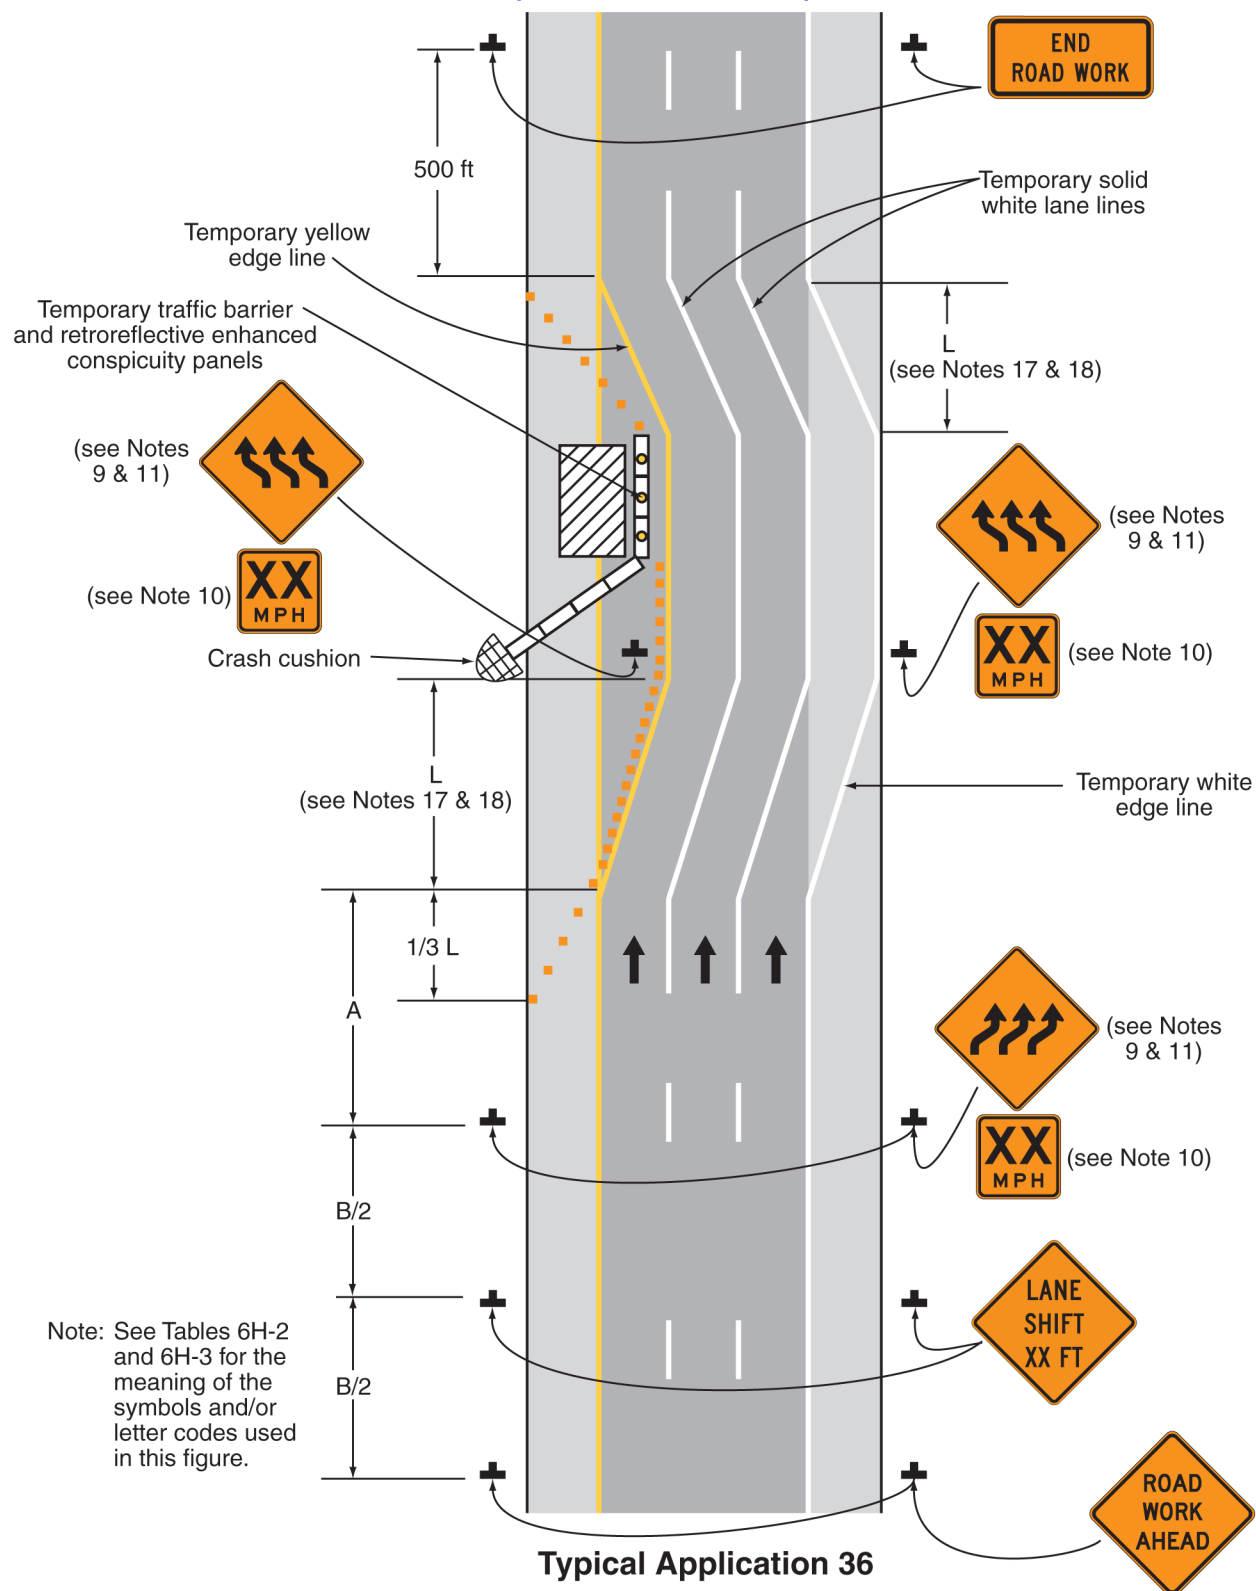

**Notes for Figure 6H-37—Typical Application 37**  
**Double Lane Closure on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

**Standard:**

1. This TTC zone application also shall be used when work is being performed in the lanes adjacent to the median on a multi-lane, divided highway. In this case, the 2 LEFT LANES CLOSED signs and the corresponding Lane Ends (or MERGE RIGHT) signs shall be substituted.
2. When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.
3. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.

*Guidance:*

4. *The second arrow board should be placed in the closed exterior lane at the upstream end of the second merging taper.*
5. *When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*


**Standard:**

6. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.

*Option:*

7. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
8. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-37. Double Lane Closure on a Multi-Lane, Divided Highway (TA-37)**  
**(Delaware Revision)**

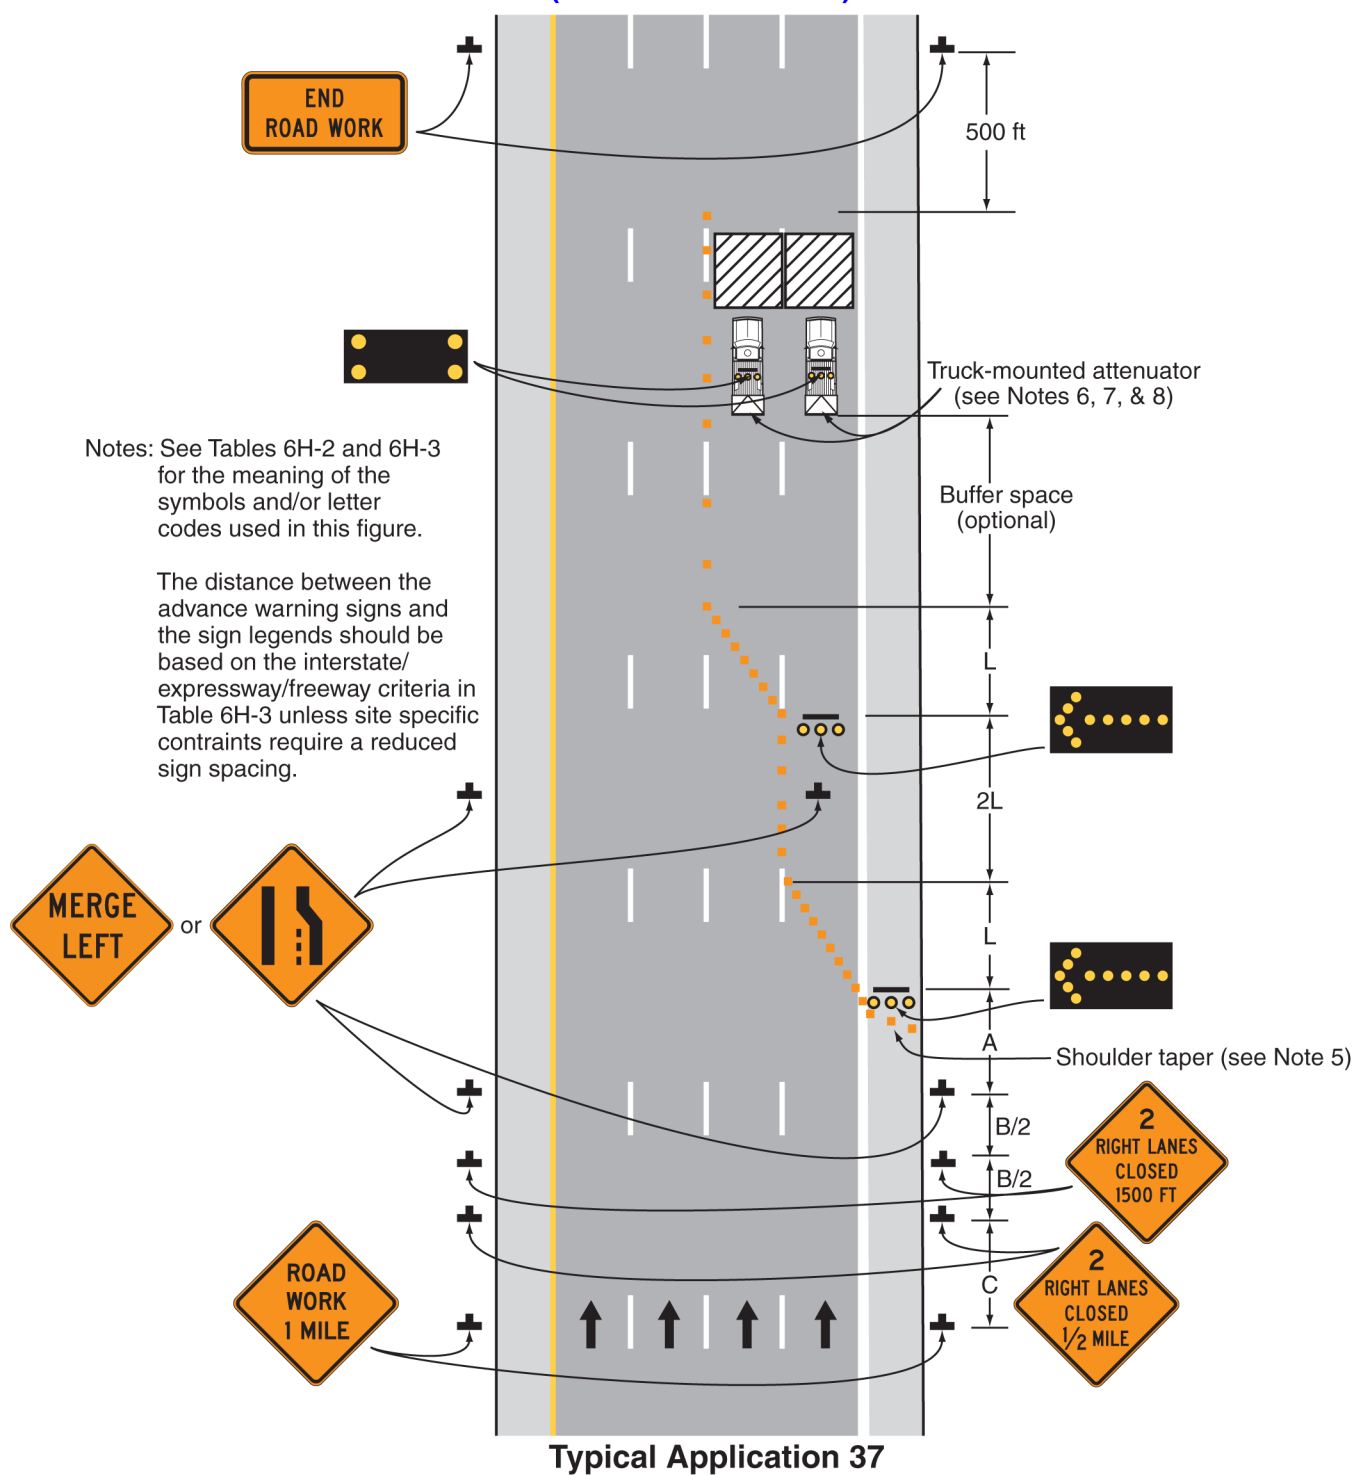

**Notes for Figure 6H-38—Typical Application 38**  
**Interior Lane Closure on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

1. *Use of this TTC zone application is strongly discouraged because of worker safety and driver expectancy concerns associated with permitting high-speed traffic on both sides of the work space. When an interior lane is closed, an adjacent lane should also be considered for closure to provide additional space for vehicles and materials and to facilitate the movement of equipment within the work space. The method for closing an interior lane when the open lanes have the capacity to carry vehicular traffic should be as shown in Figure 6H-37, instead of as shown in this TTC zone application.*

**Standard:**

2. **An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**
3. **When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**
4. **For long-term stationary work, existing conflicting pavement markings shall be removed and temporary markings shall be installed before traffic patterns are changed.**

*Guidance:*

5. *The first arrow board displaying an arrow pointing to the right should be on the left-hand shoulder at the beginning of the taper. The arrow board displaying a double arrow should be centered in the closed interior lane and placed at the downstream end of the shifting taper.*
6. *If the two arrow boards create confusion, the 2L distance between the end of the merging taper and beginning of the shift taper should be extended so that road users can focus on one arrow board at a time.*
7. *The placement of signs should not obstruct or obscure arrow boards.*
8. *For long-term use, the dashed lane lines should be made solid white in the two-lane section.*
9. *A short, single row of channelizing devices should be added in advance of the vehicular traffic split to restrict vehicular traffic to their respective lanes.*
10. *When paved shoulders having a width of 8 feet or more are closed, channelizing devices should be used to close the shoulder in advance of the merging taper to direct vehicular traffic to remain within the traveled way.*

**Option:**

11. **As an alternative to initially closing the left-hand lane, as shown in the TTC zone application, the right-hand lane may be closed in advance of the interior lane closure with appropriate channelization and signs.**
12. **DO NOT PASS signs may be used.**
13. **If a paved shoulder having a minimum width of 10 feet and sufficient strength is available, the left-hand and center lanes may be closed and motor vehicle traffic carried around the work space on the right-hand lane and a right-hand shoulder.**

*Guidance:*

14. *When a shoulder lane is used that cannot adequately accommodate trucks, trucks should be directed to use the normal travel lanes.*
15. *For a long-term closure, a barrier should be used to provide additional safety to the operation in the closed interior lane. A buffer space should be used at the upstream end of the closed interior lane.*

**Standard:**

16. **If used, the temporary traffic barrier and retroreflective enhanced conspicuity panels shall comply with the provisions of Section 6F.85.**
17. **If used, the barrier shall not be placed along the shifting taper. The lane shall first be shifted using channelizing devices and pavement markings.**
18. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

**Option:**

19. **For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.**
20. **Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.**


*Guidance:*

21. *A shifting taper length of L is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*
22. *Shift areas should be illuminated at night, except in emergencies.*

**Figure 6H-38. Interior Lane Closure on a Multi-Lane, Divided Highway (TA-38)**  
(Delaware Revision)

Notes: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

The distance between the advance warning signs and the sign legends should be based on the interstate/expressway/freeway criteria in Table 6H-3 unless site specific constraints require a reduced sign spacing.

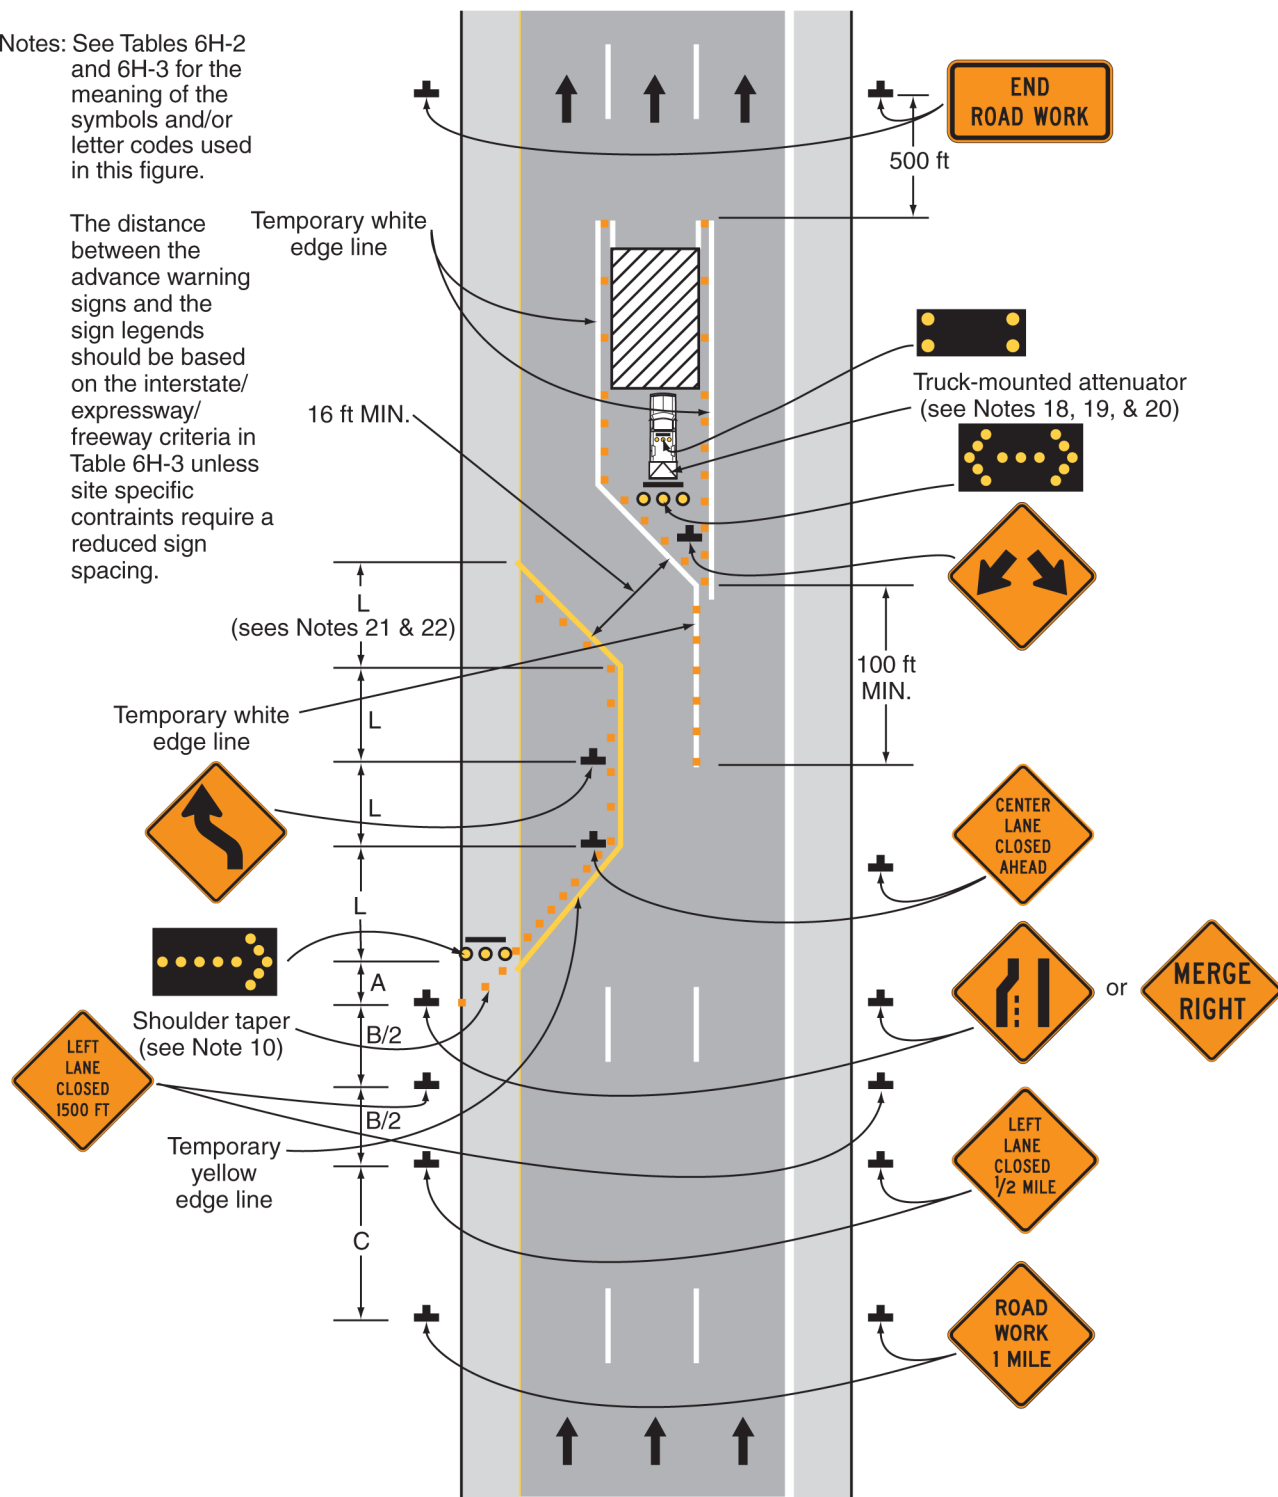

**Typical Application 38**

**Notes for Figure 6H-39—Typical Application 39**  
**Median Crossover on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

**Standard:**

- 1. Channelizing devices or temporary traffic barriers shall be used to separate opposing vehicular traffic.**
- 2. An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**

*Guidance:*

- 3. For long-term work on high-speed, high-volume highways, consideration should be given to using a temporary traffic barrier to separate opposing vehicular traffic.*

*Option:*

- 4. When a temporary traffic barrier is used to separate opposing vehicular traffic, the Two-Way Traffic, DO NOT PASS, KEEP RIGHT, and DO NOT ENTER signs may be eliminated.*
- 5. The alignment of the crossover may be designed as a reverse curve.*

*Guidance:*

- 6. When the crossover follows a curved alignment, the design criteria contained in the AASHTO "Policy on the Geometric Design of Highways and Streets" (see Section 1A.11) should be used.*
- 7. When channelizing devices have the potential of leading vehicular traffic out of the intended traffic space, the channelizing devices should be extended a distance in feet of 2.0 times the speed limit in mph beyond the downstream end of the transition area as depicted.*
- 8. Where channelizing devices are used, the Two-Way Traffic signs should be repeated every 1 mile.*

*Option:*

- 9. NEXT XX MILES Supplemental Distance plaques may be used with the Two-Way Traffic signs, where XX is the distance to the downstream end of the two-way section.*

*Support:*


- 10. When the distance is sufficiently short that road users entering the section can see the downstream end of the section, they are less likely to forget that there is opposing vehicular traffic.*
- 11. The sign legends for the four pairs of signs approaching the lane closure for the non-crossover direction of travel are not shown. They are similar to the series shown for the crossover direction, except that the left lane is closed.*

*Guidance:*

- 12. A shifting taper length of L is preferred on state-maintained roads (see Tables 6C-3 and 6C-4).*
- 13. Shift areas should be illuminated at night, except in emergencies.*
- 14. Advisory Speed plaques should be used only when the advisory speed is less than the posted speed limit.*
- 15. Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*



**Figure 6H-39. Median Crossover on a Multi-Lane, Divided Highway (TA-39)**  
**(Delaware Revision)**

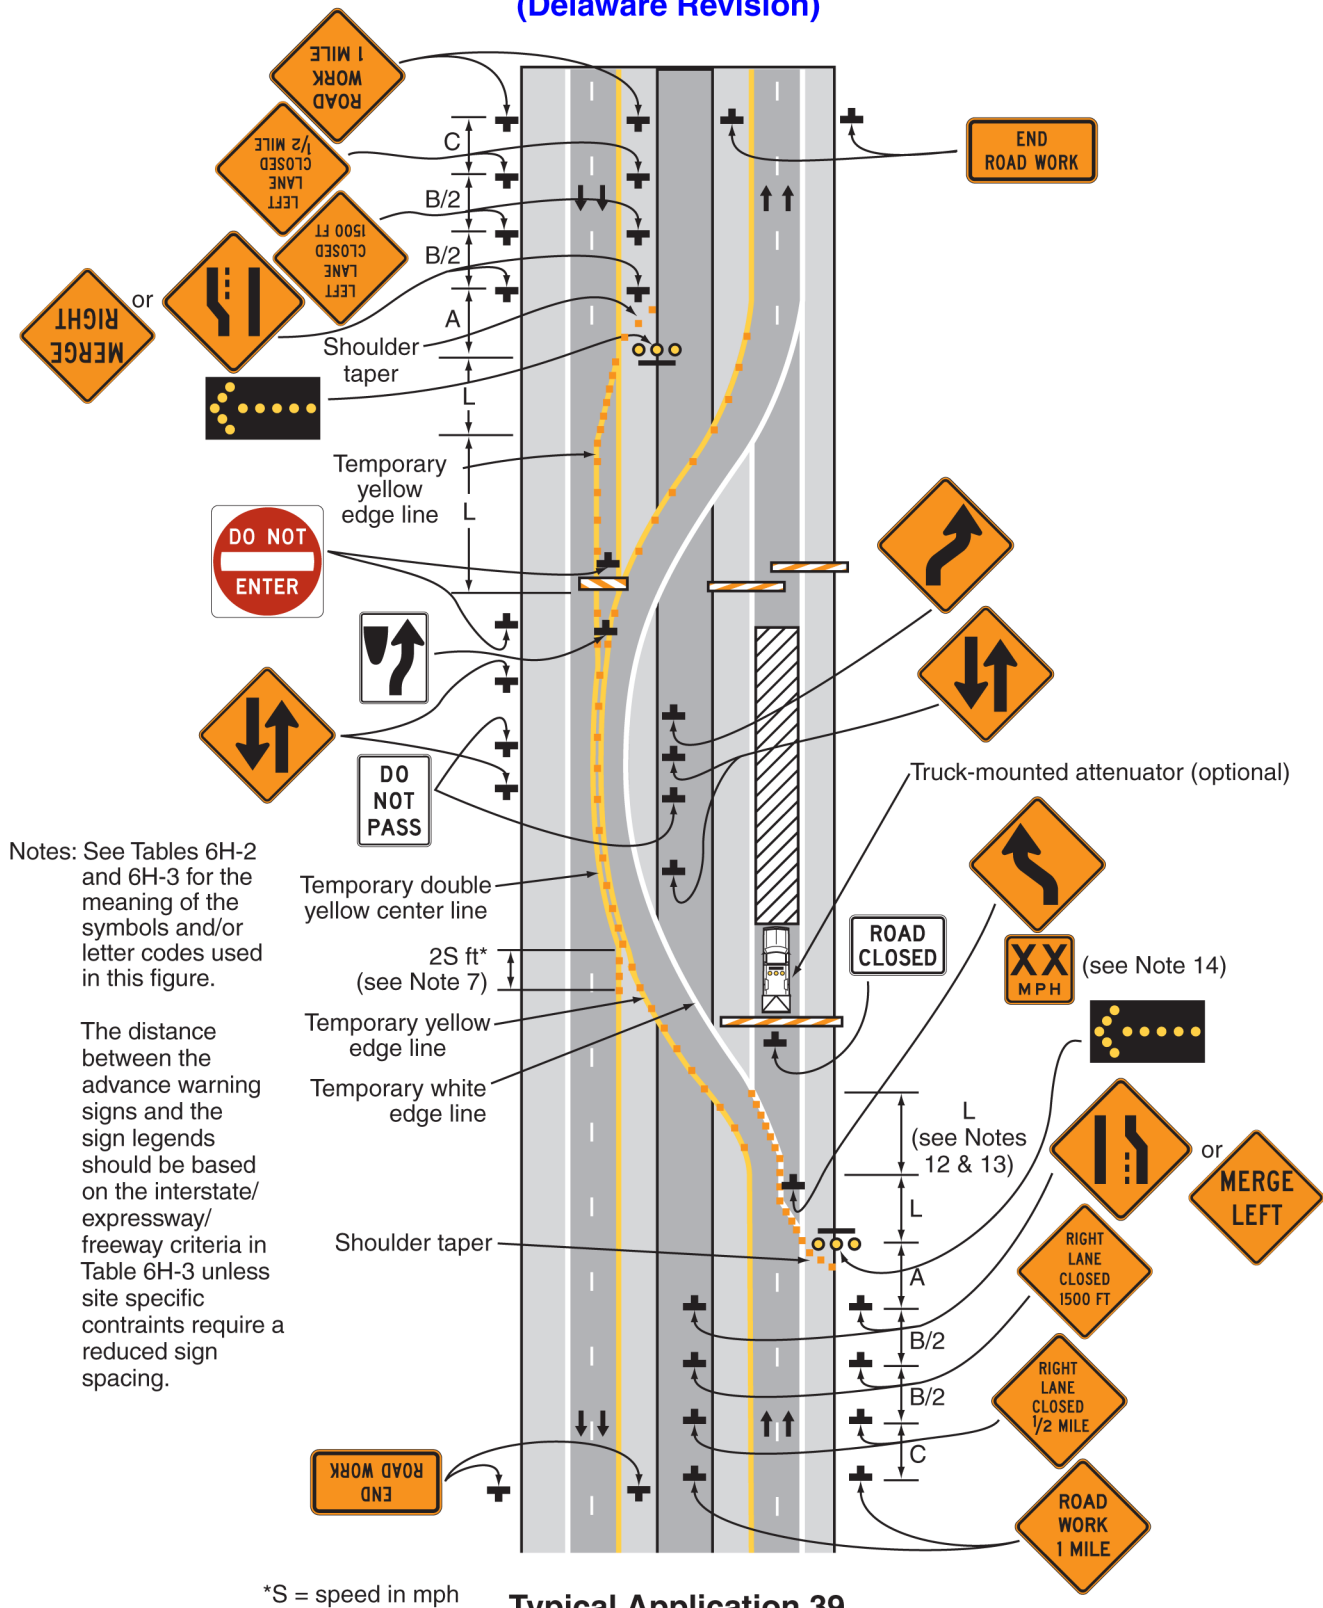

**Notes for Figure 6H-40—Typical Application 40**  
**Median Crossover for an Entrance Ramp on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

- 1. The TTC zone application illustrated should be used for carrying an entrance ramp across a closed directional roadway of a divided highway.*
- 2. A temporary acceleration lane should be used to facilitate merging. The design criteria contained in the AASHTO “Policy on the Geometric Design of Highways and Streets” (see Section 1A.11) should be used for determining the acceleration lane length.*
- 3. When used, the YIELD or STOP sign should be located so that ramp vehicular traffic has adequate sight distance of oncoming mainline vehicular traffic to select an acceptable gap in the mainline vehicular traffic flow, but should not be located so far forward that motorists will be encouraged to stop in the path of the mainline traffic. Also, a longer acceleration lane should be provided beyond the sign to reduce the gap size needed. If insufficient gaps are available, consideration should be given to closing the ramp.*
- 4. Where STOP signs are used, a temporary stop line should be placed across the ramp at the desired stop location.*

*Option:*

5. If vehicular traffic conditions allow, the ramp may be closed.


**Standard:**

- 6. Except as provided in Note 7, entrance ramp closures along state-maintained roadways shall have a detour plan approved by DelDOT Traffic.**

*Option:*

7. A detour plan may not be needed for entrance ramp closures during off-peak, short duration or mobile operations.
8. A broken edge line may be carried across the temporary entrance ramp to assist in defining the through vehicular traffic lane.
9. When a temporary traffic barrier is used to separate opposing vehicular traffic, the Two-Way Traffic signs and the DO NOT ENTER signs may be eliminated.
10. A Stop Beacon (see Section 4L.05) may be placed above the STOP sign.
11. Where the acceleration distance is significantly reduced, a supplemental plaque may be placed below the Yield Ahead sign reading NO MERGE AREA.

**Figure 6H-40. Median Crossover for an Entrance Ramp on a Multi-Lane, Divided Highway (TA-40)**  
**(Delaware Revision)**

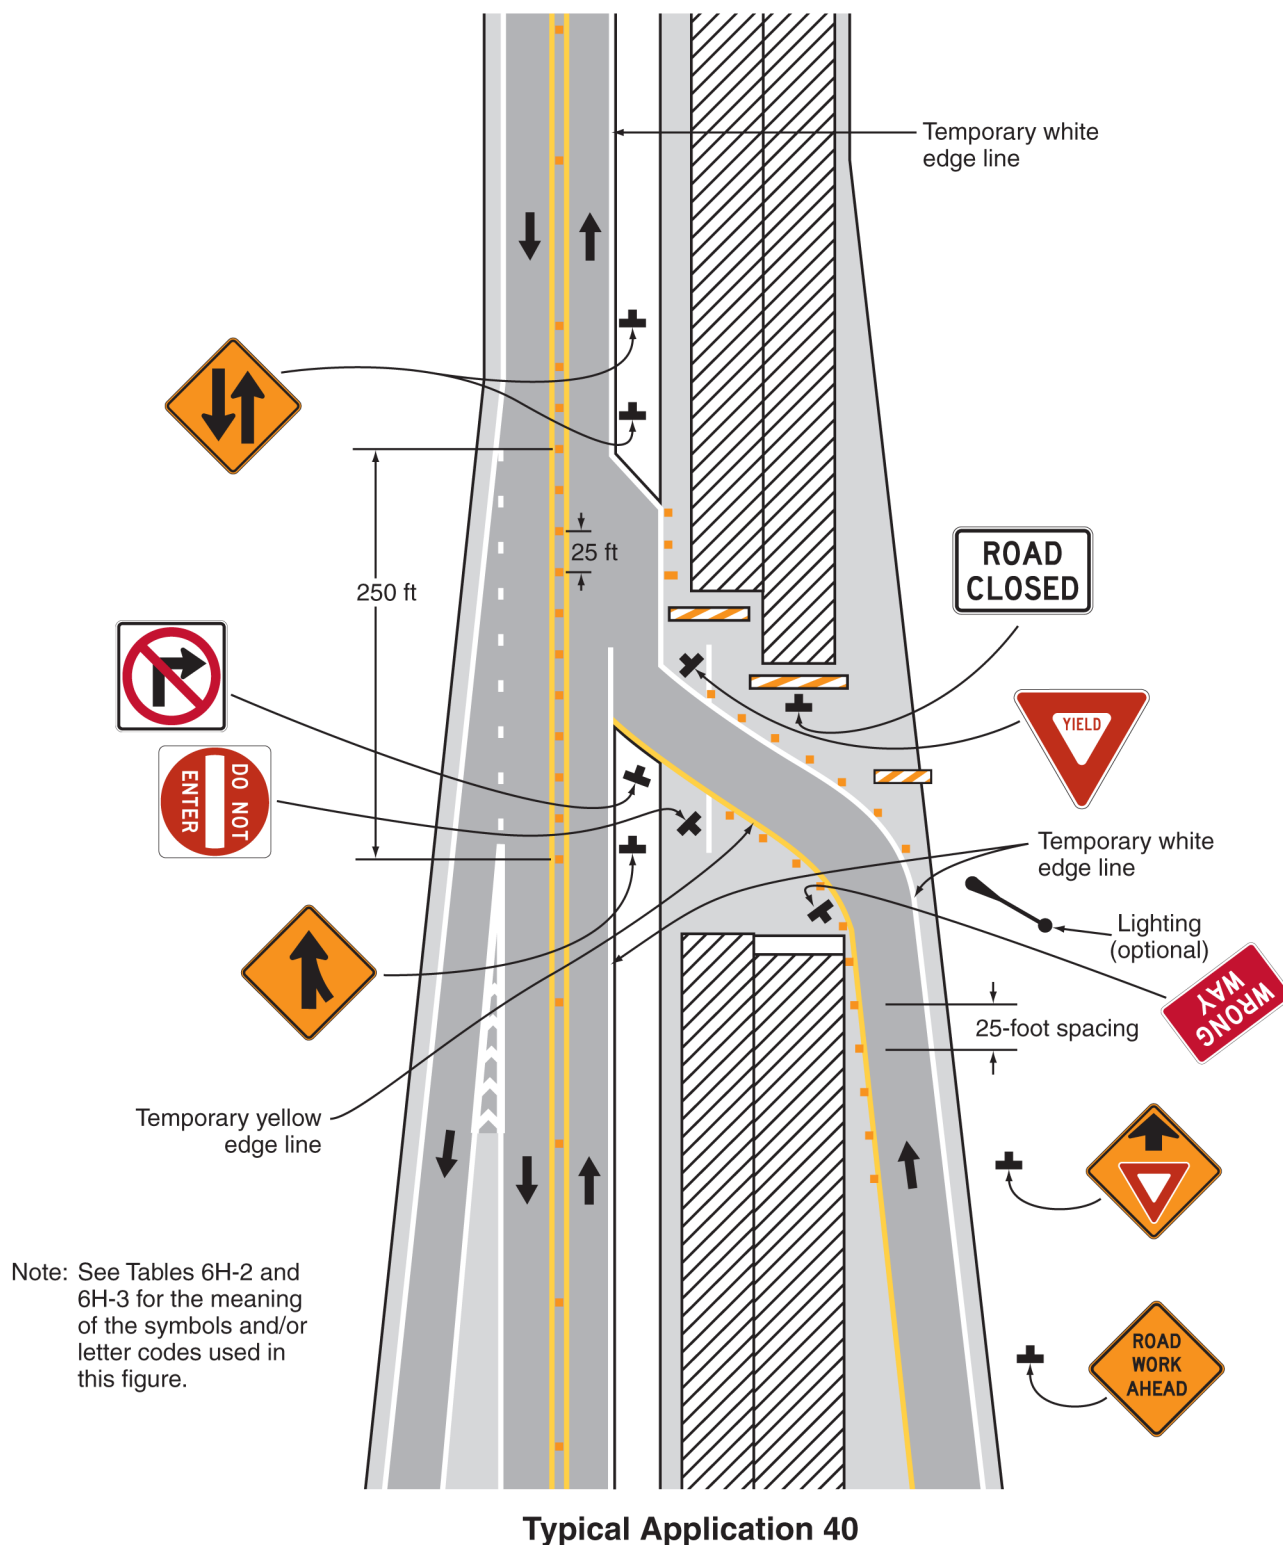

**Notes for Figure 6H-41—Typical Application 41**  
**Median Crossover for an Exit Ramp on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

1. *This TTC zone application should be used for carrying an exit ramp across a closed directional roadway of a divided highway. The design criteria contained in the AASHTO “Policy on the Geometric Design of Highways and Streets” (see Section 1A.11) should be used for determining the curved alignment.*
2. *The guide signs should indicate that the ramp is open, and where the temporary ramp is located. Conversely, if the ramp is closed, guide signs should indicate that the ramp is closed.*
3. *When the exit is closed, a black on orange EXIT CLOSED sign panel should be placed diagonally across the interchange/intersection guide signs and channelizing devices should be placed to physically close the ramp.*
4. *In the situation (not shown) where channelizing devices are placed along the mainline roadway, the devices’ spacing should be reduced in the vicinity of the off ramp to emphasize the opening at the ramp itself. Channelizing devices and/or temporary pavement markings should be placed on both sides of the temporary ramp where it crosses the median and the closed roadway.*
5. *Advance guide signs providing information related to the temporary exit should be relocated or duplicated adjacent to the temporary roadway.*

**Standard:**

6. **A temporary EXIT sign shall be located in the temporary gore. For better visibility, it shall be mounted a minimum of 7 feet from the pavement surface to the bottom of the sign.**

*Option:*

7. *Guide signs referring to the exit may need to be relocated to the median.*
8. *The temporary EXIT sign placed in the temporary gore may be either black on orange or white on green.*
9. *In some instances, a temporary deceleration lane may be useful in facilitating the exiting maneuver.*
10. *When a temporary traffic barrier is used to separate opposing vehicular traffic, the Two-Way Traffic signs may be omitted.*
11. *If vehicular traffic conditions allow, the ramp may be closed.*


**Standard:**

12. **Except as provided in Note 13, exit ramp closures along state-maintained roadways shall have a detour plan approved by DelDOT Traffic.**

*Option:*

13. *A detour plan may not be needed for exit ramp closures during off-peak, short duration or mobile operations.*

**Figure 6H-41. Median Crossover for an Exit Ramp on a Multi-Lane, Divided Highway (TA-41)**  
**(Delaware Revision)**

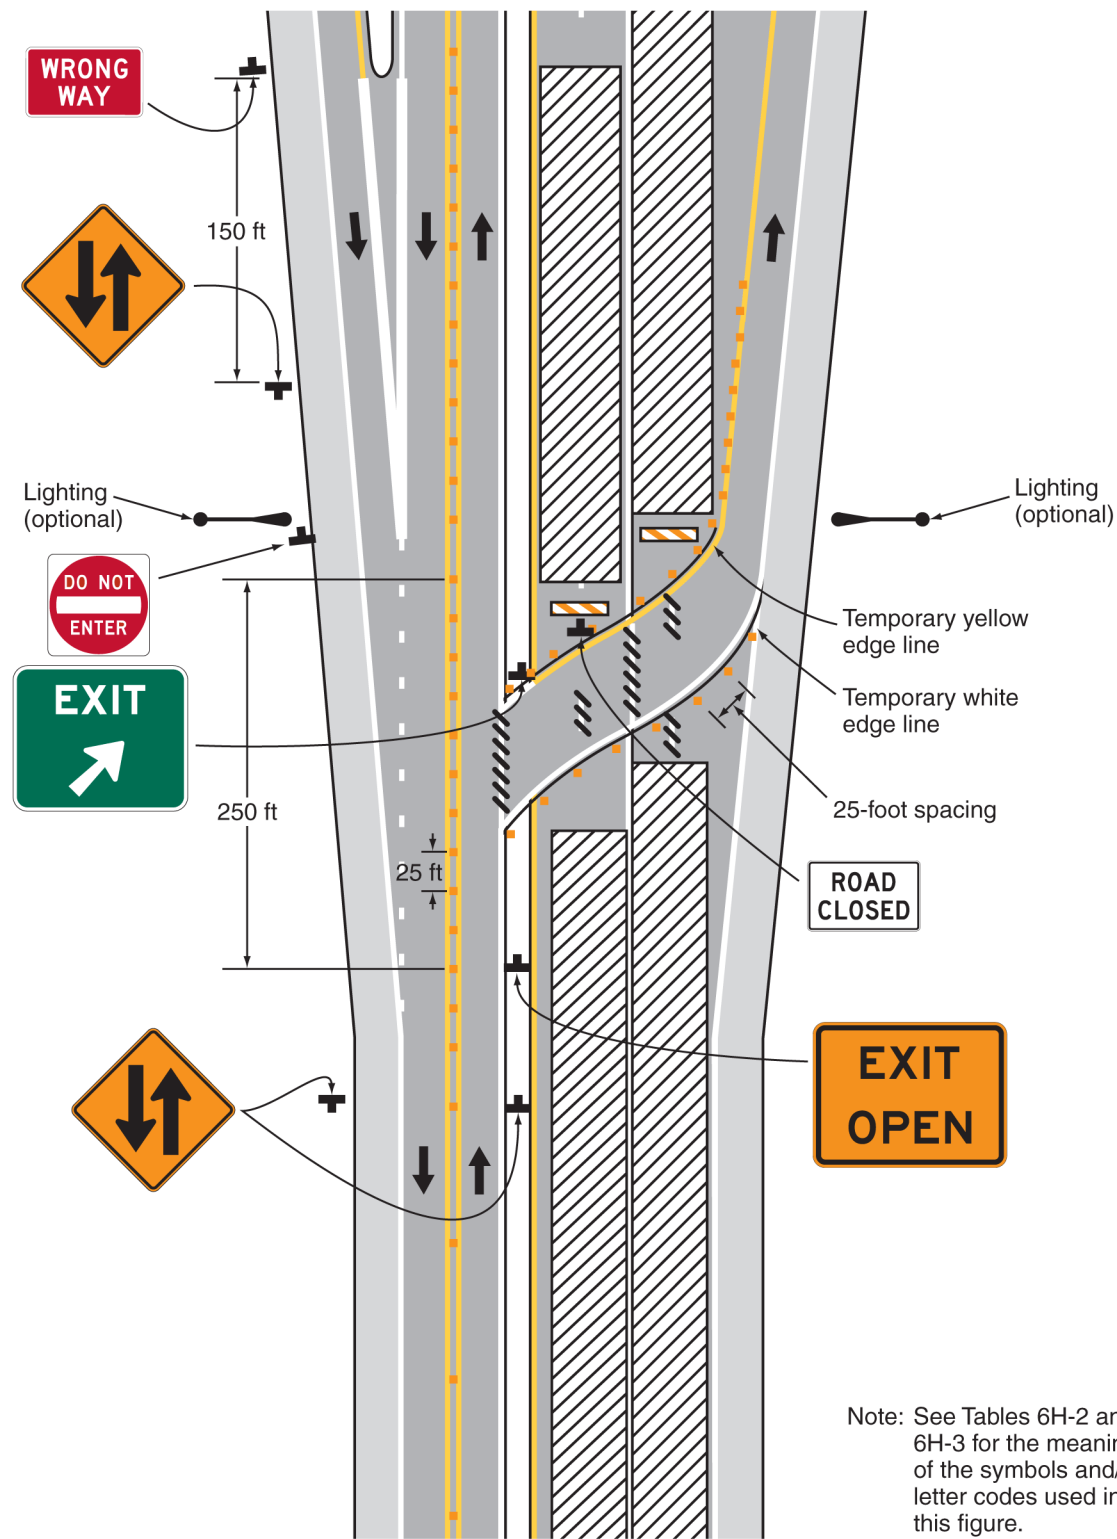

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

## Typical Application 41

**Notes for Figure 6H-42—Typical Application 42**  
**Work in the Vicinity of an Exit Ramp on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

1. *The guide signs should indicate that the ramp is open, and where the temporary ramp is located. However, if the ramp is closed, guide signs should indicate that the ramp is closed.*
2. *When the exit ramp is closed, a black on orange EXIT CLOSED sign panel should be placed diagonally across the interchange/intersection guide signs.*
3. *The design criteria contained in the AASHTO “Policy on the Geometric Design of Highways and Streets” (see Section 1A.11) should be used for determining the alignment.*

**Standard:**

4. **A temporary EXIT sign shall be located in the temporary gore. For better visibility, it shall be mounted a minimum of 7 feet from the pavement surface to the bottom of the sign.**

*Option:*

5. The temporary EXIT sign placed in the temporary gore may be either black on orange or white on green.

**Standard:**

6. **An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**
7. **When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

*Guidance:*

8. *Truck off-tracking should be considered when determining whether the minimum lane width of 12 feet is adequate (see Section 6G.08).*

*Option:*

9. If vehicular traffic conditions allow, the ramp may be closed.

**Standard:**

10. **Except as provided in Note 11, exit ramp closures along state-maintained roadways shall have a detour plan approved by DelDOT Traffic.**

*Option:*

11. A detour plan may not be needed for exit ramp closures during off-peak, short duration or mobile operations.


**Standard:**

12. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

13. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
14. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-42. Work in the Vicinity of an Exit Ramp  
on a Multi-Lane, Divided Highway (TA-42)**  
(Delaware Revision)

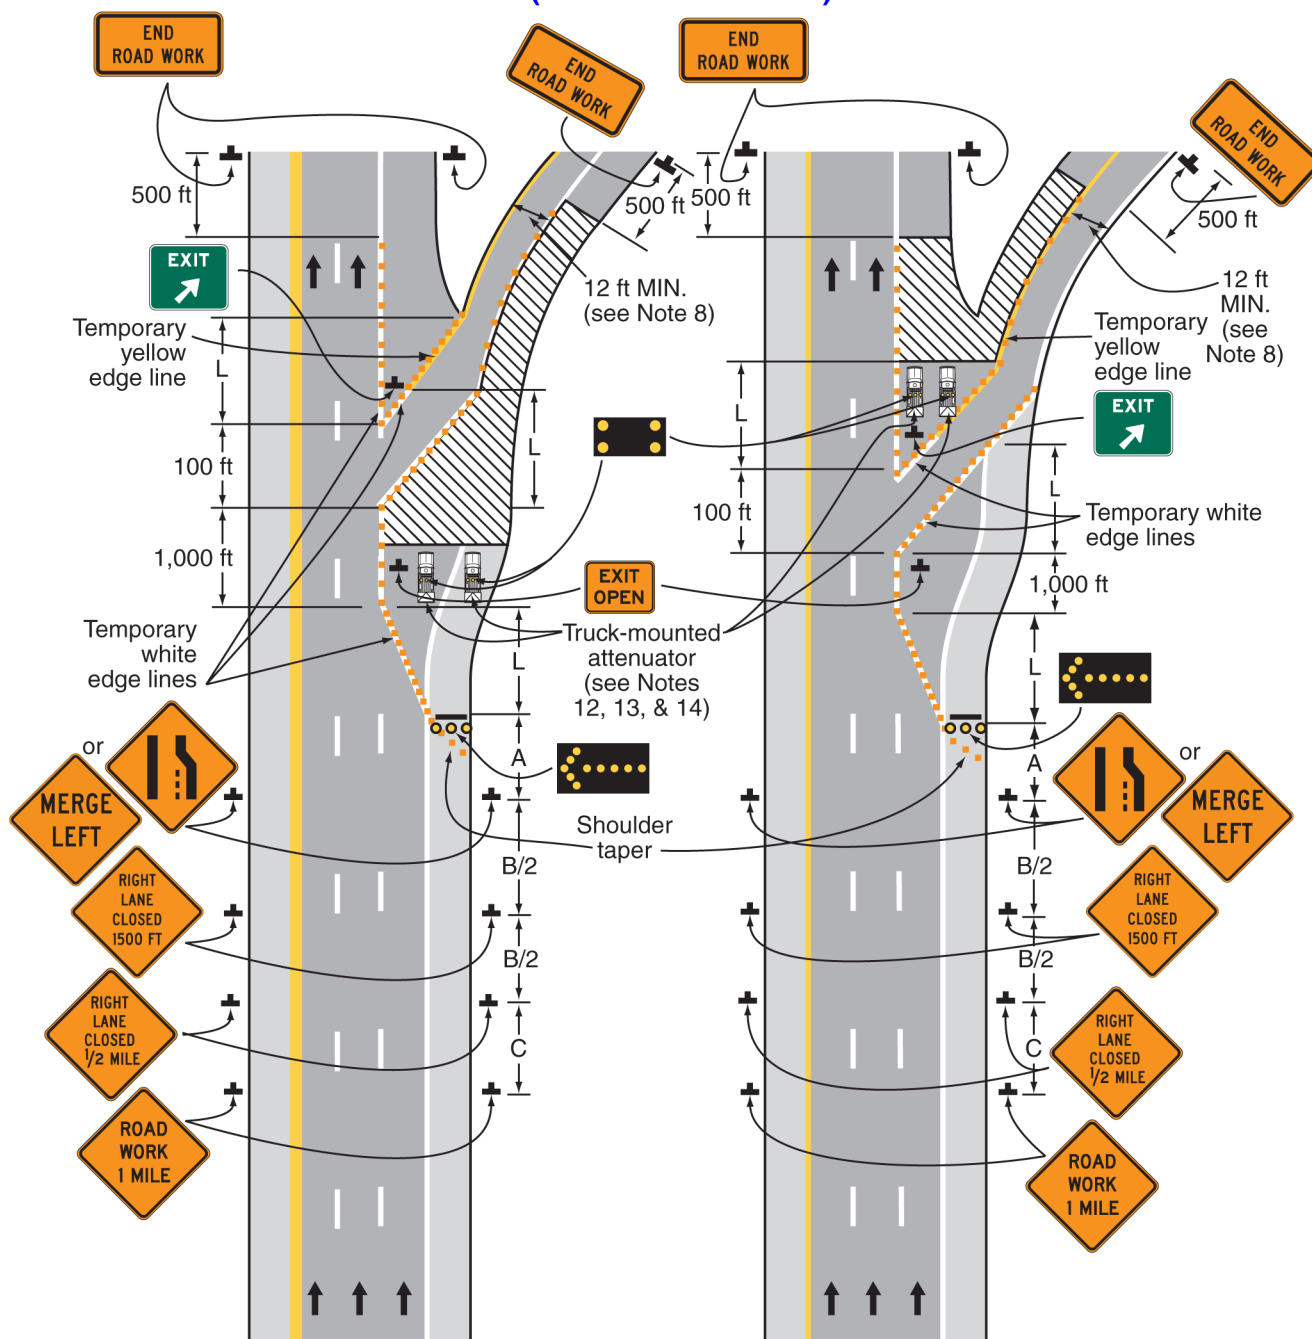

### Typical Application 42

Notes: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

The distance between the advance warning signs and the sign legends should be based on the interstate/expressway/freeway criteria in Table 6H-3 unless site specific constraints require a reduced sign spacing.



**Notes for Figure 6H-43—Typical Application 43**  
**Partial Exit Ramp Closure**  
**(Delaware Revision)**

*Guidance:*

1. *Truck off-tracking should be considered when determining whether the minimum lane width of 10 feet is adequate (see Section 6G.08).*

*Option:*

2. If vehicular traffic conditions allow, the ramp may be closed.

**Standard:**

**3. Except as provided in Note 4, full exit ramp closures along state-maintained roadways shall have a detour plan approved by DelDOT Traffic.**

*Option:*

4. A detour plan may not be needed for full exit ramp closures during off-peak, short duration or mobile operations.

**Standard:**

**5. For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**


*Option:*

6. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.

7. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.



**Figure 6H-43. Partial Exit Ramp Closure (TA-43)**  
**(Delaware Revision)**

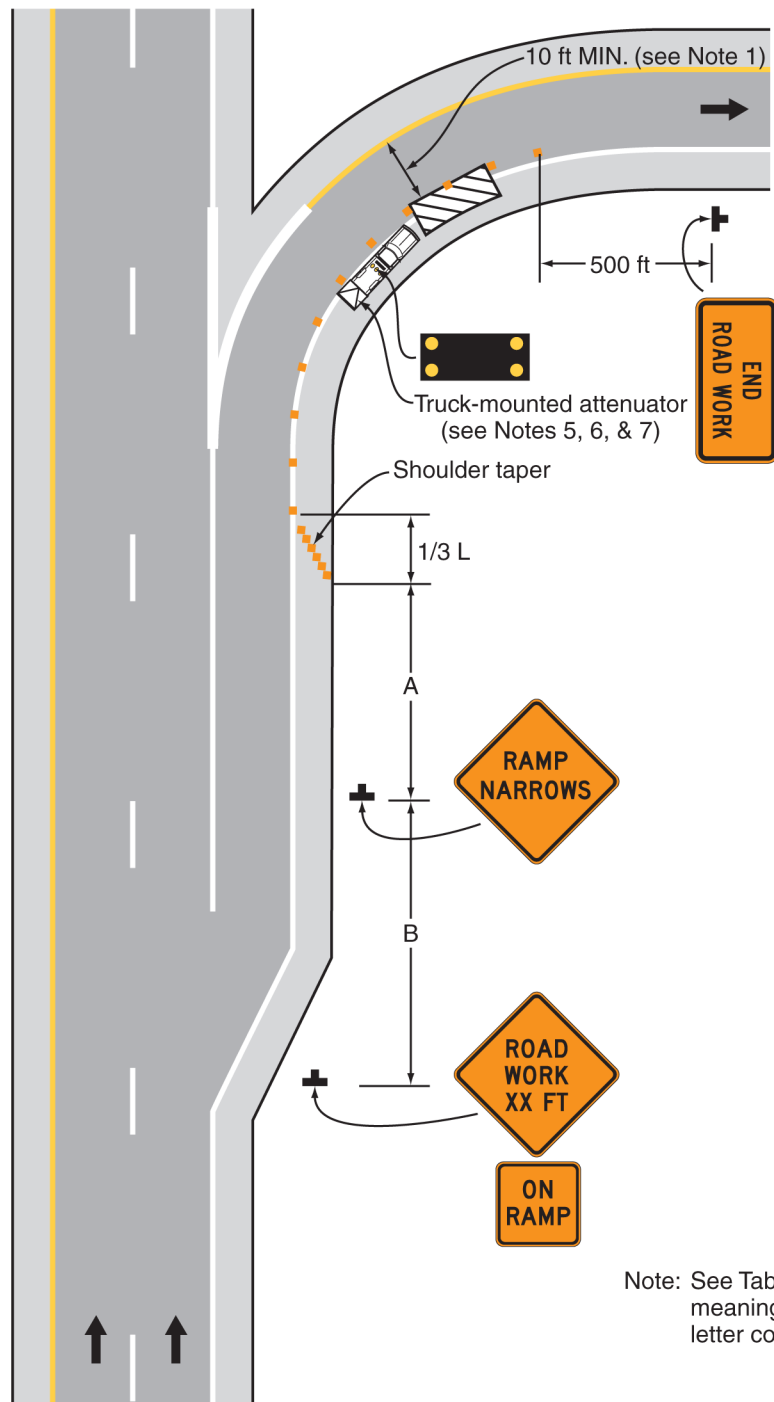

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

**Typical Application 43**

**Notes for Figure 6H-44—Typical Application 44**  
**Work in the Vicinity of an Entrance Ramp on a Multi-Lane, Divided Highway**  
**(Delaware Revision)**

*Guidance:*

1. *On the right diagram, a temporary acceleration lane should be used to facilitate merging. The design criteria contained in the AASHTO “Policy on the Geometric Design of Highways and Streets” (see Section 1A.11) should be used for determining the acceleration lane length.*

**Standard:**

2. **For the information shown on the diagram on the right-hand side of the TTC zone application, where inadequate acceleration distance exists for the temporary entrance, the YIELD sign shall be replaced with STOP signs (one on each side of the approach).**

*Guidance:*

3. *When used, the YIELD or STOP sign should be located so that ramp vehicular traffic has adequate sight distance of oncoming mainline vehicular traffic to select an acceptable gap in the mainline vehicular traffic flow, but should not be located so far forward that motorists will be encouraged to stop in the path of the mainline traffic. Also, a longer acceleration lane should be provided beyond the sign to reduce the gap size needed. If insufficient gaps are available, consideration should be given to closing the ramp.*

4. *Where STOP signs are used, a temporary stop line should be placed across the ramp at the desired stop location.*

5. *The mainline merging taper with the arrow board at its starting point should be located sufficiently in advance so that the arrow board is not confusing to drivers on the entrance ramp, and so that the mainline merging vehicular traffic from the lane closure has the opportunity to stabilize before encountering the vehicular traffic merging from the ramp.*

6. *If the ramp curves sharply to the right, warning signs with advisory speeds located in advance of the entrance terminal should be placed in pairs (one on each side of the ramp).*

*Option:*

7. A Stop Beacon (see Section 4L.05) may be placed above the STOP sign.

8. Where the acceleration distance is significantly reduced, a supplemental plaque may be placed below the Yield Ahead sign reading NO MERGE AREA.

**Standard:**

9. **An arrow board shall be used when a lane is closed. When more than one lane is closed, a separate arrow board shall be used for each closed lane.**

10. **When a side road or entrance ramp intersects the highway within the TTC zone, additional TTC devices shall be placed as needed.**

*Guidance:*

11. *Truck off-tracking should be considered when determining whether the minimum lane width of 12 feet is adequate (see Section 6G.08).*

*Option:*

12. If vehicular traffic conditions allow, the ramp may be closed.

**Standard:**

13. **Except as provided in Note 14, entrance ramp closures along state-maintained roadways shall have a detour plan approved by DelDOT Traffic.**

*Option:*

14. A detour plan may not be needed for entrance ramp closures during off-peak, short duration or mobile operations.

**Standard:**


15. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**

*Option:*

16. For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.

17. Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.

**Figure 6H-44. Work in the Vicinity of an Entrance Ramp  
on a Multi-Lane, Divided Highway (TA-44)  
(Delaware Revision)**

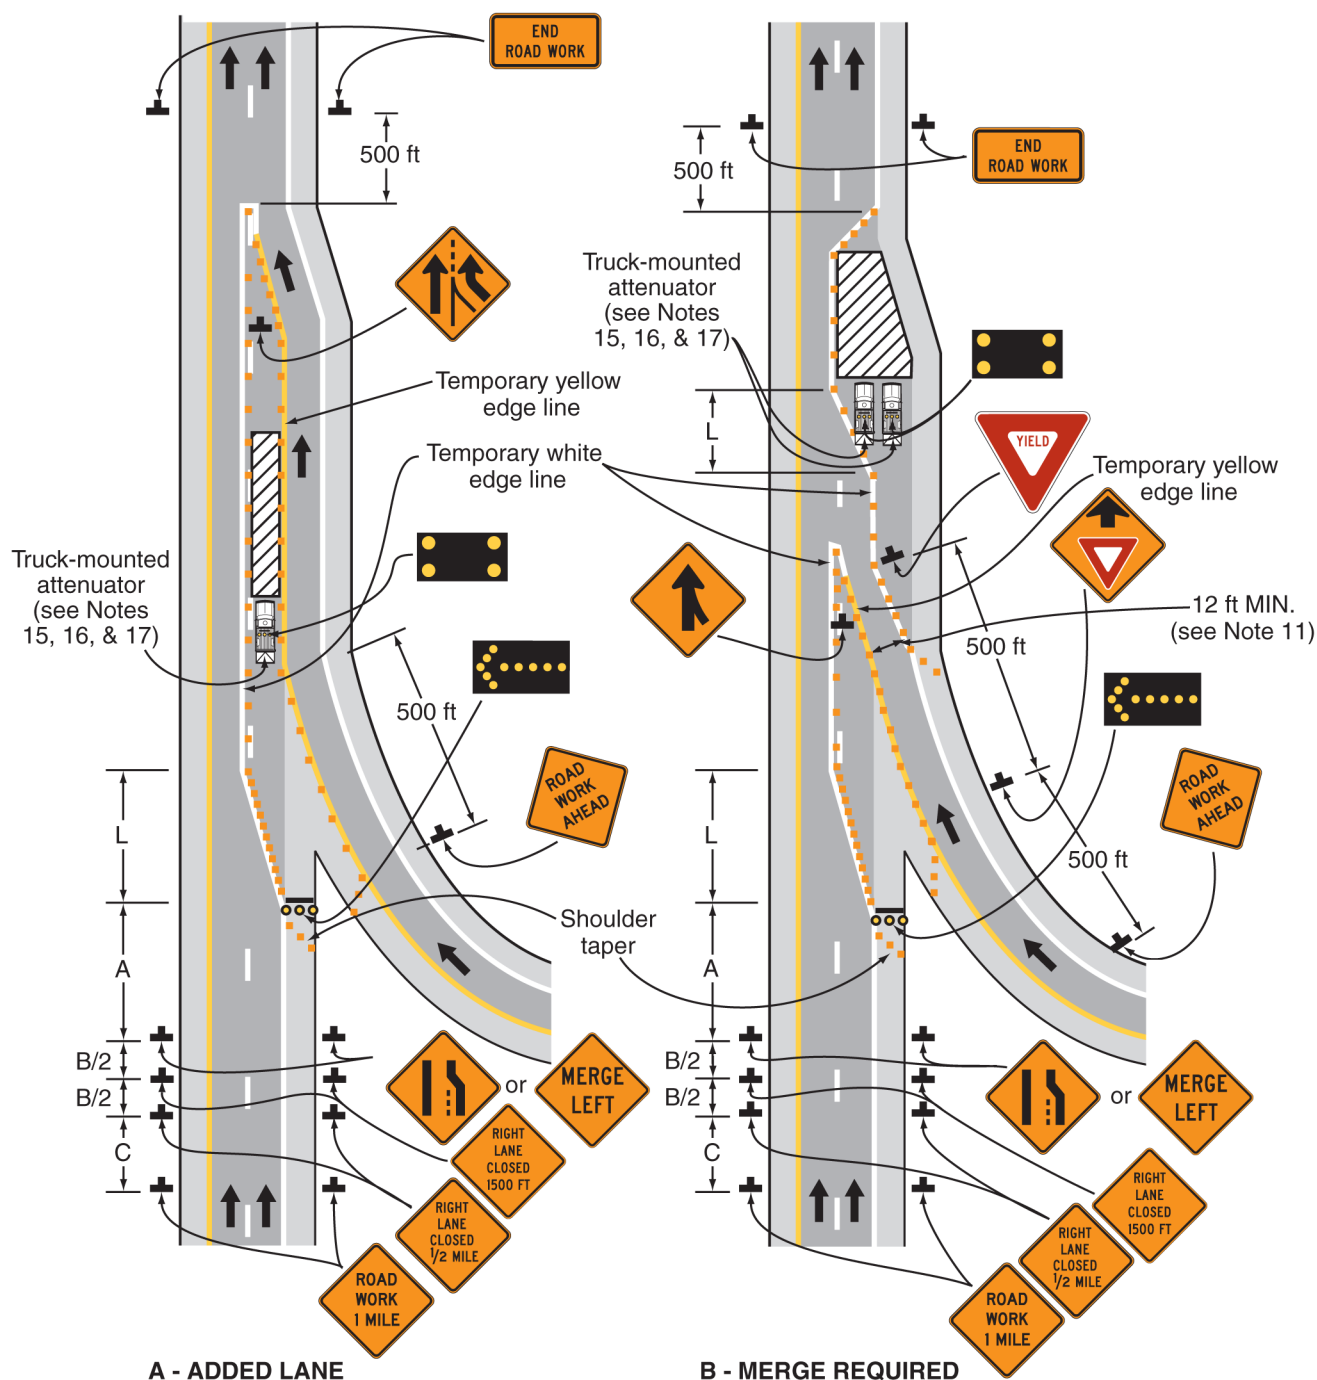

## Typical Application 44

Notes: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

The distance between the advance warning signs and the sign legends should be based on the interstate/expressway/freeway criteria in Table 6H-3 unless site specific constraints require a reduced sign spacing.

**Notes for Figure 6H-45—Typical Application 45**  
**Temporary Reversible Lane Using Movable Barriers**  
**(Not Applicable in Delaware)**

**Figure 6H-45. Temporary Reversible Lane Using Movable Barriers (TA-45)**  
**(Not Applicable in Delaware)**

**Notes for Figure 6H-46—Typical Application 46**  
**Work in the Vicinity of a Grade Crossing**  
**(Delaware Revision)**

*Guidance:*

1. *When grade crossings exist either within or in the vicinity of roadway work activities, extra care should be taken to minimize the probability of conditions being created, by lane restrictions, flagging, or other operations, where vehicles might be stopped within the grade crossing, considered as being 50 feet on either side of the closest and farthest rail.*
2. *When a grade crossing exists within or upstream of the transition area and it is anticipated that queues resulting from the lane closure might extend through the grade crossing, the TTC zone should be extended so that the transition area precedes the grade crossing.*
3. *When a grade crossing exists within the activity area, drivers operating on the left-hand side of the normal center line should be provided with comparable warning devices as for drivers operating on the right-hand side of the normal center line.*

**Standard:**

4. **If the queuing of vehicles across active rail tracks cannot be avoided, a uniformed law enforcement officer or flagger shall be provided at the upstream side of the grade crossing to prevent vehicles from stopping within the grade crossing (as described in Note 1), even if automatic warning devices are in place.**

*Guidance:*

5. *When a grade crossing equipped with active warning devices exists within the activity area, provisions should be made for keeping flaggers informed as to the activation status of these warning devices.*
6. *Early coordination with the railroad company or light rail transit agency should occur before work starts.*
7. *In the example depicted, the buffer space of the activity area should be extended upstream of the grade crossing (as shown) so that a queue created by the flagging operation will not extend across the grade crossing.*
8. *The DO NOT STOP ON TRACKS sign should be used on all approaches to a grade crossing within the limits of a TTC zone.*
9. *Where drivers emerging from an intersecting roadway will not encounter an advance warning sign prior to the work zone, additional signs should be placed on the intersecting road.*

*Option:*

10. A BE PREPARED TO STOP sign may be added to the sign series.

*Guidance:*

11. *When used, the BE PREPARED TO STOP sign should be located before the Flagger symbol (or FLAGGER AHEAD) sign.*


**Standard:**

12. **At night, flagger stations shall be illuminated, except in emergencies.**
13. **For long-term, intermediate-term, and short-term operations, a truck-mounted attenuator shall be used on roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph.**
14. **If the operation requires using a truck-mounted attenuator upstream of the grade crossing, the truck-mounted attenuator's roll-ahead buffer space shall not extend across the grade crossing.**

*Option:*

15. *For short duration operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed greater than 40 mph, a truck-mounted attenuator may be omitted if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.*
16. *Truck-mounted attenuators may be used for all operations along roadways with a posted speed limit or 85<sup>th</sup>-percentile speed less than or equal to 40 mph.*

**Figure 6H-46. Work in the Vicinity of a Grade Crossing (TA-46)**  
**(Delaware Revision)**

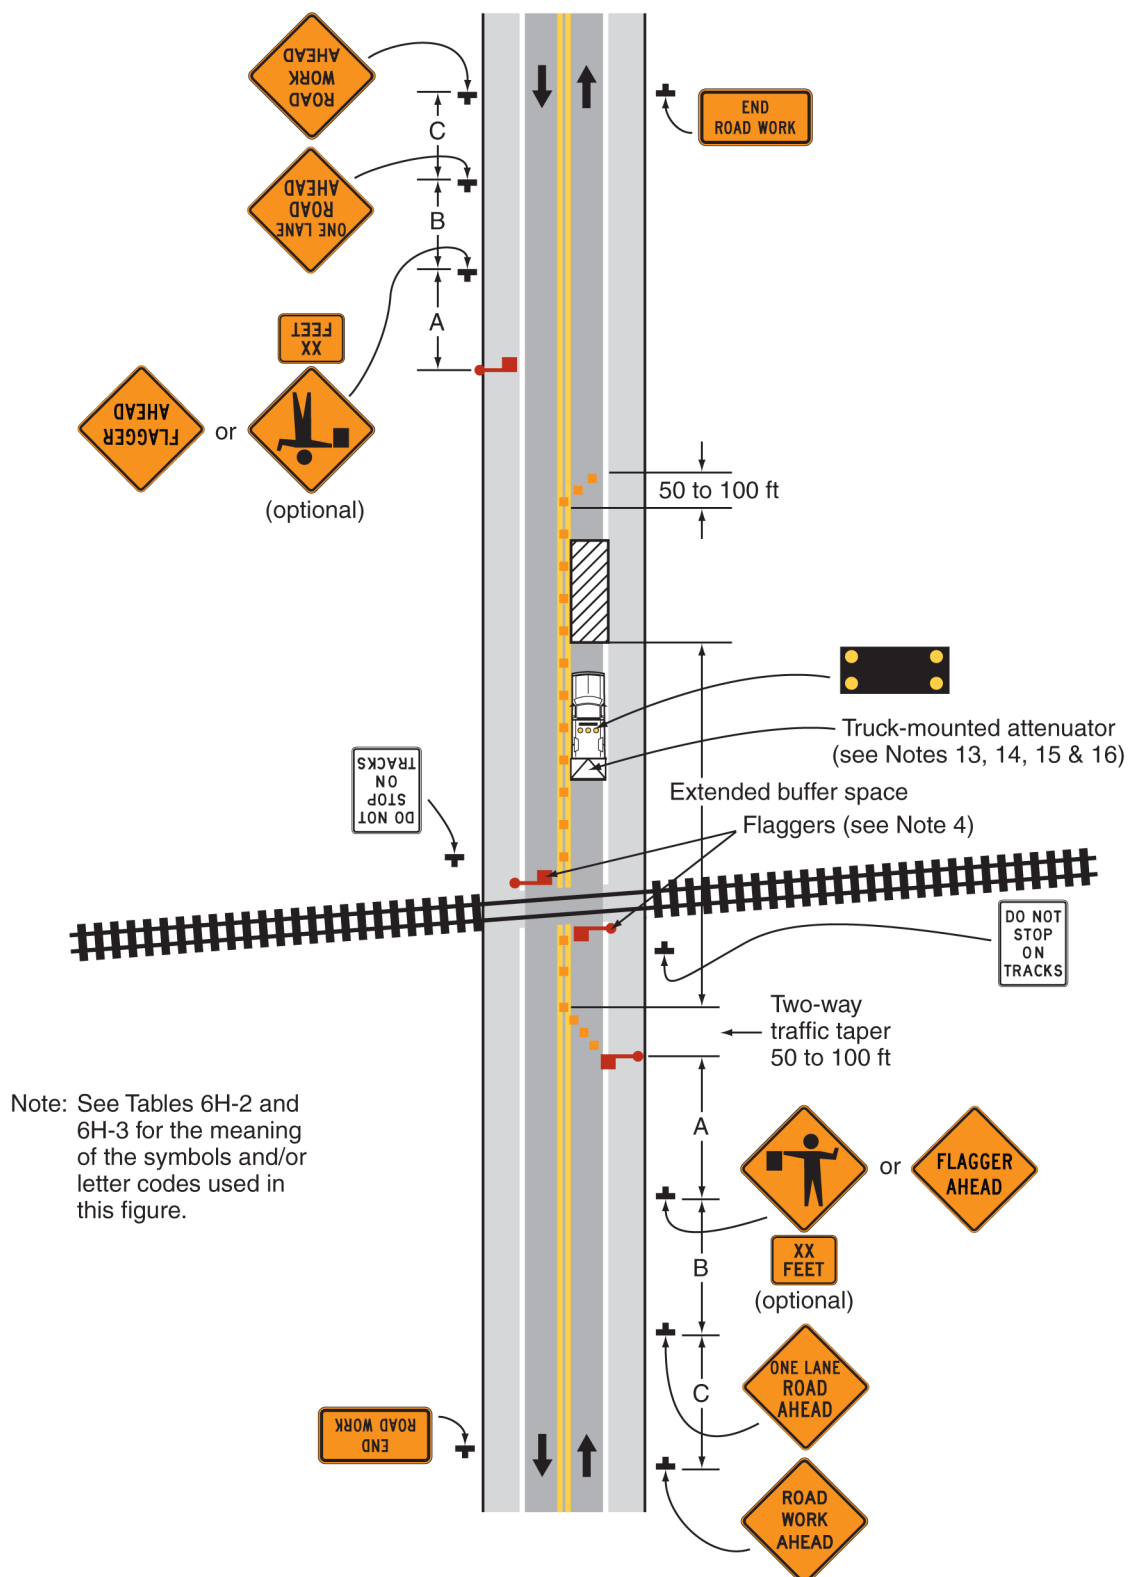

(This Page Left Intentionally Blank)