

Status Panel CS0-RSP-06(P)

Description:

The Status Panel is used to remotely monitor up to (6) dry-contacts from any device. The panel is wall mounted and can be located up to 1,000 feet from the monitored contact. The panel uses LED's to visually display the monitored input status. The provides a common alarm output for notification to other systems, an audible alarm and alarm silence / acknowledge button.

Assembly Overview


- Remotely monitor (6) dry-contacts from up to 1,000 ft.
- Configurable inputs for Normally Open and Closed
- Common alarm output
- Visual and audible indication of alarm
- LED Test function
- Brother 1/2" label compatible
- Modbus/RTU standard
- Modbus/TCP optional
- NEMA 1 rated enclosure
- High-grade ABS material, lightweight, sturdy and securable
- Suitable for indoor industrial applications




Assembly

CS0-RSP-06

Dimensions

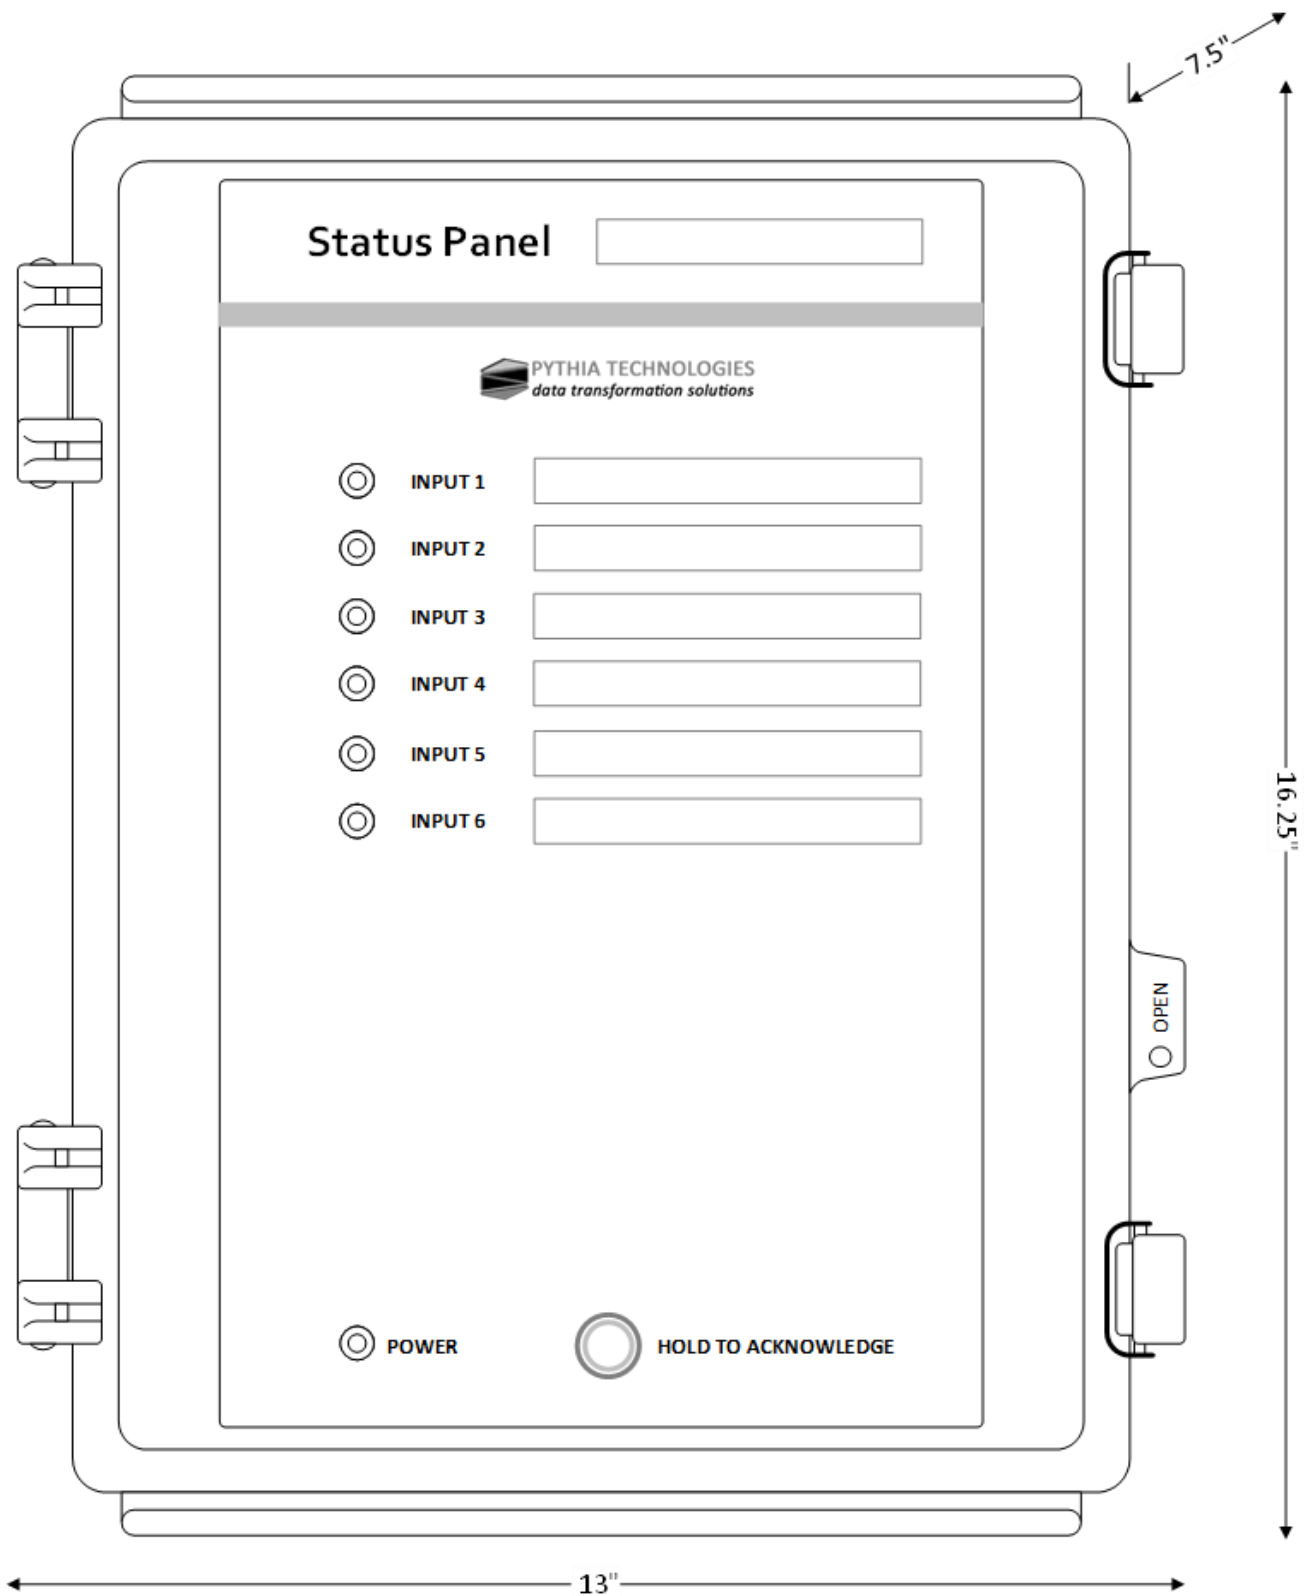

User Connections

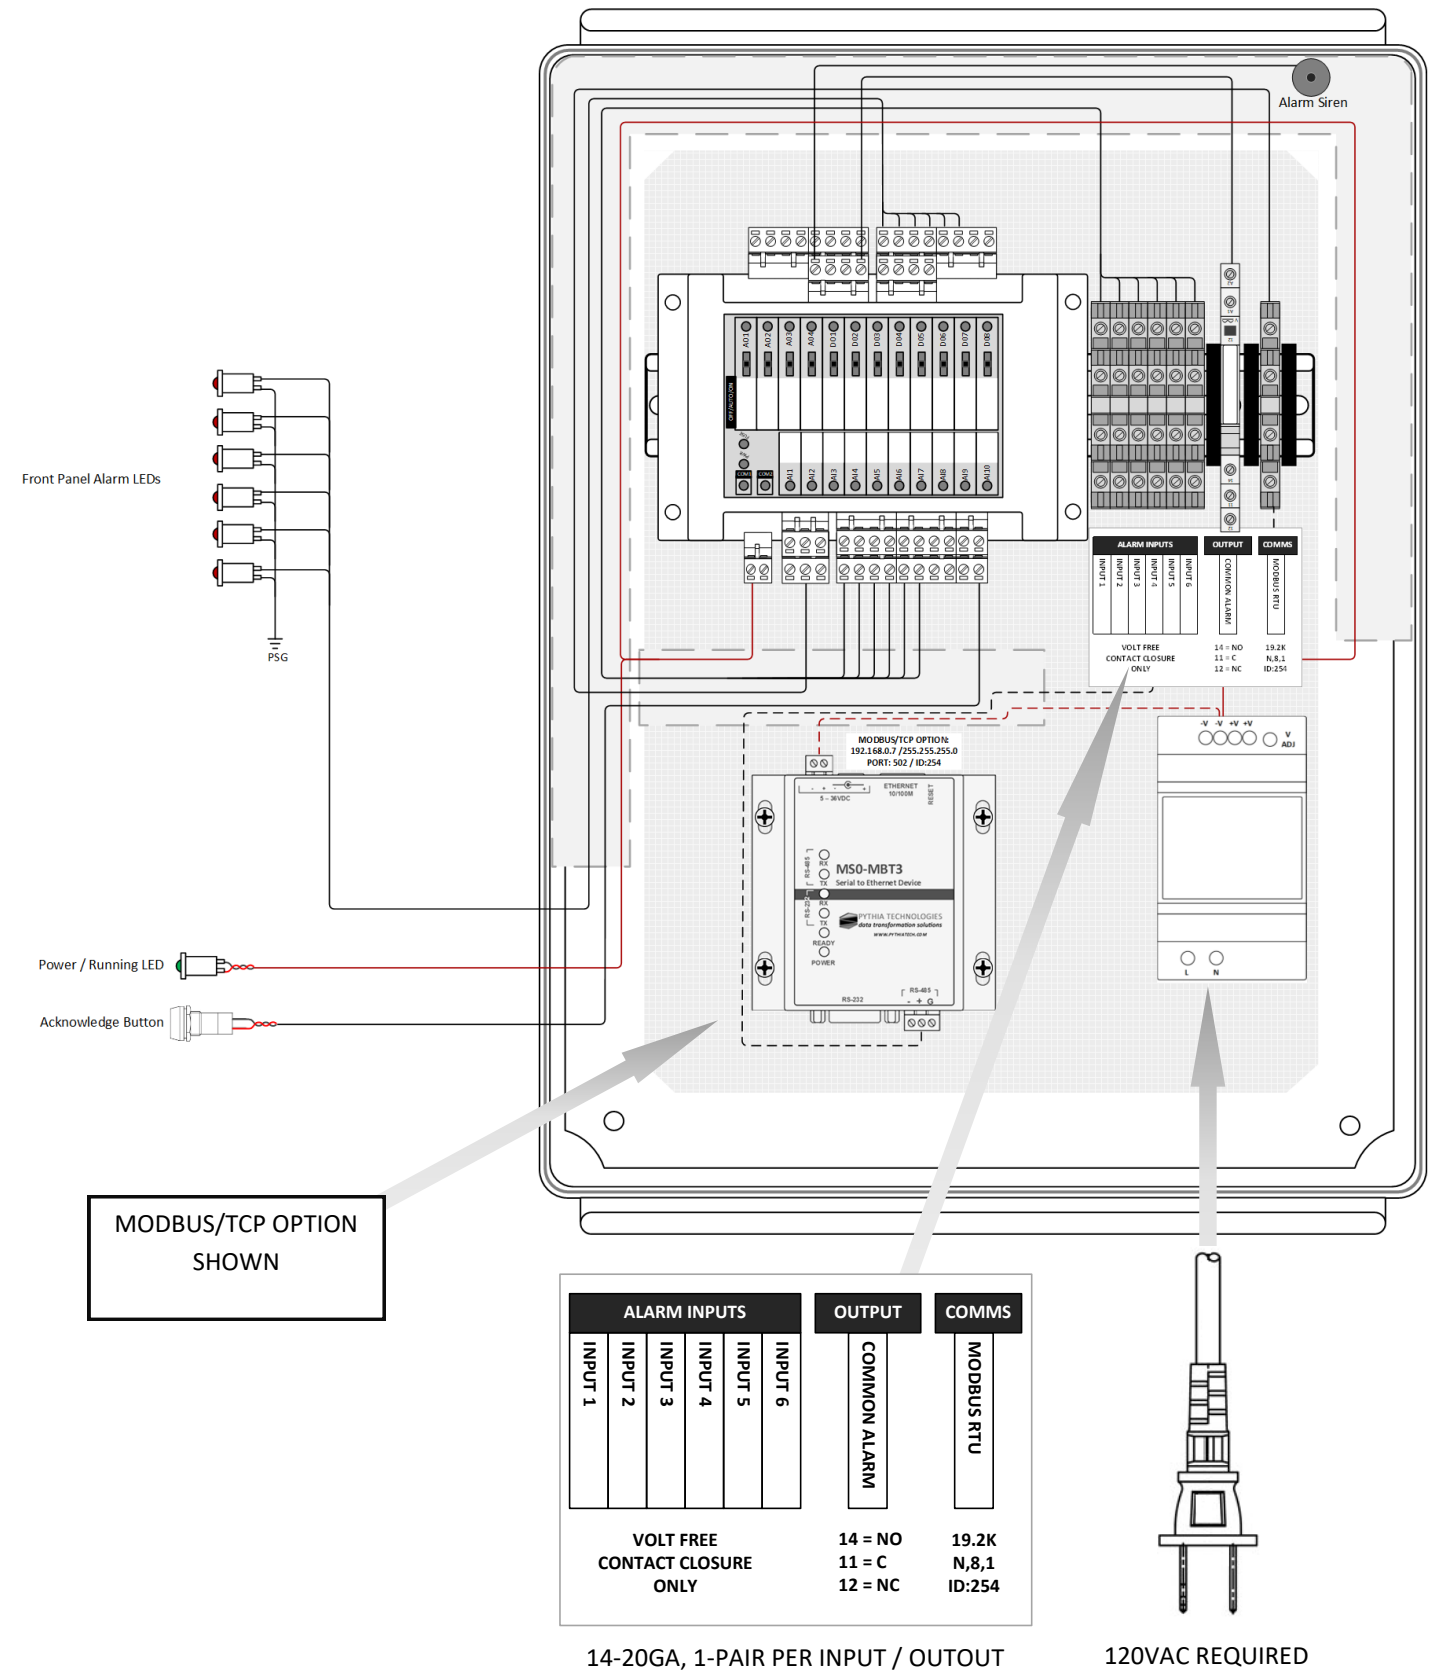

Key Features:

Monitor (6) Normally Open/Closed Dry-Contacts. Remote contacts can be 1000 feet away

(1) Common Alarm

Modbus/RTU connectivity / Modbus/TCP optional

Audible and Visual indicators of Alarms

NEMA1, High Grade ABS enclosure suited for industrial applications

SPECIFICATIONS

Communications	Modbus/RTU
Inputs	6
Input Type	Dry-contact only / zero voltage relays or contacts / Normally Open or Normally Closed
Output Relay	(1) NO / NC relay rated 3A @ 120VAC
Dimensions	16.25" x 13" x 7.5"
Weight	10.0lbs
Input Power	120/240 VAC @ 1.8A maximum
Input labels	Brother 1/2 inch compatible (or similar)
Input wiring	14-20ga 1-pair per input
Output Relay wiring	14-20ga
Modbus/RTU communications	18-22ga shielded, twisted pair

Other Specifications

none	

Ordering

PN. CS0-RSP-06

Call for alternative assembly pricing



175 S. Sandusky Street, Suite 321 Delaware OH 43015 Tel. 740.363.2272

sales@pythiatech.net

© 2021-2023 Pythia Technologies, Inc.

All rights reserved throughout the world.

Specification may change at anytime without notice.

Document #: SPEC_CS0-RSP-06_002_0223