### **Technical Specification**

#### **UPS Remote Status Panel**


#### Description:

UPS Remote Status Panel (URSP) is used to remotely monitor the alarm condition and real time state of any UPS. The URSP is wall mounted and can be located up to 1,000 feet from the UPS. The panel uses LED's to visually display the monitored UPS input status, the output that is being used and any UPS fault conditions. The URSP also has an audible alarm to warn of UPS fault conditions.

UPS AC Input UPS Charger / Rectifier UPS System Batteries UPS Inverter
UPS Output Load on Bypass UPS Fault UPS Overload
UPS Input Failure UPS Low Battery Audible Alarm Silenced Battery BU Status

#### **Assembly Overview**


- Remotely monitor UPS systems from up to 1,000 ft.
- ♦ Visual indication with audible alarm
- ♦ Internal battery backup
- ♦ Powder coat finish
- ♦ ETL listed to UL 1778 and CSA certified




#### **Assembly**

CS0-UPS

External Power Supply Adapter

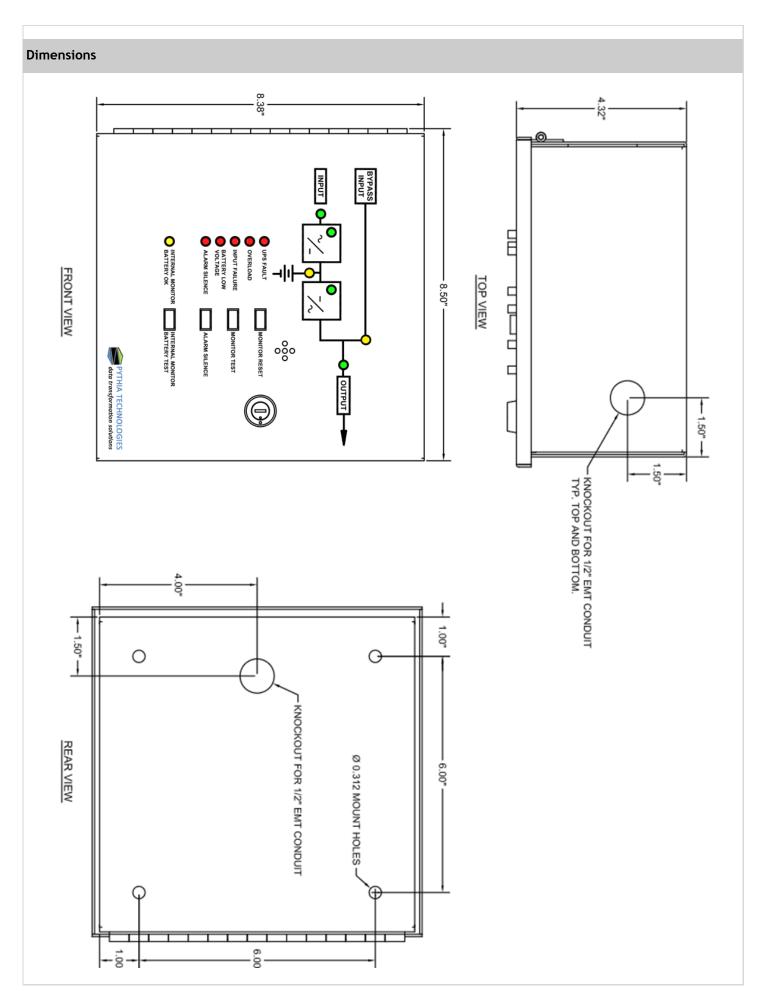

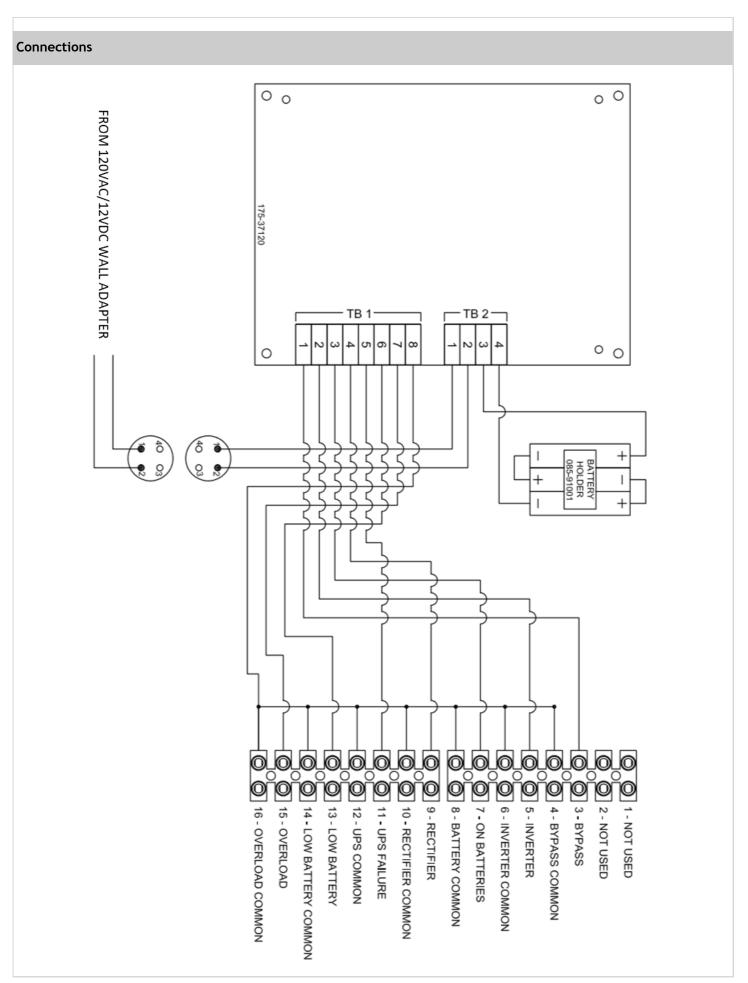

## Monitor all UPS critical alarms Remote contacts can be 1000 feet away Audible and Visual indicators of Alarms Battery backed up for extended uptime UL and CSA Listed **SPECIFICATIONS** Communications None Alarm Inputs Input Type Dry-contact only / zero voltage relays or contacts Dimensions 8.4" x 8.5" x 4.35" Weight 6.0lbs UL 1778, CSA Certification Other Specifications none **Ordering** CS0-UPS

# PYTHIA TECHNOLOGIES data transformation solutions

175 S. Sandusky Street, Suite 321 Delaware OH 43015 Tel. 614.363.2272 Fax 740.693.8409

Sales@pythiatech.com

© 2018 Pythia Technologies, Inc.

Call for alternative assembly pricing

**Key Features:** 

All rights reserved throughout the world.

Specification may change at anytime without notice.

Document #: SPEC\_CS0-UPS\_001\_0818