3-GALLON SPOTTER / EXTRACTOR

Innovative, powerful, clever. It's what we hear about our new 3-gallon spotter. Designed with simplicity and durability in mind and performance only found on large extraction equipment. Options of standard or super vacuum motors, 201 degree stainless steel in-line heater, 55, 120 and 220psi solution pumps leave this spotter clearly in a category of its own. Now add the industry's first "Noise Diffusing Exhaust Manifold" and a new definition of clever is an understatement.

Specifications

55psi Spotter / Extractor

55psi Standard Motor

Model: 3G-0055-AS
Capacity / Recovery: 2.9 gal / 2.6 gal
Vacuum: Super 82" lift / 97cfm / 8amp
Pump: 55psi / 1amp FloJet UL Viton seals
Power cord: UL 20ft integrated strain relief
Hose: 1-1/4" x 8ft
Hand Tool: Stainless Steel Tool w/ Clear Head
Part Number: 900-0041
Weight / Shipping: 25lb / 29lb shipping
Dimension / Shipping: 19"H x 21"L x 9"W

55psi Standard Motor Heated

Model: 3G-0055-HS
Capacity / Recovery: 2.9 gal / 2.6 gal
Vacuum: Super 82" lift / 97cfm / 8amp
Pump: 55psi / 1amp FloJet UL Viton seals UL Viton seals
Power cord: UL 20ft integrated strain relief
Hose: 1-1/4" x 8ft
Hand Tool: Stainless steel tool
Part Number: 900-0040
Weight / Shipping: 27lb / 31lb shipping
Dimension / Shipping: 19"H x 21"L x 9"W
Heater: Stainless steel 201°/ 7amp

120psi Spotter / Extractor

120psi Standard Motor

Model: 3G-0120-AS
Capacity / Recovery: 2.9 gal / 2.6 gal
Vacuum: Super 82" lift / 97cfm / 8amp
Pump: 120psi AquaTec UL Viton seals
Power cord: UL 20ft integrated strain relief
Hose: 1-1/4" x 8ft
Hand Tool: Stainless Steel Tool w/ Clear Head
Part Number: 900-0041
Weight / Shipping: 27lb / 30lb shipping
Dimension / Shipping: 19"H x 21"L x 9"W

120psi Standard Motor Heated

Model: 3G-0120-HS
Capacity / Recovery: 2.9 gal / 2.6 gal
Vacuum: Super 82" lift / 97cfm / 8amp
Pump: 120psi AquaTec UL Viton seals
Power cord: UL 20ft integrated strain relief
Hose: 1-1/4" x 8ft
Hand Tool: Stainless steel tool
Part Number: 900-0040
Weight / Shipping: 28lb / 32lb shipping
Dimension / Shipping: 19"H x 21"L x 9"W
Heater: Stainless steel 201°/ 7amp

220psi Spotter / Extractor

220psi Standard Motor

Model: 3G-0220-AS
Capacity / Recovery: 2.9 gal / 2.6 gal
Vacuum: Super 82" lift / 97cfm / 8amp
Pump: 220psi AquaTec UL Viton seals
Power cord: UL 20ft integrated strain relief
Hose: 1-1/4" x 8ft
Hand Tool: Stainless Steel Tool w/ Clear Head
Part Number: 900-0041
Weight / Shipping: 27lb / 30lb shipping
Dimension/Shipping: 19"H x 21"L x 9"W

220psi Standard Motor Heated

Model: 3G-0220-HS
Capacity / Recovery: 2.9 gal / 2.6 gal
Vacuum: Super 82" lift / 97cfm / 8amp
Pump: 220psi AquaTec UL Viton seals
Power cord: UL 20ft integrated strain relief
Hose: 1-1/4" x 8ft
Hand Tool: Stainless steel tool
Part Number: 900-0040
Weight / Shipping: 27lb / 31lb shipping
Dimension / Shipping: 19"H x 21"L x 9"W
Heater: Stainless steel 201°/ 7amp



Shown with Stainless steel hand tool w/ clear view **900-0041**

Warranty: Lifetime on body, 3-Year on motor and pump

Stainless steel tool with clear view head & brass valve and jet



Standard on heated units
900-0041

Stainless steel hand tool with brass valve and jet




Optional on heated & non-heated units
900-0040

3-GALLON SPOTTER / EXTRACTOR

Mosquito's use of premium components includes sealed marine grade bearings, epoxy coated vacuum fans, pumps with chemically resistant viton seals, and stainless steel latches. The list goes on and on. To put it simply, each component must excel in its function or we won't use it. Mosquito is setting a new standard in design excellence and yes, Mosquito is American designed, manufactured and owned.

Foam-shield™ captures airborne moisture/foam in the recovery tank and returns it to liquid for disposal



650-0005

In-line clear view filter eliminates motor damage caused by liquid starvation to the pump. It's stainless steel and washable



500-0002





Mosquito's stainless steel heater with dual ceramic thermostats and 1000 watt element



Mosquito's exclusive DTS dual thermostat system with bimetallic thermal cut off switches regulates temperatures within 9 degrees

SPOTTER

Single rotary latch allows for quick removal of the recovery tank for easy disposal



Balanced easy carry handle - dispose of liquids quickly and easily



Ducted air intake channels cool air to the motor



Cord strain relief is recessed inside the cord wrap




Molded-in cord wrap with quick-release. Just pull from a bottom corner and you're ready to go! No unwinding required



Industry First

1. **Red arrows** show heated / high-pitch air exiting the motor into the exhaust manifold.
2. **Orange arrows** show air moving through the exhaust manifold. High frequency noise is deflected against sound absorbing material, as air is gradually released.
3. **Yellow arrows** show air exiting the noise diffuser without the high pitch noise of the fan blades.

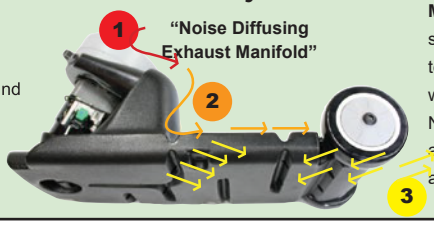

Mosquito's exclusive "Noise Diffusing Exhaust Manifold" suppresses high-frequency sound with its noise-canceling technology. Motor exhaust is directed through exhaust grates which redirects sound waves while gradually releasing exhaust. No back pressure is generated from this device as it scrubs 8dB and 11dB sones from the final exhaust. This is an industry first and the beginning of a new generation of extractors fromMosquito.