


## BROAD BAND ANTI-REFLECTION

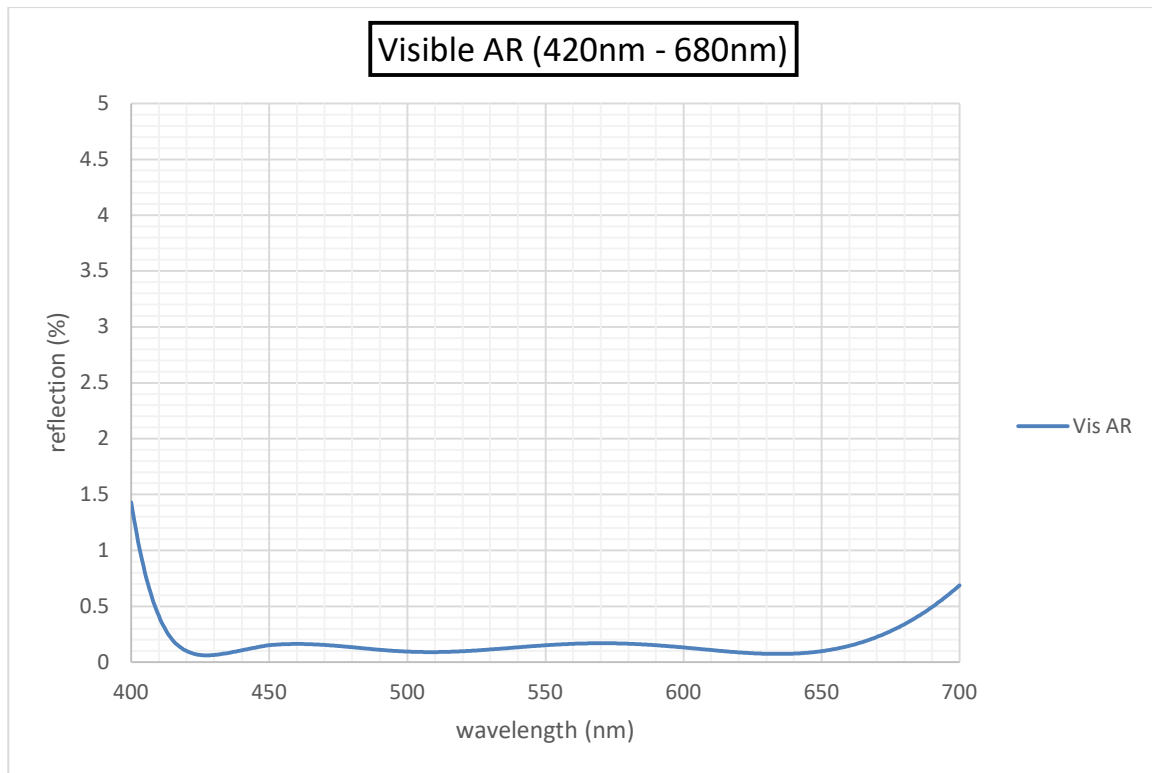

### SPECIFICATION:

| Wavelength (nm) | Reflection (average) | Reflection (absolute) |
|-----------------|----------------------|-----------------------|
| 420nm – 680nm   | 0.3%R                | 0.6%R                 |

### Environmental (MIL – C – 675)

|                     |                                              |
|---------------------|----------------------------------------------|
| Adhesion            | Fast Pull (Snap)<br>LT-90 self-adhesive tape |
| Abrasion (moderate) | 50 rubs (25 cycles)<br>Cheesecloth @ 1lb     |
| Abrasion (Severe)   | 40 rubs (20 cycles)<br>Rubber Pad @ 2.5lb    |
| Humidity            | 24 hours @ 95% RH (50 deg C)                 |
| Temperature Cycle   | -60 deg C to +70 deg C                       |