


**“The Otter just got Hotter!”**  
**With Index Matched I.T.O. Heated Windows.**

**Tailored to your required resistivity with high transmission and optional PVD  
 Bus Bars.**

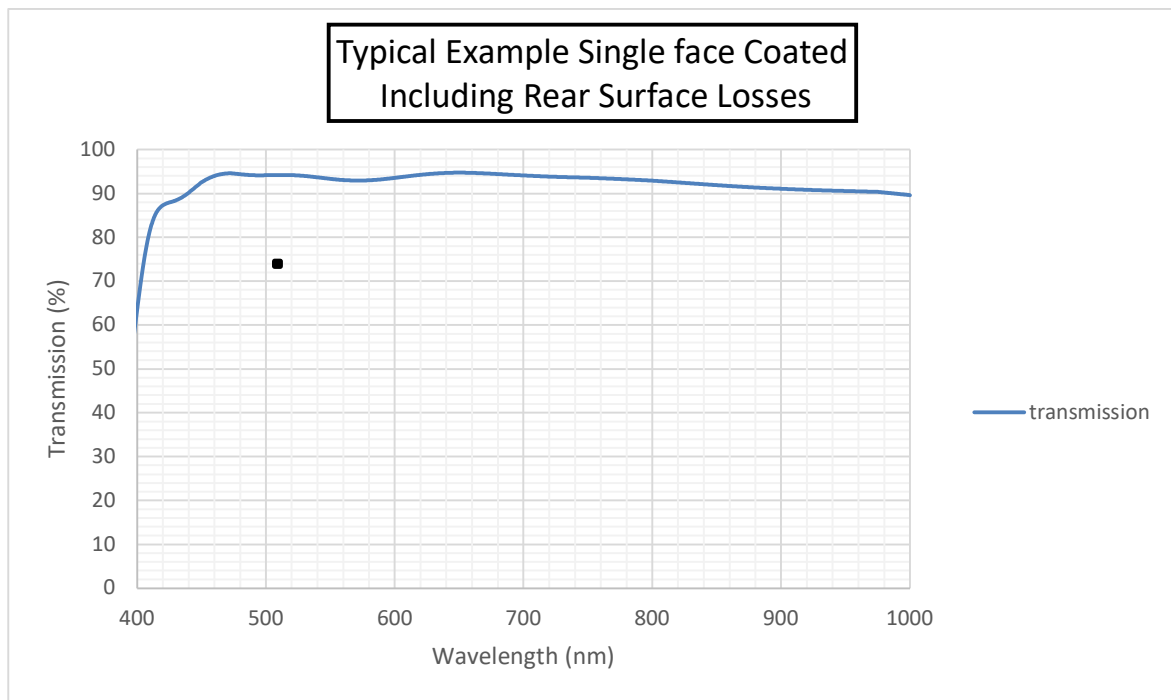

**SPECIFICATION:**

Wavelength (nm)	Transmission (Average)	Resistivity
450nm – 1000nm	>90%	12 – 20 Ohms / sq

**Environmental (MIL – C – 675)**

Adhesion	Fast Pull (Snap) LT-90 self-adhesive tape
Abrasion (moderate)	50 rubs (25 cycles) Cheesecloth @ 1lb
Abrasion (Severe)	40 rubs (20 cycles) Rubber Pad @ 2.5lb
Humidity	24 hours @ 95% RH (50 deg C)
Temperature Cycle	-60 deg C to 70 deg C

