


SHORTPASS FILTER

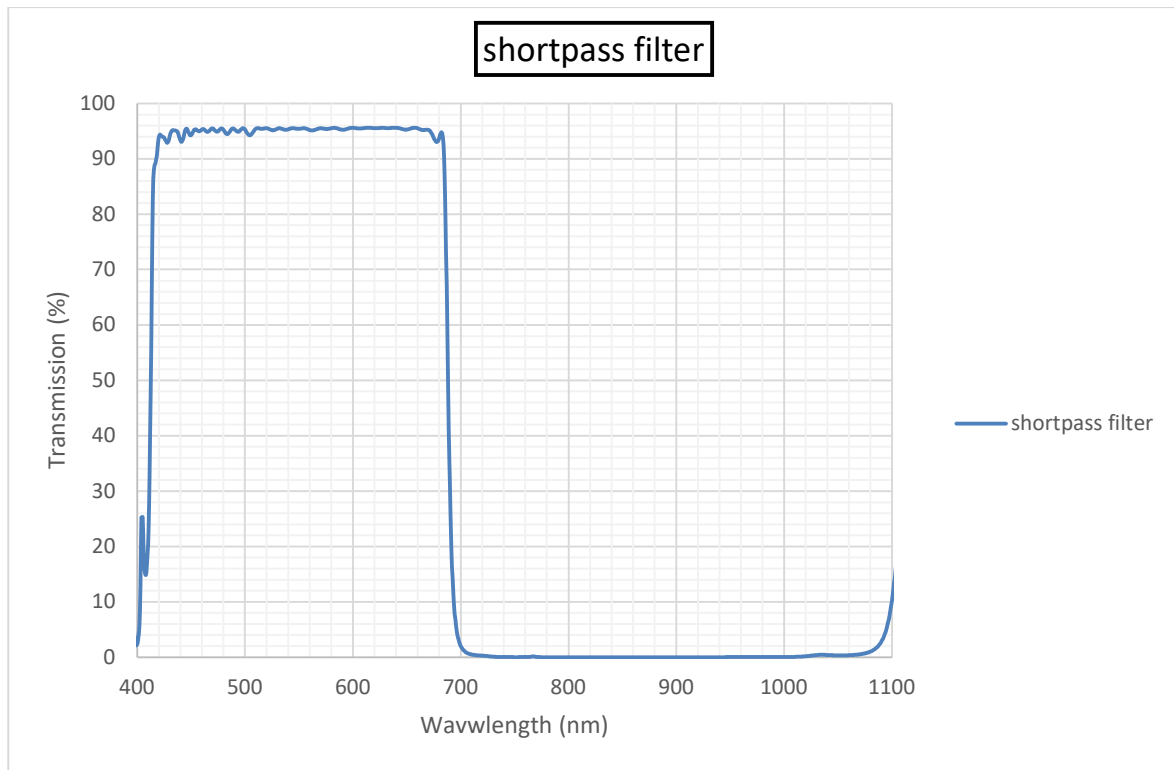

SPECIFICATION:

Wavelength (nm)	%T (average)	Edge Position
420nm – 680nm	> 93%	
680nm+/-5nm		50%T
700nm – 1000nm	< 1%	

Environmental (MIL – C – 675)

Adhesion	Fast Pull (Snap) LT-90 self-adhesive tape
Abrasion (moderate)	50 rubs (25 cycles) Cheesecloth @ 1lb
Abrasion (Severe)	40 rubs (20 cycles) Rubber Pad @ 2.5lb
Humidity	24 hours @ 95% RH (50 deg C)
Temperature Cycle	-60 deg C to 70 deg C