


CS6510-48S6Q-HI 40G Datacenter Switch

Product Overview

CS6510-48S6Q-HI data center 40G switch uses advanced hardware and software architecture design, support built-in modular 1+1 redundant power supplies, 4+1 redundant fans, cross ventilation and wind direction adjustable. It has 48*10GE SFP+ ports and 6*40G QSFP+ ports.

CS6510-48S6Q-HI is ideal for cloud computing data center server access and core switch of small to medium datacenter. For campus or other large network, CS6510-48S6Q-HI could also be deployed at aggregation or core layer as its high performance and reliability.

Appearance	Description
 CS6510-48S6Q-HI	<ul style="list-style-type: none">● 48 x 10G SFP+ and 6 x 40G QSFP● AC+AC Power Supply● 1 console, 1 USB, 1 RJ45 management port● Forwarding performance: 1071Mpps● Switching capacity: 1440Gbps

Key Features and Highlights

High Performance and scalability

With high switching capacity, CS6510-48S6Q-HI supports wire-speed L2/L3 forwarding and high routing performance for IPv4 and IPv6 protocols.

The 10 Gigabit Ethernet connectivity of CS6510-48S6Q-HI is accomplished via a hot-pluggable 10 Gigabit SFP+ transceiver which supports distance up to 300 meters over multi-mode fiber and 10 to 40km over single-mode fiber (The distance depends the optical module chosen).

High Reliability

CS6510 series support modular 1+1 redundant power supplies and 4+1 redundant fans. Business won't be interrupted in case replacing power supplies and fans. System supports dual images. Even though the primary image was destroyed, system will still boot via backup image normally.

VSF (Virtual Switch Framework)

As new generation data center switch, CS6510 support VSF which not only guarantees the flexibility, but also enhanced the scalability of datacenter network.

Flex Resource

Flex Resource is able to allocate, recover and reallocate hardware resource dynamically according to demand. It can increase the utilization of the hardware resource.

Rich L3 Features

CS6510-48S6Q-HI delivers high-performance, hardware-based IP routing.

RIP, OSPF and BGP provide dynamic routing by exchanging routing information with other Layer 3 switches and routers.

With CS6510-48S6Q-HI, customers could easily achieve Policy based Route (PBR), which is important when they need multi exit application.

MPLS/VPLS

CS6510-48S6Q-HI supports MPLS L3 VPN/MPLS L2 VPN(VPLS) and helps customer to construct more secure/extendable network. With max.255 VRF instances, CS6510-48S6Q-HI series could be deployed as P & PE devices, guarantees the variety of services.

Abundant IPv6 Support

CS6510-48S6Q-HI supports IPv6 switching and routing based on hardware for maximum performance. With increased network devices growing and the need for larger addressing and higher security becomes critical, CS6510-48S6Q-HI will be a right product to meet the requirement. CS6510-48S6Q-HI passed IPv6 form Phase II certification, which is the best proof of the application.

Strong Multicast

CS6510-48S6Q-HI supports abundant multicast features such as IGMPv1/v2/v3 snooping and fast leave and IGMPv1/v2/v3, PIM-DM, PIM-SM, PIM-SSM and even MSDP. With Multicast VLAN Register (MVR), multicast receiver/sender control and illegal multicast source detection functions, CS6510-48S6Q-HI provides great application experience for customer.

Specifications

Item	CS6510-48S6Q-HI
Physical port	48 * 10G SFP+ and 6 * 40G QSFP
Management port	Console port RJ45 10/100/1000Mbps RJ45 Ethernet Management port USB2.0 Management port
Performance	
Switching Capacity	1440Gbps
Forwarding Rate	1071Mpps
MAC Address	96K(standard)/32K(routee)/288K(bridge), UFT configuration, default is standard
ARP Table	16k
Routing Table	16k
Physical	
Dimension(W*H*D)	433.8mm*44mm*475mm
Relative Humidity	10%~90% non-condensing
Temperature	Working 0°C~50°C, storage -40°C~75°C
Power Input	AC: 100~240V,50~60 Hz
Power Supply	1+1 Modular Redundant
Main Features	
L1, L2 Features	IEEE 802.3(10Base-T), IEEE 802.3u(100Base-TX), IEEE 802.3z(1000BASE-X) IEEE 802.3ab(1000Base-T), IEEE 802.3ae(10GBase), IEEE802.3x IEEE 802.3ak(10GBASE-CX4) IEEE 802.3ba
	12k Jumbo Frame Port Loopback Detect LLDP and LLDP-MED UDLD 802.3ad LACP, max 128 group trunks with max 8 ports for each trunk LACP Load Balance
	N:1 Port Mirroring RSPAN ERSPAN
	IEEE802.1d(STP) IEEE802.1w(RSTP) IEEE802.1s(MSTP) Root Guard BPDU Guard BPDU Tunnel ERPS(ITU-T G.8032)
	802.1Q, 4096 VLAN MAC VLAN, VOICE VLAN, Private VLAN, Protocol VLAN, Multicast VLAN QinQ, Selective QinQ, Flexible QinQ GVRP N:1 VLAN Translation Broadcast / Multicast / Unicast Storm Control

	IGMP v1/v2/v3 Snooping and L2 Query
	ND Snooping
	MLDv1/v2 Snooping
	Port Security
	Flow control: HOL, IEEE802.3x Bandwidth Control
L3 Features	Static Routing, RIPv1/v2, OSPFv2, BGP4 OSPFv3, BGP4+ OSPF Multiple Process LPM Routing Policy-based Routing (PBR) for IPv4 and IPv6 VRRP URPF, ECMP BFD
	IGMP v1/v2/v3, IGMP Proxy, DVMRP, PIM-DM, PIM-SM, PIM-SSM, any cast RP, MSDP Static Multicast Route Multicast Receive Control Illegal Multicast Source Detection
	ARP Guard, Local ARP Proxy, Proxy ARP, ARP Binding, Gratuitous ARP, ARP Limit Anti ARP Cheat, Anti ARP Scan
	DNS Client
	GRE Tunnel
	6to4 Tunnel, Configured Tunnel, ISATAP Tunnel, GRE Tunnel
	ICMPv6, ND, DNSv6 IPv6 LPM Routing, IPv6 Policy-Based Routing (PBR) IPv6 VRRPv3, IPv6 URPF, IPv6 RA RIPng, OSPFv3, BGP4+ MLD Snooping, IPv6 multicast VLAN MLDv1/v2, PIM-SM/DM for IPv6, IPv6 Anycast RP, IPv6 ACL, IPv6 QoS
MPLS	MPLS, VRF, LDP
	MPLS L3 VPN, MPLS L2 VPN(VPLS), VPWS
QoS	8 Queues SWRR, SP, WRR, DWRR, SDWRR, WRED Traffic Classification Based on 802.1p CoS, ToS, DiffServ DSCP, ACL, port number Traffic Shaping PRI Mark/Remark
ACL	IP ACL, MAC ACL, IP-MAC ACL Standard and Expanded ACL Based on source/destination IP or MAC, IP protocol, TCP/UDP port, DSCP, ToS, IP Precedence), VLAN, Tag/Untag, CoS REDIRECT and accounting-based ACL Rules can be configured to port, VLAN Time ranged ACL


Security	802.1x AAA Port, MAC based authentication Accounting based on time length and traffic Guest VLAN and Auto VLAN
	RADIUS for IPv4 and IPv6
	TACACS+ for IPv4 and IPv6
	MAB
DHCPv4/v6	DHCP Server/Client for IPv4/IPv6 DHCP Relay/Option 82 DHCP Snooping/Option 82
Traffic Monitor	sFlow Traffic Analysis
Security Management	Network CLI, WEB, Telnet, SNMPv1/v2c/v3 through IPv4 and IPv6 Syslog and external Syslog server HTTP SSL SNMP MIB, SNMP TRAP FTP/TFTP/SFTP SNTP/NTP RMOM 1,2,3,9 Authentication by radius SSH v1/v2 Dual firmware images/ Configuration files 802.3ah OAM, 802.1ag OAM
Data Center Features	VSF (Virtual Switch Framework)

The contents marked with “*” need future upgrade or are under development

Application

Date Center Applications

CS6510-48S6Q-HI switch work as TOR switches and connect to the core using 100GE ports.

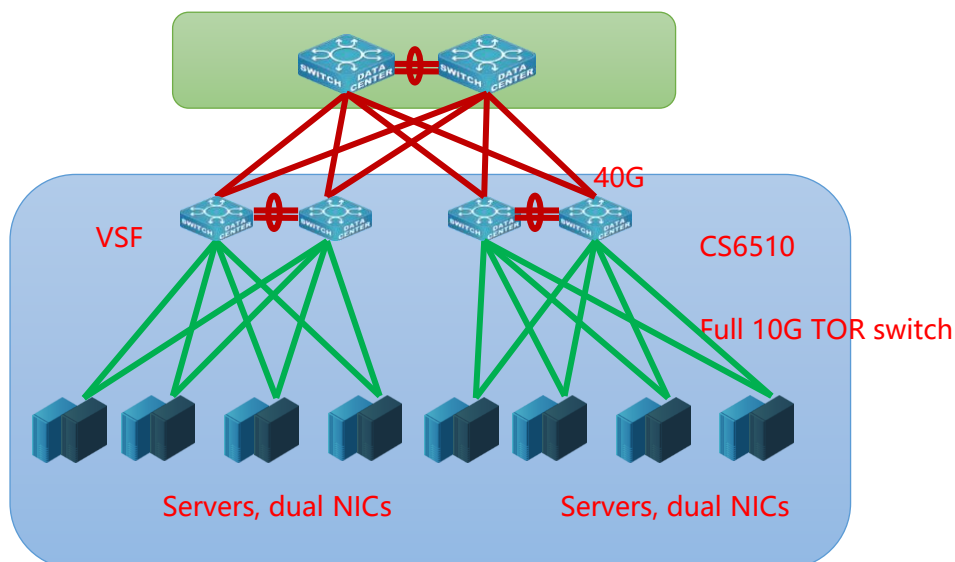

Order Information

Product	Description
CS6510-48S6Q-HI	40G Advance Enhanced Datacenter Switch (48*10GbE (SFP+) +6*40GbE (QSFP+)), redundant and modular design, high performance. Full L3 features, Default with two hot-swap AC power supply, Default with 5 (4+1) fans, Broadcom chipset