



CS6200X-EI Series L3+ 10G Fiber Routing Switch

Product Overview

DCN CS6200X-EI fiber series switches are next-generation 10G stackable routing switches that provide fixed gigabit access and 10GE uplink ports. CS6200X-EI fiber switch has advanced hardware and software architecture design. These switches provide high availability, scalability, security, energy efficiency, and ease of operation with rich features such as **VSF (Virtual Switch Framework)** and redundant power supplies. It is ideal for high-density aggregation or core layer in campus networks.

The following models are available in the CS6200X-EI fiber series.

Appearance	Description
 CS6200X-24S6X-EI	<ul style="list-style-type: none">● 24*100/1000Base-X(SFP) + 6*10GbE(SFP+)● 1 console, 1 USB, 1 RJ45 management port● AC power + optional modular AC● Switching capacity: 168Gbps● Forwarding rate: 125Mpps
 CS6200X-48S6X-EI	<ul style="list-style-type: none">● 48*100/1000Base-X(SFP) + 6*10GbE(SFP+)● 1 console, 1 USB, 1 RJ45 management port● AC power + optional modular AC● Switching capacity: 216Gbps● Forwarding rate: 161Mpps

Key Features and Highlights

Performance and Scalability

With high switching capacity, CS6200X-EI Fiber series support wire-speed L2/L3 forwarding and high routing performance for IPv4 and IPv6 protocols.

The 10 Gigabit Ethernet connectivity of CS6200X-EI Fiber is accomplished via a hot-pluggable 10 Gigabit SFP+ transceiver which supports distance up to 300 meters over multimode fiber and 10 to 40km over single-mode fiber (The distance depends on the optical module chosen).

VSF (Virtual Switch Framework)

Virtual Switch Framework can virtualize multiple DCN switches into one logical device, achieving the sharing of information and data tables between different switches. The performance and ports density of the virtualized device is greatly enlarged by times under VSF. VSF also simplifies management work for the network administrator and provides more reliability.

Rich L3 Features

CS6200X-EI Fiber series delivers high-performance, hardware-based IP routing. RIP, OSPF, ISIS and BGP provide dynamic routing by exchanging routing information with other Layer 3 switches and routers. With the CS6200X-EI Fiber series, customers could easily achieve a Policy-based Route (PBR), which is important when they need a multi exit application.

Strong Multicast

CS6200X-EI Fiber series supports abundant multicast features. In Layer 2, such as IGMPv1/v2/v3 snooping and fast leave. L3 multicast protocols such as IGMPv1/v2/v3, PIM-DM, PIM-SM, PIM-SSM, and even MSDP. With Multicast VLAN Register (MVR), multicast receiver/sender control and illegal multicast source detect functions; the CS6200X-EI Fiber series provides a great application experience for the customer.

Easy High-Reliability network

MRPP is a Multi-layer Ring Protection Protocol, which is DCN's private fast Ethernet ring protocol. Comparing to spanning tree protocol, it has the advantages of fast convergence, simple protocol calculation, fewer system resources cost, and so on, which can improve the reliability of Ethernet network operation.

Comprehensive QoS

With 8 queues per port, the CS6200X-EI Fiber series enable differentiated management of up to 8 traffic types. The traffic is prioritized according to IEEE802.1p, DSCP, IP precedence, and TCP/UDP port number, giving optimal performance to real-time applications such as voice and video.

CS6200X-EI Fiber series also supports Bi-directional rate-limiting, per port or traffic class preserves network bandwidth, and allows full control of network resources.

Enhanced Security

IEEE 802.1X port-based access control and MAC-based access control ensure all users are authorized before being granted access to the network. Ingress/Egress Access Control Lists (ACLs) can be used to restrict access to sensitive network resources by denying packets based on L2/L3/L4 headers information. And for some services that are based on time, the product can support time-based ACL to match the requirement.

Secure Shell (SSH) encrypts network management information via Telnet providing secure network management.

RADIUS Authentication enables centralized control of the switch and restricts unauthorized users from altering the configuration of the switch.

Specifications

Item	CS6200X-24S6X-EI	CS6200X-48S6X-EI
Physical port	24*100/1000Base-X(SFP) + 6*10GbE(SFP+)	48*100/1000Base-X(SFP) + 6*10GbE(SFP+)
Management port	1 x RJ45 Ethernet Management port	
	1x Console port	
	1x USB2.0 interface	
Performance		
Switching Capacity	168Gbps	216Gbps
Forwarding rate	125Mpps	161Mpps
Jumbo Frame	12K	12K
MAC Address	32K	32K
ARP Table	8K	8K
Routing Table	12K	12K
ACL Table	3K	3K
Physical		
Dimension (W*H*D)	440mm x 44mm x 380mm	440mm x 44mm x 380mm
Relative Humidity	5%~95%, non-condensing	
Temperature	Working 0°C~50°C, storage -40°C~70°C	
Power Supply	Modular AC:100~240VAC, 50~60Hz Standard with AC + optional modular AC	
Power Consumption	<65W	<75W
Main Features		
L1, L2 Features	IEEE802.3(10Base-T), IEEE802.3u(100Base-TX), IEEE802.3z(1000BASE-X), IEEE802.3ab(1000Base-T), IEEE802.3ae(10GBase), IEEE802.3x, IEEE802.3ak(10GBASE-CX4)	
	Port loopback detection	
	LLDP and LLDP-MED	
	UDLD	
	802.3ad LACP, max 128 group trunks with max 8 ports for each trunk	
	LACP load balance	
	ERPS (G.8032)	
	N:1 Port Mirroring	
	RSPAN	
	IEEE802.1d(STP)	
	IEEE802.1w(RSTP)	
	IEEE802.1s(MSTP)	
	Root Guard	
	BPDU Guard	
	BPDU Tunnel	
802.1Q, 4K VLAN		
MAC VLAN, Voice VLAN, PVLAN, Protocol VLAN, Multicast VLAN		
QinQ, Selective QinQ		
GVRP		
N:1 VLAN Translation		
Broadcast / Multicast / Unicast Storm Control		
IGMP v1/v2/v3 Snooping and L2 Query		
ND Snooping		
MLDv1/v2 Snooping		


	Port Security
	Flow Control: HOL, IEEE802.3x
	Bandwidth Control
L3 Features	Static Routing, RIPv1/v2, ISIS, OSPFv2, BGP4 OSPFv3, BGP4+ OSPF multiple processes VRF-lite LPM Routing Policy-based routing (PBR) for IPv4 and IPv6 VRRP URPF, ECMP BFD
	IGMP v1/v2/v3, IGMP Proxy, Static Multicast Route Multicast Receive Control Illegal Multicast Source Detect
	ARP Guard, Local ARP proxy, Proxy ARP, ARP Binding, Gratuitous ARP, ARP Limit Anti ARP Cheat, Anti ARP Scan
	DNS Client, DNS Relay
	GRE Tunnel
IPv6	6to4 Tunnel, Configured Tunnel, ISATAP Tunnel, GRE Tunnel ICMPv6, ND, DNSv6 IPv6 LPM Routing, IPv6 Policy-based Routing (PBR) IPv6 VRRPv3, IPv6 URPF, IPv6 RA RIPng, OSPFv3, BGP4+ MLD Snooping, IPv6 Multicast VLAN MLDv1/v2, IPv6 Anycast RP, IPv6 ACL, IPv6 QoS
MPLS	MPLS, VRF, LDP
	MPLS L3 VPN
QoS	8 Queues SP, WRR, SP+WRR WRED Traffic Classification Based on 802.1p COS, ToS, DiffServ DSCP, ACL, port number Traffic Policing PRI Mark/Remark
ACL	IP ACL, MAC ACL, IP-MAC ACL Standard and Expanded ACL Based on source/destination IP or MAC, IP Protocol, TCP/UDP port, DSCP, ToS, IP Precedence), VLAN, Tag/Untag, CoS Redirect and statistics Rules can be configured to port, VLAN, VLAN routing interfaces Time Ranged ACL ACL rules can be configured to port, VLAN
Security	802.1x AAA Port, MAC-based authentication Accounting based on time length and traffic Guest VLAN and auto VLAN
	RADIUS for IPv4 and IPv6
	TACACS+ for IPv4 and IPv6
	MAB
DHCPv4/v6	DHCP Server/Client for IPv4/IPv6
Traffic Monitor	DHCP Relay/Option 82 DHCP Snooping/Option 82
Traffic Monitor	sFlow Traffic Analysis

Security Network Management	CLI, WEB, Telnet, SNMPv1/v2c/v3 through IPv4 and IPv6 Syslog and external Syslog Server HTTP SSL SNMP MIB, SNMP TRAP FTP/TFTP SNTP/NTP RMON 1,2,3,9 Authentication by Radius/TACACS SSH v1/v2 Dual firmware images/ Configuration files 802.3ah OAM, 802.1ag OAM
Data Center Features	MC-LAG, Netconf, VSF (Virtual Switch Framework, support mixed stacking among models CS6200X-48T6X-EI, CS6200X-24T6X-EI, CS6200X-24T6X-P-EI, CS6200X-24S6X-EI, CS6200X-48T6X-P-EI and CS6200X-48S6X-EI)

Application

CS6200X fiber series are deployed as aggregation switches which provide gigabit downlink and 10G uplink in campus or enterprise network.

CS6200X fiber series is ideal aggregation for FTTx solutions

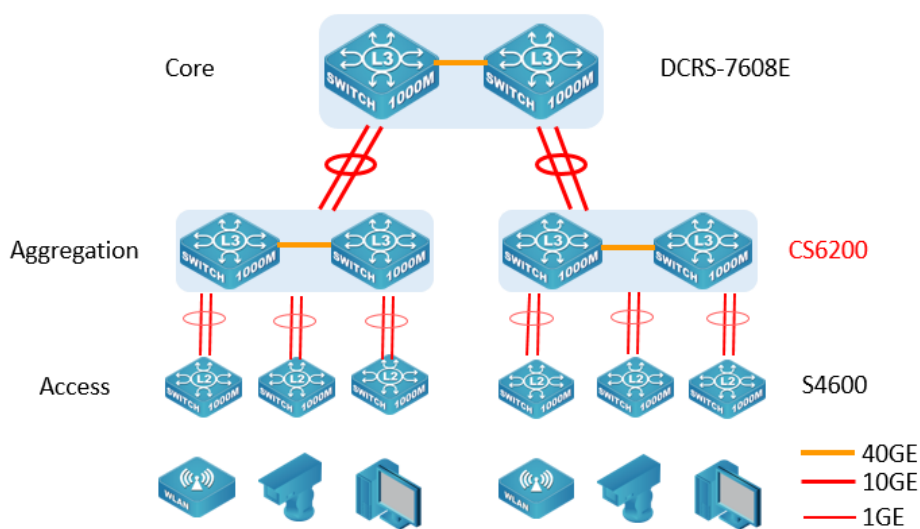

Order Information

Product	Description
CS6200X-24S6X-EI	10G L3 Switch (24*100/1000Base-X(SFP) + 6*10GbE(SFP+)), Default with 1 modular AC Power and 1 optional AC Power M6200X-AC-60 for 1+1 redundancy (not support other power modules)

CS6200X-48S6X-EI	10G L3 Switch (48*100/1000Base-X(SFP) + 6*10GbE(SFP+)), Default with 1 modular AC Power and 1 optional AC Power M6200X-AC-100 for 1+1 redundancy (not support other power modules)
M6200X-AC-60	AC Power Supply Module (60W) for S5750X-24S6X-EI, CS6200X-24S6X-EI, CS6200X-24T6X-EI, CS6200X-48T6X-EI, 100V-240V. Could be purchased alone as accessory
M6200X-AC-100	AC Power Supply Module (100W) (100V-240VAC & 240VDC) for S5750X-48S6X-EI, CS6200X-48S6X-EI. Could be purchased alone as accessory