

Global leader in high performance signal **Distribution** Global leader in high performance signal **Conversion** Global leader in high performance signal **Switching**




US Universal Switching Corporation

Global Signal Switching, Conversion & Distribution Specialists
2019A



Communications - Telemetry - Automated Testing - Broadcast

Made in the USA

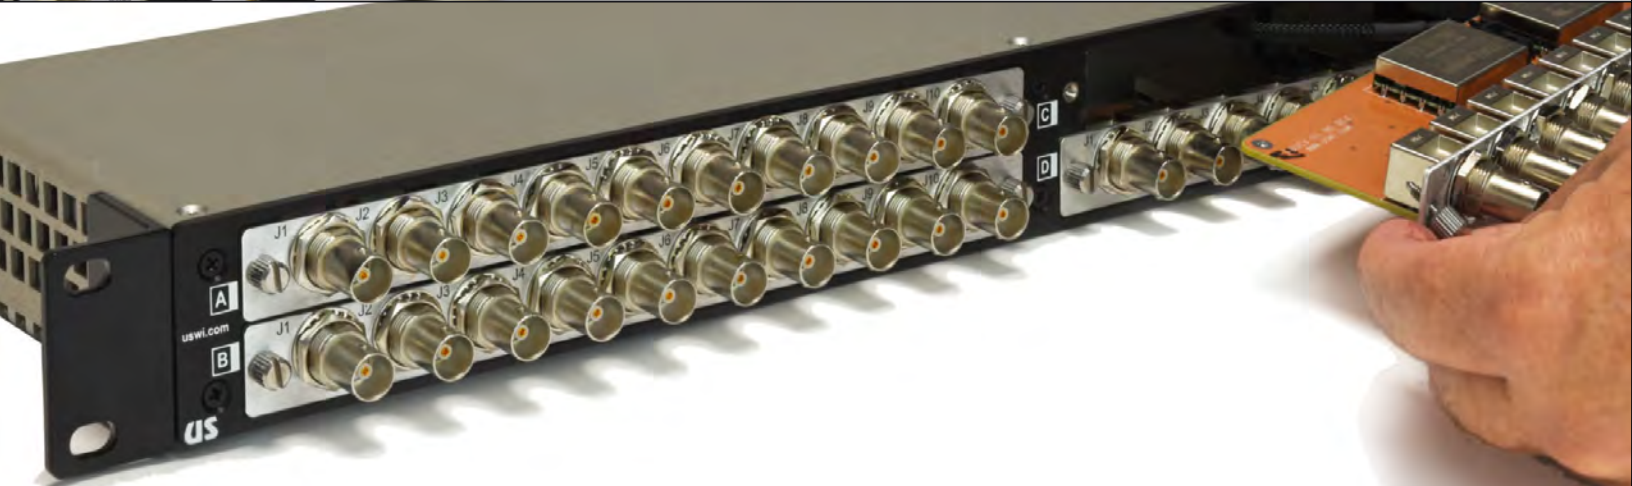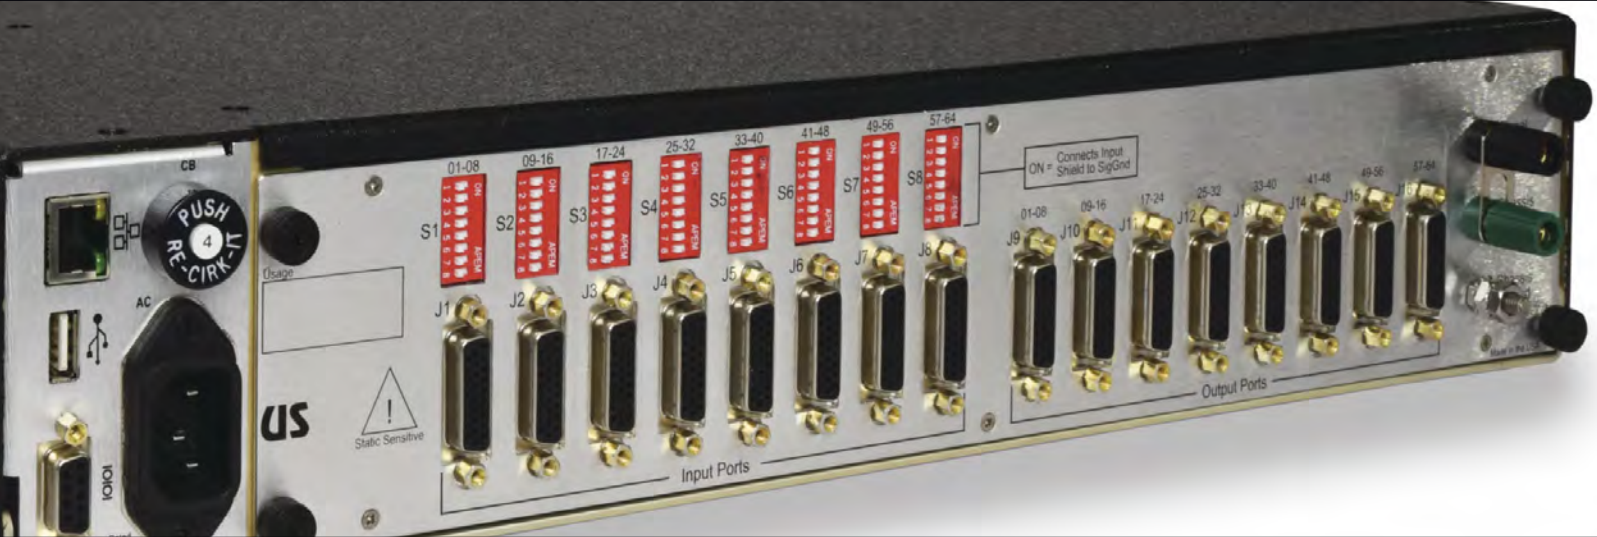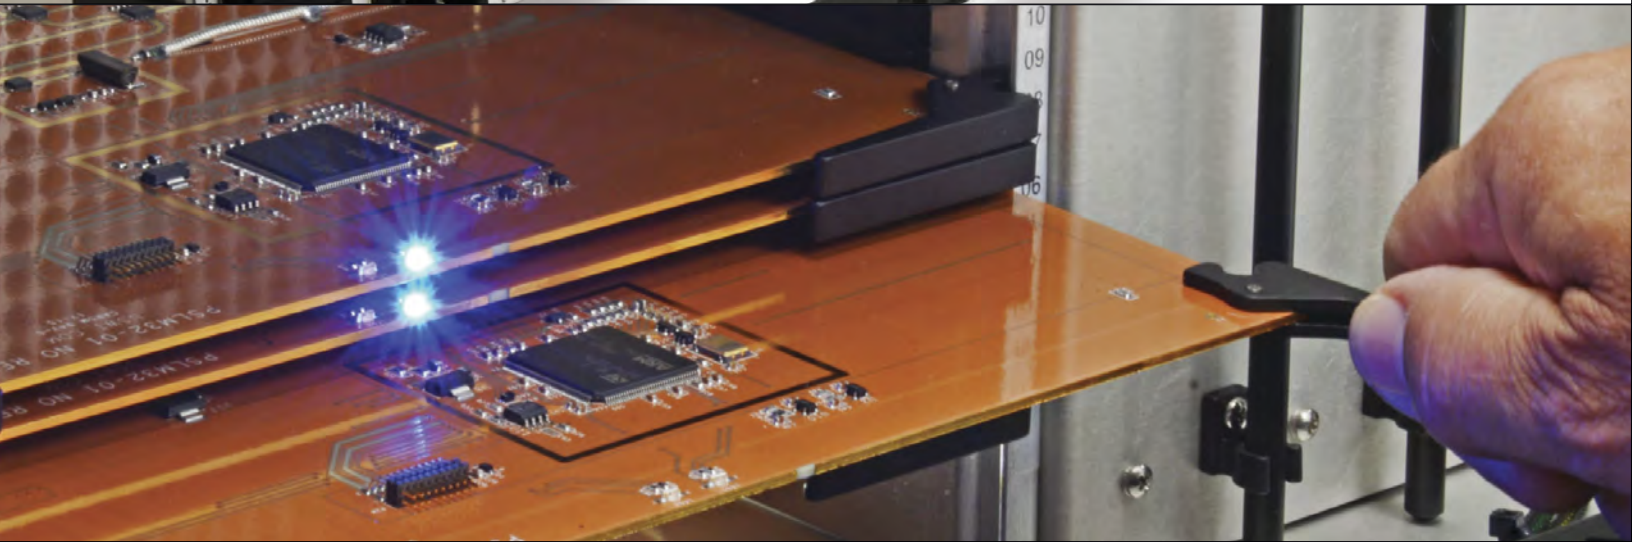

C ontents

Page

- The Company 4
- Satellite RF Chain Diagram 5
- Applications & Products Photo Gallery 6 - 7
- Rack Mounted Modular Switching Solutions (DC-40GHz): Series G2 8 - 9
- Modular 32x32 Switching Matrices (IF, L-Band and Wideband): SIM32, SLM32, SWM32. 10
- Fixed size 16x16 L-Band & Wideband Switching Matrices: SLM16 & SWM16. 11
- Modular 16x16 Wideband Switching Matrices with N-Type and 10.1" screen: SWM16X. 11
- Flexible 64x256, 128x192 Switching Matrices (L-Band): SLX320 & SLX321 12
- RF Over Fiber (RToF) Transmitter & Receiver (200MHz-3000MHz): F-LINK-II Mini, and FiberSTIK™ 12
- Universal Chassis with "PUC" Switching Technology (DC-50GHz): UC1 13
- Redundancy Switching Units (PUC): RSX4 (single, dual or quad channel) 13
- Multicouplers, Distribution, Conversion up to 1x16 (video, analog, RF & digital): MDU4 14
- LNB Power, RToF, Distribution, Multicouplers, Conversion & Switching (analog, digital & fiber): LS16A. 15
- RS530/422/232 Switch Matrices for Satellite (FDMA, CDMA, TDMA): System S24530B, S64530 16
- Flexible Digital & Analog Matrices 32x32 to 1024x1024 (TTL, 422, PCM): S2560F, S2561F, S2562F, S2565F, S2566F 17
- Precision 64x64 Instrumentation & Sensor Switch (DC-200kHz): TS02A 18
- Flexible 1553 Patching Matrix 8x8 to 64x64 (1553, 422 or ATE differential): BS1553F. 19
- Modular DC-18GHz Matrix 4x4 to 12x12 (DC-18/26/40/50GHz): MS2010A. 20
- Microwave Switchers (DC-18/26/40/50GHz): MSD0601 and MS06X02. 21
- Coaxial Relay Module (N-Type) & Panel Assemblies (DC-6GHz): RM1X2 21
- Video Routers 16x16 to 32x32, and MUX 8x1 & 16x1 (UHD-SDI, 8K-SDI, Analog Routers: UHDVSUX, VSUX, HDVMMU1 22
- Precision Digital Timing Distribution, Dual 1x32 (PECL, LVPECL, LVTTL & LVDS): DDU32 22
- Master Array Controller & Remote Controller/Display: MAC4 23
- Pre-Configured Series G2 Configurations (analog/digital/RF): TS2. 24
- Critical Application System Solutions (DC-30GHz): Series **GZ-CAS** 24
- Custom, OEM & Special Build Services 25
- Rugged Coaxial Relays & Chassis: E70000, U70000 and URS70000 (formerly Matrix Systems Corporation) 26 - 27
- Remote Control Options 28
- Control & Monitor Software: RouteWarePRO 5.0 28
- Quality Management System: ISO 9001-2015 29
- Standard Warranty Statement (extended warranties available) 30
- Return Loss to VSWR Conversion Table 30
- Factory Authorized Representatives: Domestic and International. Cover



Hot-Swap dual CPU, power supplies & modules
 Most products feature hot-swap monitored supplies, control CPUs and modules for the ultimate in hardware reliability.



Features, features and more features
 We strive to provide as many standard product features during the product design period to extend the life cycle and purpose of our hardware.



Plug-in C3 and C3-Lite Controllers certified LXI with TCP/IP, HTTPS (SSL/TLS), SNMP v1/v2c/v3, SNTp, IPv4/6
 Latest in hot-swap control interface technology with the best in network security layers and protocols, plus fast 1GB hardware now available.

Cover
 Our 2019A cover highlights the new MAC4 Master Array Controller & Remote Display. See page 23 for more information.

What is the RR all about?
 The graphic is on our front cover, and throughout our catalog, products, website, Twitter, Facebook & elsewhere. Find out more on page 29.



Global Signal Switching and Distribution Specialists



About the Company

Global Leader in Switching Technology

Universal Switching Corporation is an internationally recognized leader in the switching industry that manufactures "state-of-the-art" switching, distribution and conversion equipment. Since 1992, the USC commitment to Continuous-Process-Improvement and cutting-edge technology has been combined to provide a unique blend of cost effective and high quality products.

With a corporate culture that includes a modern facility in Burbank, talented personnel, comprehensive Quality Management System and **ISO 9001:2015 certification**, USC provides a standard 2-Year warranty for all equipment, and optional 7-Year warranties.

Product Line Offering

We design and build a broad product line of switching systems, switching modules and distribution units that span a frequency range from DC to 50GHz. Signal types include AC/DC power switching, audio, ATE instrumentation, composite video, SD, HD, 4K, HF, RF, IF and L-Band signals, high resolution RGB+HV video, high speed 422, LVDS, PECL or ECL digital data, small & large L-Band, S-Band and C-Band products, plus other >6GHz signals all the way to 50GHz.

Embedded controllers and software are utilized throughout the product line to provide fast, accurate and easy control and monitoring. Adapter panels and remote control panels provide configurability to meet unique interface and control requirements.

Product Line Expansion and Legacy Items

With the acquisition of Matrix Systems Corporation's (MSC) switching product line in 2007, the USC product line now includes a number of unique relay modules in support of existing system installations throughout the world. A number of USC product enhancements have further improved this proven product line.

COTS Solutions

Leading the automated switching industry with the largest cross-point capacity, programmable switching systems and modules are available in "off the shelf" configurations to solve time-sensitive switching requirements. Rather than long lead times for special, modified or custom ordered equipment like other manufacturers, USC's "off the shelf" configurations provide turn-key solutions in real time by utilizing the full spectrum of current technology coupled with the latest in design and manufacturing techniques.

In addition to "turn-key" solutions, USC provides custom or OEM systems and modules with minimal lead time and expedited delivery. USC specializes in switching, distribution and conversion products and equipment that supports or connects to switching equipment, but also has resources and engineering expertise to fulfill any switching related need including requirement evaluation, system design, translation, distribution and system integration.

Switching Experience

With a core competency in the switching arena, USC is focused on switching and distribution needs within a variety of industries and the direction of future requirements. A range of USC products are used in the most sensitive of areas requiring high reliability like aerospace and defense, surveillance stations, satellite communications, as well as "everyday" production testing and evaluation applications.



Call and get our 4G USB stick with all our information and software.



Global Signal Switching and Distribution Specialists

G2 Series (G2T)

The G2 Series modular product line continues to evolve and offers a host of features and improvements including high performance configurations, fully shielded modules, hot-swap module technology, field-upgradeable firmware, plus optional redundant CPU and power supply configurations. Ethernet (TCP/IP) control has been a USC standard for more than 16 years while other manufacturers are just now embracing the technology. Our C3 CPU is LXI compliant with TCP/IP, SNMP, SNT, IPv6, and has a host of capabilities including a USB control port. A new C3-Lite controller has also been introduced where legacy needs don't need to be met.



G2T touchscreen rackmount units

Includes 10/100 Ethernet (SNMP, TCP/IP, SNT, IPv4/6) multi-serial and USB ports

Modular products are typically more cost effective than trying to configure "dedicated purpose" boxes that are the mainstay for many of our competitors. The advantages of our modular systems offered, like our G2 Series, are as follows:

- Flexible system architecture
- Hot swap power supplies via front panel
- Efficient modular design
- Common control and command protocol
- Compact physical format
- Multiple configurations in one box
- Simple logistics for sparing items

SNMP

LXI

IPV6

Scalable Switching Arrays

The scalable design concept used in the revolutionary System S256x6 combines the latest in component technology and advanced control and monitoring features. The scalable design is available in analog or digital, and supports up to 1024x1024 in a compact 5RU rack mounted "building-block" package. This modular concept has been carried through the entire product line including our modular Wideband & RF systems. It is clearly exhibited within the very capable and high-performing SLM32X and other products.


Technological Accomplishments

Globally recognized industry accomplishments include our evolving field proven G2 Series product line introduced in 2001, the revolutionary System S256x6 units, C3 Controller, new compact high performance digital and analog product lines, and modular RF systems. Most of our new or upgraded products are in this short form.

Product Development

Ongoing product development is the driving force behind our advanced and innovative designs. USC continues to lead rather than follow the switching industry by investing resources in research and development. New digital products, LXI standards, Tri-Stage hardware, touchscreens, control & security protocols all represent the corporate commitment to Continuous-Process-Improvement and product development.

New product development and designs are regularly introduced on our website, but feel free to contact one of our engineering representatives or the factory directly for consultation. We are confident that a solution to your technical requirement is available.

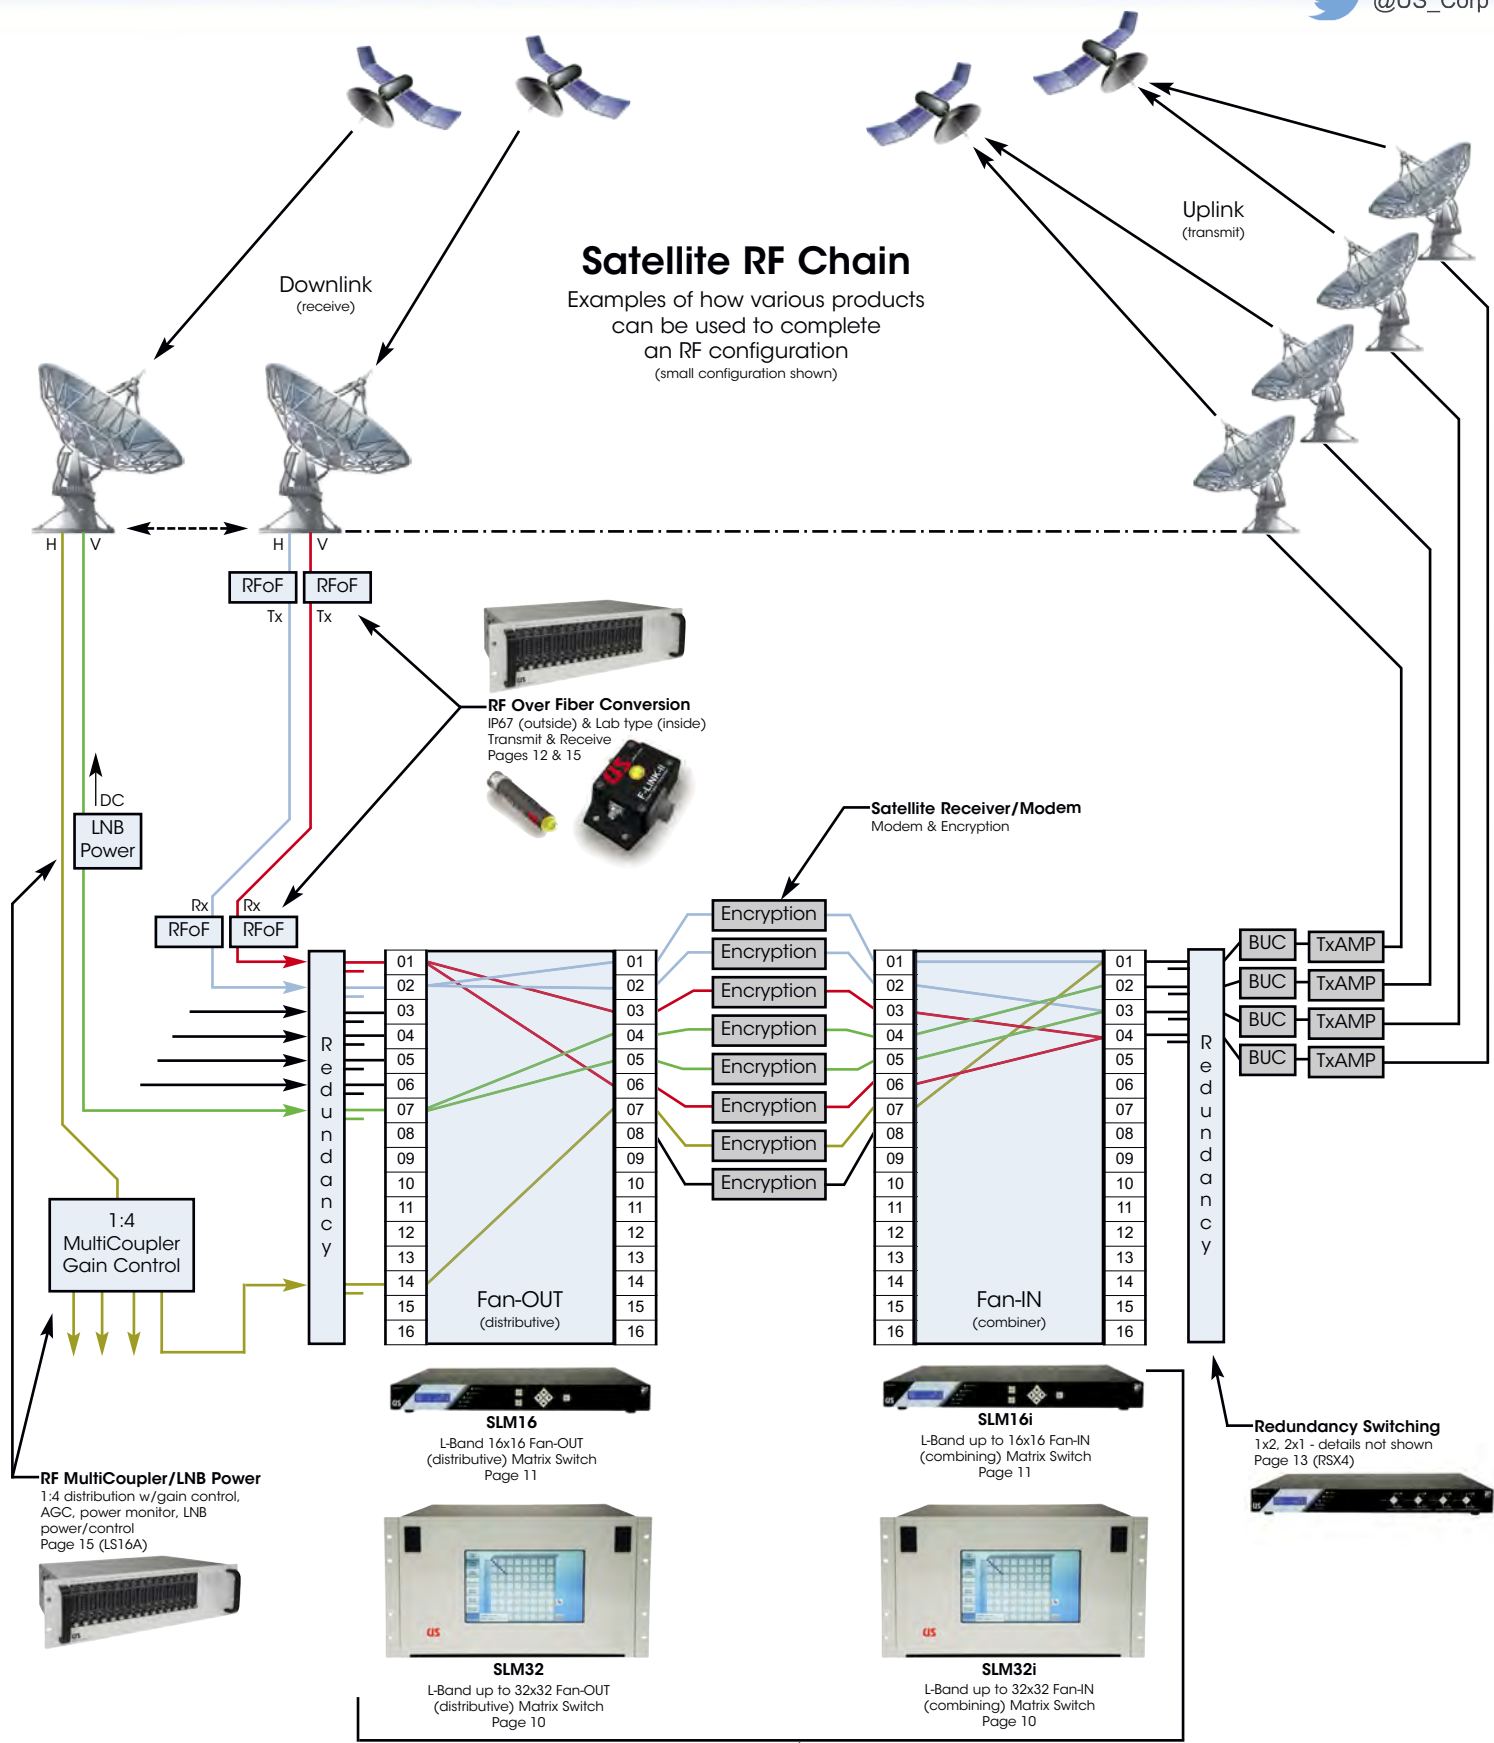

A

pplications and products

- L-Band, S-Band or X-Band switching and distribution
- RF-Over-Fiber modules and links
- Uplink / Downlink switching or IRIG timing distribution
- High speed TTL, '422, '232, LVDS, PECL and ECL data switching
- ATE test stations for routing test points to test equipment
- 8K & 4KHD, HD-SDI, SDI, and NTSC video switching & distribution
- Low noise antenna routing to HF receivers
- Rugged airborne surveillance signal switching
- Microwave signal switching (DC to 40GHz)
- High power AC or DC switching (10-90 amps)
- Radar X-Y-Z data, and radar video routing
- Telecommunication routing and broadcasting
- Switching inputs from RF analyzers to UUT's
- Instrumentation control and monitoring
- Sensor & gauge routing

New
E70000
Rugged coaxial relays
DC-800MHz
10/100 Ethernet w/PoE
Page 26 & 27



New
Series MR188
Plug-in microwave relays
(DC-18GHz)



RM1X2
Coaxial 1x2 3GHz
relay module (N-Type)
Page 21



New
FiberSTIK™
Wideband fiberoptic receiver, FC
200-3000MHz, LNB powered, 50 ohm
Page 12



RCP1
Rack mount control panel with
serial port and quad relays (1RU)
Page 21



New
UHDVSU1
Low cost video routers
4K-SDI, HD-SDI, SDI & NTSC (1RU)
Page 22

4K HDSDi
1080p FULLHD



New
RSX4 Redundancy Switch
Up to four channels, many plug-ins (1RU)
Page 13



New
UC1 Universal Chassis
Universal Chassis with PUC plug-in
Page 13



New
HDVMU1
Low cost SDI video muxes
4K-SDI, HD-SDI, SDI & NTSC (1RU)
Sizes 8x1 and 16x1
Page 22

4K HDSDi
8K HDSDi
1080p FULLHD



New
PUC1 Module Technology: DC-50GHz
Universal Chassis plug-ins
Page 13



New
MDU4 Modular Distribution
'422, TTL, ECL, LVDS, 1553, video
Multicouplers to 3GHz (1RU)
Page 14

4K HDSDi
8K HDSDi

New
BS1553 Modular 1553 Switch
Scalable from 8x8 to 64x64 (4RU)
Page 19



New
LS16A Modules
New RF-Over-Fiber Modules (RF/TX) and
Digital distribution units
Page 15




Updated
S256xFX Digital/Analog Switch
Scalable from 32x32 to 1024x1024
Page 17



Updated
LS16A Modular "Linker System"
Signal distribution, conversion & switching
Page 15

New
MAC4: Master Array Controller
Remote display, desktop or rackmount (4RU)
Page 23

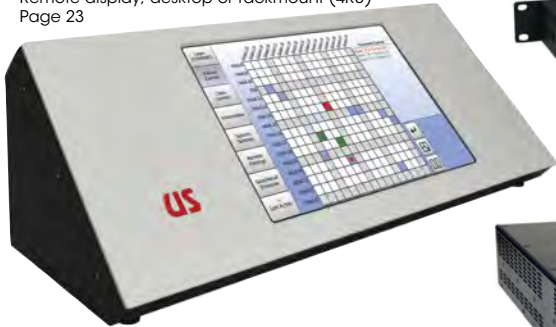

DDU32
Digital distribution unit (dual 1x32), up to 3Gbps
PECL, LVPECL, LVDS, LVTTTL distribution (clk/data)
Page 22



Updated
G2T4 Modular System DC - 50GHz
Four-slot G2T Mainframe (2RU)
Page 8 & 9



Updated
G2T16: Modular System DC - 50GHz
Sixteen-slot G2 Mainframe (8RU)
Shown with dual CPUs & mixed modules installed
Page 8 & 9

G2R40-71X6-60
G2 plug-in with seven 6x1 relays (40GHz)
Page 8 & 9



G2S47-6432-25
G2 plug-in 32x32 IF matrix with expanders (20-250MHz)
Page 8 & 9



G2D70A
TTL, ECL, LVDS or PECL data matrix
Differential 8x8 to 64x64
Page 8 & 9



Model G2R12
G2 plug-in with five high power 1x6 relays (12GHz)
Page 8 & 9



G2 - CAS
Critical Application Systems
for IF, RF, L-Band, microwave
and other types of signals
Page 24

New
SxM32 Modular Switch: Up to 6GHz
Scalable from 4x4 to 64x64 (6RU)
Page 10



New
TS02A: DC-2MHz
Instrumentation, sensor, audio matrix
Differential in, Single-ended out 64x64
Page 18

New
SWM16X Modular Switch: 3GHz
Scalable from 4x4 to 16x16 (4RU)
Page 11



New
SGM16: Up to 6GHz
8x8, 16x16 Wideband Matrix Units (1RU)
Page 11

Updated
S64530 & S24530B
Digital RS-530/422/232 Switching System
Modular up to 64x64 DCE/DTE (5RU)
Page 12



New
SLX320 & SIX321 L-Band Matrices
Modular configurations up to 64x256 & 128x192
Page 12



Series G2 Rack-Mounted Modular Switching

Modules covering DC to 50GHz
Configurations from 1x2, up to 64x64

Series G2 products is our continuously evolving line of modular products that provides the system engineer with cost effective configuration and performance options in a field proven standard design. Any Series G2 module can be installed by simply sliding the module into the rear module bay of a Series G2T Mainframe.

Solid-state, relay-based, digital and fiber-optic products are offered to meet most any requirement. The list of module types keeps growing with new products including both MxN switching arrays and 1xN types. Non-blocking (Fan-OUT), combining (Fan-IN) and blocking (1:1) arrays are available. Popular L-Band and IF switching plus fully digital types as well including TTL, E1/T1, 422, ECL, PECL and LVDS.

What is the Series G2, and how does it work?

The Series G2 is a comprehensive modular switching product design comprised of two system components. These two major system components are what's required to complete a high-performance modular switching system.

- Rack mount mainframe with hot-swap supplies and CPU
- Plug-in switching module(s)

G2T Mainframes with Touchscreen

Our rack-mount mainframes are available in four rack-mount sizes with 2RU, 3RU, 6RU and 8RU. Different sizes are offered to meet various sized switching and distribution demands from small to large. They provide control and power to any of our Series G2 plug-in modules. Modules install into the rear-facing module bay providing easy connection access for cable management (see upper right).

Front installed redundant hot-swap power sections are available to meet the requirements of the various types of Series G2 modules. Supplies are self-monitoring with operational status reported to the C3 Controller. Single or redundant supplies install through hinged front panels for hot-swap replacement, perfect for critical requirements including independent AC power circuits.

Our two larger mainframes (6RU and 8RU) can be specified to include one or two (redundant) hot-swap C3 controllers, while the smaller 3RU (G2T6) and 2RU (G2T4) can only have one. These LXI compliant CPU's provide control for the modules as well as remote control interfacing to the user via the 10/100 Ethernet, USB 2.0 and multi-serial port. Firmware is field upgradeable via the integrated web browser. For legacy applications that require GPIB, we offer our Model GPIB-USB adapter. For secure applications, the C3 accepts a removable uSD memory card to store settings and port alias names.

G2 Plug-in Modules


The modules that plug-in to our Series G2T mainframes are designed to install at the rear of the units. This makes the signal I/O connectors face the rear (inside of the rack) of the mainframe. This is best suited for most installations to simplify cable routing to and from the switching system. The Series G2 module series spans DC-50GHz to address many different applications including audio or video, high speed digital data, telemetry, IF & RF, L-Band, microwave and other types of installations. Each module occupies a certain number of module "slots" within a mainframe. Some modules occupy only one slot while others occupy up to 16 slots. Power and control for the module is supplied by the mainframe.

NOTE: Plug-in Model C3 Controller is backwards compatible for most systems, but provides new features such as a USB port, SNMP, SNTP, and IPv6. It does not include an integrated GPIB port, but our Model GPIB-USB adapter is perfect for supporting legacy applications. A C3-Lite is included in some newer systems (non-G2T type) that do include serial or USB ports.

Custom systems or modules available.



Global Signal Switching and Distribution Specialists

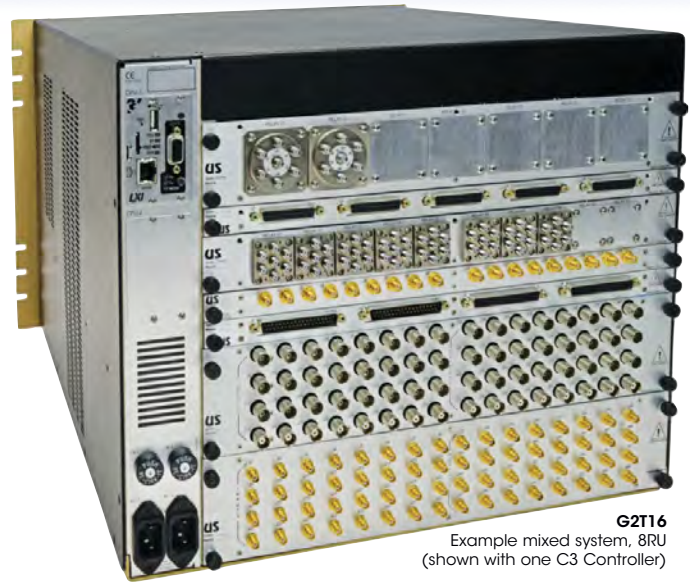

G2T16
Example mixed system, 8RU
(shown with one C3 Controller)



G2T4 Mainframe
Four module slots, 2RU



G2T6 Mainframe
Six module slots, 2RU



G2T12 Mainframe
Twelve module slots, 6RU
(shown with **Option X** display)



G2T16 Mainframe
Sixteen module slots, 8RU
(shown with **Option X** display)



SNMP

LXI



C3 Controller

- Plug-in CPU
- 10/100 Ethernet, USB & Serial
- Integrated web browser
- Scheduler & relay life counters
- Realtime clock
- FLASH memory
- Removable microSD card (security)
- SNMP (v1/v2/v3), SNTP, TCP/IP, IPv4, IPv6
- Look for the C3 logo

Our 10/100/1GB version is available 3Q2019. Contact the factory or your local representative.



Series G2 Modules: Switching Matrix Arrays - MxN (sorted by frequency range)

	Series	Elements	Frequency Range	Isolation (dB) Typ	Impedance	Minimum Size	Maximum Size	Slots	Conn Type
New	G2S02A	Solid-state	DC-200kHz	>80dB @ 20kHz	100 or 1M	16in, 64out	64in, 64out	4	HD-Dsub
	G2R10	Relay	DC-10MHz (typ)	>45dB @ 10MHz	100 ohm balanced	4in, 4out, 2-wire	16in, 16 out, 2wire	1	D-Sub
	G2S11	Solid-state	T1 & E1 rates	n/a	100 ohm balanced	8in, 8out	16in, 16out	3	RJ45
	G2D62B	Digital	DC-50Mbps	n/a	100 ohm (422)	8in, 8out	64in, 64out	1-8	Triax (BJ77)
	G2D64B	Digital	DC-50Mbps	n/a	100 ohm (422)	32in, 32 out	64in, 64out	1 or 2	D-Sub
	G2D71	Digital	>100Mbps	LVDS in, ECL out	50 ohm (differential)	8in, 8out	64in, 64out	2-8	SMB
	G2D72	Digital	>100Mbps	LVDS in, LVDS out	50 ohm (differential)	8in, 8out	64in, 64out	2-8	SMB
	G2S32H	Solid-state	DC-75MHz	>60dB @ 10MHz	50 or 75 ohm	8in, 8out	64in, 64out	1-8	BNC
	G2S32	Solid-state	DC-125MHz	>40dB @ 125MHz	50 or 75 ohm	8in, 8out	64in, 64out	1-8	BNC
	G2S33	Solid-state	DC-160MHz	>40dB @ 125MHz	50 or 75 ohm	8in, 8out	64in, 64out	1-8	BNC
	G2S44	Solid-state	20-250MHz	>60dB @ 70MHz	50 or 75 ohm	8in, 8out	48in, 48out	4-6	BNC
	G2S47	Solid-state	20-250MHz	>60dB @ 70MHz	50 or 75 ohm	8in+EX, 8out+EX	48in+EX, 48out+EX	4-6	BNC
	G2S48	Solid-state	20-250MHz	>60dB @ 70MHz	50 or 75 ohm	8in, 8out+EX	48in, 48out+EX	4-6	BNC
	G2S54	Solid-state	20-250MHz	>60dB @ 70MHz	50 or 75 ohm (combine)	8in, 8out	48in, 48out	4-6	BNC
	G2S57	Solid-state	20-250MHz	>60dB @ 70MHz	50 or 75 ohm (combine)	8in+EX, 8out+EX	48in+EX, 48out+EX	4-6	BNC
	G2S58	Solid-state	20-250MHz	>60dB @ 70MHz	50 or 75 ohm (combine)	8in, 8out+EX	48in, 48out+EX	4-6	BNC
	G2D70A	Digital ECL	>600Mbps	n/a	50 ohm (differential)	8in, 8out	64in, 64out	2-16	SMA or SMB
	G2S42	Solid-state	20-1000MHz	>50dB @ 1000MHz	50 ohm	8in, 8out	12in, 16out	4	BNC or SMA
	G2S75A	Solid-state	800-2400MHz	>50dB @ 2400MHz	50 ohm	8in, 8out	16in, 16out	4	SMA or N
New	G2S78A	Solid-state	20-3000MHz	>50dB @ 2400MHz	50 ohm	8in, 4out	16in, 16out	2-6	BNC, SMA or N
	G2R19A	Relay	DC-18GHz	>80dB @ 18GHz	50 ohm	4in, 2out	12in, 12out	4	SMA or N

NOTE: See data sheet for full model number, specifications and suffix definitions.

Series G2 Modules: 1xN Type Arrays (sorted by frequency range)

	Series	Elements	Frequency Range	Isolation (dB) Typ	Impedance	Minimum Size	Maximum Size	Slots	Conn Type
	G2S08	Solid-state	DC-400Hz	Power Relay	AC or DC switch	1ea 1x1	1ea 1x8	3	Terminal Screw
	G2R04	Relay	DC-10MHz (typ)	>50dB @ 10MHz	100 ohm balanced	1ea 1x4, 2-wire	1ea 1x4, 8 wire	1	D-Sub
	G2R06	Relay	DC-10MHz	>60dB @ 10MHz	General purpose	8ea 1x1 (DPDT)	4ea 1x16 (DP16T)	1	D-Sub
	G2R16	Relay	DC-1.3GHz	>55dB @ 1GHz	50 or 75 ohm	6ea 1x2	1ea 1x16 w/exp	1	BNC or SMA
	G2R16T	Relay	DC-1.3GHz	>55dB @ 1GHz	50 or 75 ohm (self term)	6ea 1x2	1ea 1x16 w/exp	1	BNC or SMA
	G2R15	Relay	DC-3GHz	>60dB @ 1GHz	50 or 75 ohm	6ea 1x2	1ea 1x16 w/exp	1	SMA
	G2R15T	Relay	DC-3GHz	>60dB @ 1GHz	50 or 75 ohm (self term)	6ea 1x2	1ea 1x16 w/exp	1	SMA
	G2R13	Relay	DC-6GHz	>55dB @ 3GHz	50 ohm	6ea 1x2	2ea 1x8	1	SMA
	G2R20	Relay	DC-12GHz	>80dB @ 4GHz	50 ohm	1ea 1x2	6ea 1x2, 2ea 1x6	4	N-Type
	G2R12	Relay	DC-12GHz	>80dB @ 4 GHz	50 ohm	1 ea 1x3	5ea 1x6	4	N-Type
	G2R14	Relay	DC-18GHz	>60dB @ 18GHz	50 ohm (self terminating)	1ea 1x3	6ea 1x6	3	SMA
	G2R17	Relay	DC-18GHz	>60dB @ 18GHz	50 ohm	1ea transfer	8ea transfer	2	SMA
	G2R18	Relay	DC-18GHz	>60dB @ 18GHz	50 ohm	1ea 1x6	7ea 1x6	3	SMA
	G2R21	Relay	DC-18GHz	>60dB @ 18GHz	50 ohm	1ea 1x2	8ea, 1x2 & transfer	2	SMA
	G2R22	Relay	DC-18GHz	>60dB @ 18GHz	50 ohm	1ea 1x6	10ea 1x6	2	SMA
	G2R27	Relay	DC-18GHz	>60dB @ 18GHz	50 ohm (self terminating)	1ea 1x8	4ea 1x10	5	SMA
	G2R28	Relay	DC-18GHz	>60dB @ 18GHz	50 ohm	1ea 1x8	7ea 1x10	3	SMA
	G2R25	Relay	DC-26.5GHz	>55dB @ 26GHz	50 ohm	4ea 1x2	16ea 1x2	2	SMA
	G2R40	Relay	DC-40GHz	>50dB @ 40GHz	50 ohm	1ea 1x3	7ea 1x6	3	K-Type
	G2F90	Mems	1300-1610nm	>50dB	n/a	1ea 1x2	8ea 1x2	2	SC or FC

NOTE: See data sheet for full model number, specifications and suffix definitions.

Modular IF, L-Band, Wideband Switching

SIM32 20-250MHz up to 32x32

SLM32 850-2450MHz up to 32x32

SWM32 20-3150MHz up to 32x32

SGM32 20-6000MHz up to 32x32 **New**



Applications:

- Communications
- Teleport and last mile
- Encryption Tx/Rx modem
- Satellite ground stations
- Security installations
- Uplinks or downlinks

6RU - Flexible configurations from 4x4 to 32x32: 20MHz-6GHz

Eliminating multi-couplers, manual patch bays and patch cords, our SxM32 family of units are a highly modular switch array specifically designed for routing of RF signals with respectable crosstalk isolation, noise figure, IP3, and other critical signal parameters. It can be configured in single-channel increments from 4x4 up to 32x32, and with multiple units up to 128x128.


Fully populated, these units provide up to 32 input ports and 32 output ports in a modular 6RU package. The SxM32 is a Fan-OUT unit (a given input can connect to multiple outputs - "distributive"), and the SxM32i is a Fan-IN unit (combine multiple inputs to a given output "combiner"). Within the table below are standard frequency ranges available spanning 20MHz to 6GHz. They are available with SMA or BNC connectors. For N-Type connectors, 1RU panels are available.

Our unique design allows isolated failure capability. Should an element receive a damaging signal level and experience a failure, it will only affect that individual channel and not a group of channels. All elements and modules are secured within the unit for rugged and trouble free operation.

The front panel includes a touchscreen display with menu driven operation. Pick between the standard 4.3" display, or the **Option X** 10.1" display (shown here) which provides enhanced features. The unit can be configured with single or dual power supplies and CPU's (full redundant). Option "L" adds redundant LNB power supply and LNB control/monitor features for antenna applications (0/13/18V, 22kHz tone, current monitoring). Other options include variable gain control, AGC and power monitoring. Compatible with miniature FiberSTIK™ fiberoptic receiver (see below).

System Type	Frequency Range	Features
SIM32	40-250MHz	IF-Band, non-blocking Fan-OUT
SIM32i	40-250MHz	IF-Band, non-blocking Fan-IN
SLM32	850-2450MHz	Extended L-Band, non-blocking Fan-OUT
SLM32i	850-2450MHz	Extended L-Band, non-blocking Fan-IN
SWM32	20-3150MHz	Wideband, non-blocking Fan-OUT
SGM32	20-6000MHz	Extreme WB, non-blocking Fan-OUT

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.

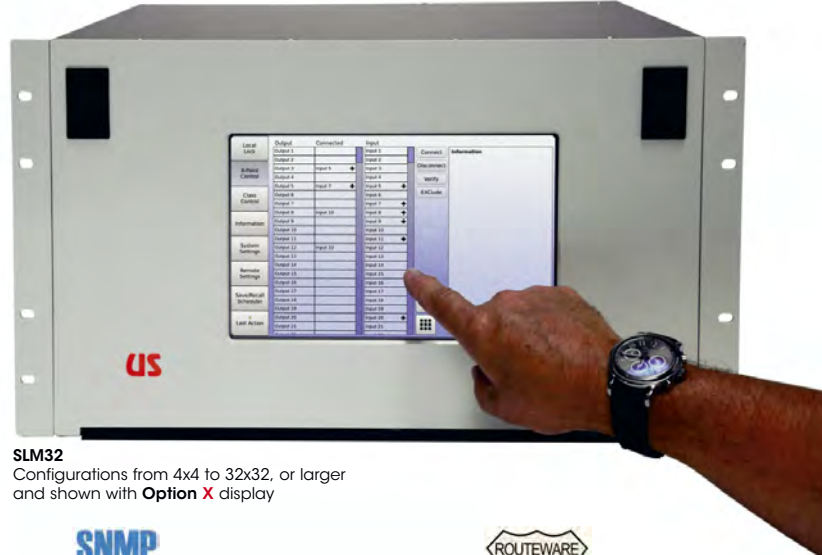

SLM32
Configurations from 4x4 to 32x32, or larger and shown with **Option X** display




Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!



SxM32
SMA or BNC connectors
Optional dual CPU
Optional LNB power & control, gain, AGC



MAC4
Multi-unit configurations are easily controlled with our Master Array Controller. See page 23

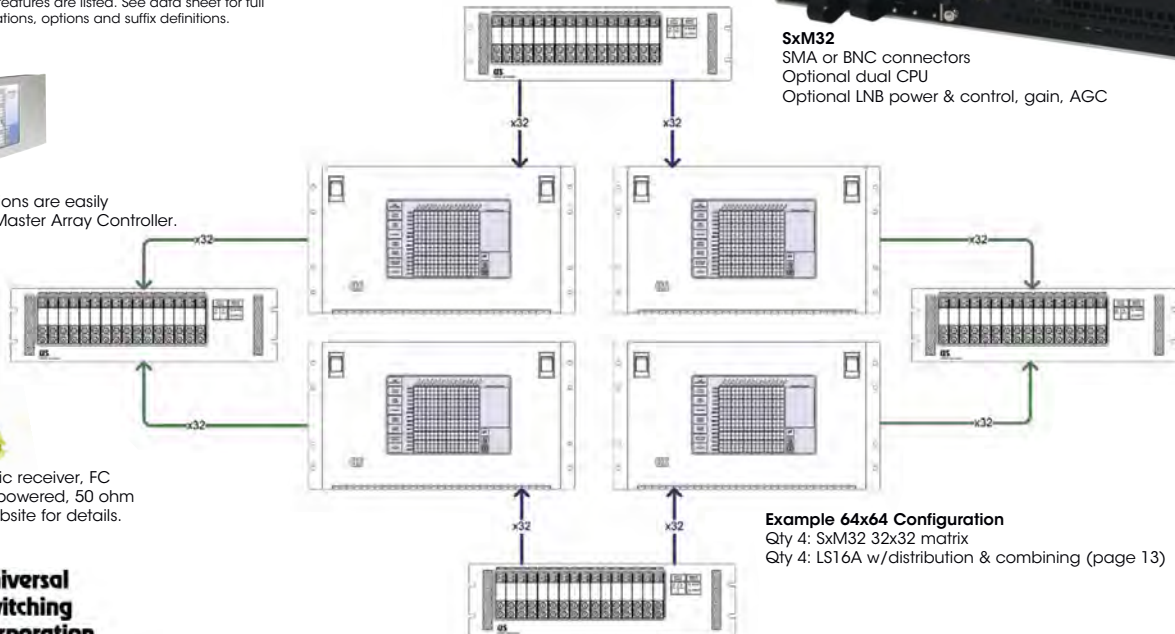

New FiberSTIK™
Wideband fiberoptic receiver, FC 200-3000MHz, LNB powered, 50 ohm See page 12 or website for details.

Example 64x64 Configuration
Qty 4: SxM32 32x32 matrix
Qty 4: LS16A w/distribution & combining (page 13)



L-Band & Wideband Fixed-Sized Switching

SLM16 850-2450MHz sizes 8x8 to 16x16

SWM16 20-3150MHz sizes 8x8 to 16x16

New SGM16 20-6000MHz sizes 8x8 to 16x16



Applications:

- Communications
- Teleport and last mile
- Encryption Tx/Rx modem
- Satellite ground stations
- ENG vans or trucks
- Uplinks or downlinks

1RU - Fixed configurations loaded with features: 20MHz - 6GHz

For smaller or budget minded yet performance demanding applications like ENG vans or trucks, these 1RU units are purpose built for IF and L-Band switching. Available in 8x8 or 16x16, and with SMA or BNC connectors, they provide great RF specifications for IP3, noise figure and isolation. They come standard with 10/100 Ethernet & multi-serial control ports, web browser (SNMP/IPv4/6/LXI), redundant fans, and redundant power supplies. Signal connectors are located at the rear while the front panel has LCD display and control keys. Other options include variable gain control, AGC, power monitoring, and LNB power/control features.

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.




SLM16
16x16 L-Band Matrix



New FiberSTIK™
Wideband fiberoptic receiver, FC 200-3000MHz, LNB powered, 50 ohm
See page 12 or website for details.



FREE RWP5 License With Purchase in 2019



Modular IF, L-Band, Wideband Switching

SWM16X 20-3000MHz up to 16x16

8x8, dual 8x8, 8x16 & 16x16



Applications:

- Communications
- Teleport and last mile
- Encryption Tx/Rx modem
- Satellite ground stations
- ENG vans or trucks
- Uplinks or downlinks

4RU - Modular symmetric or asymmetric configurations

Compact and high performance, the SWM16W provides a cost effective switching capacity for smaller installations. All inputs and outputs are located at the rear of the unit. The SWM16X is a distributive non-blocking (Fan-OUT) product that can be ordered in array sizes from 4x16 to 16x16. The SWM16Xi is a combiner version (Fan-IN) in sizes from 16x4 to 16x16.

Standard redundant hot-swap power supplies with independent AC inputs deliver the ultimate in system reliability for critical applications. The unit can also be configured with dual control CPU capability. An optional Bias-T capability power supply is available (option P). Complete control and status of the unit is available at the single or dual 10/100 ports, built-in web browser, touchscreen display, or via the RouteWarePRO software packaged provided.

Our popular RouteWarePRO software package (included) makes it easy to control multiple units from the same GUI, or you can manage the unit from a web browser window. Our critical new "X-Point Classing" feature is included. Custom configurations are available upon request.



FREE RWP5 License With Purchase in 2019

System Type	Features
SWM16X-1608-15N	8 input, 8 output, distributive Fan-OUT, single CPU
SWM16X-1608-25N	8 input, 8 output, distributive Fan-OUT, dual CPU
SWM16X-D1608-25N	Dual 8 input, 8 output, distributive Fan-OUT, dual CPU
SWM16X-2416-15N	8 input, 16 output, distributive Fan-OUT, single CPU
SWM16X-2416-25N	8 input, 16 output, distributive Fan-OUT, dual CPU
SWM16X-3216-25N	16 input, 16 output, distributive Fan-OUT, dual CPU

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.



Download our Monitor & Control software **RouteWarePRO** for a **FREE 30-day trial** today!



SWM16X
N-Type connectors
Optional dual CPU
Optional LNB power & control, gain, AGC



Global Signal Switching and Distribution Specialists

Available Q4-2019

Large Format Modular L-Band Switching

SLX320 850-2450MHz up to 64x256

SLX321 850-2450MHz up to 128x192



14RU - Modular symmetric or asymmetric configurations

Designed to be the "gold standard" for large format extended L-Band matrices, these new Tri-Stage products are rich with features. Leveraging the absolute latest in component technology and design concepts, these modular switch arrays are specifically designed for routing high performance signals in symmetric or asymmetric matrix configurations. They provide respectable crosstalk isolation, noise figure, IP3 and other critical RF parameters.

The SLX320 provides Fan-OUT (distributive) configuration up to 64in x 256out in 8-channel port increments. The SLX321 has the same structure, but has different "mid-stage" elements to allow a configuration up to 128x192. Both units are available in complementary Fan-IN configurations (combine multiple inputs to a given output) by adding an "i" to the model number which then provides a modular configuration up to 256x64 or 192x128 Fan-IN with 8-channel port expansion increments.

Units come standard with redundant hot-swap power supplies and can feature either one or two hot-swappable plug-in control CPUs. An extension of our CAS product line, all active modules, power supplies and assemblies are installed via the lockable hinged front panel. No rear panel access is needed to maintain the unit.

System Type	Frequency Range	Features
SLX320	850-2450MHz	Up to 64x256, distributive Fan-OUT
SLX320i	850-2450MHz	Up to 256x64, combining Fan-IN
SLX321	850-2450MHz	Up to 128x192, distributive Fan-OUT
SLX321i	850-2450MHz	Up to 192x128, combining Fan-IN
SWX320	20-3000MHz	Wideband, distributive Fan-OUT

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.

Applications:

- Communications
- Teleport and last mile
- Encryption Tx/Rx modem
- Satellite ground stations
- ENG vans or trucks
- Uplinks or downlinks



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!



SLX321 L-Band Matrix
Modular configurations up to 128x192 (13RU)



Available Q3-2019

RF Over Fiber: 200-3000MHz

F-LINK-II Mini and FiberSTIK™

Rugged IP67 Waterproof & Miniature


Our small F-LINK RfOf products are designed provide a fiber optic conversion to/from copper for analog signals from 200-3000MHz (min). They are compatible with both the LS16-FR2 & LS16-FT2 from our LS16A product offering (see page 15), and well as our miniature FiberSTIK™ receiver.

F-LINK is designed for bulkhead installation, has a twist-lock DC power connector, stainless steel FC single-mode optical connector, status LED, and a choice of SMA, BNC or TNC connectors (50 ohm). The transmitter has a Class-1 Fabrey-Perot laser with 1310nm wavelength.

FiberSTIK™ product allows the user to pick and choose what port(s) on their system they want to have fiber optic receiver (input) capability. DC power is provided by LNB power sourced from the host system where it is installed (must have LNB power option). The host system can typically monitor current for proper operation as well.

Model	Description
FLINK-II-MTX-x	Mini RfOf Transmitter, 200MHz-3000MHz, FC Optic
FLINK-II-MTX-x	Mini RfOf Receiver, 200MHz-3000MHz, FC Optic
FiberSTIK™	Miniature RfOf Receiver, 200MHz-3000MHz, FC Optic

NOTE: See data sheet for details.



Applications:

- Antenna fiber links
- Teleport and last mile
- Backup antennas
- Satellite ground stations
- Communications
- Uplinks or downlinks



New
FiberSTIK™
Miniature Fiber Optic Receiver
BNC



New
FLINK-II-MTX-A
Mini IP67 Fiber Optic RfOf
SMA, BNC & TNC



Global Signal Switching and Distribution Specialists

Redundancy Switches & Universal Chassis

RSX4 Modular Redundancy Single, Dual or Quad

UC1 Modular Universal Chassis PUC Technology

1RU Sized Units For Up to Two "PUC" Elements: DC - 50GHz

These two 1RU compact modular units are identical with exception of the front panel button controls. The RSX4 front is tailored for redundancy applications, and the UC1 for any type of module.

About the RSX4

The RSX4 front panel is designed specifically for 1-4 channel redundancy (A/B) switching and is a drop-in replacement for our field proven 1094xB redundancy switchers (control, capability & performance). High value satellite communication assets (and other similar critical applications) require high reliability equipment and redundancy switching.



Applications:

- Communication centers
- Signal redundancy
- L-Band, IF, RF signals
- Satellite systems
- ENG vans or trucks



Model RSX4 & UC1
Universal Redundancy Chassis

About the UC1

The front panel of the UC1 is designed to control any switching element whether it be a full matrix element, or a simple Nx1 configuration. The front panel allows you to navigate an efficient menu system to name channels, make connections or any other common system operation.



Packed with features

Units feature a unique modular design with "PUC" elements that allows the user to remove/install a "PUC" to reconfigure, or field upgrade the unit. PUC's can also be remotely located outside the chassis up to 400 feet away with available extension cables.

Units include 10/100 Ethernet & Multi-Serial control ports (RS232/422/485), front panel control & display, alarm port with status hard contact, dual monitored fans, built-in web browser, real-time clock, cable support bracket, benchtop or flanges for rack mount, redundant power supplies and dual power input. Available in dual AC, DC or AC/DC powered versions.



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!

PUC Type	Frequency Range	Features
PUC1-0117C	HD/SDI Video	Video Switch & Three-Way Distribution
PUC1-02/03/04/05	DC-18/6/40/26GHz	1 or 2: Transfer Relays (various frequencies)
PUC1-06nic	DC-3GHz	1 to 4: Terminated (1W) 2x1 Relay, BNC/N/SMA conn
PUC1-07niX	DC-100MHz	1 or 2: Terminated (1/2W) 1553 2x1 Relay, Triaxial conn
PUC1-08/09n0J	100Mbps/1Gbps	1 or 2: 8-Wire 2x1 Relay, RJ45 conn
PUC1-16/17/18	DC-6/26/18GHz	1 or 2: Non-Terminated 2x1 Relay, SMA conn
PUC1-20n5A	DC-26GHz/50GHz	1, 2 or 3: Non-Terminated 6x1 Relay, SMA conn
PUC1-2115N	DC-3GHz	Terminated (1W) 4x1 Relay, N-Type conn
PUC1-2315N	DC-3GHz	Terminated (5W) 3x1 Relay, N-Type conn

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.



PUC Elements can be removed up to 400 feet away.



Global Signal Switching and Distribution Specialists

Distribution, Conversion & Multicouplers

MDU4 Modular up to 4 Elements

1RU - Mix up to four digital, RF & analog elements

The MDU4 takes cues from our rugged and high performance products of the past, and yields something new in the process. The 1RU sized unit is at home installed as a rack-mount unit, or on the R&D bench-top. Both rack-mount flanges and rubber feet are included.

It also features modularity so it's simple to specify exactly what type of distribution or conversion elements you need. Up to four single-slot elements can be mixed & matched to meet your needs.

Units include redundant power supplies, visual and audible supply status, and dual power input. Available in dual AC, DC, or AC/DC powered versions. Includes rubber feet for benchtop use and flanges for rack mount. Low cost custom or modified elements can be done by contacting the factory.




Applications:

- PCM Telemetry
- TTL Clock and Data
- Mixed analog signals
- 422 Clock and Data
- IRIG time code
- Audio or Video routing
- Digital conversion



Element	Signal	Config	Description
A2	ECL	Single 1x4	Digital differential ECL distribution (400Mbps) SMA connectors (10 total), 50 ohm impedance, four output pairs
C1	TTL	Single 1x8	Digital single-ended TTL (PCM) distribution (50Mbps) BNC connectors (9 total), 50 or 75ohm impedance (jumper selectable)
C2	TTL	Dual 1x4	Digital single-ended TTL (PCM) distribution (50Mbps) BNC connectors (10 total), 50 or 75ohm impedance (jumper selectable)
C3	TTL	Triple 1x2	Digital single-ended TTL (PCM) distribution (50Mbps) BNC connectors (9 total), 50 or 75ohm impedance (jumper selectable)
C4	TTL	Single 1x16	Digital single-ended TTL (PCM) distribution (50Mbps), wire BNC connectors (17 total), 50 or 75ohm impedance (jumper selectable)
D8	422	8-Pair 1x4	Digital differential 422 distribution (50Mbps), eight pairs of 1x4 DB25 connectors (5 total), 100 ohm
DB	422	2-Pair 1x4	Digital differential 422 distribution (50Mbps), two pairs of 1x4, plus expander DB25 connectors (5 total), 100 ohm
F2	TTL/422	Dual 1x4	Digital conversion and distribution, TTL input, differential 422 outputs (50Mbps) BNC input, Triaxial output connectors, 50 or 75 ohm input (selectable)
F5	TTL/422	Five 1x1	Digital conversion, TTL input, differential 422 output (50Mbps) BNC input, Triaxial output connectors, 50 or 75 ohm input (selectable)
G2	422/TTL	Dual 1x4	Digital conversion and distribution, differential 422 input, TTL outputs (50Mbps) Triaxial input, BNC output connectors, 100 ohm input
G5	422/TTL	Five 1x1	Digital conversion, differential 422 input, TTL output (50Mbps) Triaxial input, BNC output connectors, 100 ohm input
M1	20-3000MHz	Single 1x8	RF multi-coupler (RF distribution), unity gain, wideband, -1dB >+5dBm, NF <10dB, <2.0:1 VSWR SMA connectors (9 total), 50 ohm impedance
M2	20-3000MHz	Dual 1x4	RF multi-coupler (RF distribution), unity gain, wideband, -1dB >+5dBm, NF <10dB, <2.0:1 VSWR SMA connectors (9 total), 50 ohm impedance
T1	422	Single 1x8	Digital differential 422 distribution (50Mbps) Triaxial connectors (9 total), 100 ohm
T2	422	Dual 1x4	Digital differential 422 distribution (50Mbps) Triaxial connectors (10 total), 100 ohm
T3	422	Triple 1x2	Digital differential 422 distribution (50Mbps) Triaxial connectors (9 total), 100 ohm
U1	SDI to UHD-SDI	Single 1x8	Digital video distribution: UHD-SDI (4K & 8K), HD-SDI with EQ, reclock, cable-driver (SMPTE ST-2082, ST-2081, ST-424, ST-292 signals), BNC connectors (9 total), 75 ohm
U2	SDI to UHD-SDI	Dual 1x4	Digital video distribution: UHD-SDI (4K & 8K), HD-SDI with EQ, reclock, cable-driver (SMPTE ST-2082, ST-2081, ST-424, ST-292 signals), BNC connectors (10 total), 75 ohm
U3	SDI to UHD-SDI	Triple 1x2	Digital video distribution: UHD-SDI (4K & 8K), HD-SDI with EQ, reclock, cable-driver (SMPTE ST-2082, ST-2081, ST-424, ST-292 signals), BNC connectors (9 total), 75 ohm
V1	Analog DC-200MHz	Single 1x8	Analog video distribution (DC-200MHz): baseband video, PCM, TTL, NTSC, instrumentation BNC connectors (9 total), 75 ohm
V2	Analog DC-200MHz	Dual 1x4	Analog video distribution (DC-200MHz): baseband video, PCM, TTL, NTSC, instrumentation BNC connectors (10 total), 75 ohm
W1	422	Single 1x8	Digital differential 422 distribution (50Mbps) Amphenol 31-2225 type Twinaxial connectors (9 total), 100 ohm
W2	422	Dual 1x4	Digital differential 422 distribution (50Mbps) Amphenol 31-2225 type Twinaxial connectors (10 total), 100 ohm
W3	422	Triple 1x2	Digital differential 422 distribution (50Mbps) Amphenol 31-2225 type Twinaxial connectors (9 total), 100 ohm

Flexible rack mounting

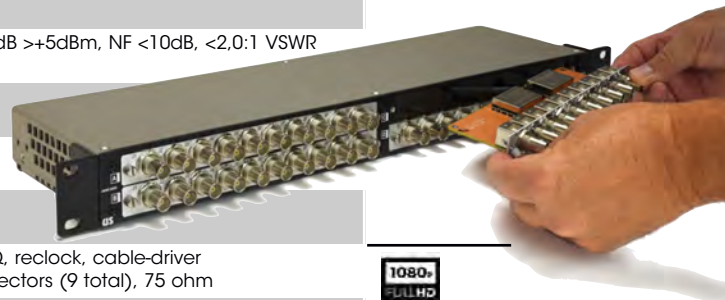

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.



Universal Switching Corporation

Global Signal Switching and Distribution Specialists

Distribution, Conversion, Multicouplers & Switching

LS16A Modular up to 16 Elements

3RU - Mix up to sixteen different elements

Many times there is a need to convert various signal types, buffer them or even provide distribution or switching for these signals. Our "Linker System" provides a very cost effective means to provide all these functions. Properly configured with the appropriate modules it can be a "drop-in" replacement for many units from APCOM or Apogee Labs (and other companies), but with additional capability, features, higher quality, and newer technology.

The LS16A provides the system professional with an uncompromising combination of modularity, high performance and high reliability. Our unique design provides slots where any combination of 16 modules can be installed from the rear of the unit and (depending upon the module type) can also provide front panel indicators, adjustments, controls and test points to the user. Modules typically have the signal connectors at the rear.

The unit's modules are hot-swap capable and the frame can be populated with redundant hot-swap power supplies to deliver the ultimate in system reliability for critical applications.

Digital, analog, conversion, switching and RF-Over-Fiber modules are available and can be mixed and matched within the same frame. Each slot is addressable so that the user can monitor or control an individual module independent of another with the optional plug-in controller with 10/100 Ethernet port. The LXI certified controller provides web browser control and TCP/IP access to monitor & control the system including power supplies, fans and unit health. Customized modules are available.



- Applications:**
- PCM Telemetry
 - RF Over Fiber Conversion
 - TTL Clock and Data
 - Mixed analog signals
 - 422 Clock and Data
 - IIRIG time code
 - SDI Video routing
 - Digital conversion
 - Redundancy Switching



Updated
LS16A showing the "Open Window" front panel design w/test points & LEDs



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!

Element	Frequency Range	Module Description
LS16-A07	DC-50MHz	Analog Distribution Amplifier (1x6): manual adjust, BNC, 75 ohm
LS16-A18	50MHz-3GHz	Wideband Multicoupler (1x4): variable gain, power & gain monitor, C3 LINK
LS16-A19	850MHz-2450MHz	L-Band Multicoupler (1x4): variable gain, power & gain monitor, LNB control, C3 LINK
LS16-D05	DC-50Mbps	Distribution Module: Digital TTL/422 distribution (1x6), 3x TTL, 3x "422"
LS16-D09	40Mbps	Distribution Module: Dual 1x2 TTL digital distribution, 50/75 or High Z input, BNC
LS16-FR2	50MHz-3GHz	RF Over Fiber (Rx): Dual channel, 1310nm (used with USC F-LINK-II Tx unit)
LS16-FT2	50MHz-3GHz	RF Over Fiber (Tx): Dual channel, 1310nm (used with USC F-LINK-II Rx unit)
LS16-L02	850MHz-2450MHz	L-Band LNB Power: LNB control, C3 LINK
LS16-L03	850MHz-2450MHz	L-Band Multicoupler (1x2): variable gain, power & gain monitor, LNB control, C3 LINK
LS16-S04	DC-3GHz	Switch Module: 6x1 relay mux with input termination, BNC, C3 LINK
LS16-S10	DC-3GHz	Switch Module: dual 2x1 relay mux with input termination, BNC, C3 LINK
LS16-S06-x	DC-18GHz	Switch Module: up to three 2x1 relay elements, SMA, C3 LINK

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.



Global Signal Switching and Distribution Specialists



Multi-Level Digital Routing - RS530/422/232

S24530B 20Mbps up to 24x24

S64530 50Mbps up to 64x64

5RU - Flexible configurations from 3x3 to 64x64: Up to 50Mbps

The S24530B and S64530 systems are fully digital asynchronous switch arrays specifically designed for routing RS-530, RS-530A & RS-232 bi-directional serial interfaces. This includes all data, clock, and handshaking lines present in the complete bus for each interface. Multi-channel Bi-directional RS-422 busses are also supported with available interface cards.

Activity detection, loopback testing, level conversion (RS-232 to RS-530), and RS232 primary/secondary channel shifting are all available features. Switching is done using an all-digital asynchronous core minimizing timing skew and avoiding limitations associated with systems using a multiplexed common bus architecture.

Fully populated, the S24530B can route as many as 24 DTE and 24 DCE devices. The S64530 can support up to 64 DTE and 64 DCE devices using a single mainframe, and can be arrayed for systems of 128 DTE by 128 DCE and larger.

All user connections are industry standard DB25 connectors using EIA standard pinouts for each interface. The S24530 has all I/O directly at the rear panel and is scalable in 3-channel increments. The S64530 scales in 8-channel increments and utilizes external 1RU adapter panels for user connectivity. Both systems use a 5RU mainframe with minimal MTTR.

All ports are secured with stainless hardware for rugged & trouble free operation. With smaller configurations, filler plates are included to complete the system configuration. Expanded S64530 systems use additional adapter panels for connectivity.

Available with single or dual controllers with each providing 10/100 Ethernet with web browser, USB port, and multi-serial. Self-monitoring redundant hot-swap power supplies can be powered by any international AC power source. Optional "X" types include our **Option X** touchscreen display with X-Point view and other enhanced features, and our MAC4 remote control panel can be added to any system to provide a networked hardware 10" display control panel for rack or desktop mount. Customized configurations are available.

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.



S64530X
(shown with Option X display)

4.3" Screen



S64530
RS-530/422 Digital Router
64X64 with Adapter Panels



New
S24530B
RS-530/422/232 Digital Router
24X24




Applications:

- TDMA Satellite Control
- FDMA Control
- TTL Clock and Data
- CDMA Satellite Control
- 422 Clock and Data



Download our Monitor & Control software **RouteWarePRO** for a **FREE 30-day trial** today!

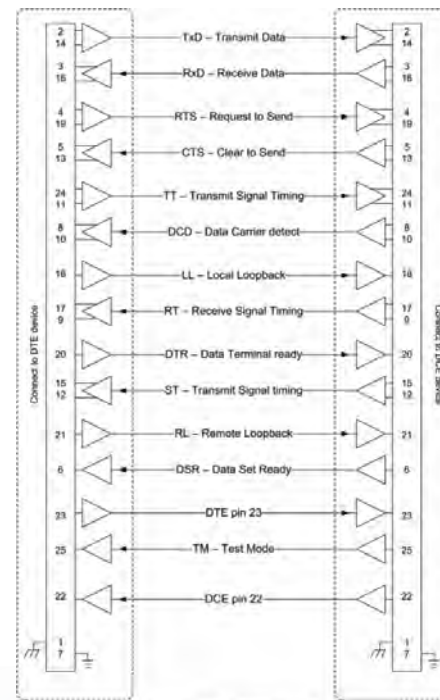

This diagram is to clarify the directionality and function of the signals that will be switched.



Global Signal Switching and Distribution Specialists

Modular Digital & Analog Systems

S2560F Digital 50Mbps

S2561F Analog 125MHz

S2562F Analog 200kHz

New S2565F Hybrid (64x64) BNC's on unit - No Adapters Needed

New S2566F Hybrid S2560F & S2561F combined

5RU - Flexible configurations from 32x32 to 1024x1024

With a global installation base, these field proven units can be configured up to a 256 input x 256 output system within a single chassis. Up to eight input and eight output modules can be installed adding 32 channels to the system capacity with each additional module.

With just four units, a 512x512 can easily be configured (shown below), or with sixteen units for a large 1024x1024. They offer the highest crosspoint density in the switching industry with over 65,500 effective crosspoints in a single 5RU package.

Redundant signal paths allow each I/O connection up to 30 different signal paths for ultimate reliability. Our digital & analog cores offer high bandwidth and performance with the digital version including realtime crosspoint verification. I/O modules are available with different specifications including digital 422, analog, and instrumentation. These can be mated to compatible Series AP type adapter panels to allow for different type of signal connectivity (422, TTL, or analog) for a truly comprehensive solution including a variety of signal connectors.

Our updated "FX" types include our **Option X** touchscreen display with X-Point view and other enhanced features. The "F" version is the same but has a 4.3" touchscreen without X-Point view. They also include single or dual controllers with web browser interface, 10/100 Ethernet, USB, multi-serial ports, and includes an important new feature called "X-Point Classing".


The example shown below illustrates the S2561F used as a building block to configure a full 512x512 configuration with >125MHz band-pass capability using the external 1RU adapter panel assemblies (Series AP32x).

System Type	Frequency Range	Features
S2560F(X)	>50Mbps	Differential digital (422) I/O, SCSI-II
S2561F(X)	DC-125MHz	Single-ended analog, 50 Position D-Sub
S2562F(X)	DC-200kHz	Single-ended instrumentation analog
New S2565F(X)	Hybrid - Direct	Digital & analog type with BNC's (64x64)
New S2566F(X)	Hybrid	Digital & analog type, adapters required

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.



- Applications:**
- PCM Telemetry
 - TTL Clock and Data
 - Mixed analog signals
 - 422 Clock and Data
 - IRIG time code

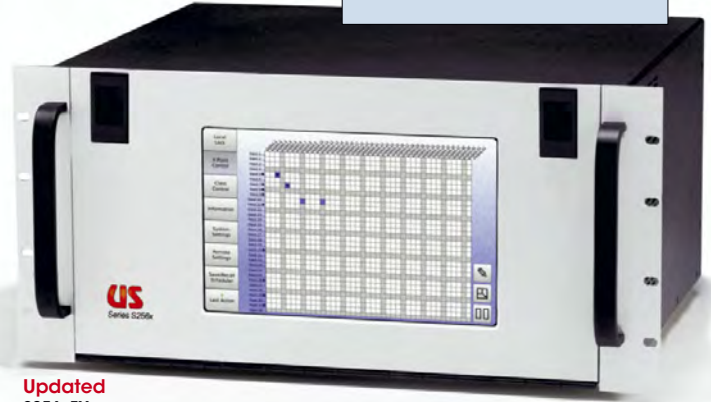

Updated S256xFX
(shown with **Option X** display)



NEW S2565FX
BNC's at rear of unit and LED status indicators.



Download our Monitor & Control software **RouteWarePRO** for a **FREE 30-day trial** today!



AP32 Adapter Panels
Units available for various configurations with interconnect cables included



512 x 512 Example
4x S2561F 256x256 matrices
16x AP32BI 32-channel input panels
16x AP32BO 32-channel output panels
1x MAC4 Master Array Controller

S2560F & S2561F
Multipin connectors at the rear of the unit



Global Signal Switching and Distribution Specialists



Precision Instrumentation & Sensor Routing

TS02A 16x64 up to 64x64

2RU - Precision Automated Patch: DC-200kHz, 64x64

Designed from scratch to improve on the legacy Precision Filters Model 4164, the TS02A uses the absolute latest in component technology. Many still use manual patch cords & patch panels to interconnect sensors, recorders, scopes and other instrumentation in test & evaluation labs.


Our TS02A can automate much of your lab's sensor connectivity eliminating errors from human patching as well as mechanical connectivity problems from continuous patch cord activity. The TS02A provides up to 64 inputs, and 64 outputs in a non-blocking full Fan-OUT array. It includes built-in self-tests that non-invasively verifies validity of closed crosspoints (Go/No-Go), and can also perform testing on the complete array (FAT).

Each input is a differential pair to help eliminate low frequency sensor noise, and each output is single-ended. Each negative input (of the input pair) can individually be switched to signal ground for applications dependent needs. The RED dip switch you see in the picture provides this function for each input (see block diagram).

The TS02A includes front panel touchscreen and single controller providing 10/100 Ethernet with web browser, USB port, and multi-serial. Self-monitoring redundant hot-swap power supplies can be powered by any international AC power source. Optional 1RU rackmount isolated BNC panels are available (see below). Customized configurations are available by contacting the factory.


NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.

TS02A
Fully populated 64x64

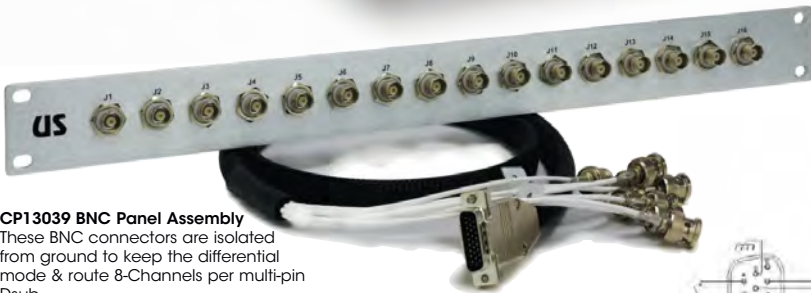

CP13039 BNC Panel Assembly
These BNC connectors are isolated from ground to keep the differential mode & route 8-Channels per multi-pin Dsub.

Other custom panel assemblies are available upon request.




New TS02A
Instrumentation 64x64 with touchscreen control

Applications:

- Survivability lab
- Environmental chamber
- Vibration testing
- Satellite ground stations
- Laboratories
- Telemetry data



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!

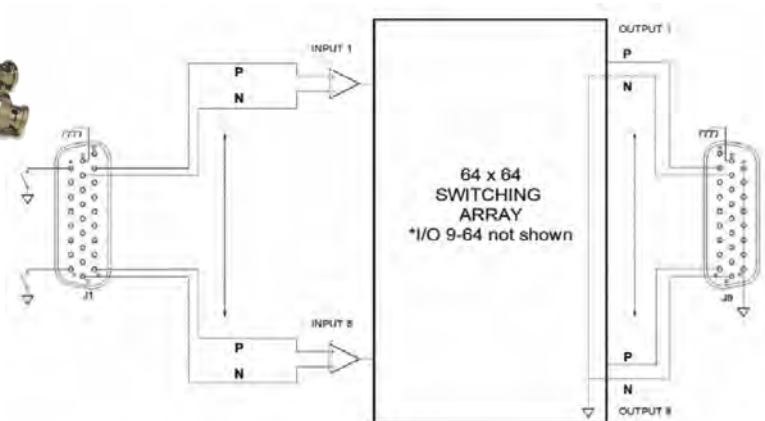

Global Signal Switching and Distribution Specialists

Modular 1553 Patching System (Triax)

New BS1553F 8x8 up to 64x64, DC-15MHz

5RU - Flexible configurations from 8x8 to 64x64

Automating "patch panels" is a proven & effective method to reduce facility operating costs by increasing efficiency, productivity, repeatability, and reliability. Our BS1553F(X) unit is a modular high density 5RU automated patch unit that can be configured in symmetric or asymmetric configurations from 8x8 to 64x64 within the same chassis.

Designed specifically for a passive differential signal path, high reliability mechanical relay technology is used with DC coupling (no transformers). Each input and output is terminated with 78 ohms (center pin to inner shield) when not selected to be patched. The internal stubbreaking design provides a nearly "transparent" 1553B environment to allow for accurate bus simulations.

Since the signal path is passive, it can also be used in ATE applications for patching signals to make differential or single-ended measurements. The unit can also patch high-speed 422 differential data signals.

Fully populated, this 5RU unit contains a total of 64 inputs and 64 outputs where each input can be connected to any one of the 64 outputs. The BS1553FX is the same but has a 10.1" display (Option X), plus enhanced front panel features and capabilities.

The BS1553F comes standard with redundant hot-swap power supplies and is available with either single or dual (redundant) hot-swap C3 controllers installed. The C3 controller features 10/100 Ethernet (LXI certified), USB 2.0 and multi-serial (RS-232C/422A/485) control ports. It also includes an important new feature called "X-Point Classing".

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.




- Applications:**
- 1553B Bus simulation
 - Aircraft test lab facilities
 - Clock and Data routing
 - Differential 422 routing
 - Differential ATE signals



New BS1553FX
(shown with Option X display)

1553B Bus Simulation
Automated patch for including cables and hardware into the configuration.

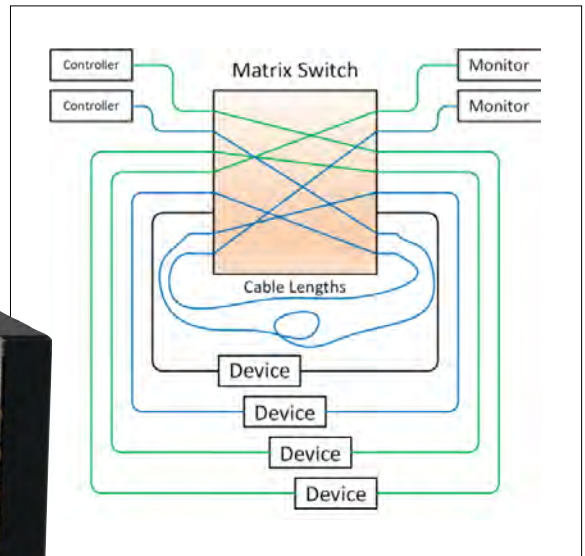

BS1553F(X)
Up to 8 input and 8 output modules with BJ77 (Triax) connectors, and LED status indicators



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!



Global Signal Switching and Distribution Specialists



Modular DC-18GHz Matrix

MS2010A 4x4 up to 12x12 Matrix - Low MTTR
 Cascade multiple for 33x33 Matrix, or larger

2RU - Relay-based, high performance, simple to maintain

Unique in the industry, this 18GHz product delivers a full matrix configuration in a small 2RU package. It features our proprietary relay element and design construction providing up to a 12x12 in just 2RU plus the added feature of quick and easy relay replacement with simple hand tools in <30 seconds for low MTTR.

Providing complete 1:1 connectivity of any input to any output (no fanout), the MS2010A has very high performance, passive, fully shielded, and bidirectional signal paths. Intended to automate manual patch cords or physical cable swapping (or replace similar bulky and dated competitive products), this unit is designed for switching any coaxial signal within the DC-18GHz frequency while being as transparent as possible. The SMA connectors at the rear panel are standard with N-Type and others optional.

The unit can also be specified with external input and/or output terminations if required (up to 11x12, 12x11 or 11x11). The unit can also include "looping ports" to cascade multiple units into larger arrays that are either symmetrical or asymmetrical (such as 22x22, or 12x44 respectively). Multi-unit arrays are easy to control & monitor with our MAC4 array controller (see below).

The MS2010A comes standard with redundant hot-swap power supplies and includes our C3 controller, both with convenient access behind the hinged front panel. The C3 controller features 10/100 Ethernet (LXI certified), USB 2.0 and multi-serial (RS-232C/422A/485) control port. It also includes an important new feature called "X-Point Classing".

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.





Applications:

- Telemetry routing
- Antenna Selection
- Mixed analog signals
- High speed data
- ATE selector or router




MS2010A
 Modular 18GHz Matrix
 Up to 12x12 with Low MTTR

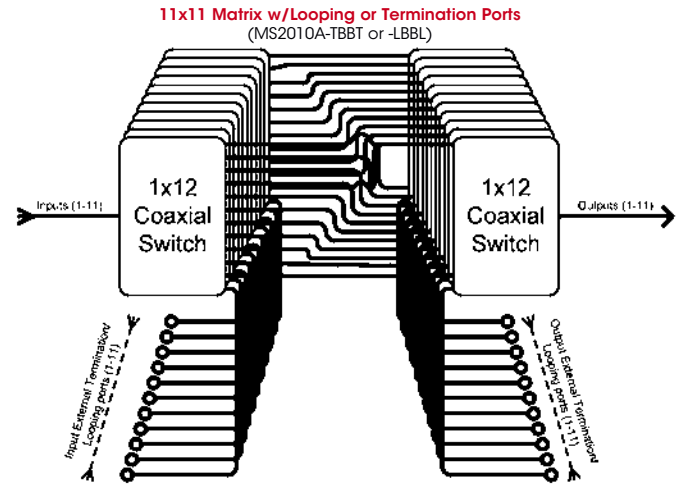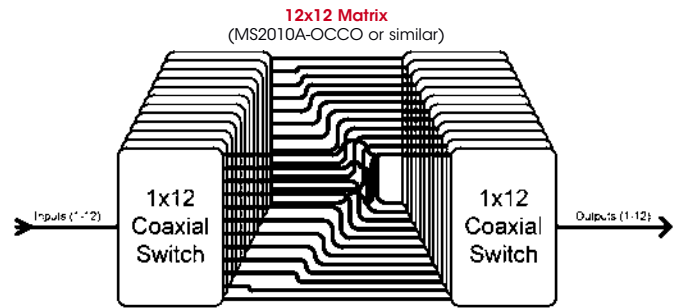

33x33 Matrix

Multiple units forming a 33x33 matrix array

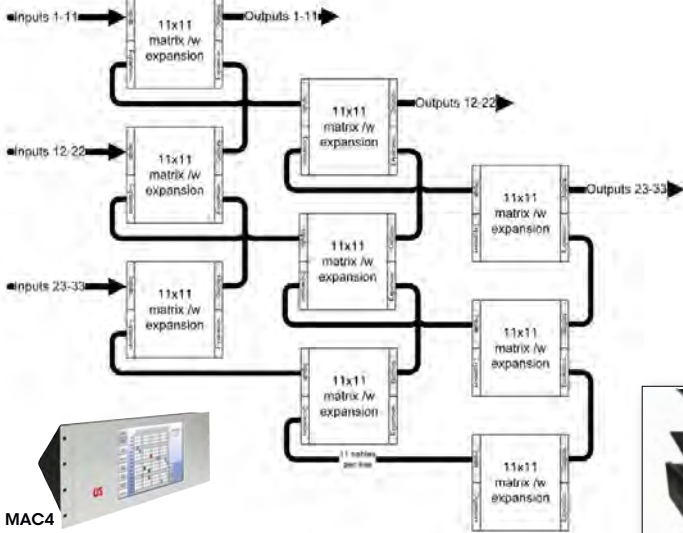

MAC4
 Multi-unit configurations are easily controlled with our Master Array Controller
 See page 23



User replaceable relay elements
 (10x10 shown with access panel removed)



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!



Global Signal Switching and Distribution Specialists

Other DC-18GHz Configurations (50GHz)

- MSD0601** Dual 6x1 with A/B Select
- MS06X02** 6x2 Matrix

2RU - Relay-based, high performance

This selection of units provide relay-based solutions in a few different configurations in a compact cost effective 2RU package. Standard units have DC-18GHz relays, though additional performance is available with optional 26GHz, 40GHz or even 50GHz relays. Units include 10/100 Ethernet & Multi-Serial control ports (RS232/422/485), front panel control & display, built-in web browser, and real-time clock.

About the MSD0601

This unit has two individual 6x1 self-terminating DC-18GHz switch paths, plus an A/B output selector. For control, it has illuminated LED buttons adjacent to each port as well as 10/100 Ethernet and multi-serial ports. This unit is also available with 26GHz, 40GHz or 50GHz relays as well for additional performance. It can be ordered with connectors on front or rear.

About the MS06X02

Delivering a blocking (1:1 connection) bidirectional 6x2 matrix array, this unit has SMA connectors that can be ordered with connectors on front or rear. For control, it has illuminated LED buttons in a matrix array as well as 10/100 Ethernet and multi-serial ports.



- Applications:**
- Telemetry routing
 - Antenna Selection
 - Mixed analog signals
 - High speed data
 - ATE selector or router



Coaxial Relay Modules: DC-3GHz/6GHz RM1X2, RCP1, RCP1R

Cascadeable module, optional control panels: DC-6GHz

The RM1X2 is a high performance low cost coaxial relay module with N-Type connectors that can be just a component, or mounted to one of two 1RU rack mount relay control panels. The module has a DE-9P connector with a DE-9S on the opposite side of the module so that one module can plug into another. Relay control lines are passed through the module and kept independent so up to four relays can be either gang controlled, or individually as requirements demand.

The 1RU sized RCP1 and RCP1R rack mount control panels include an integrated serial control port and relay drivers. The RCP1R unit is designed so the signal connectors to face inside the rack, and the RCP1 is designed so everything faces the front of the rack (see below). They can DC powered, or include an optional wall mount power supply.



- Applications:**
- Redundancy
 - Teleport and last mile
 - Backup antennas
 - Satellite ground stations
 - Communications
 - Uplinks or downlinks



RCP1 Panel Type
Up to four relay elements (1RU)

Model	Description
RM1X2	Relay module DC-3GHz, N-Type normally open (add -6 suffix for 6GHz version)
RM1X2T	Relay module DC-3GHz, N-Type self terminating (50 ohms)
RCP1	1RU Relay control panel, everything faces front of rack
RCP1R	1RU Relay control panel, everything faces rear of rack

NOTE: See data sheet for model number suffix definitions for DC voltages and AC wall mount power options.

RCP1R Panel Type
Up to four relay elements (1RU)



Video Routers

1RU & 2RU - 4KSDI, HD-SDI, SDI and Analog Video Routers

Specifically designed for analog and digital video switching or distribution, this array of units provide an effective solution for smaller installations. Compact and feature loaded, they are only 1RU or 2RU high and turn-key out of the box. These "fixed" configurations systems are not modular to reduce their cost. Suffix dash numbers can define other options. Units include 10/100 Ethernet control ports and web browser.



Signal Types:

- SDI, HD-SDI, 4K-SDI Video
- NTSC and RGB Video
- DVI-D and HDMI
- TTL or IRIG Timecode
- LVDS, PECL, LVTTL



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!



HDVSU1-3216
16 input, 16 output
HDsdi, SDI & NTSC (1RU)



New HDVMU1
Low cost SDI video muxes
4Ksdi HDsdi, SDI & NTSC (1RU)



HDVSU2
32 input, 32 output
HDsdi, SDI & NTSC (2RU)

Model	Digital/Analog	Function	Frequency Range	Typ Signal	Features
VSU1-3208	Analog	24in, 8out	DC-300MHz	+/-1.5V	BNC, 75 ohm
VSU1-3208H	Analog	24in, 8out	DC-75MHz	+/-5.0V	High Level, BNC, 75 ohm
VSU1-3208	Analog	16in, 16out	DC-300MHz	+/-1.5V	BNC, 75 ohm
VSU1-3208H	Analog	16in, 16out	DC-75MHz	+/-5.0V	High Level, BNC, 75 ohm
VSU1-3208	Analog	8in, 24out	DC-300MHz	+/-1.5V	BNC, 75 ohm
VSU1-3208H	Analog	8in, 24out	DC-75MHz	+/-5.0V	High Level, BNC, 75 ohm
VSU1-4P6T	Analog	Quad 6x1	DC-135MHz	+/-5.0V	High Level, BNC, 75 ohm
VSU1-4P6T-AB	Analog	Quad 6x1 A/B	DC-135MHz	Analog	Quad 6x1 analog, high level with A/B
VSU2-6432	Analog	32in, 32out	DC-500MHz	Analog	BNC, 75 ohm
HDVSU1-3216	Digital	16in, 16out	270M/1.485G/2.97G	Digital	SMPTE 292M, 424M, BNC, 75 ohm
HDVSU2-6432	Digital	32in, 32out	270M/1.485G/2.97G	Digital	SMPTE 292M, 424M, BNC, 75 ohm
HDVMU1-08	Digital	8x1	270M to 5.98Gbps	Digital	NTSC to UHDSdi video mux, BNC, DC supply New
HDVMU1-16	Digital	16x1	270M to 5.98Gbps	Digital	NTSC to UHDSdi video mux, BNC, DC supply New

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.

Precision Dual 1x32 Digital Distribution


1RU - PECL, LVPECL, LVTTL & LVDS Types

The DDU32 is a cost effective and purpose built unit for the precision distribution of digital signals. It comes in a standard dual 1x32 configuration, and is available for many digital signal applications.

Sized in a 1RU package, the unit is designed with rear facing high performance SMB connectors. The unit is rack mountable with an illuminated power switch on the front panel, and all I/O and power connectors on the rear. To assist with providing the slightest amount of skew between all ports, the dual inputs are positioned at the center rear of the unit.

For clock and data distribution applications, many times the skew and alignment of data and clock signals is critical. This unit has a very precise skew design. An optional purpose built trigger and clock alignment feature is available with timing skew of <75ps through all ports.

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.

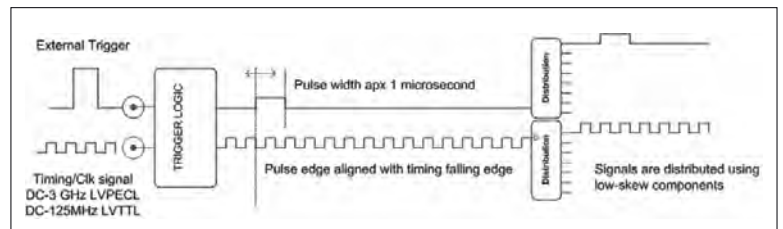

DDU32
Dual 1x32 Digital Distribution
PECL, LVPECL, LVTTL, LVDS



Global Signal Switching and Distribution Specialists

Master Array Controller - Remote Panel Model MAC4 Rackmount or Desktop

4RU - Modular symmetric or asymmetric configurations

To support signal switching, distribution, and monitoring applications requiring large channel counts, the recommended system may be comprised of several units working in concert. Operation of such an array typically requires application specific control software.

The MAC4 (Master Array Controller) is specifically designed to streamline control of a multi-system array. It can operate a group of switching hardware while providing the user with a single cross point configuration to control. It supports the 488.2 protocol common to Universal Switching products and can create arrays with most in-service units manufactured in the last decade.

Although intended for use with large system arrays, the MAC4 can also be used as a remote access panel or expanded function display for smaller single-system applications. Since the MAC4 communicates over Ethernet, it can be physically located anywhere that it can communicate to the other systems in the array. The MAC4 is designed for standard 19-inch rack mounting or desktop use.

An additional feature is the capacity to control two locally connected "PUC" modules. The MAC4 functions as a 10" display controller option for our RSX4/UC1 product lines. For reliability, the unit includes redundant replaceable power supplies. The integrated C3 controller features 10/100 Ethernet supporting LXI certified TLS secured WEB access, SNMP v1/v2/v3, and TCP/IP remote control access.

Applications:

- Communications
- Teleport and last mile
- Encryption Tx/Rx modem
- Satellite ground stations
- ENG vans or trucks
- Uplinks or downlinks




MAC4
Multi-unit configurations are easily controlled with our Master Array Controller (use as 4RU rackmount or desktop)



Example Multi-Chassis System

Shown here are four of our S2561F units. Each unit is a full 256x256 and connected together with supporting signal adapters configure a 512x512. By adding the MAC4, the hardware controls as a 512x512.

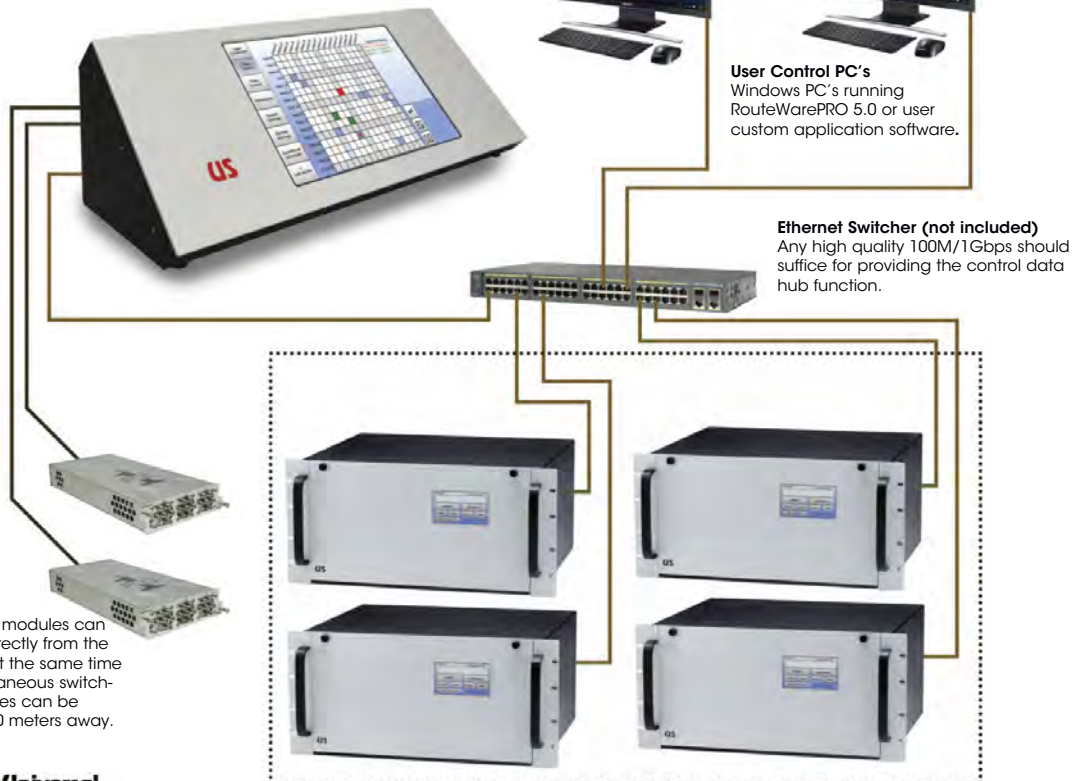

User Control PC's
Windows PC's running RouteWarePRO 5.0 or user custom application software.

Ethernet Switcher (not included)
Any high quality 100M/1Gbps should suffice for providing the control data hub function.

PUC1 Modules
Up to two "PUC" modules can be controlled directly from the AC4 controller at the same time for other miscellaneous switching tasks. Modules can be located over 100 meters away. Consult factory.



Pre-Configured TS2 Systems

2RU - Complete systems from our G2 Series of products

This convenient system package called "TS2" which takes common configurations from our Series G2 switching line (see pages 6 & 7) and makes it simple to order a complete "turn-key" unit. All units are based on the 2RU rack mounted G2T4 unit, include redundant power supplies and contain all three remote interface types (10/00 Ethernet, Serial and USB).

The "TS2" supplants the "SS2" units. It incorporates our advanced C3 Controller and touchscreen display. See our website for additional details and individual data sheets.



Model	Frequency Range	Configuration
TS202A	DC-200kHz	Differential input, single-ended output analog matrix, audio/sensors 16x16 to 64x64
TS214	DC-18GHz	Up to six 6x1 self-terminating microwave relays
TS215	DC-3GHz	Coaxial Nx1 switching, 2x1, 4x1, 8x1, 16x1 sizes, SMA connectors
TS216	DC-1.3GHz	Coaxial Nx1 switching, 2x1, 4x1, 8x1, 16x1 sizes, BNC or SMA
TS216T	DC-1.3GHz	Coaxial Nx1 switching with self-termination, 2x1, 4x1, 8x1, 16x1 sizes, BNC or SMA
TS218	DC-18GHz	Up to seven 6x1 normally open microwave relays, SMA connectors
TS232	DC-125MHz	DC coupled system for high frequency video signals (+/- 1.5V)
TS232H	DC-75MHz	DC coupled system for high-level PCM, video, TTL or similar signals (+/-5V)
TS240	DC-40GHz	Up to seven 6x1 normally open microwave relays, SMA connectors
TS244	20-250MHz	High performance non-blocking "fan out" IF matrix, 8x8 to 32x32, 50 or 75 ohm
TS254	20-250MHz	High performance combining "fan in" IF matrix, 8x8 to 32x32, 50 or 75 ohm
TS262A	DC-50Mbps	Differential 422 digital matrix for clock/data, 8x8 to 16x16, single or dual, Triax
TS264B	DC-50Mbps	Differential 422 digital matrix for clock/data, 16x16 to 64x64, single or dual, Dsub

NOTE: Not all models or features are listed. See data sheet for full model number, specifications, options and suffix definitions.



Download our Monitor & Control software **RouteWarePRO** for a FREE 30-day trial today!

Series G2 - CAS (Critical Application System)

Modules covering DC to 30GHz - Digital or Analog Rack Mounted Modular Switching Configurations

The **CAS** version of our field proven Series G2 products brings switching system technology to a new level. Derived from our Series G2, the **CAS** version is specifically designed for ease of maintenance and high reliability coupled with a streamlined rugged design.

The typical **CAS** configuration consists of a 2RU power and control head, plus one or more switch frames depending upon the overall system configuration. The 2RU head unit can be configured with front loading dual hot-swap power supplies and dual hot-swap control CPU's. Standard features include touchscreen controls. The switch frames are available in standard sizes to meet common system needs. The frames are easily configured to user needs providing all interconnect cabling required between the front loading **CAS** modules and the rear connector panels. Rear panel signal connectors can be specified to meet any user requirement.


All modules, CPU's and power supplies can be hot-swapped via the hinged front panels without disturbing any cabling whatsoever. Simply open the front panel, slide an item out and replace with a spare.

Applications:


- Ground stations
- Communication centers
- Defense or FAA needs
- Critical missions
- Shipboard installations



G2 - CAS
Example switch frame, 7RU

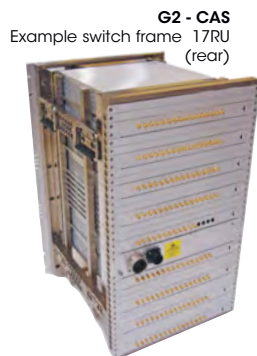

G2 - CAS
Example switch frame 17RU
(rear)

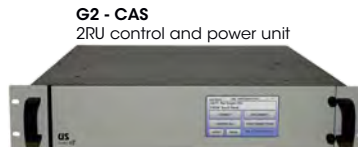

G2 - CAS
2RU control and power unit



G2 - CAS
Example switch frame, 17RU



Global Signal Switching and Distribution Specialists

Custom, OEM & Special Build Services

Complete switching, distribution and purpose built

Since 1992, Universal Switching Corporation has been engineering & developing products for industry, Government agencies and subcontractors. With nearly 30 years of experience, we are looked to for delivering quality products fitted with the latest in technology and excellent reliability.


We can design something to suit most any application and most any specification. We've developed OEM products for numerous companies, produced "build-to-print" items, custom RF boxes, and have delivered entire multi-rack systems complete with custom software. All products are built in our ISO 9001:2015 certified facilities. Contact our local representative or the factory directly.



Complete Systems
Building entire turnkey systems with software



Custom Products
Develop and build what you need



Build-To-Print Manufacturing

Custom RF Boxes
Design unique purpose built RF boxes with documentation & software



OEM Products
Private label our products for you



Custom Finishes
We can provide any paint or finishes you need for your application



Legacy Updates
Update older legacy MSC products



Global Signal Switching and Distribution Specialists



U70000 , URS70000 & E70000 Coaxial Relays



Rugged Coaxial Relays: DC-800MHz (frequency is size dependent)
Sizes from 2x1 to 24x1

USC acquired the product line of Matrix Systems Corporation in April of 2007. One of the product lines that USC continues to build is the unique coaxial relay line. The U70000, URS70000 and E70000 relays are unique in the relay industry due to the rugged design and excellent shielding characteristics.

The Series U70000 is an Nx1 relay with various coaxial contact types controlled by simply applying the appropriate DC voltages, or install it into a Model U11600 rack mount chassis complete with relay drivers, remote control ports and power supplies as shown below. It has an LCD display and can be populated with up to 24 relay modules. LED illuminated driver cards must be installed for each relay installed. Status of the relays can be viewed through the top of the chassis.

The Series URS70000 is an Nx1 relay (like the Series U70000), but has a built-in serial control port as well. The RS70000 can be used in a standalone installation since the control port and wall mount style power supply is included. Our latest version is the E70000. It is the same relay but with a new 10/100 PoE (power over Ethernet) capability and built-in web browser control. The controller is upgradeable from serial to Ethernet. Contact the factory.

USC has slightly changed the model numbering of the original series for compatibility with our inventory system. If you are unsure what your new model number might be, feel free to contact our application staff for assistance. Note that not all combinations or sizes are being built. For exact reorder of an old MSC unit, there will be a minimum order quantity of five. Contact your local salesperson or the factory for details.

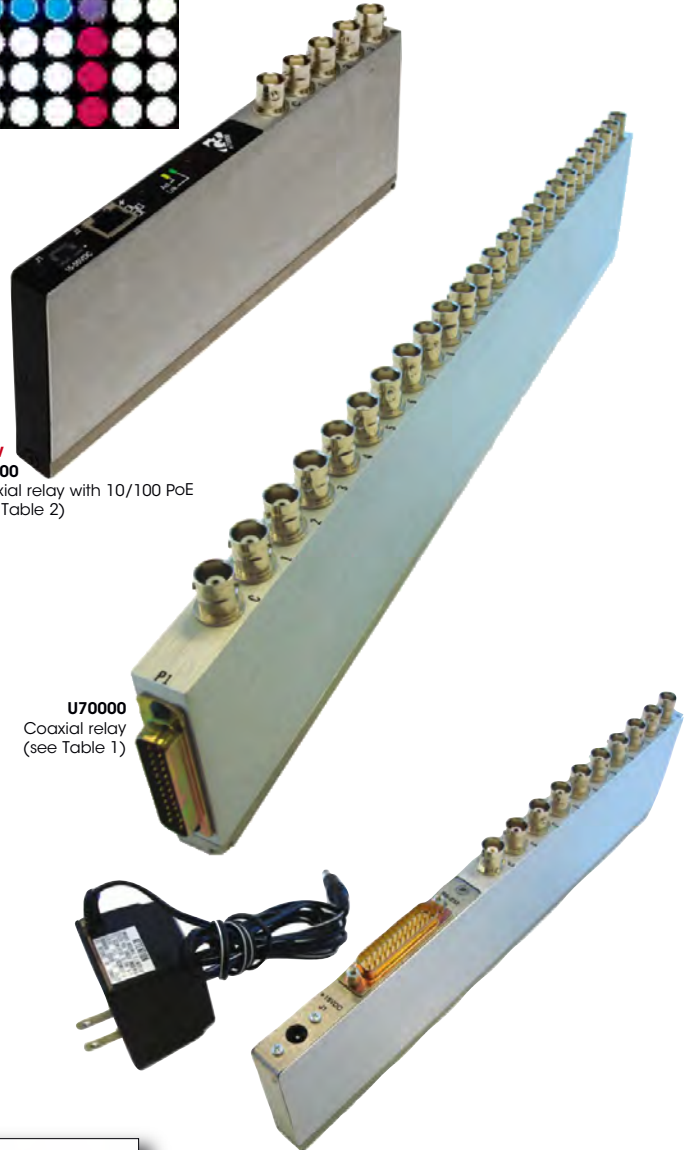


New E70000
 Coaxial relay with 10/100 PoE
 (see Table 2)

U70000
 Coaxial relay
 (see Table 1)

URS70000
 Coaxial relay with RS232 port and
 wall mount power supply
 (see Table 2)



U11600-26
 3RU rack mount relay chassis with
 power supply, GPIB and RS-232C port

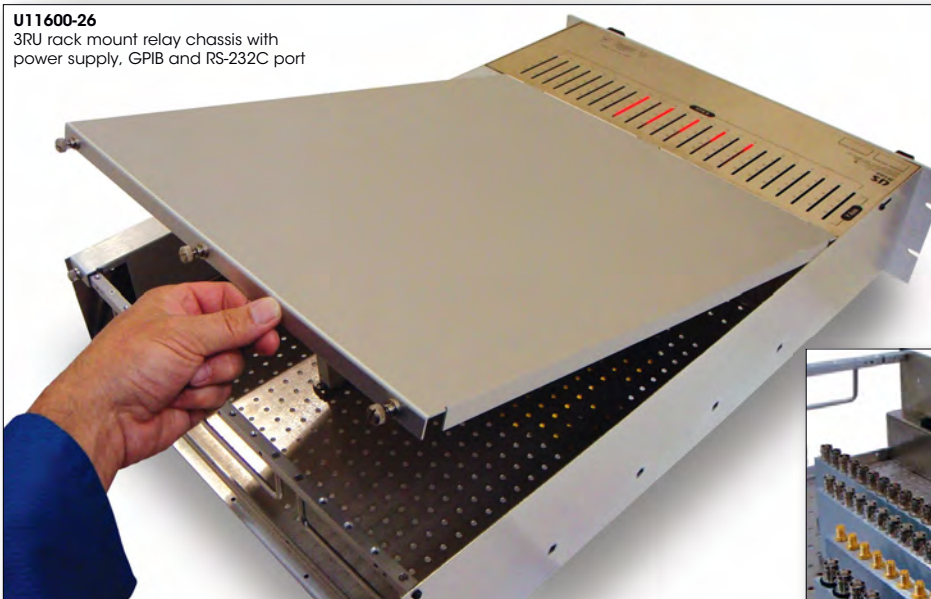

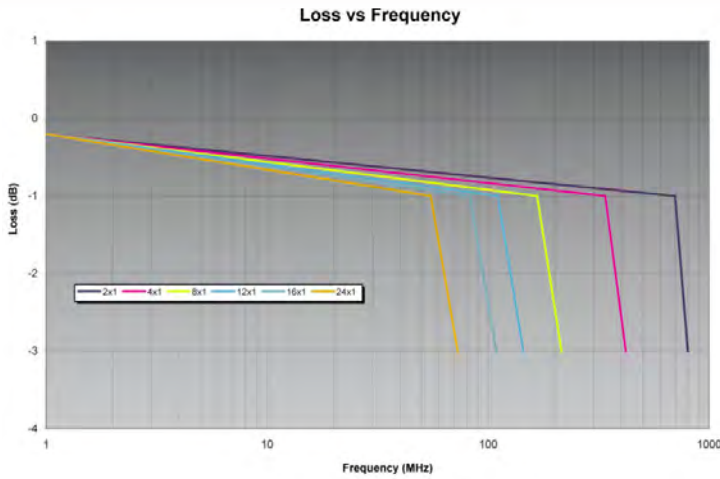


TABLE 1

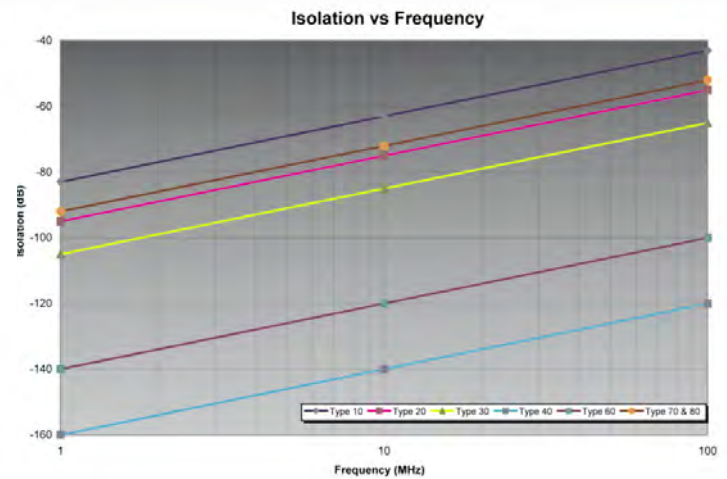


TABLE 2

U70000 Model Number Definition

U7[CC][NT]-[V][D][X]

Example: U72512-1PA (contact 25, 12x1, 24vdc, diodes with common positive and SMA's)

[CC] - Contact Configuration Type

- 10 - Standard (normally open) 100vdc, 250ma, 10W
- 25 - Standard (self-terminating type, 50 ohm) 4vdc, 250ma, 1/3W
- 27 - Standard (self-terminating type, 75 ohm) 4vdc, 250ma, 1/3W
- 30 - Medium isolation (normally open) 100vdc, 250ma, 10W
- 40 - High isolation (normally open) 28vdc, 250ma, 3W
- 65 - High isolation (self-terminating, 50 ohm) 4vdc, 250ma, 1/3W
- 67 - High isolation (self-terminating, 75 ohm) 4vdc, 250ma, 1/3W
- 70 - Mercury wetted (normally open) 500vdc, 1A, 35W (Note 5)
- 90 - Standard with Triaxial connector (BJ77) 100vdc, 250ma, 10W

[NT] - Number of throws

- 02 - 2x1
- 04 - 4x1
- 08 - 8x1
- 12 - 12x1
- 16 - 16x1
- 24 - 24x1

[V] - Coil voltage (nominal)

- 1 - 24vdc to 28vdc (1000 ohm coils)
- 2 - 15vdc (500 ohm coils)
- 5 - 5vdc (135 ohm coils with NO series polarity diode included: P or N option)

[D] - Coil suppression diodes

- 0 - Not included
- P - Suppression diodes included with coil common positive
- N - Suppression diodes included with coil common negative

[X] - Extra options

- A - SMA signal connectors (only on contact types 10, 25, 27 & 65)
- F - F-Type signal connectors (only on contact types 10, 27)
- T - TNC signal connectors (only on contact types 10, 25, & 65)
- I - Insulated coaxial shield (only on contact types 10, 25, 27 & 70)
- S - Insulated & switched coaxial shield (only contact types 10, 25, 27, 70)
- L - Lockscrews on control connector so mate can be secured

U70000 NOTES:

1. The I or S options are not available on the optional signal connectors or the contact type 90 (triaxial).
2. The "expander" port is not available any longer.
3. No mating connectors or hardware are included.
4. Contact type 70 must be mounted with signal connectors facing up.
5. Due to new environmental laws, USC may or may not be able to sell relays with mercury wetted contacts. Spec was 2A, 50W. Connectors must be within 20 deg of up.
6. For installing into the U11600 chassis, the "-1" coil voltage is needed.
7. Type 27 and 67 use the standard 50 ohm MSC connector.

URS70000 & E70000 Model Number Definition

**URS7[CC][NT]-[X]
E7[CC][NT]-[X]**

Example: URS71008-A (contact 10, 8x1, and SMA connectors)

[CC] - Contact Configuration

- 10 - Standard (normally open) 100vdc, 250ma, 10W
- 25 - Standard (self-terminating type, 50 ohm) 4vdc, 250ma, 1/3W
- 27 - Standard (self-terminating type, 75 ohm) 4vdc, 250ma, 1/3W
- 30 - Medium isolation (normally open) 100vdc, 250ma, 10W
- 40 - High isolation (normally open) 28vdc, 250ma, 3W
- 65 - High isolation (self-terminating, 50 ohm) 4vdc, 250ma, 1/3W
- 67 - High isolation (self-terminating, 75 ohm) 4vdc, 250ma, 1/3W
- 70 - Mercury wetted (normally open) 500vdc, 1A, 35W (Note 5)
- 90 - Standard with Triaxial connector (BJ77) 100vdc, 250ma, 10W

[NT] - Number of throws

- 02 - 2x1
- 04 - 4x1
- 08 - 8x1
- 12 - 12x1
- 16 - 16x1
- 24 - 24x1

[X] - Extra options

- A - SMA signal connectors (only on contact types 10, 25, 27 & 65)
- F - F-Type signal connectors (only on contact types 10, 27)
- T - TNC signal connectors (only on contact types 10, 25, & 65)
- I - Insulated coaxial shield (only on contact types 10, 25, 27 & 70)
- S - Insulated & switched coaxial shield (only contact types 10, 25, 27, 70)

URS70000 & E70000 NOTES:

1. The I or S options are not available on the optional signal connectors or the contact type 90 (triaxial).
2. The "expander" port is not available any longer.
3. No mating connectors or hardware are included.
4. Contact type 70 must be mounted with signal connectors facing up.
5. Due to new environmental laws, USC may or may not be able to sell relays with mercury wetted contacts. Spec used to be 2A, 50W.
7. Type 27 and 67 use the standard 50 ohm MSC connector.



Global Signal Switching and Distribution Specialists



Quality Management System

Since 2007, Universal Switching Corporation has implemented and maintains a Quality Management System (QMS) which serves as the backbone for the products, services and innovative designs offered. Continuing our commitment to being the leader in the programmable switching industry, the company is certified to the ISO 9001:2015 quality standard.

Universal Switching Corporation's management fully supports the ISO process and its function within the company. The tremendous teamwork and dedication shown by all "Team USC" members to our Quality Management System has resulted in continuous re-certification by National Quality Assurance since our QMS was effected. Of all QMS regimes, the ISO 9000 family of standards is the most widely implemented across the globe.

Quality Policy

Universal Switching Corporation is committed to being the leader in the programmable switching industry by providing innovative products and services that continually exceed our customer expectations.

Quality Statement

Universal Switching Corporation has a Quality Policy that serves as the backbone for the products, services and innovative designs it offers. As a global supplier of cutting-edge switching equipment and associated support products, Universal Switching Corporation's management fully supports the ISO process and its function within the company. In achieving ISO 9001:2015 certification, Universal Switching Corporation has demonstrated to ANAB accredited third party auditors (National Quality Assurance) that we have an effective Quality Management System in place. These include the following types of processes:

- **Management responsibility**
- **Management review**
- **Resources and work environment**
- **Product realization**
- **Design and development**
- **Customer relations**
- **Measurement, analysis and improvement**
- **Purchasing**
- **Outsourcing**
- **Production and service provisions**
- **Control of monitoring and measuring devices**
- **Control of nonconforming product**
- **Analysis of data**
- **Continual improvement**
- **Corrective action**
- **Preventative action**



What Is That RR All About?

A new graphic is on our front cover, throughout our catalog, products, website, Twitter, Facebook & elsewhere. Some switching manufacturers focus only on resiliency. While this common, it is only half of our product development mission. What sets Universal Switching Corporation apart from our competition is the first part of our mission. **Engineering absolute reliability into our products.** We are using this graphic to remind everyone that our mission is to engineer BOTH reliability and resiliency into each and every product we build.

reliability [ri-lahy-uh-bil-i-tee] noun

1: the ability to be relied on or depended on, as for accuracy, or achievement.

resiliency [ri-zil-yuh n-see] noun

1: the power or ability to return to the original form.
2: ability to recover readily from adversity, or the like.

The company was established with three objectives in mind:

1. Provide the best switching, distribution and conversion equipment on the market.
2. Provide superior service and serviceability utilizing modular, expandable, leading edge designs by blending the full spectrum of available technology.
3. Provide our customers with timely and cost-effective solutions for all their signal applications.

A little known fact is that the property that Universal Switching Corporation sits on was formerly Lockheed's secret division called "Skunk Works". This division was operated by Clarence L. "Kelly" Johnson where very famous aircraft were secretly conceived such as the XB80, U-2, F-117 Stealth Fighter, and the beautiful SR-71 Blackbird (which still hold the worlds flight speed record).



Global Signal Switching and Distribution Specialists

Standard Warranty Agreement

Universal Switching products are warranted against manufacturing and workmanship defects for a period of two years from the date of shipment. During this period, Universal Switching Corporation will, at its option, either repair or replace products which prove to be defective or out of specification per the original purchase order or contract. Damage by misuse or abnormal conditions of operation, or evidence of partial or complete disassembly beyond normal maintenance or expansion procedures void this warranty in its entirety. Since Universal Switching Corporation has no control over conditions of use or applications for the products it manufactures, no warranty is made or implied as to the suitability for the customer's intended use, beyond such performance specifications set forth in the purchase order or contract at the time of order.

Equipment shipped FOB factory (Universal Switching Corporation) shall become the property of the Buyer upon delivery to the carrier. Equipment shipped FOB destination shall become the property of the buyer upon delivery acceptance of the carrier. All damages during shipment should be handled by immediately requesting the carrier's inspection upon evidence of damage or tampering of the packing material or equipment. This warranty excludes all other warranties expressed or implied. Universal Switching shall not be liable for any special, indirect or consequential damages.

For warranty service or repair, the buyer shall prepay all shipping charges to Universal Switching Corporation, and Universal Switching Corporation shall pay shipping charges to return the repaired or replaced item to the buyer. However, the buyer shall pay all shipping charges, duties and taxes for products returned to Universal Switching Corporation from a country other than that of the United States of America.


Universal Switching Corporation warrants that its software and firmware designated by Universal Switching Corporation for use with an instrument will execute its programming instructions when properly installed on that instrument. Universal Switching Corporation does not warrant that the operation of the instrument, or software, or firmware will be uninterrupted or error-free.

Extended warranties are available from the factory up to 7 years. For other support options, we also provide customized service contracts as needed. Contact the factory for more information.

Return Loss to VSWR Conversion Table

Return Loss (dB)	VSWR (ratio)	Reflection Coefficient	Mismatch Loss (dB)	Reflected Power (%)	Through Power (%)
1	17.39	0.891	6.868	79.43	20.57
2	8.72	0.794	4.329	63.10	36.90
3	5.85	0.708	3.021	50.12	49.88
4	4.42	0.631	2.205	39.81	60.19
5	3.57	0.562	1.651	31.62	68.38
6	3.01	0.501	1.256	25.12	74.88
7	2.61	0.447	0.967	19.95	80.05
8	2.32	0.398	0.749	15.85	84.15
9	2.10	0.355	0.584	12.59	87.41
10	1.92	0.316	0.458	10.00	90.00
11	1.78	0.282	0.359	7.94	92.06
12	1.67	0.251	0.283	6.31	93.69
13	1.58	0.224	0.223	5.01	94.99
14	1.50	0.200	0.176	3.98	96.02
15	1.43	0.178	0.140	3.16	96.84
16	1.38	0.158	0.110	2.51	97.49
17	1.33	0.141	0.088	2.00	98.00
18	1.29	0.126	0.069	1.58	98.42
19	1.25	0.112	0.055	1.26	98.74
20	1.22	0.100	0.044	1.00	99.00
21	1.20	0.089	0.035	0.79	99.21
22	1.17	0.079	0.027	0.63	99.37
23	1.15	0.071	0.022	0.50	99.50
24	1.13	0.063	0.017	0.40	99.60
25	1.12	0.056	0.014	0.32	99.68
26	1.11	0.050	0.011	0.25	99.75
27	1.09	0.045	0.009	0.20	99.80
28	1.08	0.040	0.007	0.16	99.84
29	1.07	0.035	0.005	0.13	99.87
30	1.07	0.032	0.004	0.10	99.90
31	1.06	0.028	0.003	0.08	99.92
32	1.05	0.025	0.003	0.06	99.94
33	1.05	0.022	0.002	0.05	99.95
34	1.04	0.020	0.002	0.04	99.69
35	1.04	0.018	0.001	0.03	99.97
36	1.03	0.016	0.001	0.03	99.97
37	1.03	0.014	0.001	0.02	99.98
38	1.03	0.013	0.001	0.02	99.98
39	1.02	0.011	0.001	0.01	99.99
40	1.02	0.010	0.000	0.01	99.99

Sketch your secret design concept here.....

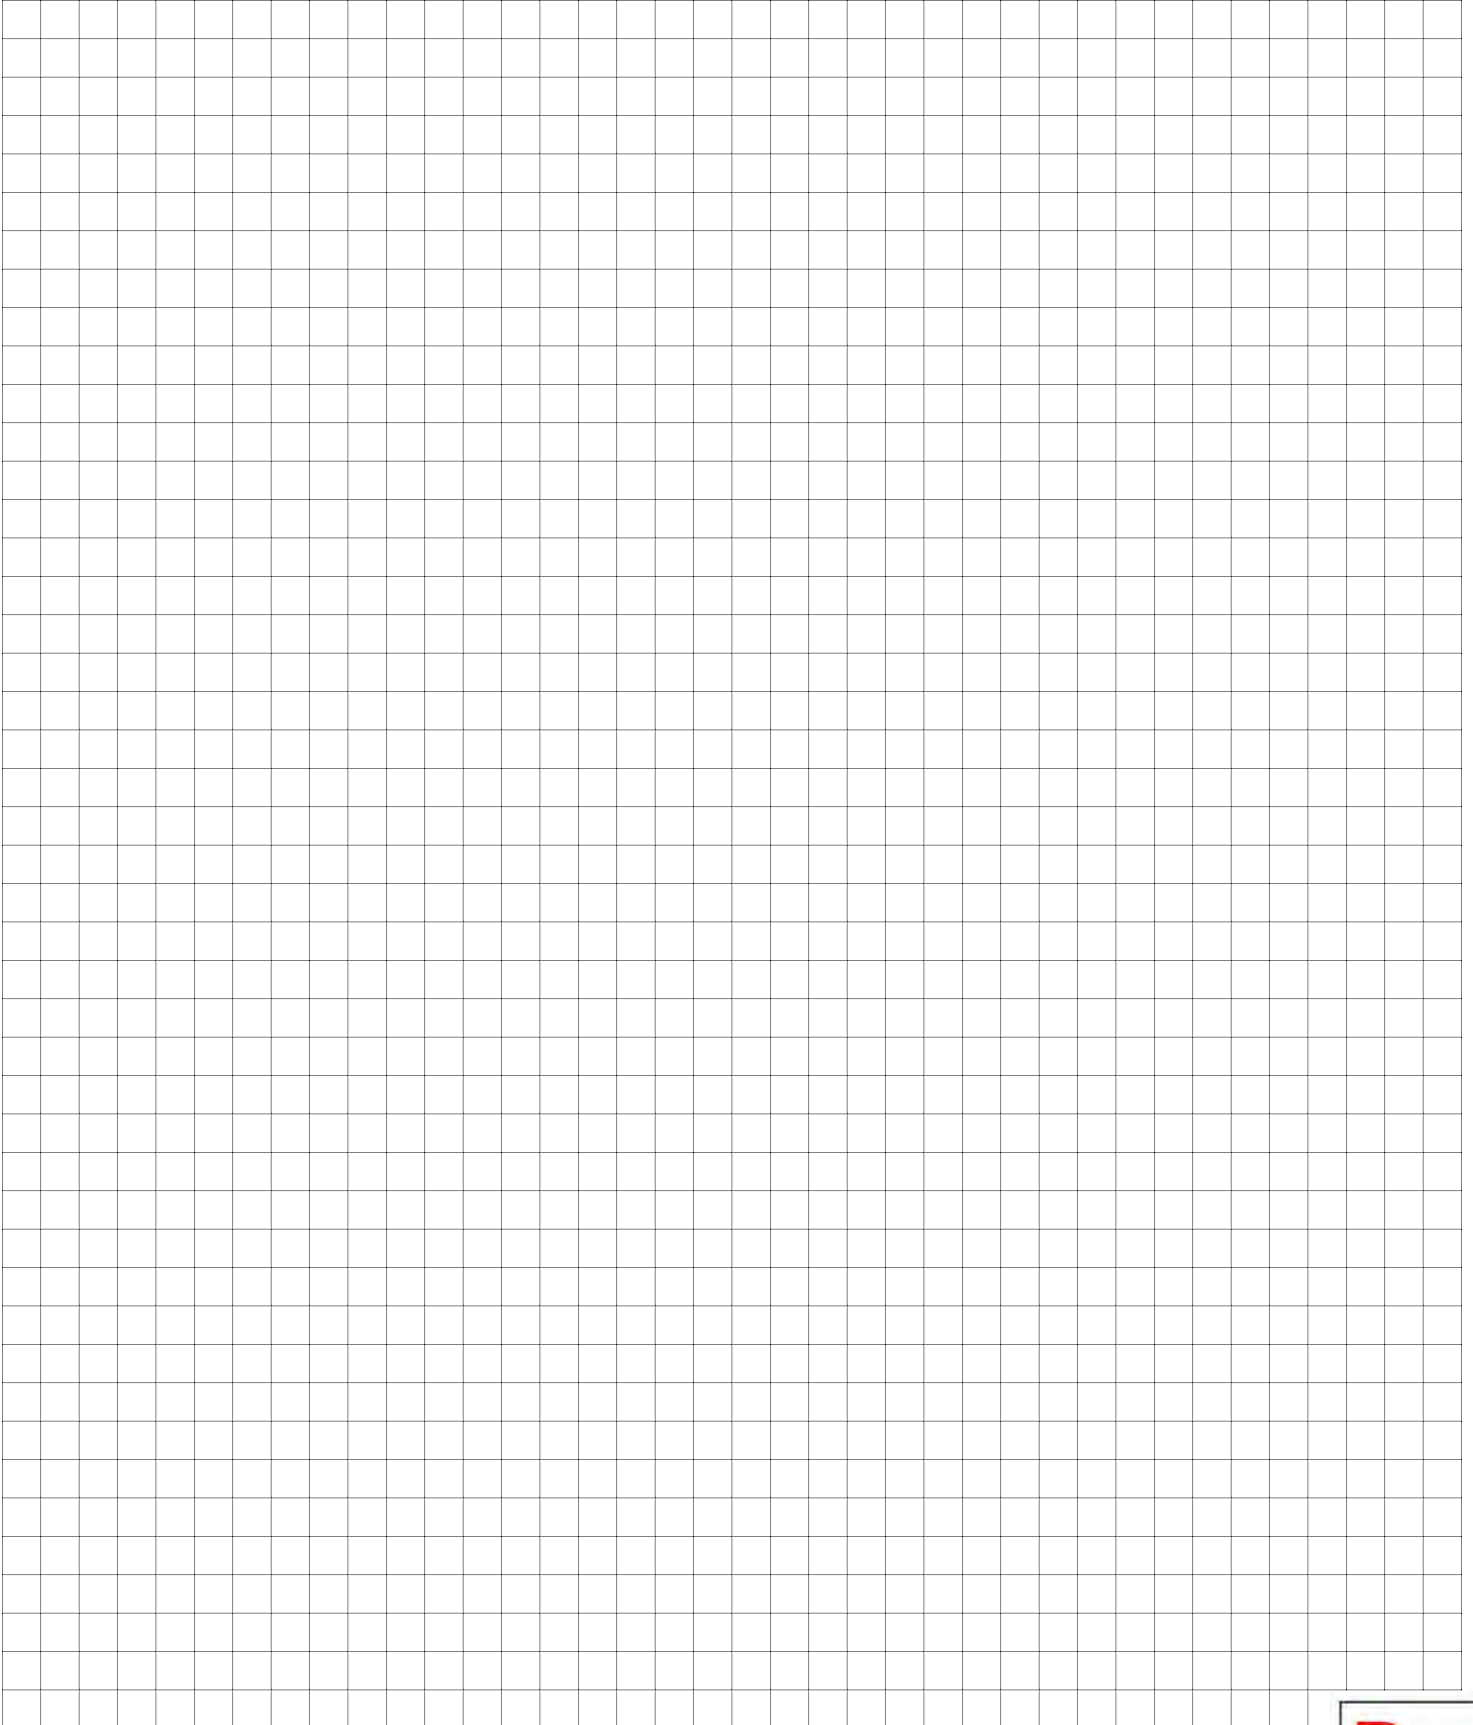

Grid :

Factory Authorized Representatives

Domestic and International Offices - May 2019

Alabama <i>GenTek Inc</i> Phn: (813) 961-0689 GenTekRep.com	Maine <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	Oklahoma <i>CentraMark</i> Phn: (972) 414-8188 cmatex.com	Australia <i>SouthTech Systems</i> Phn: +61-3-9459-4963 southtechsystems.com.au	Netherlands <i>EEMCCOIMEX</i> Phn: +31-320-295-395 eemc.nl
Alaska <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Massachusetts <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	Oregon <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Belgium <i>EEMCCOIMEX</i> Phn: +31-320-295-395 eemc.nl	New Zealand <i>SouthTech Systems</i> Phn: +61-3-9459-4963 southtechsystems.com.au
Arizona <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Maryland <i>Delmarva Engineering</i> Phn: (410) 990-9000 delmarva-eng.com	Pennsylvania <i>Clafin Associates</i> Toll Free: (888) 252-3546 Web: 888clafin.com	Brazil <i>Boreal Beta Communications Ltda</i> Phn: +55 (19)3258-2210 borealtec.com.br	Philippines <i>TME Systems Pte Ltd</i> Phn: +(65) 6747 7234 tmesystems.net
Arkansas <i>CentraMark</i> Phn: (972) 414-8188 cmatex.com	Michigan <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	Rhode Island <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	Brunei <i>TME Systems Pte Ltd</i> Phn: +(65) 6747 7234 tmesystems.net	Portugal <i>Milexia</i> Phn: +34 917 216 630 milexia.com
California <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Minnesota <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	South Carolina <i>GenTek Inc</i> Phn: (813) 961-0689 GenTekRep.com	Egypt <i>SHIMCO Engineering Consultants</i> Phn: +202-330-36216	Singapore <i>TME Systems Pte Ltd</i> Phn: +(65) 6747 7234 tmesystems.net
Colorado <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Mississippi <i>GenTek Inc</i> Phn: (813) 961-0689 GenTekRep.com	South Dakota <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	Estonia <i>Calltest Oy</i> Phn: +385-400-455443 calltest.fi	South Korea <i>Adex Aerospace</i> Phn: +1-714-280-0195 adexaero.com
Connecticut <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	Missouri <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	Tennessee <i>GenTek Inc</i> Phn: (813) 961-0689 GenTekRep.com	Finland <i>Calltest Oy</i> Phn: +385-400-455443 calltest.fi	<i>Lumax Aerospace</i> Phn: +82-42-934-8293 lumaxaero.com
Delaware <i>Clafin Associates</i> Toll Free: (888) 252-3546 Web: 888clafin.com	Montana <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Texas <i>CentraMark</i> Phn: (972) 414-8188 cmatex.com	France <i>Milexia</i> Phn: +33 (0)1 69 53 80 00 milexia.fr	Spain <i>Milexia</i> Phn: +34 917 216 630 milexia.com
Florida <i>GenTek Inc</i> Phn: (813) 961-0689 GenTekRep.com	Nebraska <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	Utah <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	India <i>ITGlobe Incorporated</i> Phn: +91-11-26440720 itglobe.com	Taiwan (R.O.C.) <i>Evergo Instruments Inc.</i> Phn: +886-2-2752-0767 evergo.com.tw
Georgia <i>GenTek Inc</i> Phn: (813) 961-0689 GenTekRep.com	Nevada <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Vermont <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	Indonesia <i>TME Systems Pte Ltd</i> Phn: +(65) 6747 7234 tmesystems.net	Thailand <i>TME Systems Pte Ltd</i> Phn: +(65) 6747 7234 tmesystems.net
Hawaii <i>Elotek Systems</i> Toll Free: (888) 435-6835 Web: elotek.com	New Hampshire <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	Virginia <i>Delmarva Engineering</i> Phn: (410) 990-9000 delmarva-eng.com	Ireland <i>Castle Microwave LTD</i> Phn: +44 (0)1635 271300 castlemicrowave.com	United Kingdom <i>Castle Microwave LTD</i> Phn: +44 (0)1635 271300 castlemicrowave.com
Idaho <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	New Jersey <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	Washington <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Israel <i>A. Telemetry LTD</i> Phn: +972-9-7450475 a-telemetry.com	NOTE: For areas not mentioned on this list, please contact the factory directly.
Indiana <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	New Mexico <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Washington D.C. <i>Delmarva Engineering</i> Phn: (410) 990-9000 delmarva-eng.com	Italy <i>Milano Brothers</i> Phn: +39-338.49.69.298 milanobro.com	
Illinois <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	New York <i>Clafin Associates</i> Toll Free: (888) 252-3546 888clafin.com	West Virginia <i>Delmarva Engineering</i> Phn: (410) 990-9000 delmarva-eng.com	Luxemburg <i>EEMCCOIMEX</i> Phn: +31-320-295-395 eemc.nl	
Iowa <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	North Carolina <i>Delmarva Engineering</i> Phn: (410) 990-9000 delmarva-eng.com	Wisconsin <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	Malaysia <i>TME Systems Pte Ltd</i> Phn: +(65) 6747 7234 tmesystems.net	
Kansas <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	North Dakota <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com	Wyoming <i>Elotek Systems</i> Toll Free: (888) 435-6835 elotek.com	Mexico <i>Grupo Etercom S.A.</i> Phn: +(55) 5539 43 76 etercom.com.mx	
Louisiana <i>CentraMark</i> Phn: (972) 414-8188 cmatex.com	Ohio <i>JR Johnson Associates</i> Toll Free: (800) 637-6775 jamesr.com			

