

PRODUCT INFORMATION:

ElastPro Flexible Expansion Joint Tape is transversely flexible, longitudinally rigid, with hole punching on both sides, and is made of flexible thermoplastic elastomer (TPE) material, the middle part of which is resistant to tearing and suitable for adhesion with 2-Component epoxy-resin adhesives.

USAGE AREAS:

- In underground applications as it is resistant to plant roots,
- In the waterproofing of horizontal/vertical dilatations,
- In the insulation of wide and irregular cracks,
- Elastic waterproofing of base-parapet connections,
- At the junctions of different building materials such as steel construction and reinforced concrete,
- In swimming pool and waste water units,
- It is used in tunnels and similar underground structures.

ADVANTAGES:

- Hole punched for better adhesion.
- Waterproof.
- High UV resistance.
- Its resistance to plant roots is high.
- Resistant to bacterial attacks and chemical degradation.
- It has high resistance to environmental effects and aggressive environments.
- Time saving & cost effective.
- Highly flexible & elastic tapes.


PRODUCT CODE

1. TPE-XP150 - 25 Mtrs x 150 MM x 1MM
2. TPE-XP200 - 25 Mtrs x 200 MM x 1MM
3. TPE-XP300 - 25 Mtrs x 300 MM x 1MM
4. TPE-XP400 - 25 Mtrs x 400 MM x 1MM
5. TPE-XP500 - 25 Mtrs x 500 MM x 1MM
6. TPE-XP600 - 25 Mtrs x 600 MM x 1MM
7. TPE-XP150 - 25 Mtrs x 150 MM x 2MM
8. TPE-XP200 - 25 Mtrs x 200 MM x 2MM
9. TPE-XP300 - 25 Mtrs x 300 MM x 2MM
10. TPE-XP400 - 25 Mtrs x 400 MM x 2MM
11. TPE-XP500 - 25 Mtrs x 500 MM x 2MM
12. TPE-XP600 - 25 Mtrs x 600 MM x 2MM

*Customized bulk order can be produced in desired width, thickness and quantity.

PACKAGING: 25 M Roll

SHELF LIFE: 36 months unopened under suitable storage conditions (in a dry and cool environment, in its original packaging).

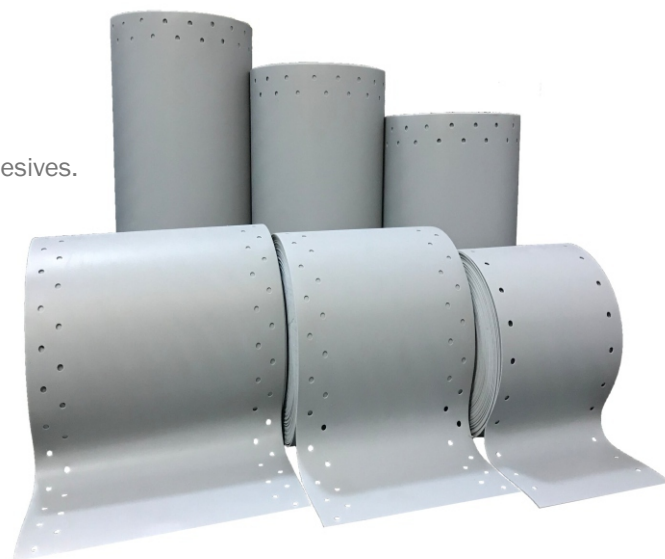

TECHNICAL FEATURES:

TEST	STANDARD	UNIT	VALUE
Tensile Strength (Transverse)	EN-ISO 527-3	MPa	7
Elongation at Maximum Load (Transverse)	EN-ISO 527-3	%	580
Tear Propagation Strength (Transverse)	EN-ISO 12310-2	N/mm ²	48
Hardness	ISO 868	Shore A	80
Chemical Resistance	Water-based and bitumen-based foundation insulations, Sea water, Waste water, UV rays, Hydrolysis, Microorganism		
Colour	Grey		
Water Pressure Resistance	EN 1928	Bar	> 5
Cold Folding	SIA 280/3	-	No Cracking at -30°C
Service Temperature	SIA V280/3+4	-	30 / +80°C
Thickness		mm	1-2

Manufactured and Marketed by :Ankit Polymers

Plot No. 83, Pace City 1, Sector-37, Gurugram, Haryana, INDIA-122001

Ph: +91-9873507113 / 9810396709 / 9811693280

www.elastpro.com, www.elastpro.in

ankitpolymers1997@gmail.com