

# SWING DOOR DRIVE UNIT **GILGEN FD 20**



## **All the functions – one drive mechanism Full Power and**

- Electromechanical opening system
- Controlled, spring-actuated closure with motor assistance
- Spring-actuated closure in the event of a power failure
- No travel stops required (except where there is a danger of vandalism and for fire-related doors)
- Adjustable wind-load function
- Integrated "inverse" power-down opening function
- Vertical interlocking of door leaf

## **Easy installation**

- Can be attached to the door lintel or door leaf
- Optional pull/push-rod or sliding rod
- Consistent installation position
- Reliable plan-compatibility suitable for a large range of applications
- All-pole, circuit-breaking master switch (integrated into side cover)

## **Initial startup made simple**

- Operating sequence
- Opening angle
- Push and go function
- Electronic closing-sequence control for two-leaf doors
- Interlock function
- Reinforced closure

## **Safety-tested**

The Gilgen FD 20 is TÜV-tested for conformity with both EN 16005 and DIN 18650.

## **Operating and safety elements**

- Safety sensors
- Radar devices
- Contactless detection sensors
- Hand-held radio transmitter
- Foot- or elbow-operated switches
- Key-operated pulse switches and badge/pass scanners
- Electric locks and locking devices
- D-BEDIX external control unit

## **For reliable, convenient operation**


- Obstacle-detection system with automatic stop/reverse mechanism
- Optical sensor strips
- Smooth, noise-free opening and closing
- 100% electromechanical configuration
- Very low power consumption in standby (4 watts)
- Illuminated program selector keys integrated into side cover
- Operates reliably even in high winds

## Installation and configuration options

### Lintel assembly with sliding rods

Pushing function, single- and two-leaf


- Aesthetic solution, simple installation

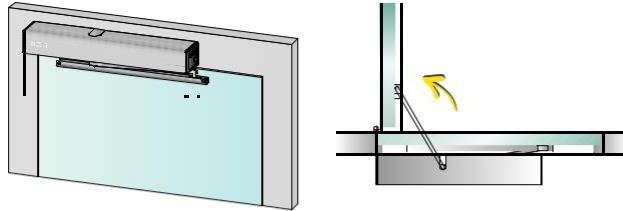

### Lintel assembly with sliding rods

Pulling function, single- and two-leaf


- Aesthetic solution, simple installation

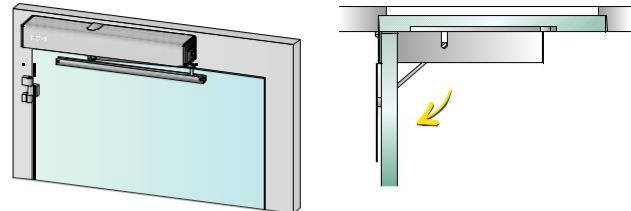

### Lintel assembly with standard rods

Pushing function, single- and two-leaf


- Highly-efficient power transmission

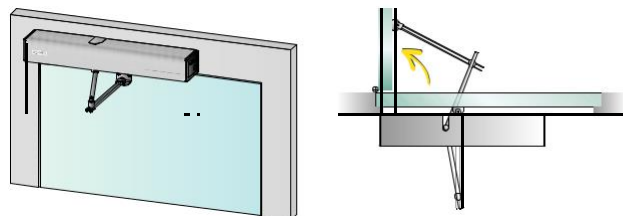

### Door installation with sliding rods

Pushing function, single-leaf

- Suitable for use where height is limited

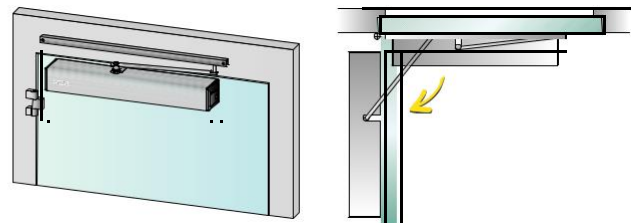

### Technical specifications:

Power transfer	Standard rods (pushing function) Sliding rods (pushing and pulling function)
Dimensions of drive mechanism (mm)	Height 95, width 690, depth 120
Weight of drive mechanism	10,5 kg
Ambient temperature	-15 to +50 °C
Protection rating	IP 40
Operating voltage	230 VAC (+10/-15 %), 50 Hz, 10/13 A
Power consumption of drive mechanism	max. 560 W
Rated motor capacity	100 W
Stand-by consumption	4 W
Power supply,	
external user	24 VDC (±10 %), 2 A
Output shaft torque	max. 80 Nm
Lintel depth standard rods	max. 250 mm
Lintel depth sliding rods	-30 / +150 mm
Opening speed	max. 40°/s
Closing speed	max. 40°/s
Relative humidity	max. 85 %

### Application limits:

Max. leaf weight	600kg under specific condition
Door sizes EN 3-7	(850 – 1600 mm)
Door sizes fire doors EN 4-6	(950 – 1400 mm)
Max. opening angle	105°
Max. wind speed	80 km/h (320 Pa)*

\* depending on door size and type of rod

