



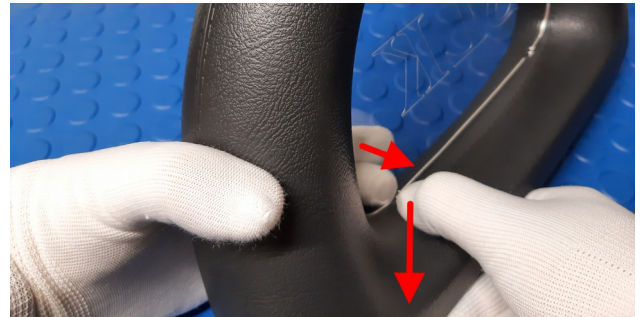

### **SLK R170 roll bar inserts - assembly instructions:**

- 1.) Clean both roll bars before installation with the supplied cockpit cleaning cloth. To avoid leaving fingerprints, please wear the supplied cotton gloves during installation.
- 2.) Position the insert with the upper retaining lugs on the middle seam.
- 3.) Now press the lower retaining tabs up to the seam as well, by alternately pushing the foam from behind under the retaining tabs slightly.

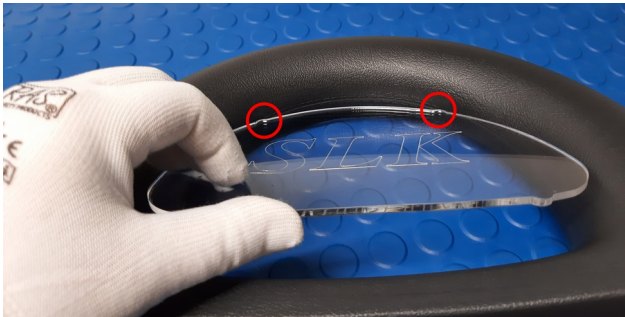

The retaining lugs are rounded and will not damage your roll bar. They hold the insert in the foamed casing in a form-fitting and non-positive manner. After dismantling, the small pressure points disappear completely within a short time.

### **Care instructions:**

**Never clean the inserts with harsh cleaning agents, solvents or alcohol !!!**

**Clean the inserts with lukewarm water and a few drops of dishwashing detergent.  
Then use a soft, lint-free cloth dry the cotton cloth (dish towel).**

If a scratch does occur, it can be easily removed with an acrylic or plexiglass polishing paste (e.g. Displex) or fine car paint polish.

**Have fun with your new roll bar inserts and always have a safe journey.**

Many greetings from Hamburg

Windschotts & more

