



## SK-20

Intake: **Mid-Suction**  
 Rated Flow: **20GPM**  
 Rated Voltage: **115V**

## Dimensions

**w.**  
3.87in


**H.**  
22.75in

**D.**  
3.87in



Scan for More

## Curve Chart

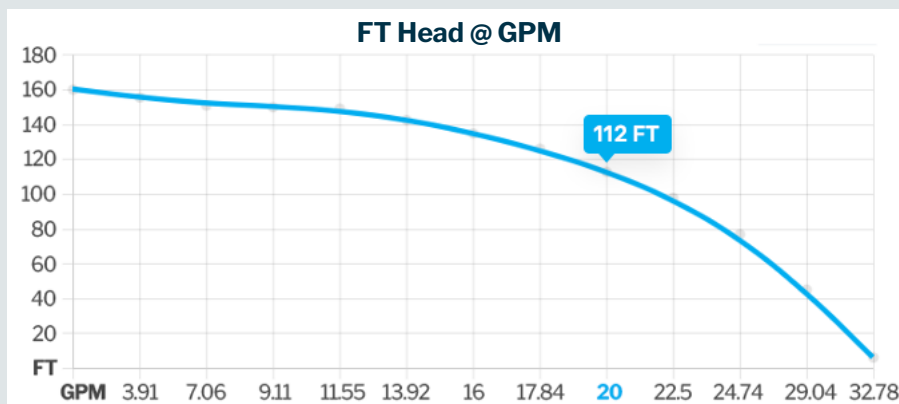

Specifically designed with reliability and efficiency as core requirements, the SK series is constructed using 304 stainless steel and high-durability thermoplastic components to ensure corrosion resistance and longevity.

## Warranty Details:

**3 Year Warranty** effective from the sale date for pro customers. (contact us for full warranty terms and details)

## Specs:

<b>Discharge Diameter:</b>	1.25 inches
<b>Solid Handling Capability</b>	Up to 1/8-inch without issues.
<b>Housing Material</b>	High-Grade 304 stainless steel
<b>Power Cord</b>	Heavy-Duty 10 ft SJOW jacketed cord
<b>Motor Size</b>	1/2HP