

CON-SERV




MANUFACTURING

Standard are the Obvious Con-Serv Qualities:

User Friendly ■ Quality Construction ■ Performance ■ Low Cost to Operate ■ Inexpensive to Purchase

Flowmeters

Economical Flowmeters
for ranges from .1 gpm to
200 gpm for most water conditions.
Quality solutions for residential,
commercial and industrial
applications.

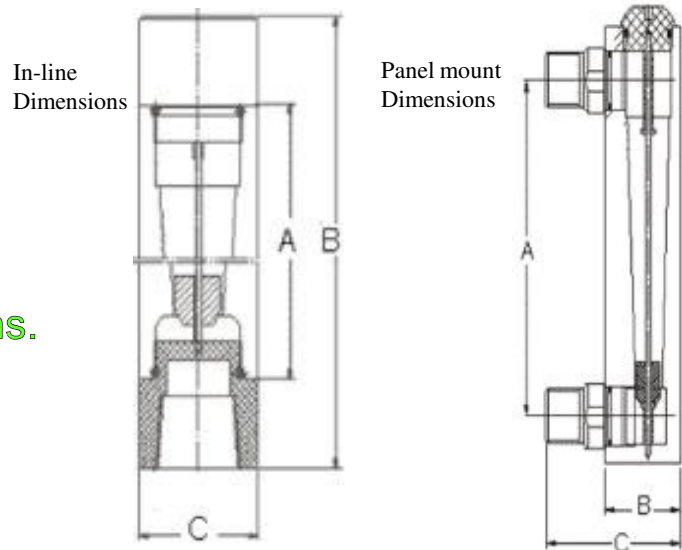

PART NUMBER	DESCRIPTION	MOUNT	TYPE	MATERIAL	FLOW RATE (GPM)	INLET/ OUTLET	A	B	C
FM-1001-G	FLOWMETER, INLINE, .1 - 1 GPM	IN-LINE	ROTAMETER	ACRYLIC	.1 TO 1	3/8" NPT	6.3	8.3	1.25
FM-1002-G	FLOWMETER, INLINE, .2 - 2 GPM	IN-LINE	ROTAMETER	ACRYLIC	.2 TO 2	1/2" NPT	6.3	8.3	1.25
FM-1005-G	FLOWMETER, INLINE, .5 - 5 GPM	IN-LINE	ROTAMETER	ACRYLIC	.5 TO 5	1/2" NPT	6.3	8.3	1.25
FM-2510-G-S	FLOWMETER, INLINE, 1 - 10 GPM	IN-LINE	ROTAMETER	ACRYLIC	1 TO 10	1" NPT	9	11.6	1.75
FM-2520-G-S	FLOWMETER, INLINE, 2 - 20 GPM	IN-LINE	ROTAMETER	ACRYLIC	2 TO 20	1" NPT	9	11.6	1.75
FM-4004-G-S	FLOWMETER, INLINE, 4 - 40 GPM	IN-LINE	ROTAMETER	ACRYLIC	4 TO 40	1-1/2" NPT	9.05	11.9	2.7
FM-4006-G-S	FLOWMETER, INLINE, 6 - 60 GPM	IN-LINE	ROTAMETER	ACRYLIC	6 TO 60	1-1/2" NPT	9.05	11.9	2.7
FM-4008-G-S	FLOWMETER, INLINE, 8 - 80 GPM	IN-LINE	ROTAMETER	ACRYLIC	8 TO 80	1-1/2" NPT	9.05	11.9	2.7
FM-4010-G-S	FLOWMETER, INLINE, 10 - 100 GPM	IN-LINE	ROTAMETER	ACRYLIC	10 TO 100	1-1/2" NPT	9.05	11.9	2.7
FM-5015-G	FLOWMETER, INLINE, 50 - 150 GPM	IN-LINE	ROTAMETER	ACRYLIC	50 TO 150	2" NPT	12.2	15	3.75
FM-5020-G	FLOWMETER, INLINE, 40 - 200 GPM	IN-LINE	ROTAMETER	ACRYLIC	40 TO 200	2" NPT	12.2	15	3.75
FM-1001	FLOWMETER, PANEL, 0.1 - 1 GPM	PANEL	ROTAMETER	ACRYLIC	.1 TO 1	1/2" NPT	5	1.4	2.65
FM-1002	FLOWMETER, PANEL, 0.2 - 2 GPM	PANEL	ROTAMETER	ACRYLIC	.2 TO 2	1/2" NPT	5	1.4	2.65
FM-1005	FLOWMETER, PANEL, 0.5 - 5 GPM	PANEL	ROTAMETER	ACRYLIC	.5 TO 5	1/2" NPT	5	1.4	2.65
FM-2510	FLOWMETER, PANEL, 1 - 10 GPM	PANEL	ROTAMETER	ACRYLIC	1 TO 10	1" NPT	6.5	1.75	3.35
FM-2520	FLOWMETER, PANEL, 2 - 20 GPM	PANEL	ROTAMETER	ACRYLIC	2 TO 20	1" NPT	6.5	1.75	3.35

Technical Specifications:

Range: 1 gpm to 200 gpm
 Maximum Pressure: 150 psi
 Maximum Temperature: 176F
 Body Material: Lucite (acrylic)
 Float Material: 316L SST
 Guide Rod Material: 316L SST
 Connection Material: ABS Plastic
 Connection Type: NPT

If you don't see
what you need –
Feel free to call and
we will try to locate
the parts for you.