


# Series I Slim Frame Plumbing Stub Up

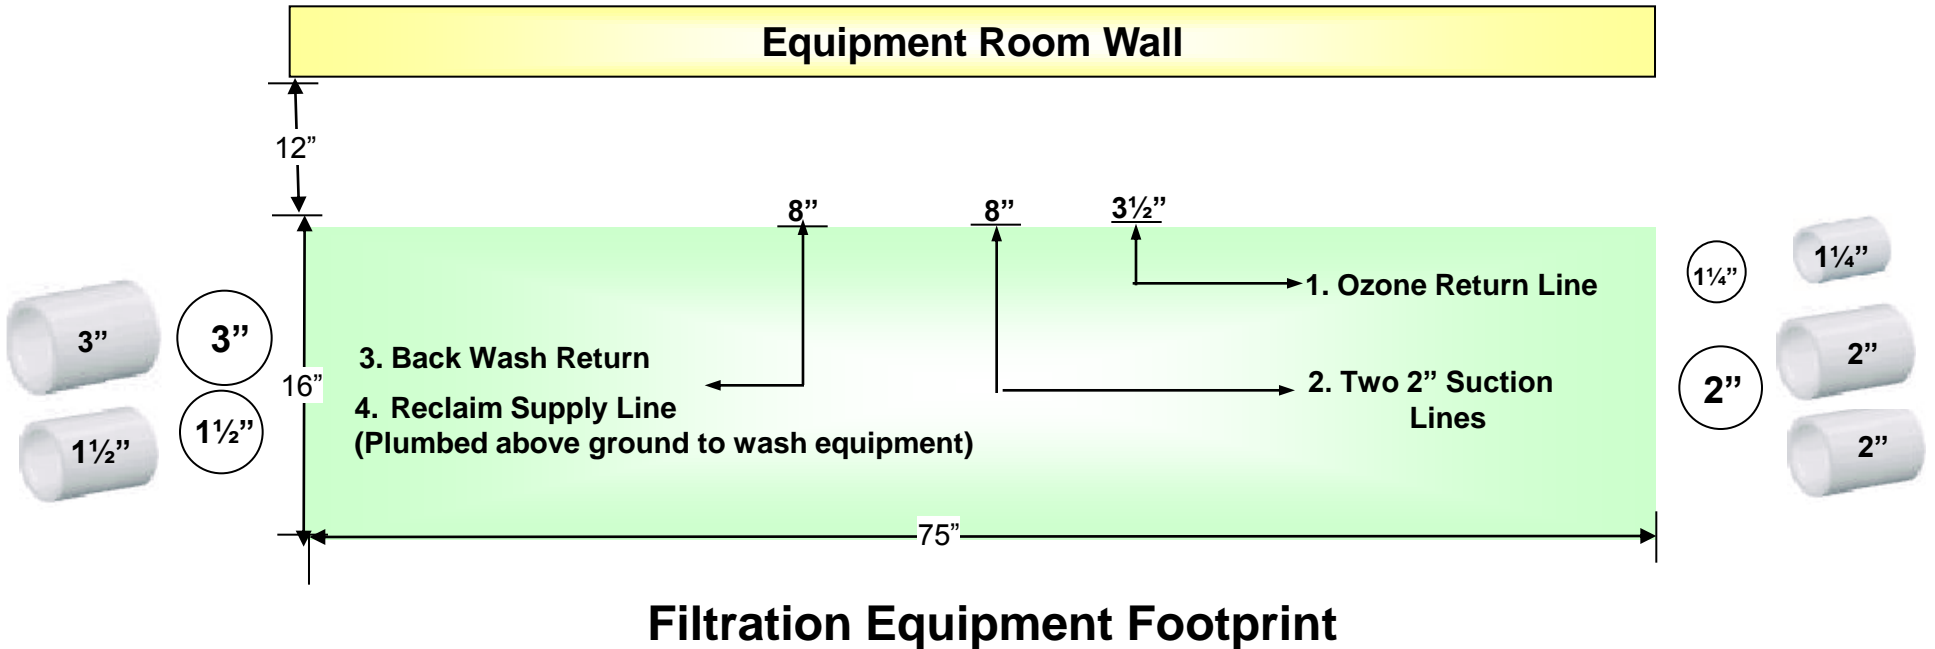

1. 1 1/4" Ozone Return Line Back to Tanking System
2. Two (2) 2" Suction Lines from Tanking System or Two (2) 3" Suction Lines for 80 GPM Equipment
3. 3" Back Wash Return to Conveyor Trough
4. 1-1/2" Reclaim Supply Line to Car Wash Equipment (LOCATED DIRECTLY ABOVE BACKWASH LINE)

- All plumbing connections can be made at outside perimeter of unit.
- Must have 1/4" factory supplied air line
- Must have 115v single phase, 20 amp service for control power.
- Must have 208-230/480v three phase, 20 amp service for pump.