


## SERIES II - SLIM LINE

### Self-Contained Slim Series

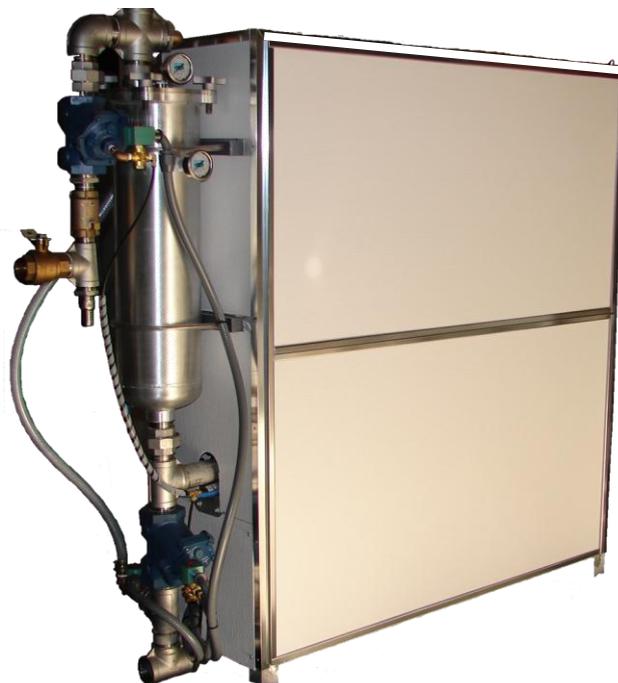

THE ENTIRE COMPONENT PACKAGE IS HOUSED  
 IN A COMPACT 16"X54" ENCLOSURE!

- 65 and 100 GPM Models Available
- All Stainless Steel Plumbing, Filter, and Components
- Mounted in a Sturdy, Lightweight Aluminum Frame with Water Tight FRP Covering
- U/L Listed Electrical Control System
- Vortex Particle Accelerator
- Features Con-Serv's Amazing New Patent Pending 6.5 Second Self Cleaning Stainless Filter with Lifetime Warranty\*

\* The flow of reclaim water is filtered down to the size of a single white blood cell with no possible chance of blow-by unfiltered water.

Model	Slim Line 3	Slim Line 5
* Flow Rate	65 GPM	100 GPM
Height	66"	
Width	54"	
Depth	16"	
Weight	725 lbs	775 lbs
Input Power	208/230/480 3 Phase 60 Cycle	
Control Power	115 Volt 1 Phase 15 Amp Max	
Primary Pump	3.0 HP	5.0 HP
Full Load Amps	8.5 / 8.0 / 4.0	13.0 / 12.2 / 6.1
Secondary Pump	.75 HP @ 3.1 / 1.55 Full Load Amp	
Suction Inlet	2" NPT	3" NPT
Filtered Outlet	1.5" NPT	2" NPT
Ozone Outlet	1-1/4" NPT	
Discharge Outlet	3" NPT	
Ballast Tank	35 Gal Fibrewound	

\* GPM Ratings may vary due to Piping Layout that may change Pump Head Curve

### Available Options

- ETL Listed Ozone Systems
- Bio-Treatment Dosing Control
- Tank Level Control
- Emergency Fresh Water Override (EFO) (Ideal for Unattended Sites)

THE SAFEST FILTERED WATER FOR ALL TYPES OF PUMPS,  
 NOZZLES, SPINNER OR OSCILLATING SPRAY TIPS!

**INCLUDES PUMP GUARD ADVISOR**