




# Series II Slim Frame Plumbing Stub Up

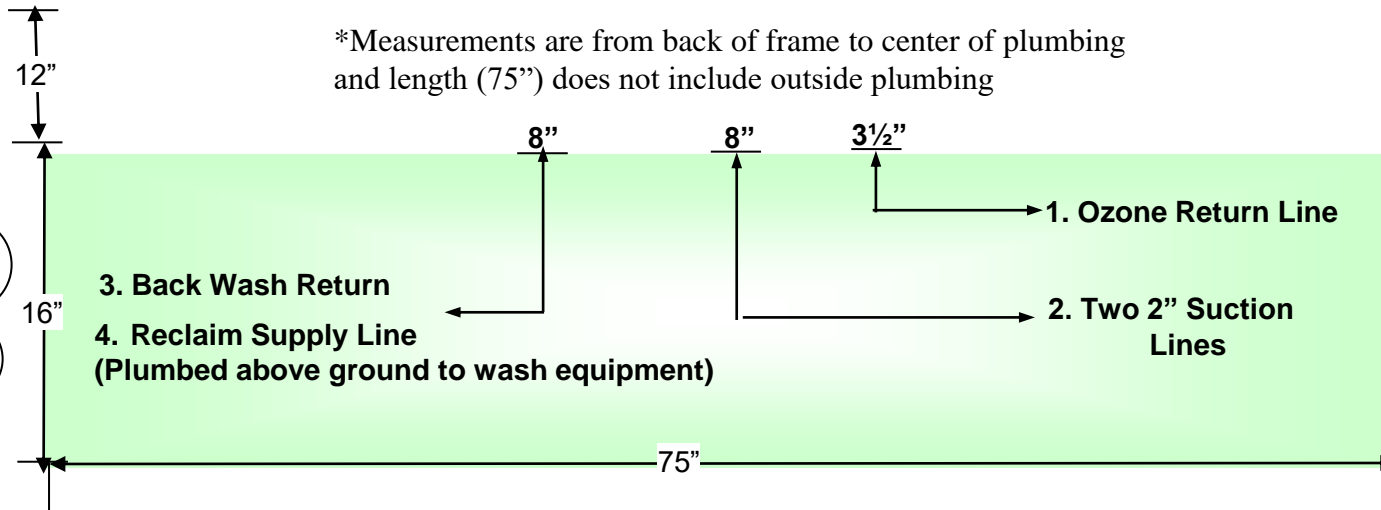

## Filtration Equipment Footprint

1. 1 1/4" Sch 80 PVC Ozone Return Line Back to Tanking System
2. Two (2) 2" Sch 80 Suction Lines from Tanking System or Two (2) 3" Sch 80 Suction Lines for 100+ GPM Equipment. Plumbed far enough apart to manifold together. Shut off valves for each line required.
3. 3" Sch 80 Back Wash Return to Conveyor Trough
4. 1-1/2"(65gpm) or 2"(100gpm) Sch 80 Reclaim Supply Line to Car Wash Equipment (LOCATED DIRECTLY ABOVE BACKWASH LINE)

- All plumbing connections can be made at outside perimeter of unit.
- Must have 1/4" factory supplied air line
- Must have 115v single phase, 20 amp service for control power.
- Must have 208-230/480v three phase, 20 amp service for pump.