


****bypass time limit 5-10 minutes max** possible system damage if longer****

Manual Flush Valve-allows you to flush/rinse your system w/fresh water. It determines what is pulled through the CHEM valve on the Hydro-Mixer, SH or water. It also allows you to rinse w/ full performance and high GPM. *optional remote rinse module available in lieu of manual

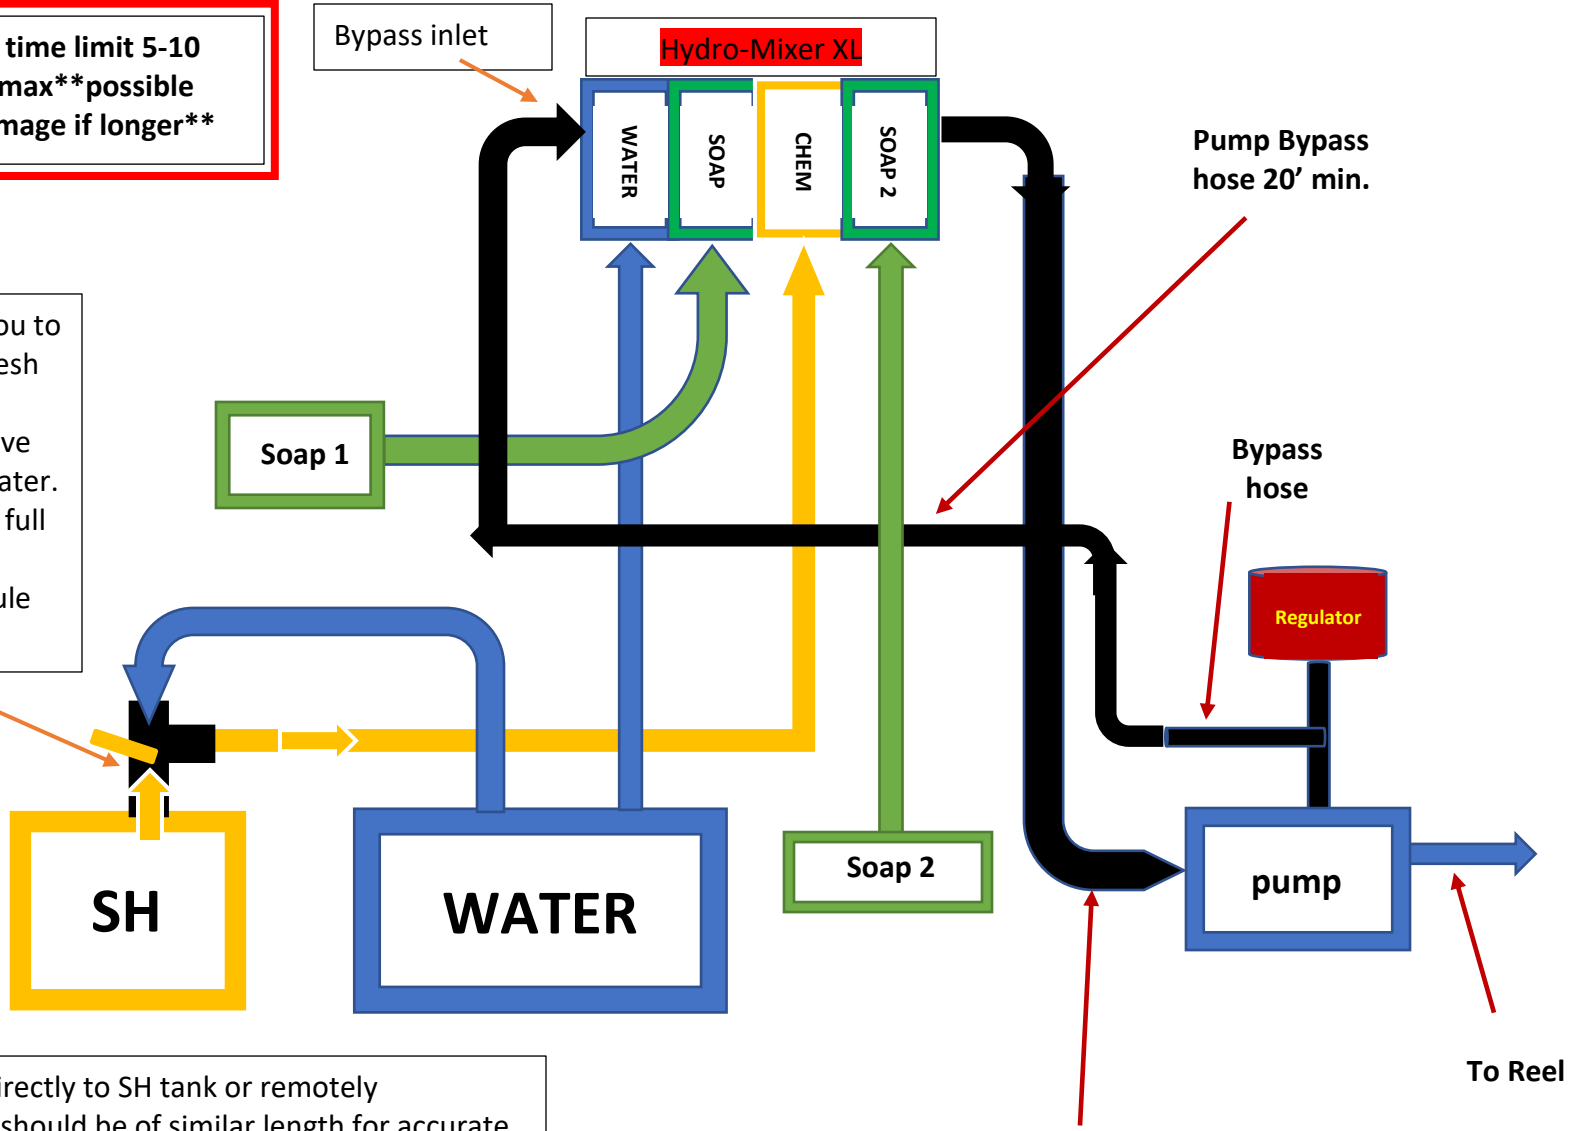

- Flush valve can mount directly to SH tank or remotely
- Water & SH supply lines should be of similar length for accurate and consistent metering
- Water supply for flush valve and water valve should be dedicated, do not tee into other lines
- Bypass inlet and outlet to pump can be reversed on manifold
- Always use strainers on pickup lines in tanks
- Use PVC slotted filter in SH tank, NO metal except titanium
- Bypass hose should be a min. 20' length to negate heat and pressure build up while in bypass