

eLighting

TITAN LED MODULAR

Performance-oriented aesthetic and engineered with purpose. The Titan delivers class leading versatility with effortless efficiency. Distinctive in its nature, the Titan operates interchangeably between Highbay, Flood light and high mast with IP65 rugged durability.

The formidable Titan embodies South African ingenuity in delivering over 145lm/w (system efficiency) in a selection of narrow to wide optical beam spreads with precision and unrivalled light uniformity.



MADE IN  **SOUTH AFRICA**

5 YEAR WARRANTY



FEATURES

140 -165LM/W*

IP65 IK08

4KV built in Surge protection

Corrosion Resistant

30° 60° 90° 120° Beam Angles

Replaces HPS & HID

50 000hrs

Energy Efficient

Low Maintenance

Made in South Africa

Construction & Installation

Designed for easy installation and to serve as a long term high light output energy saving flood light. The Titan is constructed primarily from combination of aluminium heatsinks as well as high impact polycarbonate diffusers. Its durable and rugged design makes it the perfect area lighting solution for a wide array of South African Coastal or Inland applications. The Titan is unmistakably easy to install with a Multi-angle secure lock steel stirrup.

Electrical Specifications


Custom built to effectively operate in South African conditions on 230V line voltage with a tolerance from 100 ~ 305V AC. 100W, 150W and 200W options are available. Powered by the reassuringly resilient brand of Meanwell electronic drivers. The flood light and control set offering unmatched reliability with reduced harmonic distortion, no visible flicker or emi interference. Built in 4KV Surge Protection. 10Kv surge protection is also available

Applications

Suitable for general area lighting, Sports fields, Car parks, Warehouses & High-mast and highbay applications.



Salt Spray Test
1000hours



Storage and Operation

Rated Power

Electrical Classification

Ingress Protection

Operating T°

Operating Humidity

Storage T°

100W
150W
200W

Class I II

IP65

-25 ~+45°C

0~95%

-25 ~+65°C



Photometric Specifications

Models

Model	Power	Luminous Flux	Colour	Beam Angle	CRI	LED
T100FL	100W	14000- 16500lm*	4000K & 6000K	30° 60° 90° 120°	70 / 80	3030 SMD
T150FL	150W	21000 - 24750lm*	4000K & 6000K	30° 60° 90° 120°	70 / 80	3030 SMD
T200FL	200W	28000 - 33000lm*	4000K & 6000K	30° 60° 90° 120°	70 / 80	3030 SMD

*Total Luminous flux may slightly vary >5% on correlated colour temperature and light distribution beam angle. IES files are available on specific models
 *LEDs are available in standard 70Ra & 80Ra

Spectral Data

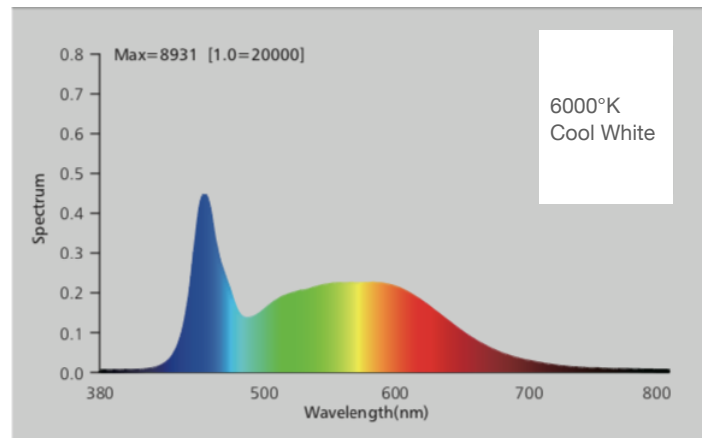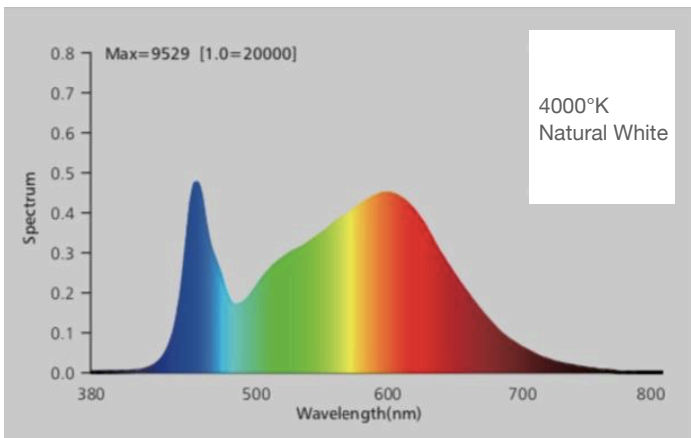


Light Distribution options




30°



60°




90°

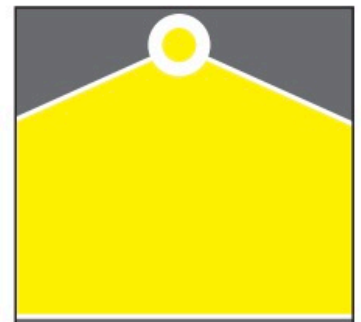

120°

Asymmetrical and Symmetrical RoHS compliant optical distribution lenses in various beam angles are available to suit the exact requirements of each specific application. The polycarbonate lens is able to withstand 20 Joules of impact with an IK10 Impact protection rating. Efficiency of distribution ranges from 94-96% with an average peak intensity of 0.5cd/lm on white Bridgelux 3030 SMD LED

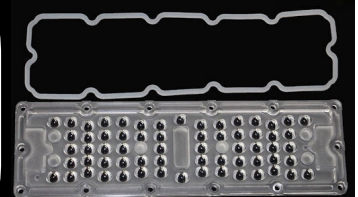



Electro-Mechanical Data

Model	Power	Input Voltage	Line Frequency	Power Factor	IP Rating	IK Rating	Surge Protection
T100FL	100W	100 - 305V AC	50Hz	0.95	65	8	4KV built in
T150FL	150W	100 - 305V AC	50Hz	0.95	65	8	4KV built in
T200FL	200W	100 - 305V AC	50Hz	0.95	65	8	4KV built in

Protection: Over current - Constant current limiting, recovers automatically after fault condition is removed. Short circuit - Hiccup mode, recovers automatically after fault condition is removed. Over Voltage - Shut down and latch off o/p voltage, re-power on to recover. Meanwell HLG Driver.
Vibration: 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes

SAFETY STANDARDS UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750(type"HL"), CSA C22.2 No. 250.0-08; EN/AS/NZS 61347-1,EN/AS/NZS 61347-2-13 independent (except for HLG-240H C type); UL60950-1(except for AB type),UL8750,TUV EN60950-1;GB19510.1GB19510.14; IP65 or IP67;J61347-1,J61347-2-13(except for B,AB and D-type),BIS IS15885(for 48V only),EAC TP TC 004,KC61347-1,KC61347-2-13(except for AB,C,D-type) approved Meanwell HLG Driver range

Size Dimensions

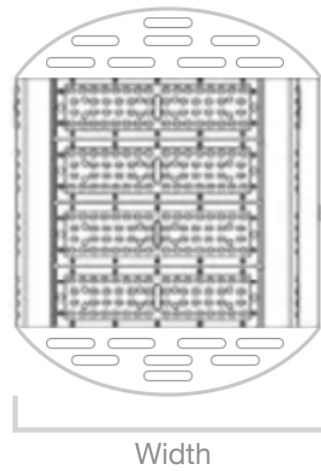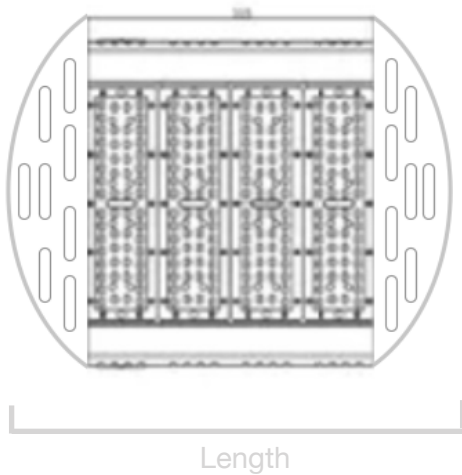

Model	Power	Length	Height	Width	Weight
T100FL	100W	320mm	100mm	320mm	3.4Kg
T150FL	150W	410mm	100mm	320mm	4.5Kg
T200FL	200W	500mm	100mm	320mm	6.1Kg

*Net weight excluding packaging

Accessories

IP67 In-line Connector



Connect easily to the incoming power feed with optional 1.5mm and 2.5mm Ip67 inline connectors

Surge Protection

10KA

