

TRACKFIX SIL

Properties:

TRACKFIX SIL is a two-component, fast-reacting, non-foaming injection resin based on silicate with good adhesive properties, very fast strength development and high final strength, especially for the consolidation of track ballast in railway construction.

The resin is universally applicable in railway construction.

Fields of application:

- Transitions from ballasted track to slab track
- Suitable for full and partial bonding I + II
- Ballast embankment protection
- Protection against gravel flow
- Protection against flying gravel
- Securing during work on the track
- Position stabilization and/or correction
- Reduction of tamping intervals
- Underpinning and fixing of sleepers
- Easier cleaning of track ballast beds
- Reduction of dust formation during operation

Due to its low viscosity *TRACKFIX SIL* penetrates excellently into the track ballast to be consolidated. As a rule, the product is processed in dry to maximum matt damp areas. However, application is also possible on wet ballast/subsoil.

Technical Data:

Substance data of components:

Component A

Consistency	liquid	
Colour	colourless	
Odour	characteristic	
Spec. density (23°C)	approx. 1,42 g/cm ³	DIN EN ISO 2811-1
Dyn. viscosity (23°C)	approx. 280 mPas	DIN EN ISO 2555

Component B

Consistency	liquid	
Colour	brown	
Odour	characteristic	
Spec. density (23°C)	approx. 1,18 g/cm ³	DIN EN ISO 2811-1
Dyn. viscosity (23°C)	approx. 40 mPas	DIN EN ISO 2555

Mixture of A- and B-component:

Mixing ratio A : B 1 : 1 (parts by volume)


Reaction data (at 23°C):

String gel time (Pot-life)	approx. 1 : 20 min	ASTM D7487
Final curing	approx. 20 min	

Properties of silicate resin:

Compressive strength		DIN EN 12190
15 min	approx. 32 N/mm ²	
30 min	approx. 33 N/mm ²	
2 h	approx. 41 N/mm ²	
24 h	approx. 46 N/mm ²	
7 d	approx. 51 N/mm ²	

Compressive strength after 24 h:

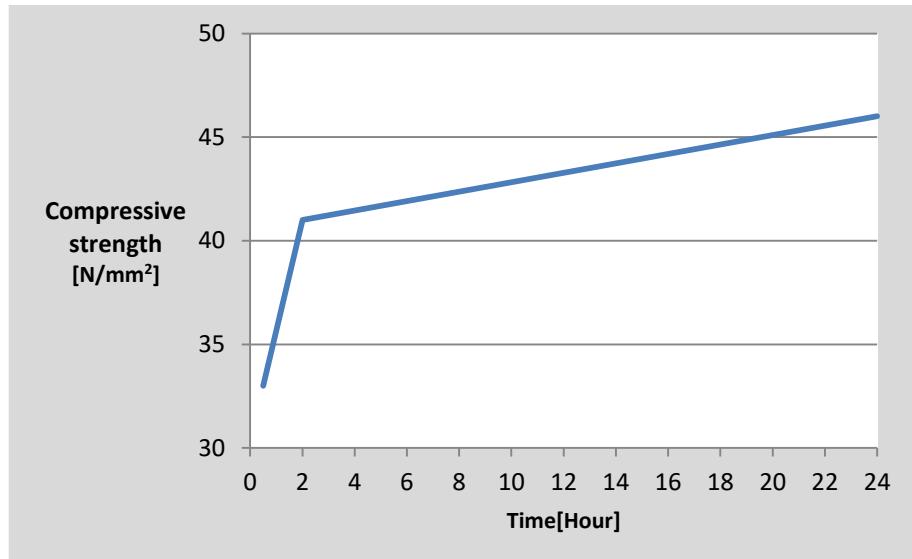

Bending tensile strength
E-modulus

approx. 24 N/mm²
approx. 1100 N/mm²

DIN EN 12390-5
DIN EN ISO 527

Processing:

Both components are pumped directly from the containers in a mixing ratio of 1 : 1 (volume parts) using two-component pumps.

Suitable pumps:

TPH INJECT PS 25-II
TPH INJECT PS 5-II

At the end of the separate delivery hoses, the components are brought together in a T or Y piece and then mixed homogeneously (free of streaks) in the mixing tube by means of a static mixer.

Suitable static mixer: Static mixer 13-32

The reaction mixture is applied to the prepared track ballast via a subsequent injection lance in such a way that an even distribution of the product is achieved (flooding method). For a simple and even distribution we recommend the use of an appropriate distribution head (approx. 40 cm long T-shaped discharge pipe with outlet openings).

The low-viscosity product penetrates quickly into the pore structure of the ballast and permanently sticks or consolidates the ballast.

The areas to be consolidated must be reworked at intervals depending on the penetration behaviour until the required quantities of resin have been used up and have led to overall consolidation of the ballast.

Alternatively, *TRACKFIX S/L* can also be injected into the ballast by means of ram lances or placed under the sleeper body.

Consumption estimates:

- ~ 3 - 4 kg/m² for gravel embankment protection
- ~ 1 - 2 kg/m² with track ballast bonding up to 15 cm ballast depth
- ~ 2 - 4 kg/m² with track bed ballast bonding up to 30 cm ballast depth
- ~ 5 - 8 kg/m² with track bed consolidation up to 50 cm ballast depth

The consumption figures are based on experience. Irrespective of this information, a test field must be created before work begins and the site-specific consumption determined.

Applicable at ambient temperatures of : 5°C to 40°C
Recommended product temperature : 15°C to 30°C

Depending on the product and ambient temperature, different viscosities and reaction times must be observed during processing.

Viscosity at different temperatures:

Temperature [°C]	Dyn. viscosity A component [mPas]	Dyn. viscosity B component [mPas]
5	790	140
10	520	100
15	440	70
20	310	50
25	270	35
30	200	25
40	190	15

* Norm DIN EN ISO 2555

Reaction times at different temperatures:

Temperature [°C]	Pot life (String gel time) [min:s]
5	2 : 40
10	2 : 00
15	1 : 50
20	1 : 30
25	1 : 10
30	0 : 55
40	0 : 47

* Norm ASTM D7487

Safety information:

Die *TRACKFIX SIL* A- and B is classified as hazardous according to Regulation (EG) Nr. 1272/2008 (CLP).

It is therefore necessary, before beginning processing, to become familiar with the precautions and safety advice as indicated in the material safety data sheet.

Packaging:

TRACKFIX SIL
Component A 27 kg- metal canister

TRACKFIX SIL
Component B 22,5 kg- metal canister

Bigger packaging on request.

Storage:

Shelf life at least 12 month in original packaging when stored in dry conditions between 15 - 25°C, protected from heat, frost and direct sunlight.

After the expiration the use of the product is generally not recommended, unless an approval has been provided by TPH. This approval can only be obtained by the quality assurance department of TPH releasing the material after verification of main properties being within specification.

Disposal:

Small quantities of cured product residues can be disposed of as normal domestic waste. Dispose of not cured product components must be effected in accordance with the corresponding local regulations. For further information please refer to the material safety data sheets.

Test certificates:

TRACKFIX SIL - Investigation of the elution behaviour of a silicate-based injection resin; MFPA Leipzig 2012

TRACKFIX SIL - Investigation of the resistance of a silicate-based injection resin to freeze-thaw cycle; MFPA Leipzig 2012

Investigation according to TrinkwV 2012 and coating guideline; görtler analytical services gmbh Vaterstetten 2019

Determination of the compressive strength of ballast cubes bonded with *TRACKFIX PUR*, *TRACKFIX POX* and *TRACKFIX SIL*, TU Munich 2019

Legal:

The correct and thus successful application of our products is not subject to our control. A guarantee can be issued for the quality of our products within the framework of our sales and supply conditions, however not for successful processing. All data and specifications in this specification sheet are based on the present state of the art and the right to changes and adaptations for the sake of development remains explicitly reserved. The consumption specifications designated by us can be only average empirical values, where deviations are possible on an individual basis and therefore cannot be excluded by us.

TPH Bausysteme GmbH
Nordportbogen 8
D-22848 Norderstedt

Tel.: +49 (0)40 / 52 90 66 78-0
Fax: +49 (0)40 / 52 90 66 78-78
e-mail: info@tph-bausysteme.com
Web: www.tph-bausysteme.com



TPH.
Waterproofing Systems