



Your future's safe!



EOS4

safety light curtains and grids

short form



Aluminum casing
Powder-coated

-30 to +55° C
Operating temperature
Ideal also in cold storage facilities

Protected height
up to 2,2 metres

Caps
Glass reinforced
polypropylene

Zero-Dead-Zone
On one side of the curtain

Finger, Hand and Body detection
and Multibeam for access control
The most comprehensive range
in today's market

IP65 and IP67

Compact size
Only 30 x 28 mm

Status indicating display
Including alignment aid

Hardware configuration
No programming necessary
Easy to install and replace

M12 connectors
Cables easy to source and install
No shielded cables needed


SAFETY LEVEL		Also available as SAFETY LEVEL	
TYPE 4	TYPE 2	TYPE 4	TYPE 2
SIL 3 - SILCL 3 PL e - Cat. 4	SIL 1 - SILCL 1 PL c - Cat. 2	SIL 3 - SILCL 3 PL e - Cat. 4	SIL 1 - SILCL 1 PL c - Cat. 2



EOS4

safety light curtains and grids

one simple product range to cover
most of today's industrial applications

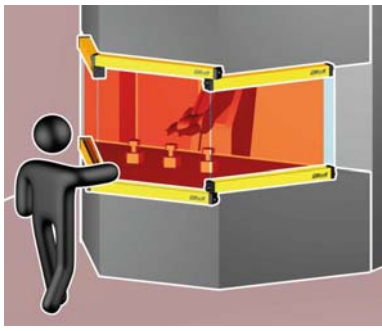

Cascade connection of two or three light curtains

No optical interference between the light curtains.

Possibility of combining different resolutions and protected heights.

Connection cable between Master and Slave up to 50 m long.



No blind area on one side

Minimal blind area on connector side.

The protected area extends until the light curtain end maintaining the resolution.

L-mounted light curtains maintain 40 mm resolution (hand detection) in corner (models with resolution 30 and 40 mm).

Unique features and a comprehensive range




EOS4 ATEX, Safety Light Curtain for explosive atmosphere

Ideal for access protection in environments with potentially explosive atmosphere.

Type 4, SIL 3, PL e Safety Light Curtains and Grids.

Classified Zone 2, 22, ATEX (2014/34/UE directive).

Gas: II 3G Ex nA IIC T6 Gc, Dust: II 3D Ex tc IIIC T 60°C Dc.



WTF and WTHF models (IP69K certified, Ecolab food-graded)

Watertight enclosures allow light curtains and light grids to be used in a harsh working environments with exposure to water and steam.

The use of inert and non-toxic components allow WTF and WTHF enclosures to be used in the Food & Beverage industry, where frequent washdown procedures are requested.

ECOLAB

type 4 safety light curtains and grid

www.reersafety.com



Typical applications

EOS4 is the ideal choice for many printing, paper, logistics, metalwo

Safety Light Curtains

Finger, Hand and Body detection

EOS4 (Type 4)

EOS4 A and EOS4 X

Resolution: 14, 30, 40, 50, 90 mm
Protected height: 160 ... 2260 mm
Range: 6 to 12 m

EOS4 AH and EOS4 XH

Resolution: 20, 30, 40, 50, 90 mm
Protected height: 160 ... 2260 mm
Range: 20 m

Other available versions

EOS2 (Type 2)

Available as Type 2, SIL 1, SILCL 1, PL c, Cat. 2

WTF and WTHF

Watertight models IP69K certified, Ecolab food-graded

ATEX (EOS4 only)

Explosion-proof Type 4 models (Zone 2, 22)

Available accessories

Connecting cables
Special mounting brackets
Floor mouting columns
Heavy-duty protection screens
Laser alignment aid

Standard models

EOS4 A

Type 4 Safety Light Curtains with Automatic Restart

EOS4 AH

Type 4 Safety Light Curtains with Automatic Restart
(*Longer Range*)

Integrated functions models

EOS4 X

Type 4 Safety Light Curtains with selectable
Automatic/Manual Restart and EDM

EOS4 XH

Type 4 Safety Light Curtains with selectable
Automatic/Manual Restart and EDM (*Longer Range*)

Cascading models

EOS4 XM

Type 4 Safety Light Curtains with selectable
Automatic/Manual Restart and EDM
(*To be used as Master in Cascade configurations*)

EOS4 XS/XS2

Type 4 Safety Light Curtains with selectable
Automatic/Manual Restart and EDM
(*To be used as Primary (XS) or Secondary (XS2) Slave in
Cascade configurations*)



Industrial applications, including: food & beverage, packaging, pharmaceuticals, printing, woodworking, chemicals, injection moulding and many more ...

Safety Light Grids

Multibeam grids for access control

EOS4 (Type 4)

EOS4 2B, 3B, 4B A and X

Number of beams: 2, 3, 4 beams
Protected height: 510 ... 910 mm
Range: 12 m

EOS4 2B, 3B, 4B AH and XH

Number of beams: 2, 3, 4 beams
Protected height: 510 ... 910 mm
Range: 20 m

Other available versions

EOS2 (Type 2)

Available as Type 2, SIL 1, SILCL 1, PL c, Cat. 2

WTF and WTHF

Watertight models IP69K certified, Ecolab food-graded

ATEX (EOS4 only)

Explosion-proof Type 4 models (Zone 2, 22)

Available accessories

Connecting cables
Special mounting brackets
Floor routing columns
Heavy-duty protection screens
Laser alignment aid

Standard models

EOS4 A

Type 4 Safety Light Grids with Automatic Restart

EOS4 AH

Type 4 Safety Light Grids with Automatic Restart
(Longer Range)

Integrated functions models

EOS4 X

Type 4 Safety Light Grids with selectable
Automatic/Manual Restart and EDM

EOS4 XH

Type 4 Safety Light Grids with selectable
Automatic/Manual Restart and EDM (Longer Range)

Cascading models

EOS4 XM

Type 4 Safety Light Grids with selectable
Automatic/Manual Restart and EDM
(To be used as Master in Cascade configurations)

EOS4 XS/XS2

Type 4 Safety Light Grids with selectable
Automatic/Manual Restart and EDM
(To be used as Primary (XS) or Secondary (XS2) Slave in
Cascade configurations)

EOS4

Main features

- Minimal cross section: 28 x 30 mm
- No blind area on one side
- Operating temperature range: -30 ... 55 °C
- Protection grade: IP65 and IP67
- Start-up time: ≤ 2 sec
- Master/Slave models for cascade connection of 2 or 3 curtains





Your future's safe!

More than 50 years of quality and innovation

Founded in Turin, Italy in 1959, ReeR distinguished itself for its strong commitment to innovation and technology.

A steady growth throughout the years allowed ReeR to become a point of reference in the safety automation industry at a worldwide level.

The Safety Division is in fact today a world leader in the development and manufacturing of safety optoelectronic sensors and controllers.

ReeR is ISO 9001, ISO 14001 and BS OHSAS 18001 certified.



Distributed in the USA by



PowerSafe Automation
129 N Main St.
Wolcottville, IN 46795

P: 844-520-7233 F: 844-662-4359
psa365@powersafeautomation.com
www.powersafeautomation.com

ReeR SpA

Via Carcano, 32
10153 Torino, Italy

T +39 011 248 2215
F +39 011 859 867

www.reersafety.com | info@reer.it



Issue 2 - Rev. 1.0
July 2018
8946238
Brochure EOS - English

Printed in Italy

