

Rasp Mine
Monthly Environmental Monitoring Report
January 2018



INTRODUCTION

Broken Hill Operations Pty Ltd (BHOP) [a wholly owned subsidiary of CBH Resources Limited (CBH)] owns and operates the Rasp Mine (the Mine), which is located centrally within the City of Broken Hill on Consolidated Mine Lease 7 (CML7).

Mining has been undertaken within CML7 since 1885. The existing operations at the Rasp Mine include underground mining operations, a processing plant producing zinc and lead concentrates and a rail siding for concentrate dispatch. These operations are undertaken in accordance with Project Approval 07_0018 granted 31 January 2011, under Part3A of the Environmental Planning and Assessment Act 1979 (EP&A Act).

As the holder of an Environmental Protection Licence, 12559, BHOP is required, under Section 66(6) of the NSW *Protection of the Environment Operations Act 1997*, to publish pollution monitoring data. In addition BHOP is required to publish data in accordance with its Project Approval 07_0018 Schedule 4 Condition 9. These documents can be found on the Rasp Mine web site.

TABLE OF CONTENTS

1	AIR QUALITY	3
1.1	HIGH VOLUME AIR SAMPLERS	3
1.2	TAPERED ELEMENT OSCILLATING MICROBALANCE SAMPLING (TEOM).....	6
1.3	DUST DEPOSITION SAMPLING	9
1.4	VENTILATION OUTLETS AND BAG HOUSE MONITORING	10
2	NOISE.....	11
2.1	BLASTING (VIBRATION AND OVERPRESSURE)	11
2.2	NOISE	13
3	WATER.....	13
3.1	GROUNDWATER	13
3.2	SURFACE WATER SAMPLE RECORD	14
4	WEATHER DATA	14
5	DATA LOG	15
6	CORRECTION LOG.....	16



1 Air Quality

The following criteria as listed in the Project Approval (MOD4 6 September 2017) apply to air quality monitoring:

Long Term Criteria for Particulate Matter

Pollutant	Averaging Period	Criterion
Total solid particles (TSP)	Annual	90 µg/m ³
Particulate matter < 10 µm (PM ₁₀)	Annual	25 µg/m ³

Short Term Criterion for Particulate Matter

Pollutant	Averaging Period	Criterion
Particulate matter < 10 µm (PM ₁₀)	24 hour	50 µg/m ³

Long Term Criteria for Deposited Dust

Pollutant	Averaging Period	Maximum Project Contribution	Maximum Total Deposited Dust Level
Deposited dust	Annual	2 g/m ² /month	4 g/m ² /month

Hot dry conditions in January


January was a hot dry windy month in Broken Hill with little rain. According to the Rasp Mine site weather station, 23 days exceeded 30°C, winds were predominantly from the south and wind speeds exceeded 36 km/h over 17 days with wind gusts up to 76 km/h. The BoM monitor at the airport confirmed these conditions recording 14 days with wind gusts greater than 50 km/h predominantly from a southern direction, and 16 days with temperatures above 35°C. These dry conditions and high winds resulted in regional dust storms impacting January air quality monitoring results.

1.1 High Volume Air Samplers


There are three high volume air samplers used to measure ambient air quality at the Rasp Mine – HVAS (EPL10) and HVAS1 (EPL11) are located at the Silver Tank, central and to the south of the mine lease, and HVAS2 (EPL12) is located adjacent to and north of Blackwood Pit. A map indicating these locations can be found on the Rasp Mine web site. HVAS samples for total suspended particulates (TSP) and lead dust, and HVAS1 and HVAS2 sample for particulate matter less than 10 microns (PM₁₀) and lead dust.

HVAS (EPL10) - SILVER TANK - ON Site Results for January

DATE	TSP (µg/m ³)	Lead (µg/m ³)
06-01-18	60.90	0.44
12-01-18	89.70	0.44
18-01-18	80.60	0.52
24-01-18	27.60	0.05
30-01-18	22.40	0.06

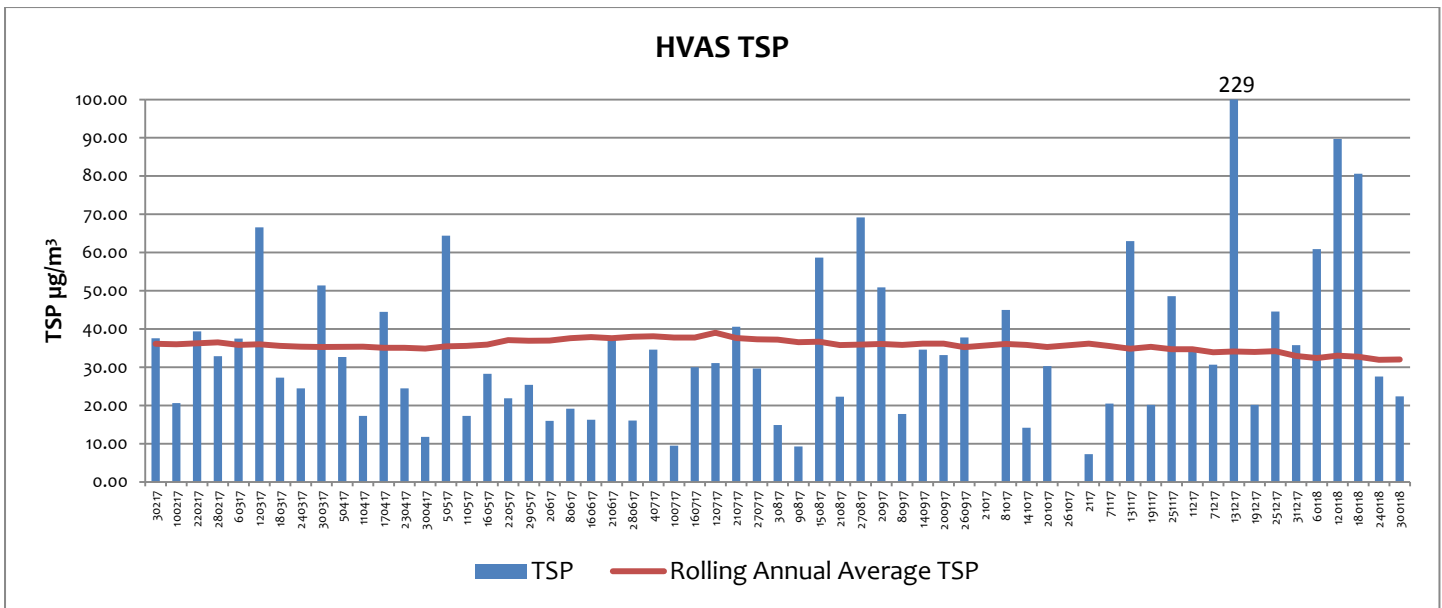

This monitoring unit is located on the Rasp Mine and criteria does not apply at this point, criteria apply at the closest residential location. The data indicates that the annual average TSP for January was $32 \mu\text{g}/\text{m}^3$ and was well below the TSP annual average criterion of $90 \mu\text{g}/\text{m}^3$ required for the nearest residential location.

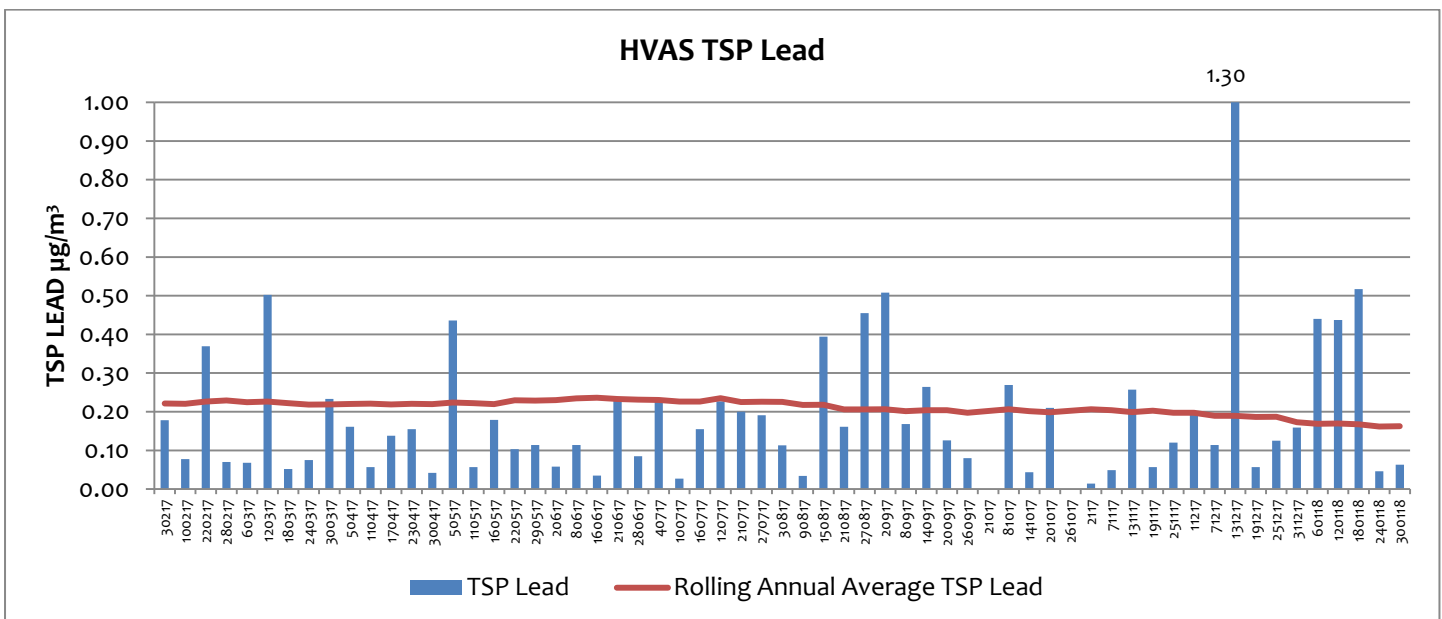

Guidelines for air quality are provided by the EPA, *Approved Methods for the Modelling and Assessment of Air Pollutants in New South Wales, 2016*. The on-site annual average for TSP lead dust for January was $0.16 \mu\text{g}/\text{m}^3$ and is below the EPA guideline of $0.50 \mu\text{g}/\text{m}^3$.


HVAS1 (EPL11) - SILVER TANK – ON Site Results for January

DATE	PM10 ($\mu\text{g}/\text{m}^3$)	PM10 Lead ($\mu\text{g}/\text{m}^3$)
06-01-18	22.90	0.14
12-01-18	27.20	0.13




Rasp Mine Monthly Environment Monitoring Report

18-01-18	21.40	0.12
24-01-18	19.60	0.05
30-01-18	13.30	0.02

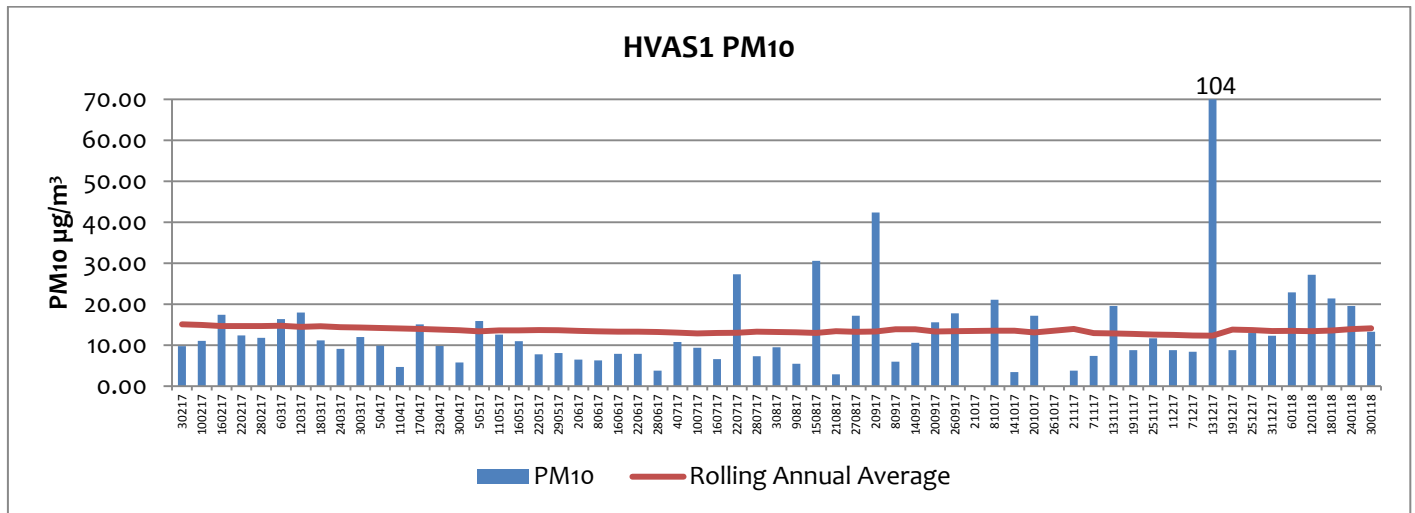

This monitoring unit is located on the Rasp Mine and the criteria does not apply at this point, criteria apply at the closest residential location. The data indicates that the annual average PM₁₀ for January of 14 $\mu\text{g}/\text{m}^3$ is below the PM₁₀ annual average criterion of 25 $\mu\text{g}/\text{m}^3$ required at the nearest residential location. Overall the trend for PM₁₀ at this location remains consistent with the previous 12 months.

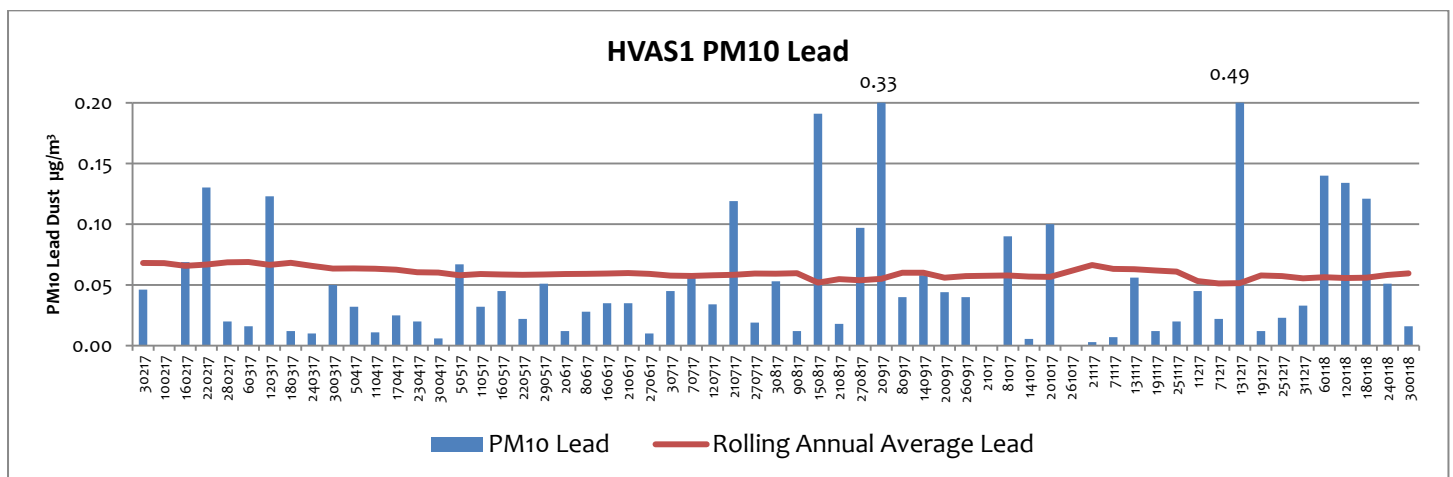

There is no guideline for assessing PM₁₀ lead dust; the trend for lead dust at this location remains consistent with the previous 12 months.


HVAS 2 (EPL12) - Blackwood Pit – On Site Results for January

DATE	PM10 ($\mu\text{g}/\text{m}^3$)	Lead ($\mu\text{g}/\text{m}^3$)
06-01-18	18.50	0.15
12-01-18	19.00	0.07
18-01-18	19.00	0.10




24-01-18	21.40	0.13
30-01-18 ¹	-	-

Note 1: Filter paper found to be damaged and unable to be analysed, EPA notified, result of investigation still pending.

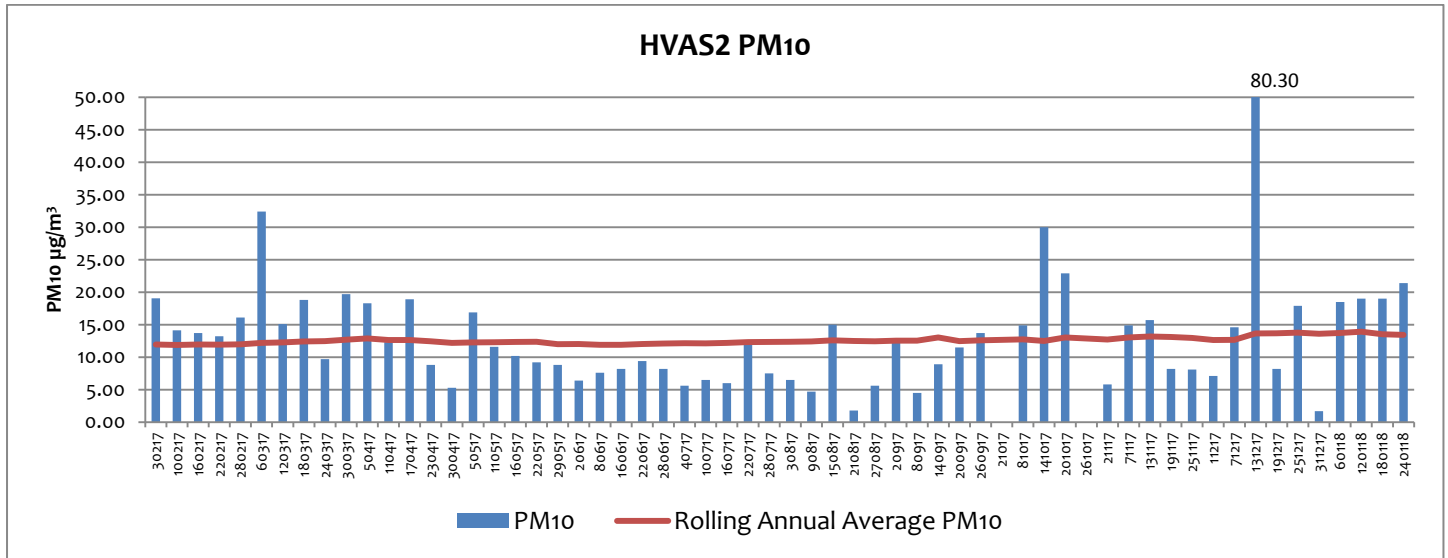

This monitoring unit is located on the Rasp Mine and criteria does not apply at this point, criteria apply to the closest residential location. The data indicates that the annual average PM₁₀ for January of 14 µg/m³ is below the PM₁₀ annual average criterion 25 µg/m³ required at the nearest residential location.

Overall the trend for PM₁₀ at this location remains consistent with the previous 12 months.

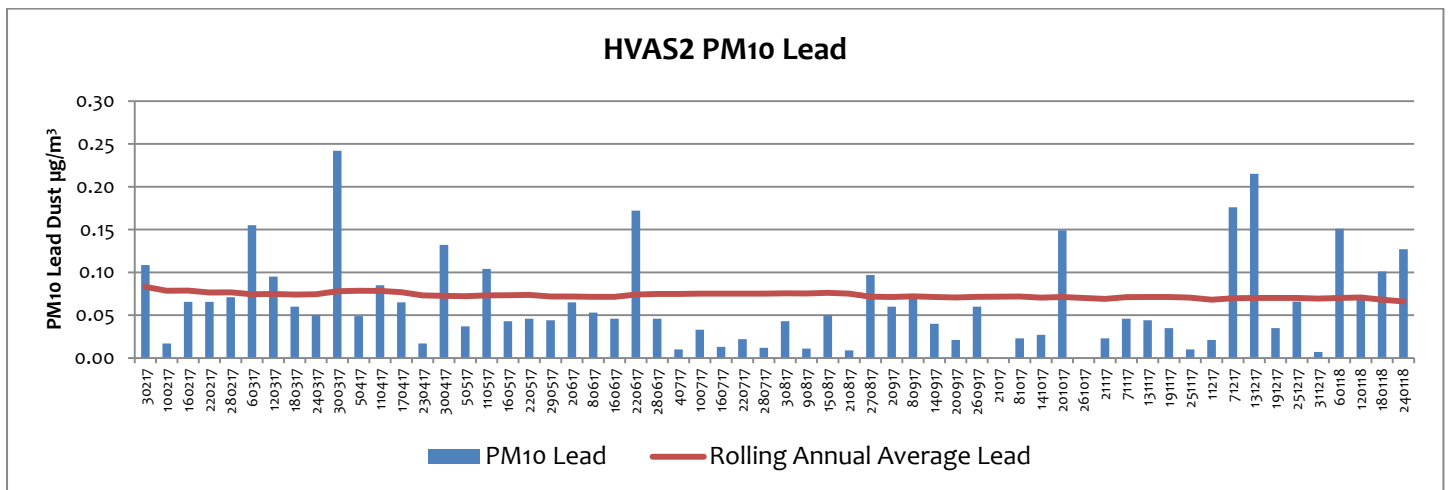

There is no guideline for assessing PM₁₀ lead dust; the trend for lead dust at this location remains consistent with the previous 12 months.

1.2 Tapered Element Oscillating Microbalance Sampling (TEOM)

There are two Tapered Element Oscillating Microbalance (TEOM) sampling units used to measure ambient air quality at the Rasp Mine – TEOM1 (EPL13) is located off-site within the perimeter fence of Essential Water south of the mine lease, and TEOM2 (EPL14) is located on-site adjacent to Blackwood Pit to the north of the mine lease. A map indicating these locations can be found on the Rasp Mine web site. TEOM1 and TEOM2 operate continuously and sample for particulate matter less than 10 microns (PM₁₀).



TEOM1 (EPL13) – Off Site and TEOM2 (EPL14) – On Site Results for January

Particulate Matter <10 Microns 24Hr Average				
Date	TEOM 1 ($\mu\text{g}/\text{m}^3$)	Compliant with 50 $\mu\text{g}/\text{m}^3$ 24hr average?	TEOM 2 ($\mu\text{g}/\text{m}^3$)	Compliant with 50 $\mu\text{g}/\text{m}^3$ 24hr average?
01-01-18	10.98	Y	Not working ²	NK ¹
02-01-18	10.99	Y	Not working ²	NK
03-01-18	10.54	Y	Not working ²	NK
04-01-18	14.08	Y	2.46	Y
05-01-18	10.82	Y	8.68	Y
06-01-18	20.14	Y	19.46	Y
07-01-18	61.34	Y (dust storm)	56.19	Y (dust storm)
08-01-18	94.35	Y (dust storm)	89.38	Y (dust storm)
09-01-18	10.01	Y	24.77	Y
10-01-18	15.78	Y	19.02	Y
11-01-18	36.00	Y	22.76	Y
12-01-18	39.95	Y	35.19	Y
13-01-18	12.19	Y	14.68	Y
14-01-18	12.36	Y	23.87	Y
15-01-18	14.11	Y	52.45	Y ³
16-01-18	11.08	Y	19.14	Y
17-01-18	18.94	Y	14.18	Y
18-01-18	27.69	Y	14.33	Y
19-01-18	21.70	Y	21.65	Y
20-01-18	21.54	Y	21.10	Y
21-01-18	28.12	Y	33.00	Y
22-01-18	37.67	Y	58.79	Y ³
23-01-18	21.75	Y	50.83	Y ³
24-01-18	31.20	Y	32.80	Y
25-01-18	25.43	Y	25.16	Y
26-01-18	39.69	Y	50.15	Y ³
27-01-18	19.44	Y	21.03	Y
28-01-18	30.48	Y	25.76	Y
29-01-18	89.44	Y (dust storm)	98.06	Y (dust storm)
30-01-18	8.94	Y	-63.33 ⁴	Y
31-01-18	12.33	Y	-18.35 ⁴	Y

Note: 1 = NK not known 2 = Refer discussion below for explanation for non-working equipment 3 = Predominant wind direction from the south/south-east not affected by site. 4 = Results may be negative or positive depending on water exposure and humidity.


TEOM1 monitoring unit is located off-site from the Rasp Mine and the criteria as listed in the Project Approval 07_0018 applies at this point. There are two criterion listed for PM₁₀ - 24 hour average and an annual average. The highest 24-hour average recorded at TEOM1 was 94.35 $\mu\text{g}/\text{m}^3$ on 8 January. This was the result of dust storms across Broken Hill with wind gusts of up to 76 km/h and winds predominantly from the south. The PM₁₀ annual average at the end of January was 26.4 $\mu\text{g}/\text{m}^3$. The Project Approval excludes extraordinary events such as dust storms and therefore the criteria does not apply.



The TEOM2 monitoring unit is located on the Rasp Mine and criteria does not apply at this point, criteria apply to the closest residential location. TEOM 2 was not operational for the first three days in January. This was due to a transformer being replaced in Broken Hill resulting in the circuit breaker having to be reset manually twice. The incident was reported to the EPA and investigated. The outcome of the investigation was the replacement of the circuit breaker.


TEOM2 results were affected by hot dry dusty conditions and high winds, predominantly from the south/south-east (the Rasp Mine is located North of this monitor). The data indicates that the highest PM₁₀ 24 hour average of 98.06 µg/m³ on 29 January was the result of these conditions. The annual average PM₁₀ for January of 25.8 µg/m³. The Project Approval and air quality guidelines exclude extraordinary events such as dust storms and therefore the criteria does not apply.

Rasp Mine is in compliance with all listed criteria.

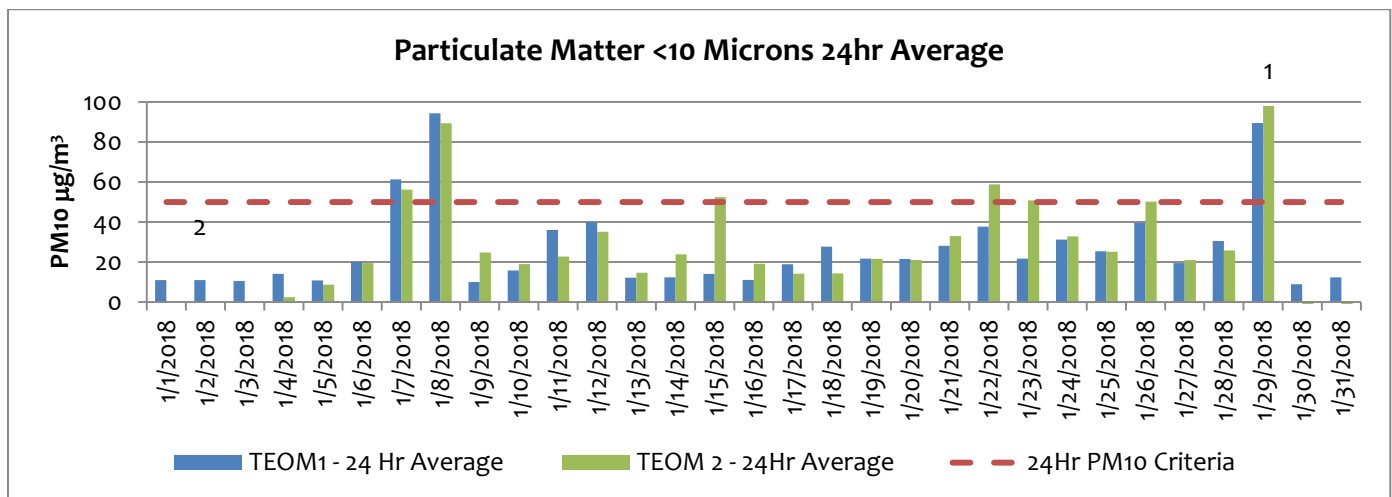

Note 1: Wind speeds for day up to 48km an hour from ESE created dust storms across monitors.

Note 2: Equipment malfunction for TEOM 2 resulted in no data recorded from 1 Jan to 3 Dec, refer above discussion.

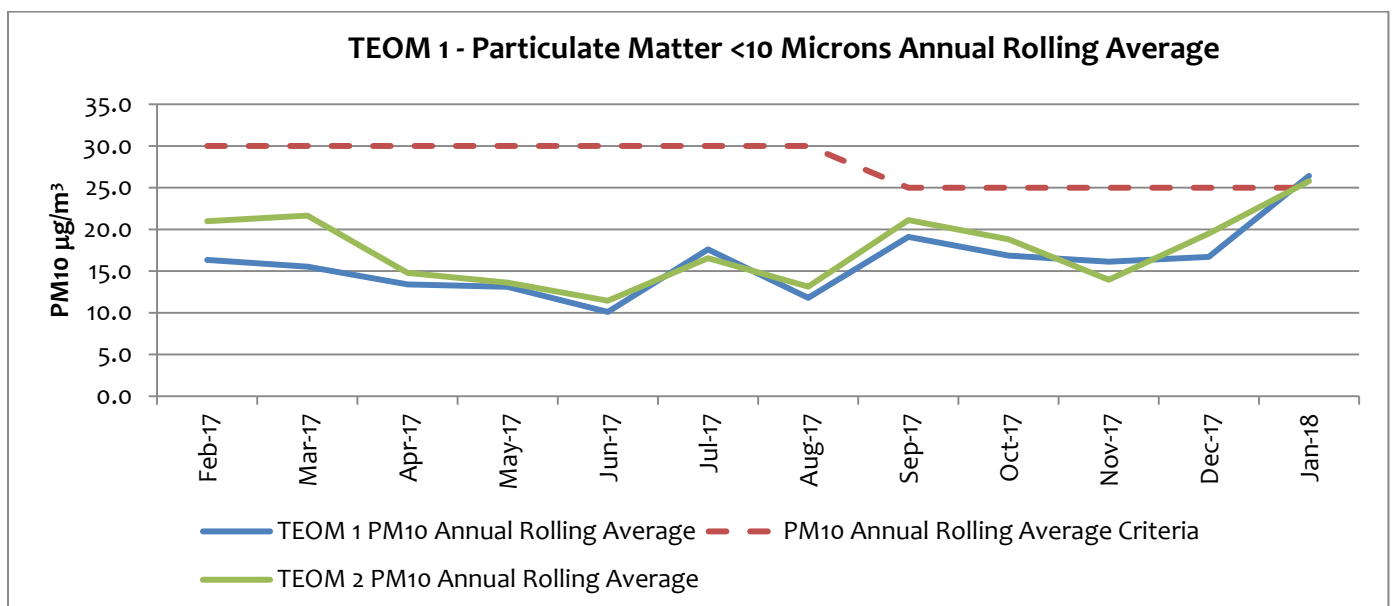

Note 1: Criteria change to 25µg/m³ in September as per PA MOD4.



The PM₁₀ annual average for January is above the Project Approval limit of 25 µg/m³ - 26.4 µg/m³ (TEOM 1) and 25.8 µg/m³ (TEOM 2) This was primarily because January was a hot dry month (BoM), with 14 days where wind gusts were greater than 50 km/h predominantly from a southern direction, and 16 days with temperature above 35°C. Extraordinary events such as dust storms, are excluded from the assessment of monitoring results against criteria thus the exceedences do not apply to the Rasp Mine results.

The Rasp Mine is in compliance with this criterion. Overall the trend for PM₁₀ at this location remains consistent with the previous 12 months.

1.3 Dust Deposition Sampling


There are seven dust deposition gauges to measure ambient air quality at the Rasp Mine – D1 to D7. D1 and D6 are located off-site, D1 near the St Johns training facility north of the Rasp Mine and D6 in Casuarina Avenue south of the Rasp Mine. D2 to D5 and D7 are located on the mine lease in various locations. A map indicating these locations can be found on the Rasp Mine web site. Dust samples are collected monthly and analysed for total deposited dust and deposited lead dust.

Dust Deposition Gauges (D1 (EPL3) to D7(EPL9)) – Results for January

Total Deposited Dust (g/m ² /Month)							
Date	D1 (off site)	D2 (on site)	D3 (on site)	D4 (on site)	D5 (on site)	D6 (off site)	D7 (on site)
January 2018	1.75	1.64	0.96	6.22	0.85	3.17	4.98
Background (2010)	4.0	3.1	4.3	5.7	- ¹	5.8	N/A
Compliant?	N	N/A	N/A	N/A	N/A	N	N/A

Note: “-1” = background not available


N/A = not applicable as dust deposition unit is located on site

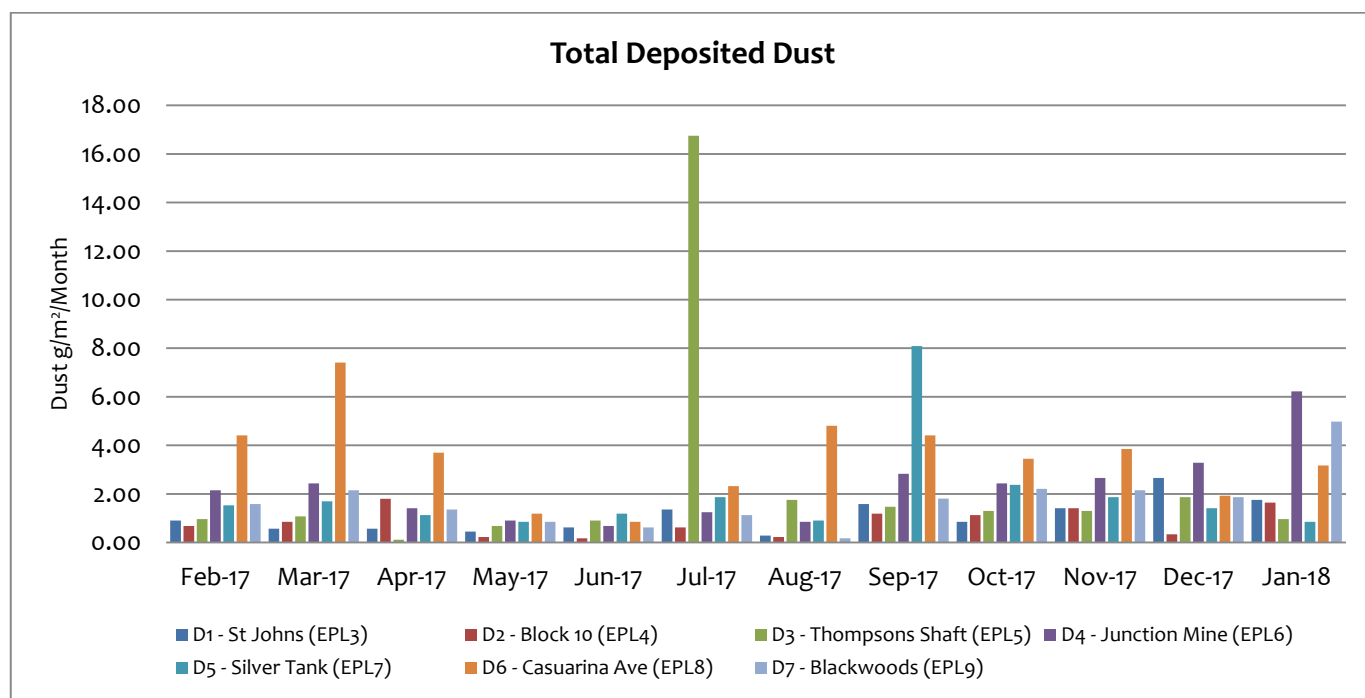

The Rasp Mine is in compliance with criteria.



Total Deposited Lead (g/m ² /Month)							
Date	D1 (off Site)	D2 (on site)	D3 (on site)	D4 (on site)	D5 (on site)	D6 (off Site)	D7 (on site)
January 2018	0.001	0.001	0.002	0.002	0.002	0.007	0.006
Background (2010)	0.0034	0.005	0.005	0.006	-	0.004	-

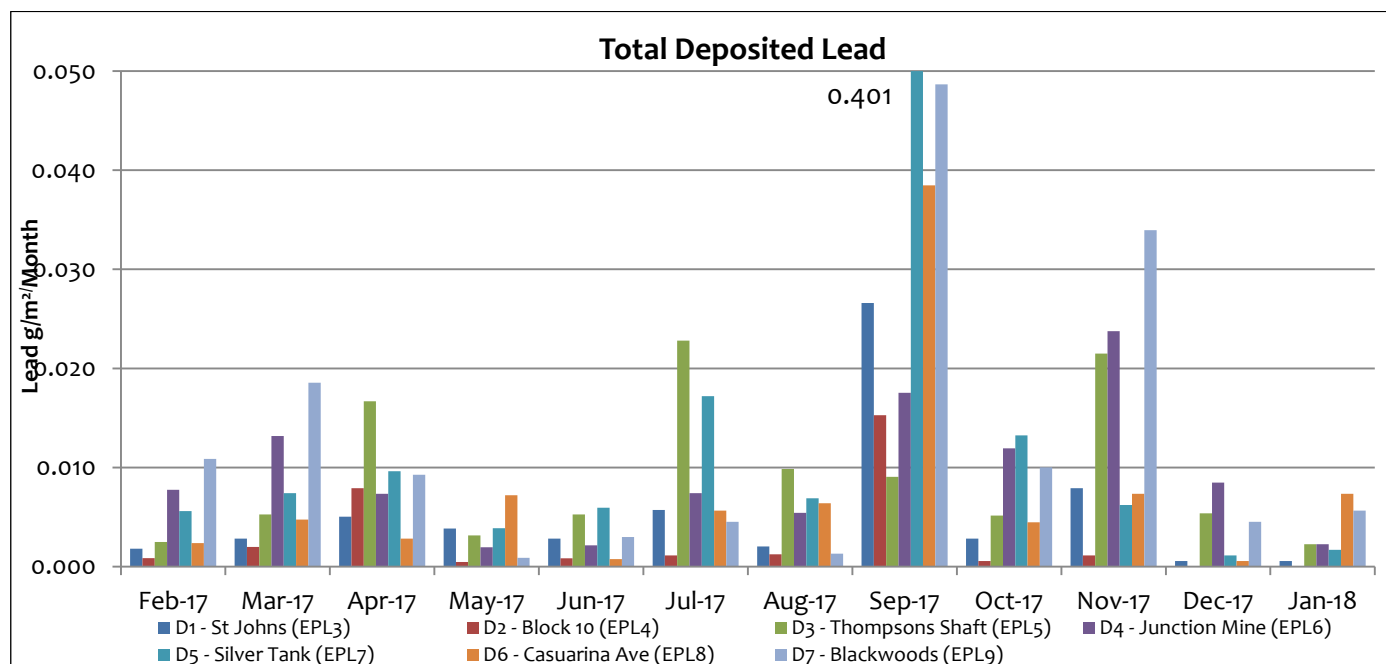

There are no guidelines for deposited lead dust. The results are consistent with previous months.

1.4 Ventilation Outlets and Bag House Monitoring

There are three locations to measure pollutants from exhausts or stacks, these include the Primary Ventilation Shaft and Shaft 6, both measuring pollutants from underground firings, and the Baghouse Stack at the crusher measuring dust. All are located on site, the Primary Ventilation Shaft is located centrally and to the north of the mine lease and Shaft 6 is located centrally within the lease. The Primary Crusher Baghouse Stack is located within the area of the processing plant to the east of the lease. A map indicating these locations can be found on the Rasp Mine web site. Samples are collected quarterly and analysed for a number parameters listed in below. Reference to the item required in the Rasp Mine Environment Protection Licence (EPL) is provided below.

Quarterly sampling is undertaken in January, April, July and January.

The following criteria apply:

Primary Ventilation Shaft (EPL1) and Shaft 6 (EPL56)

	Unit	Criteria
Nitrogen Oxides	mg/m ³	350
Volatile Organic Compounds	mg/m ³	40



Primary Ventilation Shaft (EPL1), Shaft 6 (EPL56) and Crusher Baghouse (EPL2)

	Unit	Criteria
Total Suspended particles	mg/m ³	20
Type 1 and Type 2¹	mg/m ³	1

Note: Type 1 substance Means the elements antimony, arsenic, cadmium, lead or mercury or any compound containing one or more of those elements. Type 2 substance Means the elements beryllium, chromium, cobalt, manganese, nickel, selenium, tin or vanadium or any compound containing one or more of those elements.

Primary Vent Shaft (EPL1), Crusher Baghouse (EPL2) and Vent Shaft 6 (EPL56) Results for January

	Unit	Primary Vent Shaft (EPL1)	Crusher Baghouse (EPL2)	Vent Shaft 6 (EPL 56)
Nitrogen Oxides	mg/m ³	5.15	NA	<2.05
Volatile Organic Compounds	mg/m ³	<0.486	NA	<0.425
Total Suspended particles	mg/m ³	2.11	10	0.604
Type 1 and Type 2	mg/m ³	0.009	0.385	0.069

The Rasp Mine is in compliance with all listed criteria.

2 Noise

2.1 Blasting (Vibration and Overpressure)

There are 6 vibration monitors at various locations to measure for vibration and overpressure from blast firings. These include V1 to V5 which are located off-site and V6 which is located on-site near Shaft 4. A map indicating these locations can be found on the Rasp Mine web site. In addition there are 2 roving monitors, which may be used to monitor vibration and overpressure at particular locations as required. Monitors operate continuously and are automatically triggered when a blast occurs. The following conditions apply as listed in the PA 07_0018 and EPL 12559:-

Blasting Criteria (Western Mineralisation and Main Lodes excluding Block 7)

Location	Airblast Overpressure (dB(Lin Peak))	Ground Vibration (mm/s)	Allowable Exceedance (for production and development blasts)
Residence on privately owned land (7am-7pm)	115	5	5% of the total number of blasts over a 12-month period ¹
(7am-7pm)	120	10	0%
(7pm-10pm)	105	-	-
(10pm-7am)	95	-	-
Public Infrastructure	-	100	0%

Note 1: Does not apply until completion of Pollution Reduction Program on the EPL at the end of 2018. Applies to EPL criteria in the period for the Annual Return 3 Nov to 2 Nov the following year and to DPE criteria in the reporting period 1 Jul to 30 Jun each year.



Blasting Criteria (Block 7)

Location	Airblast Overpressure (dB(Lin Peak))	Ground Vibration (mm/s)	Allowable Exceedance (for production and development blasts)
Residence on privately owned land (7am-7pm)	115	3 (interim)	5% of the total number of blasts over a 12-month period ¹
(7am-7pm)	120	10	0%
(7pm-10pm)	105	-	-
(10pm-7am)	95	-	-
Broken Hill Bowling Club, Italio (Bocce) Club, Heritage Items within CML7	-	50	0%
Perilya Southern Operations	-	100	0%
Public Infrastructure	-	100	0%

Note 1: Applies to EPL criteria in the period for the Annual Return 3 Nov to 2 Nov the following year and to DPE criteria in the reporting period 1 Jul to 30 Jun each year.

In addition the following conditions also apply:-

- Production blasts may occur between 6.45 am and 7.15 pm on any day
- 1 production blast per day, with 6 per week averaged over a calendar year
- 6 development blasts per day, with 42 per week averaged over a calendar year

Blasting Data Summary Results for January

Total Blasts:

- 0 production blasts occurred before 6.45 am or after 7.15 pm
- Production blasts averaged 4.9 per week over the previous calendar year
- Development blasts, averaged 34.04 per week over the previous calendar year

Western Mineralisation and Main Lodes (excluding Block 7):

- 0 Blast recorded >5 mm/s
- 0 Blasts recorded >10 mm/s
- 0 development blasts recorded an over pressure level over 95 dBL (10pm to 7am)
- 0 development blasts recorded an over pressure level over 105 dBL (7pm to 10pm)
- 0 Blasts recorded an over pressure level over 115dBL (7am to 7pm)
- 0 Blasts recorded an over pressure level over or 120 dBL at any time
- Percentage of development blasts over 5 mm/sec = 0% (1 February 2017 until 31 January 2018)
- Percentage of production blasts over 5 mm/sec = 4.6% (1 February 2017 until 31 January 2018)

Rasp Mine is in compliance with all listed criteria.

Block 7:

- 2 Blasts recorded >3 mm/s



- 0 Blasts recorded >10 mm/s
- 0 Blasts recorded >50 mm/s at V6
- 0 development blasts recorded an over pressure level over 95 dBL (10pm to 7am)
- 0 development blasts recorded an over pressure level over 105 dBL (7pm to 10pm)
- 0 Blasts recorded an over pressure level over 115 dBL (7am to 7pm)
- Percentage of development blasts over 3mm/sec = 0% (1 February 2017 to 31 January 2018)
- Percentage of production blasts over 3mm/sec = 6.2% (1 February 2017 to 31 January 2018) (criteria does not apply in this period as not a regulator reporting period)

In Block 7 during the last 12 months 5 blasts have exceeded 3 mm/s - 3.07 (Dec), 3.1 (Dec), 3.1 (Jan), 3.45 (Jan) and 3.54 (Sept). Mining of Block 7 has now reduced and the rolling average will continue to increase until the end of the year. All measures were taken to reduce the size of the production blasts.

2.2 Noise

Noise monitoring is undertaken as per the NSW Noise Policy for Industry at a frequency of once per annum. A noise assessment was conducted in November 2017, and is next due in Q4 2018.

3 Water

3.1 Groundwater

There are eighteen sampling locations for groundwater, GW01 (EPL37) to GW16 (EPL52) are installed piezometers at various locations around the mine site and are sampled quarterly. There are also two sampling locations for water pumped from underground mining, Shaft 7 (EPL53) and Kintore Pit (EPL54), sampled monthly. A map indicating these locations can be found on the Rasp Mine web site. Groundwater monitoring is scheduled for completion in March, June, September and January.

Groundwater Monitoring Requirements

EPA Identification Number	Frequency	Parameters to be analysed
Shaft 7 EPL53	Monthly	alkalinity (calcium carbonate (CaCO ₃)), cadmium (Cd), calcium (Ca), chloride (Cl), electrical conductivity (EC), iron (Fe), lead (Pb), magnesium (Mg), manganese (Mn), pH, sodium (Na), sulphate (SO ₄), total dissolved solids (TDS) and zinc (Zn)
Kintore Pit (U/G dewatering) EPL54	Monthly	
Piezometers EPL37 (GW01) to EPL52 (GW16)	Quarterly	

Shaft 7 (EPL53) and Kintore Pit (EPL54) Results for January

Sample Point	pH	EC (µS/cm ²)	TDS (mg/l)	Alkalinity (CaCO ₃) (mg/l)	SO ₄ (mg/l)	Cl (mg/l)	Ca (mg/l)	Mg (mg/l)	Na (mg/l)	K (mg/l)	Cd (mg/l)	Pb (mg/l)	Mn (mg/l)	Zn (mg/l)	Fe (mg/l)
Shaft 7 (EPL53)	5.96	13300	13600	2	6420	1670	513	344	1800	134	3.16	1.32	456	1350	2.41
Kintore Pit (EPL54)	6.05	12200	7040	2	6080	1530	475	301	1650	124	2.68	2.25	356	1130	6.42



Piezometer sampling was not scheduled for January.

3.2 Surface Water Sample Record

There are seven sampling locations for surface water, these include surface water basins located on the mine lease to capture and retain rainfall and two locations up and down stream of an ephemeral creek located south of the mine lease boundary. A map indicating these locations can be found on the Rasp Mine web site. Sampling is undertaken in October (highest rainfall month as recorded by Bureau of Meteorology) and April.

Surface Water Monitoring Requirements

Description	Frequency	Parameters to be Analysed
Federation Way Culvert EPL29/S31-1	2 x per year , six months apart	cadmium (Cd), chloride (Cl), electrical conductivity (EC), lead Pb), manganese (Mn), pH, sodium (Na), sulphate (SO ₄), total dissolved solids (TDS) and zinc (Zn)
Ryan Street Dam EPL31/S49	2 x per year , six months apart	
Adjacent Olive Grove EPL32/S1A	2 x per year , six months apart	
Adjacent Bowls Club EPL33 /S9-B2	2 x per year , six months apart	
Horwood Dam EPL34/Horwood Dam	2 x per year , six months apart	
Upstream Bonanza St EPL35	2 x per year , six months apart	
Downstream Sydney Rd EPL36	2 x per year , six months apart	

Surface Water Monitoring Results

Surface water sampling was not scheduled for January.

4 Weather Data

The weather station continuously monitors the following parameters as per point 55 of the Environmental Protection Licence.

The following parameters are required to be recorded each month as listed in the EPL 12559:-

Rasp Mine Weather Station (EPL55) Monitoring Requirements

Parameter	Sampling method	Units of measure	Averaging period	Frequency
Temperature at 10 metres	AM-4	degrees Celsius	15 minutes	Continuous
Wind Direction at 10 metres	AM-4	degrees in a clockwise direction from True North	15 minutes	Continuous
Wind Speed at 10 metres	AM-4	metres per second	15 minutes	Continuous
Rainfall	AM-4	millimetres	1 hour	Continuous
Sigma theta	AM-2 & AM-4	degrees	15 minutes	Continuous



Note: The onsite weather station current does not report Sigma theta.

Weather Data Summary for January

Date	Temperature @ 10m (°C)		Wind Speed @ 10m (m/s)		Predominant wind dir @ 10m (deg)		Rainfall
	Min	Max	Min	Max	Cardinal	Degree	
01-01-18	23.2	30.8	0.4	7.5	SSW	200	0.00
02-01-18	16.2	27	1.7	14.5	S	186	0.00
03-01-18	13.3	26.6	0.4	11.1	S	177	0.00
04-01-18	16.8	32.2	0.5	7.6	SSE	165	0.00
05-01-18	24.4	37.6	0.1	6.2	SE	141	0.00
06-01-18	29	41.5	0.4	12	S	174	0.00
07-01-18	24.7	38.8	0.3	15.1	SW	216	0.00
08-01-18	24	38	0.1	13.2	WSW	252	0.05
09-01-18	16.6	29.2	1.3	13.5	S	181	0.00
10-01-18	18	31	0.6	7.9	SSE	151	0.00
11-01-18	22	40	0.7	11.4	ESE	120	0.01
12-01-18	22.1	36.9	0.1	14.9	SSW	196	0.09
13-01-18	18.1	27.3	1	12.9	SW	218	0.00
14-01-18	12.6	24.2	2.3	13.1	SSE	168	0.00
15-01-18	16	29.8	1.9	13.1	SSE	153	0.00
16-01-18	20.1	32.6	1.1	9.9	SE	136	0.00
17-01-18	23.9	35.3	0.2	7.4	E	100	0.00
18-01-18	27.2	38.3	0.3	7	E	96	0.00
19-01-18	29.6	40.7	0.3	8	SE	125	0.00
20-01-18	28	41.4	0.3	9.1	SSE	153	0.00
21-01-18	25.9	42.5	0.1	9.4	SSW	200	0.00
22-01-18	28.8	41.6	0.1	12.8	SSE	153	0.00
23-01-18	20.8	31.8	0.4	12.4	S	173	0.00
24-01-18	23.5	35.7	0.5	7.7	SE	145	0.00
25-01-18	24.8	38.4	0.1	7.9	SSE	152	0.00
26-01-18	24.7	39	0.3	16.6	S	189	0.01
27-01-18	28.4	40.2	0.5	8.7	SSE	156	0.00
28-01-18	29	40.6	0.2	9	ESE	105	0.00
29-01-18	26.9	38.3	0.7	13.4	ESE	114	0.03
30-01-18	14.5	26.5	1.9	16.5	S	178	0.47
31-01-18	13.7	17.1	2.4	13.5	SSE	158	0.00

5 Data Log

Sample	Result Received
Hi Volume Samples	12-02-2018



TEOM	02-02-2018
Dust Deposition	15-02-2018
Vents & Bag House	N/A
Water	14-02-2018
Blast vibration and overpressure	02-02-2018
Weather	02-02-2018
Date posted to web site	8-3-2018

6 Correction Log

There are no corrections to the previous reports.