



HOSE & BELTING SINCE 1931



WOVEN BELTING

KEVLAR ◆ COTTON ◆ POLYESTER ◆ FIBERGLASS

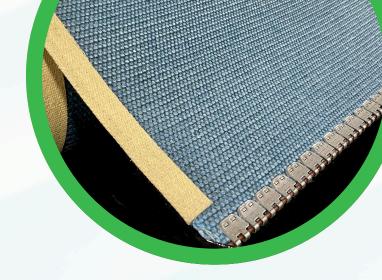





FULL FABRICATION SERVICES

- Cut lengths
- Custom width + overcast
- Stainless steel lacing
- · Plastic spiral lacing
- Sewn endless
- Grommets
- Mineral oil treatment
- · Reinforced edged
- Cleats
- Kevlar rope guides
- Standard V-guides

WOVEN TO WIDTH STOCK SIZES *CUSTOM WIDTHS AVAILABLE*

- 1 ply cotton: 39, 40, 48, 50 inches
- 2 ply cotton: 4, 8, 12, 40, 42 inches
- 3 ply cotton: 4, 12, 36, 48 inches
- 4 ply cotton: 6, 12, 18, 24, 36, 48 inches
- 4 ply kevlar: 1.13, 1.75, 3, 4, 5, 6, 8, 12, 18, 24, 36 inches
- 2 ply polyester up to 78 inches wide
- 4 ply polyester up to 48 inches wide




HOSE & BELTING SINCE 1931


WOVEN PRODUCTS



SOLID WOVEN FIBERGLASS Manufactured in a combination of 1-ply Kevlar and 2-ply fiberglass. Made to order at your desired width. Good for extreme temperature applications up to 1200F.



SOLID WOVEN ARAMID 1, 2 and 4-ply woven Aramid. Made of 100% Kevlar. Woven to width and stocked at common widths up to 36 inches. Good for very hot temperature applications up to 950F.





SOLID WOVEN COTTON 1, 2, 3 and 4-ply solid woven 100% cotton. SWC belts are woven to width and stocked at common widths up to 48 inches. FDA approved. Good for high temp conveying up to 300F.

NEEDLED PRODUCTS



SOLID WOVEN POLYESTER 2 and 4-ply solid woven polyester. Made of 100% polyester. Manufactured at 78 inches wide and can be slit and sealed to any width. FDA approved radio frequency drying, airslide. Up to 300F.



100% SHEEP WOOL Truly endless belts, sleeves and pads. Good for very oily applications. FDA approved.



SOLID WOVEN COTTON-**HERRINGBONE** 1-ply solid woven cotton with a herringbone weave. Commonly used in commercial laundry applications.