


Default specification for protective barrier

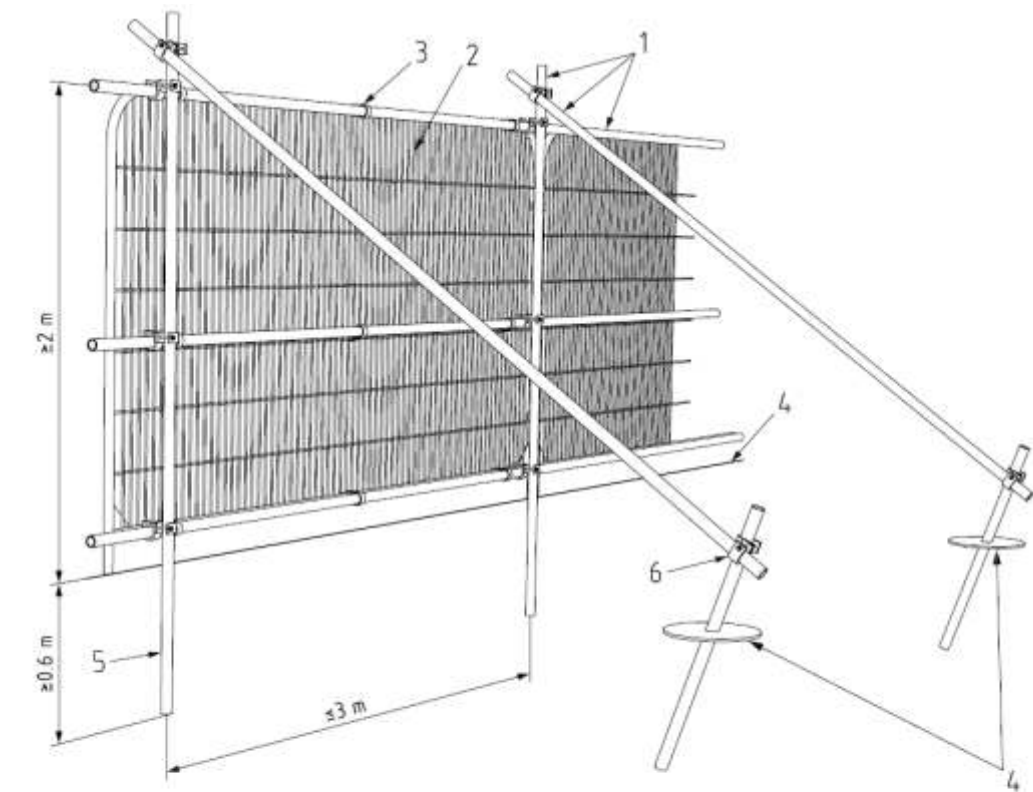


- Key
- 1 Standard scaffold poles
  - 2 Heavy gauge 2 m tall galvanized tube and welded mesh infill panels
  - 3 Panels secured to uprights and cross-members with wire ties
  - 4 Ground level
  - 5 Uprights driven into the ground until secure (minimum depth 0.6 m)
  - 6 Standard scaffold clamps


**NOTE: All-weather notices should be attached to the barrier with words such as: "CONSTRUCTION EXCLUSION ZONE - NO ACCESS".**

Details reproduced with the permission of the British Standards Institute

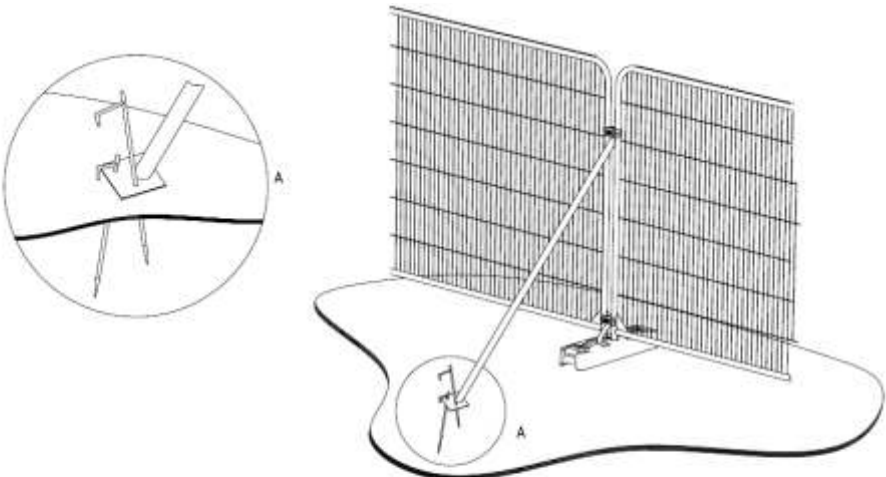

Alternative protective fencing for trees on development sites

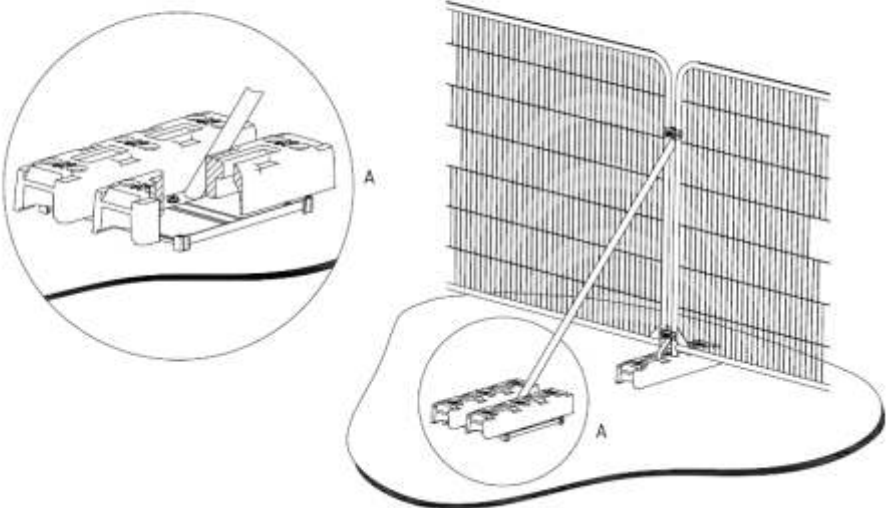

a) Stabilizer strut with base plate secured with ground pins



b) Stabilizer strut mounted on block tray

Revisions		ENVIRONMENTAL CONSULTANTS CHARTERED LANDSCAPE ARCHITECTS		
Status		PLANNING INFORMATION		
Date	17-11-24	Drawing number	The Studio, 20 The Grove Newcastle upon Tyne NE3 1NE Tel : 0191 285 5910 Fax : 0191 213 5517      Email : ajtec@ajt.co.uk	
Drawn by	BS	965-06		
Checked by	WJT	Scale: NTS		
 This drawing and the information depicted on it are the copyright of AJT Environmental Consultants and may not be reproduced or amended except by written consent.		Client & Project Fig Power, Newburn		
		Title TREE PROTECTION		