



GM Temporary Abutment


Customizable area made of titanium

A minimum height of 4 mm of the customizable area must be kept With retentive grooves for acrylic material and allows customization



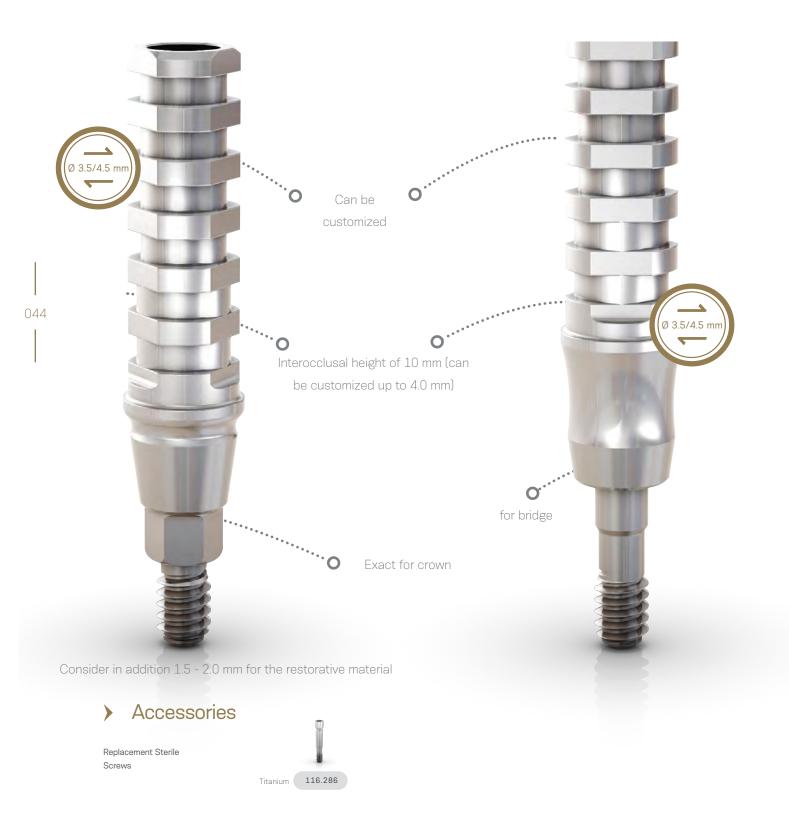

Installation Sequence

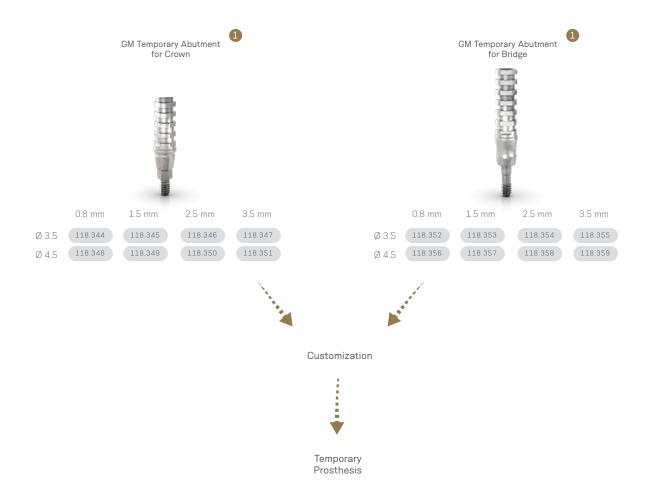



045