

※ PC required to run Foot Scanner

INFOOT



Model: IFU-S-01

INFOOT USB Standard Type

Specification

Scanner	3 Dimensional Foot Scanner
Dimensions	685 (L) × 400 (W) × 310 (H) (mm)
Power	100-240V±10%~ 50/60Hz 150W max
Weight	24kg
Scan Area	400 (L) × 200 (W) × 150 (H)

Scanning	30mm/sec
Data Processing	5 Seconds / foot
Data Accuracy	1mm step : Y(W), Z(H)=1mm, X(L)=2mm 0.5mm step: Y(W), Z(H)=1mm, X(L)=1mm
Data format	fbd (original data format)

Scan Condition	
Scan Target	Human foot & Landmark points
Weight limitation	200 kgs/person
Prohibition	Absorption and Reflection of laser

Environment	
Temperature	15 °C to 40 °C
Humidity	35% to 60%
Setting Place	In room Use only, on flat floor

PC Specification	
OS & PC	Windows 7 & 8 , 32/64 bit
CPU	Dual Core 1.66GHz or more
Memory	2GB or more
USB	2 x USB 2.0 ports for Scanner & Dongle
HDD	80GB or more
Optical Drive	DVD+/-RW Drive
Monitor	1024 x 768 or more

Software	
Tester	Scan Conditioning software
Measure	Foot Measuring software
DB Controller	Scan Data DB

Optional Accessories	
Handrail	Φ25mm Stainless Pipe 450 (W) × 1100 (H)
Calibration Tool	Calibrarion KIT & Almi case
Carry Case	Pelican Case 1660
Marker	Landmark pointing marker
Foot Cover	Sliding Foot Cover
Foot Stage	


Optional Software	
Di+	Homologous Foot modeling
File Converter	Data Conversion from fbd to DXF, CSV, STL, VRML

NOTICE: Specifications and functions will be changed without notice.


OPTION




Foot Cover



Foot Stage




Handrail

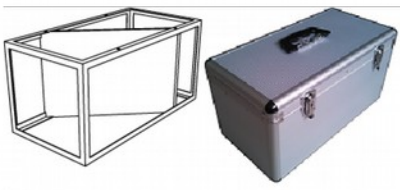

Calibration KIT & Case



Carry Case



Marker



PC (not included)

I-Ware Laboratory Co.,Ltd

Minoh Fureres Bldg, 1-10-9,
Senba-Higashi, Minoh city, Osaka,
562-0035 JAPAN

T/+81-72-726-2231 F/+81-72-726-2232

e-mail / e-info@iwl.jp