

INFOOT




Model: IFU-H-01

INFOOT USB High Type

INFOOT Specification


Scanner	3 Dimensional Foot Scanner
Dimensions	785 (L) × 400 (W) × 410 (H) (mm)
Electric supply	100V~230V
Weight	28kg
Scan Area	400 (L) × 200 (W) × 240 (H)
Scanning	30mm/sec
Data Processing	10 Seconds / foot
Data Accuracy	1mm step :Y (W), Z (H)=1mm, X (L)=2mm 0.5mm step:Y (W), Z (H)=1mm, X (L)=1mm
Data format	fbd (original data format)
Scan Condition	
Scan Target	Human foot & Landmark points
Weight limitation	200 Kg/person
Prohibition	Absorption and Reflection of laser
Environment	
Temperature	15 °C to 40 °C
Humidity	35% to 60%
Setting Place	In room Use only
PC Specification	
OS & PC	Windows 7 & 8 , 32/64 bit
CPU	Dual Core 1.66GHz or more
Memory	2GB or more
USB	2 x USB 2.0 ports for Scanner & Dongle
HDD	80GB or more
Optical Drive	DVD+/-RW Drive
Monitor	1024 x 768 or more
Software	
Tester	Scan Conditioning software
Measure	Foot Measuring software
DB Controller	Scan Data DB
Optional Accessories	
Handrail	Φ25mm Stainless Pipe 450 (W) × 1100 (H)
Calibration Tool	Calibration KIT & Almi case
Carry Case	Pelican Case AL3018
Marker	Landmark pointing marker
Foot Cover	Sliding Foot Cover
Foot Stage	
Optional Software	
Di+	Homologous Foot modeling
File Converter	Data Export from fbd to DXF, CSV, STL, VRML

NOTICE: Above Specifications and functions will be changed without notice.

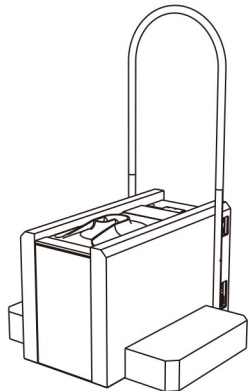


※ PC required to run Foot Scanner


OPTION

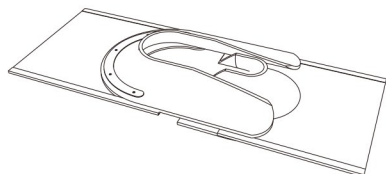


Foot Cover

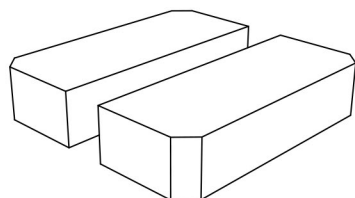

Foot Stage



Handrail



Calibration KIT



Carry Case

Marker Sheet



PC (not included)

I-Ware Laboratory Co.,Ltd.

Minoh Fureres Bldg,

1-10-9, Senba-Higashi, Minoh city,

Osaka, 562-0035, JAPAN

T/+81-72-726-2231 F/+81-72-726-2232

e-mail / e-info@iwl.jp