



*The Ultimate Fresh & Salt Water Analyzer  
for Fish Farming applications*



**Up to 8 Tests in 2 Minutes!**

**Ready to go anywhere!**



# WaterLink® SpinTouch®FF

*“Every now and then a technology emerges that changes people’s lives. For people who test water, that time is now.”*

— David LaMotte, President


## Available Tests:

Alkalinity  
Ammonia  
Calcium  
Hardness  
Magnesium  
Nitrate  
Nitrite  
pH  
Phosphate

**Up to 8 Tests in 2 Minutes!**

- Reliable Results
- Super Fast & Simple
- Auto-Record Keeping
- Rugged and Portable

The innovative **WaterLink® Spin Touch®FF** photometer does all your fresh and salt water testing for you. Each sealed reagent disk contains the precise amount of reagent needed to run a complete series of tests—both fresh and salt water disks are available. Just fill one unique Spin reagent disk with less than 3 mL of water and all your vital tests are done automatically—in just 2 minutes! It’s the most advanced system for wet chemistry methods ever produced. Now analysts can achieve test results without time consuming test and clean-up procedures. This ground-breaking analysis system is so simple anyone can use it! No vials to fill, no prep time, no guessing!

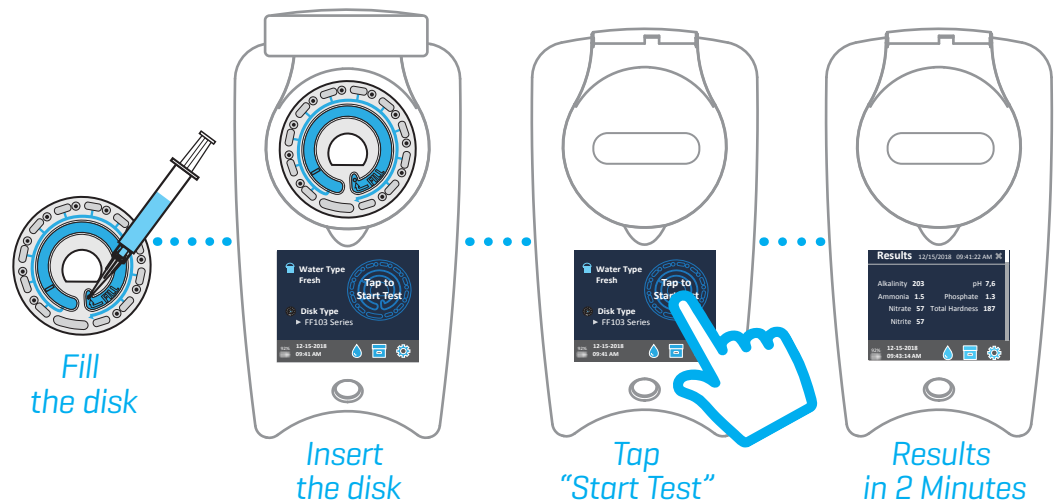

**So Simple! So Fast!**

*“The Spintouch FF is quick and easy to use. The readings I have received are accurate and compare to my conventional tests.”*

— Kenny, First Feed Supervisor




**Centrifugal  
Fluidics  
Photometry™**

# The Device *Precise analysis of up to 8 parameters in 2 minutes!*



Order Code 3587

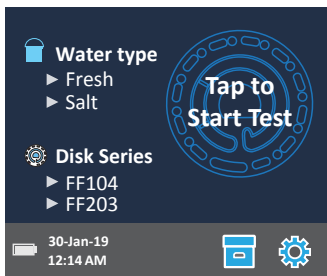

### Reliable Results

- Virtually Eliminates User-Error
- Pre-Measured Reagents
- Exact Reaction Time and Auto-Blanking
- Meter Calibration Check System
- 6-Wavelength Photometer

### Super Fast & Simple

- 2 Minutes for up to 8 Complete Tests Using One Disk
- Fill Disk and Insert > Tap "Start Test" > Read Results

### Data Logging

- Stores Test Dates, Times, Results, and Location
- Download via USB to PC

### Stand-Alone or Cloud-Connected

- Touchscreen Operation
- Connect to WaterLink Solutions via Bluetooth®

### Rugged and Portable

- Innovative Water-Resistant Housing
- Internal, Rechargeable Batteries


Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

Instrument Type:	Centrifugal Fluidics Photometer
6 Wavelengths:	390 nm, 428 nm, 470 nm, 525 nm, 568 nm, 635 nm
Display:	Color Capacitive Touchscreen, 3.5", 320 X 240 pixel resolution
Languages	English, French, Spanish, German, Italian, Portuguese, Dutch, Swedish, Turkish, Chinese
Batteries:	Lithium Ion, Rechargeable (Full Charge in 10-12 hours), 150 tests per charge
Communication:	Bluetooth, USB-C
Calibration:	Factory Set, Field Calibration via Internet Connection
Data Storage:	Last 250 Test Results with Date, Time, Location
Water Resistance:	Rubber Co-molded Base, Rubber USB Port Plug, Gasketed Display & Hinge
Size & Weight:	8.5 L x 4.9 W x 4.1 H inches; 1.74 lb; 22.6 L x 12.7 W x 11.4 H cm; 0.79 kg
Operation:	Single On/Off/Reset Button with Indicator Light, Touchscreen
Firmware:	Internet Updateable (New Tests, New Test Calibrations, etc.)
Printer:	Optional Bluetooth® Printer (Code 5-0066); 384 dots per line at 8 dots/mm resolution
Certification	CE

## The Complete Lab

### WaterLink® Spin Touch® FF Order Code 3587

Includes: Photometer, Instruction Manual, Quick-Start Instructions, 3 Syringes, Meter Check Disk, Disk Cover, Sample Bottle, USB Cable with AC Adapter, Carrying Case [Disks sold separately]

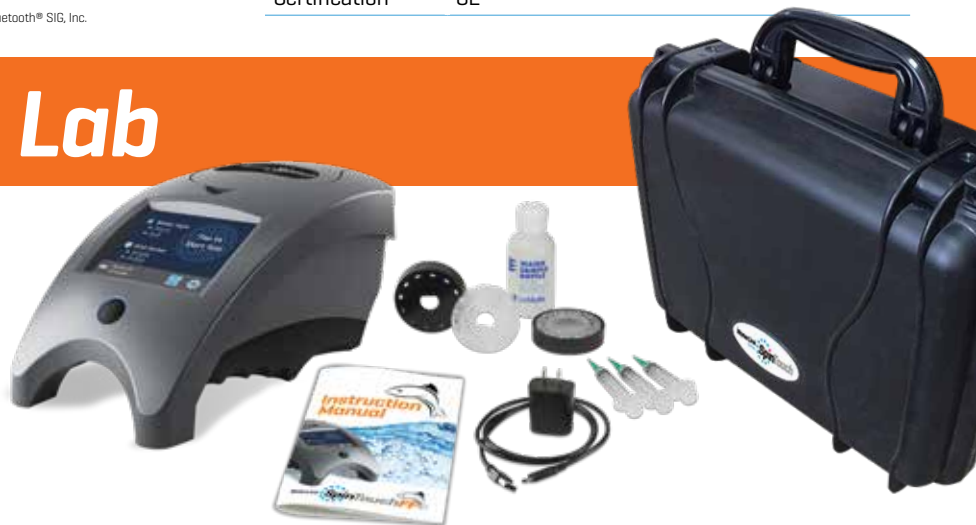

# The Reagent Cartridge Disks

Disks come individually packaged in foil pouches in boxed packs of 50.



**FF Fresh Water Disk**  
**50/box**  
**Order Code 4351-H**

Test Parameter	Range
Alkalinity	0-250 ppm
Ammonia NH <sub>3</sub>	0-4.0 ppm
Hardness	0-500 ppm
Nitrate NO <sub>3</sub>	0-250 ppm
Nitrite NO <sub>2</sub>	0-2.0 ppm
pH	4.5-10.0 pH
Phosphate PO <sub>4</sub>	0-2.0 ppm

Disk Patent No. 8,734,734  
 FCI Patent No. 8,987,000  
 TCI Patent No. 8,993,337  
 FCI EU Patent No. EP2784503 A1

**FF Salt Water Disk**  
**50/box**  
**Order Code 4352-H**

Test Parameter	Range
Alkalinity	0-300 ppm
Ammonia NH <sub>3</sub>	0-4.0 ppm
Calcium	200-800 ppm
Magnesium	500-2200 ppm
Nitrate NO <sub>3</sub>	0-60 ppm
Nitrite NO <sub>2</sub>	0-2.0 ppm
pH	6.5-10.0 pH
Phosphate PO <sub>4</sub>	0-2.0 ppm

Disk Patent No. 8,734,734  
 FCI Patent No. 8,987,000  
 TCI Patent No. 8,993,337  
 FCI EU Patent No. EP2784503 A1

## The Optional Software



- Cloud-based and **Free**
- Instantly capture date, time, test results, and location for each pond or tank
- View in real time water quality test results of each pond or tank
- Monitoring Dashboard\* provides alerts and complete water quality history of each pond or tank
- Powerful, customizable treatment engine
- Download free iOS or Android WaterLink® Solutions App for your mobile device
- Sign up for your WaterLink Solutions account at [www.softwarecenter.lamotte.com](http://www.softwarecenter.lamotte.com)

\*Monitoring Dashboard at nominal monthly charge



802 Washington Ave | Chestertown, Maryland 21620 USA  
 Tel: 800-344-3100 or 410-778-3100  
 Email: [info@lamotte.com](mailto:info@lamotte.com)  
[waterlinkspintouch.com](http://waterlinkspintouch.com) | [lamotte.com](http://lamotte.com)