



**AKVOLITO™**  
bath deckchair



**AKVOLITO™** is a bath deckchair created to help maintain hygiene.

Thanks to it, the daily care of a child will no longer be tiresome and tedious. The product ensures stability of a patient significantly reducing the risk of injuries.

Stable and comfortable position provides more comfort for patient while bathing.

The deckchair is made of light aluminium pipes and net upholstery protect against adverse effects of water. All the products for bathing have pipes filled with polyurethane foam, which prevents water ingress. After removing the product from bath or shower water will not leak out which will remain your floor dry.

The deckchair can be fully adapted to the patient's needs thanks to adjustable elements.

Thanks to its compact design **AKVOLITO™** deckchair takes up little space when folded down.

Available in **4** sizes.



## IT IS RECOMMENDED IN THE FOLLOWING CASES:

- Infantile cerebral palsy,
- Paralysis,
- Injury or amputation of limbs,
- Deformation of limbs,
- Degeneration or injury of joints.

## COLORS



Size 1



Size 2



Size 3



Size 4

## STANDARD EQUIPMENT:

Waterproof upholstery made of nylon mesh | Pelvic-femoral belt | Adjustable head stabilizer | Adjustable trunk stabilizer | Adjustable leg stabilizer | Water-resistant adjustable chair's frame | equipped with foam covers to avoid scratches on the bath tube

*Our passion - your independence!*

Colors may differ from the presented images. The manufacturer reserves the right to make changes in products without updating the directory.  
Current offer on our website.

Akces-MED sp. z o.o.  
Jasionka 955B  
36-002 JASIONKA

export@akces-med.com  
+48 (17) 864 04 77  
www.akces-med.com

Version: 09/2017



## ADVANTAGES:



### Waterproof

This construction is neutral for harmful water influence.



### Lightweight construction

The product is made of lightweight and durable materials



### Compact

When folded occupies very little space.



### Easy to use

Adjusting does not require the use of tools.



### Safety

Seat belts protect the child while bathing.



### 24 months warranty

We offer 24 months warranty on the product. We also provide after sales service.



Head support with pelottes. It is possible to adjust the width of pelottes.



The support system helps maintain proper position when lying in a deckchair.



Trunk support and lower limbs support ensures the sense of stability and comfort when using the chair.

## ACCESSORIES:



### Stabilization



### Materac BodyMap K

Vacuum stabilizing mattresses which can be easily shaped to the patient's body. They are perfect for bed sores prevention due to the fact that they support pressure points. They enable patient to keep correct position for trunk, hips, head, upper as well as lower limbs. They are used so as to correct postural defects



### BodyMap strap set

A set of Velcro straps used for fastening the cushion.



### Mobile base for bath chairs AKVO™




Product is able to use with BodyMap™

Check at [www.bodymapsystem.com](http://www.bodymapsystem.com)





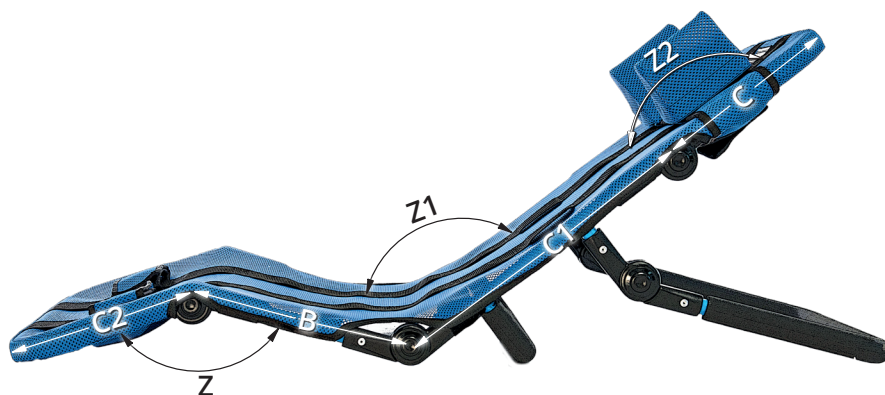

Symbol	Measurement	Unit	Size baby	Size 0	Size 1	Size 2	Size 3	Size 4
A	Product width	[cm]	35	35	40	40	45	50
B	Seat depth	[cm]	41	22	25	28	33	38
C	Headrest height	[cm]	-	19	22	26	30	33
C1	Backrest height	[cm]	41	28	33	37	43	50
C2	Lower leg length	[cm]	-	24	28	31	36	41
Z	Legrest tilt angle (relatively to the seat)	[°]	90-180°	90-180°	90-180°	90-180°	90-180°	90-180°
Z1	Backrest recline angle (relatively to the seat)	[°]	-	90-180°	90-180°	90-180°	90-180°	90-180°
Z2	Headrest tilt angle (relatively to the seat)	[°]	-	144-234°	144-234°	144-234°	144-234°	144-234°
	Max user weight	[kg]	25	25	30	30	45	60
Product dimensions and weight		Unit	Size baby	Size 0	Size 1	Size 2	Size 3	Size 4
	Width	[cm]	35	35	40	40	45	50
	Width after folding	[cm]	35	35	40	40	45	50
	Length	[cm]	82	72	83	93	105	114
	Length after folding	[cm]	41	50	60	66	76	86
	Height	[cm]	55	50	57	60	64	67
	Height after folding	[cm]	30	23	23	23	23	23
	Weight	[kg]	2,2	3,0	3,6	3,8	5	5,8

**Note:** Measurement tolerance range is +/- 1 cm / ½ in.