

Our Factory







MEET THE SEMI CIRCULAR





TECHNICAL DIMENSIONS




CVLA - 1900

STRUCTURE DIMENTION	: 1900 X 1600 MM
CABIN DIMENTION	: 1500 X 1090 MM
CABIN HIGH	: 2200 MM
DOOR DIMENTION	: 700 x 2.000 MM SLIDE OPPENING
LOAD CAPACITY	: 400 KG
DRIVER	: 6,8 KW
POWER SUPPLY	: 3 Phase 380 Vac / 50HZ-60HZ
DOOR COVERING	: Framed Glass 4 X 4 MM Laminated

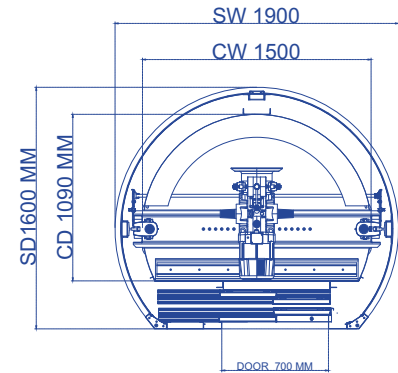

CVLA - 2000

STRUCTURE DIMENTION	: 2000 X 1660 MM
CABIN DIMENTION	: 1600 X 1150 MM
CABIN HIGH	: 2200 MM
DOOR DIMENTION	: 800 x 2.000 MM SLIDE OPPENING
LOAD CAPACITY	: 450 KG
DRIVER	: 6,8 KW
POWER SUPPLY	: 3 Phase 380 Vac / 50HZ
DOOR COVERING	: Framed Glass 4 X 4 MM Laminated

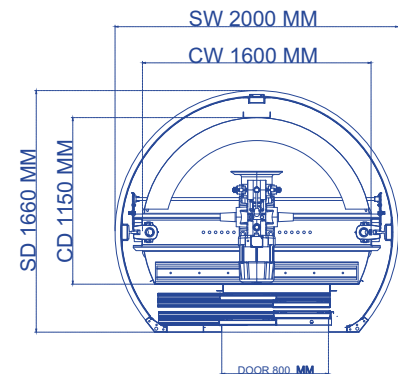

CABIN AND STRUCTURE CLADDING :
SOLID 4 MM
Polycarbonate






MEET THE CIRCULAR


CVL - 1100

OUTER DIMENTION : Ø 1100 MM
CABIN DIMENTION : Ø 800 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 600X2000 MM
LOAD CAPACITY : 200 KG
DRIVER : 3,7 KW
POWER SUPPLY : 1 Phase 220 Vac / 50HZ-60HZ
 : 3 Phase 380 Vac / 50HZ-60HZ

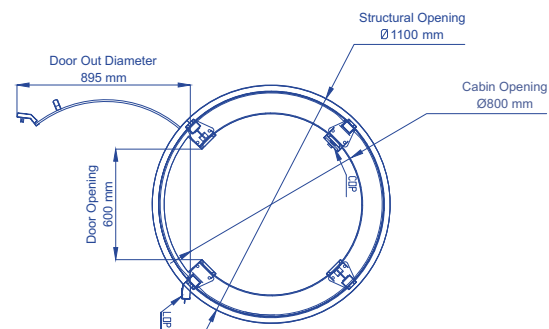


CVL - 1300

OUTER DIMENTION : Ø 1300 MM
CABIN DIMENTION : Ø 1000 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 600X2000 MM
LOAD CAPACITY : 300 KG
DRIVER : 3,7 KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ-60HZ

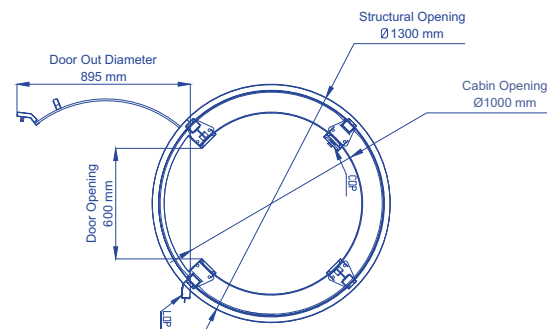


TECHNICAL DIMENSIONS

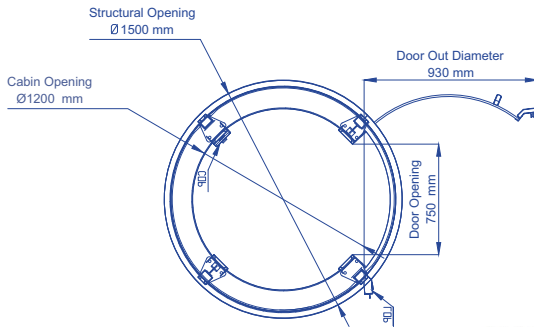

CVL - 1500

OUTER DIMENTION : Ø 1500 MM
CABIN DIMENTION : Ø 1200 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 750x 2.000 MM
LOAD CAPACITY : 400KG
DRIVER : 5,5KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ-60HZ

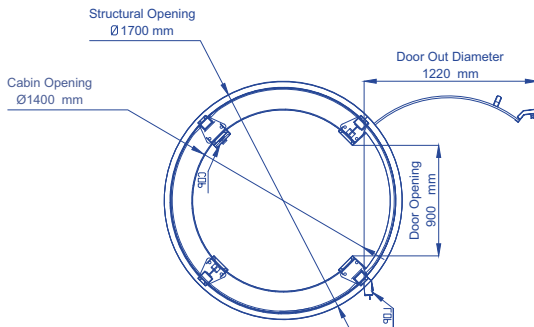

CVL - 1700

OUTER DIMENTION : Ø 1700 MM
CABIN DIMENTION : Ø 1400 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 900 x 2.000 MM
LOAD CAPACITY : 500KG
DRIVER : 6,8KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ-60HZ



CABIN AND STRUCTURE CLADDING :

4 mm
SOLID Polycarbonate

DOOR CLADDING :
FRAMED

4 mm
SOLID Polycarbonate

Multiple Door Access

The flexible design of this elevator allows us to install the entrance or the exits from different sides on each floor.






MEET THE OCTAGON


OVL - 1000

OUTER DIMENTION 1000X1000 MM
CABIN DIMENTION : 700X700 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 570X2000 MM
LOAD CAPACITY : 175 KG
DRIVER : 3,7 KW
POWER SUPPLY : 1 Phase 220 Vac / 50HZ-60HZ
 : 3 Phase 380 Vac / 50HZ-60HZ

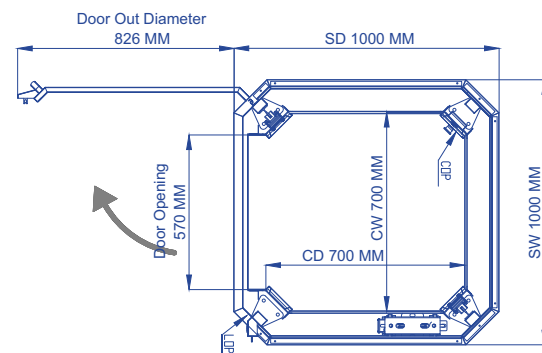


OVL - 1200

OUTER DIMENTION : 1200X1200 MM
CABIN DIMENTION : 900X900 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 700X2000 MM
LOAD CAPACITY : 250 KG
DRIVER : 3,7 KW
POWER SUPPLY : 1 Phase 220 Vac / 50HZ-60HZ
 : 3 Phase 380 Vac / 50HZ-60HZ

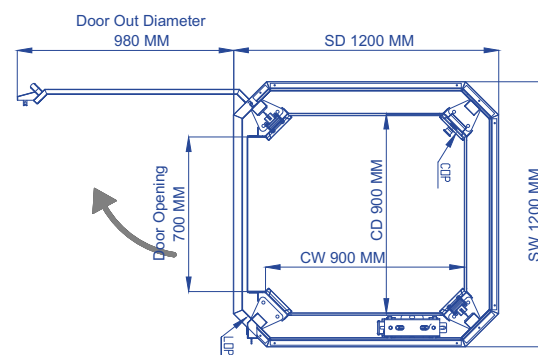


TECHNICAL DIMENSIONS

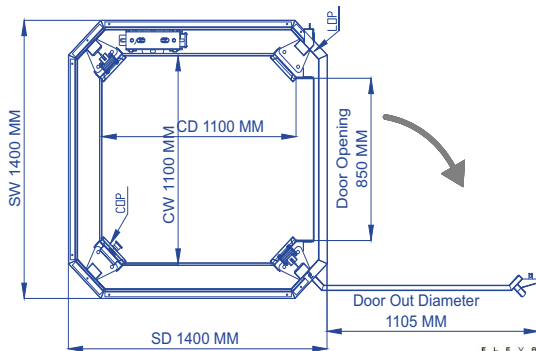

OVL - 1400

OUTER DIMENTION : 1400X1400 MM
CABIN DIMENTION : 1100X1100 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 850x 2.000 MM
LOAD CAPACITY : 400KG
DRIVER : 5,5KW
POWER SUPPLY : 3 Phase 380 Vac/ 50HZ-60HZ

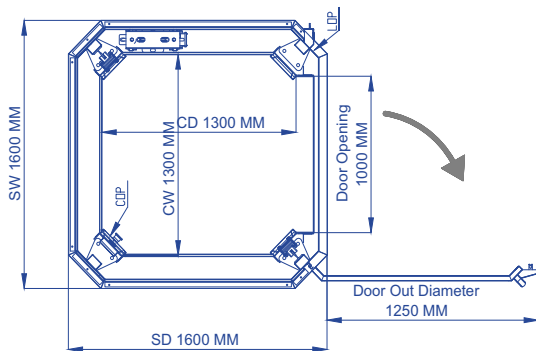


OVL - 1600

OUTER DIMENTION : 1600X1600 MM
CABIN DIMENTION : 1300 x 1300 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 600 x 2.000 MM
LOAD CAPACITY : 500KG
DRIVER : 6,8KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ-60HZ

Multiple Door Access

The flexible design of this elevator allows us to install the entrance or the exits from different sides on each floor.

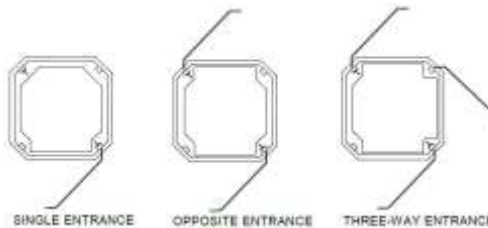

CABIN AND STRUCTURE CLADDING :

GLASS
4X4MM
LAMINATED

DOOR CLADDING :

FRAMED GLASS
4X4MM
LAMINATED




MEET THE SQUARE




SVL - 1300

OUTER DIMENTION : 1300X1300 MM
CABIN DIMENTION : 1000X1000 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 800X2000 MM
LOAD CAPACITY : 250 KG
DRIVER : 3,7 KW
POWER SUPPLY : 1 Phase 220 Vac / 50HZ-60HZ
 : 3 Phase 380 Vac / 50HZ-60HZ

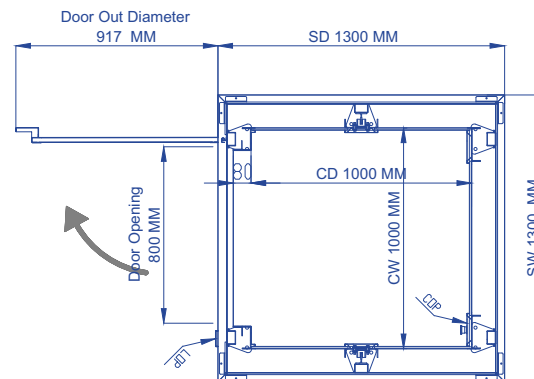

SVL - 1400

OUTER DIMENTION : 1400X1400 MM
CABIN DIMENTION : 1100X1100 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 900X1000 MM
LOAD CAPACITY : 300 KG
DRIVER : 5,5 KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ-60HZ

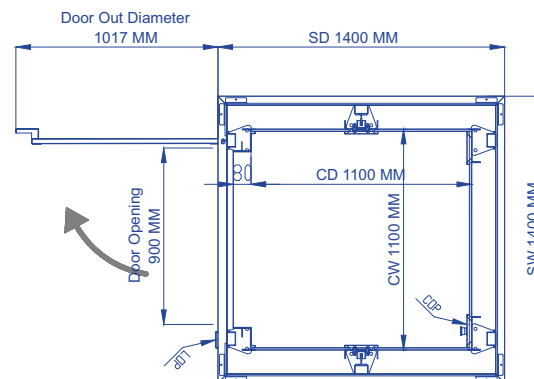

“
PIT
 120 MM
 “


“
OVERHEAD
 3000 MM
 “

“
SPEED
 0,15 M/S
 “

“
**MANUAL
 OR
 SEMI
 AUTOMATIC
 DOOR**
 “




TECHNICAL DIMENSIONS

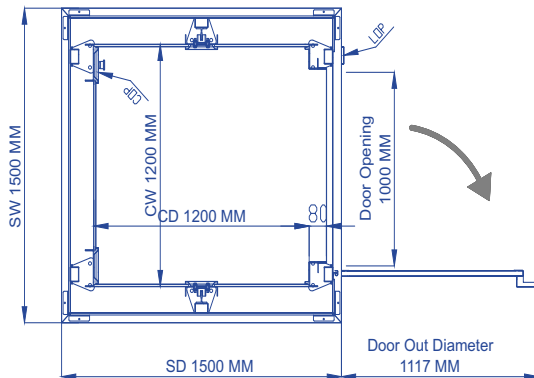

SVL - 1500

OUTER DIMENTION : 1500X1500 MM
CABIN DIMENTION : 1200X1200 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 1000X 2.000 MM
LOAD CAPACITY : 400KG
DRIVER : 5,5KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ

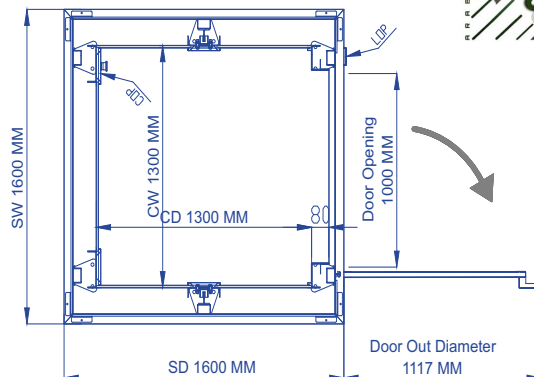


SVL - 1600

OUTER DIMENTION : 1600X1600 MM
CABIN DIMENTION : 1300 x 1300 MM
CABIN HIGH : 2000 MM
DOOR DIMENTION : 1000 x 2.000 MM
LOAD CAPACITY : 500KG
DRIVER : 6,8KW
POWER SUPPLY : 3 Phase 380 Vac/ 50HZ

Multiple Door Access

The flexible design of this elevator allows us to install the entrance or the exits from different sides on each floor.

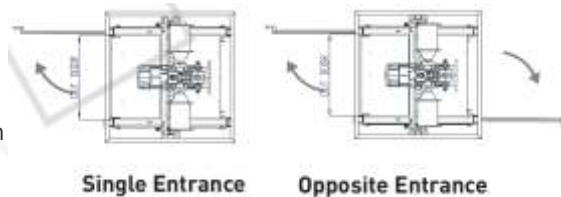

CABIN AND STRUCTURE CLADDING :

GLASS
 4X4MM
 LAMINATED

DOOR CLADDING :


FRAMED GLASS
 4X4MM
 LAMINATED



MEET THE AUTO SQUARE


SVLA - 1500

STRUCTURE DIMENTION : 1500 X 1500 MM
CABIN DIMENTION : 1150 X 950 MM
CABIN HIGH : 2200 MM
DOOR DIMENTION : 700 x 2.000 MM **SLIDE OPENING**
LOAD CAPACITY : 280 KG
DRIVER : 5,5 KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ-60HZ
DOOR COVERING : Framed Glass 4 X 4 MM Laminated

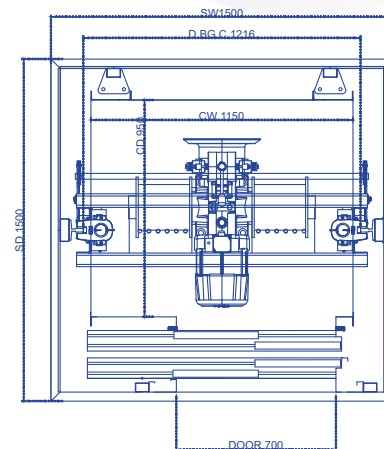


SVLA - 1600


STRUCTURE DIMENTION : 1600 X 1600 MM
CABIN DIMENTION : 1250 X 1050 MM
CABIN HIGH : 2200 MM
DOOR DIMENTION : 800 x 2.000 MM **SLIDE OPENING**
LOAD CAPACITY : 325 KG
DRIVER : 5,5 KW
POWER SUPPLY : 3 Phase 380 Vac / 50HZ-60HZ
DOOR COVERING : Framed Glass 4 X 4 MM Laminated

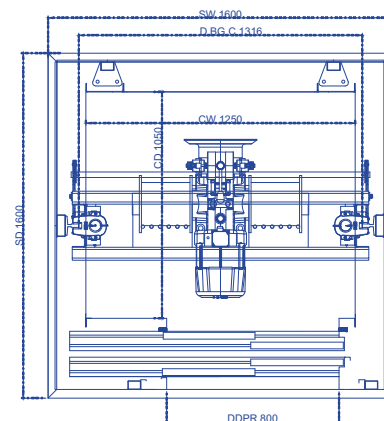

“ PIT 250 MM ”	“ OVERHEAD 3500 MM ”	“ SPEED 0,15 M/S ”	“ FULL AUTOMATIC DOOR ”
-------------------------	-------------------------------	-----------------------------	-------------------------------------




TECHNICAL DIMENSIONS

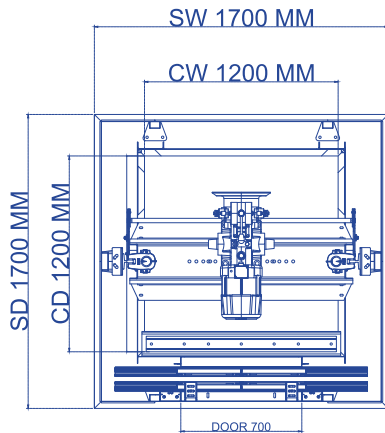

SVLA - 1700

STRUCTURE DIMENTION	: 1700 X 1700 MM
CABIN DIMENTION	: 1200 X 1200 MM
CABIN HIGH	: 2200 MM
DOOR DIMENTION	: 700 x 2.000 MM CENTER OPENING
Load Capacity	: 360 KG
DRIVER	: 6,8 KW
POWER SUPPLY	: 3 Phase 380 Vac / 50HZ-60HZ
DOOR COVERING	: Framed Glass 4 X 4 MM Laminated

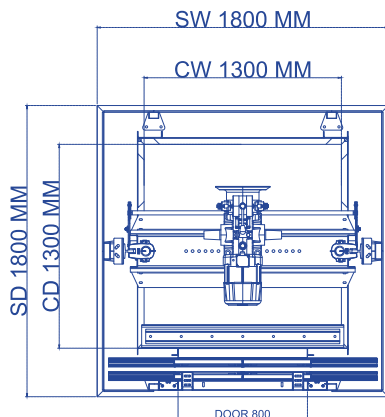

SVLA - 1800

STRUCTURE DIMENTION	: 1800 X 1800 MM
CABIN DIMENTION	: 1300 X 1300 MM
CABIN HIGH	: 2200 MM
DOOR DIMENTION	: 800 x 2.000 MM CENTER OPENING
LOAD CAPACITY	: 450 KG
DRIVER	: 6,8 KW
POWER SUPPLY	: 3 Phase 380 Vac / 50HZ-60HZ
DOOR COVERING	: Framed Glass 4 X 4 MM Laminated

CABIN AND STRUCTURE COVERING : GLASS 4X4MM LAMINATED



Ceiling And Floor Options

Ceiling and floor types in different colors and textures



HG BEYAZ MERMER
C 1918



HG SIYAH GRANIT
C 1922



AKCA AGAC
C 1452



ALMAN ANTRASIT
C 1440



HG KAHVE GRANIT
C 1920




BEYAZ HUS
C 1439



HG YESIL GRANIT
C 1921



BAMBU
C 1454



MAT AYTASI
C 1428




YESIL KAYAC
C 1831



BUTE GUMUS
C 1427



NATUREL SILVER
C 1479



SATEN SIYAH
C 1453



SIYAH GRANIT
C 1843



ACIK GRANIT
C 1841



AMERIKAN CEVIZ
C 1461



Glass and Acrylic Glass Options



Painted Steel



Frosted Glass



Clear Glass



Fame Black Glass



Painted Black Steel

**YOU CAN USE
IT INSIDE
CONCRETE
SHAFT
TOO !**



Concrete Shaft



Clear Acrylic



Black Acrylic



Color Options




At Aresforti Elevators we offer a wide range of color variants to help you choosing the most 'look & feel' that suits your building's decor.

Standard Options


Our ESP painting method reflects itself in a shiny surface, flexible & durable coating which is less liable to chip or peel. All used materials are appropriate for inside or outside use with no VOC content.




Our ESP painting method reflects itself in a shiny surface, flexible & durable coating which is less liable to chip or peel. All used materials are appropriate for inside or outside use with no VOC content.




Ral 9001
Cream




Ral 1004
Golden Yellow




Ral 5002
Ultramarine Blue




Ral 9004
Signal Black




Ral 9003
Signal White



Ral 8012
Red Brown



Ral 9007
Grey Aluminium



Ral 8003
Clay Brown



AF007




AF015



AF021



AF037



AF050



AF415



AF265



AF051

Stainless Steel Options

Alternatively we offer stainless steel covers in variant colors and cravings.




Mirror
Ti-Gold



Mirror
Ti-Black



Mirror



Mirror
Ti-Rose




Mirror
Ti-Bronze



Hairline



AF-Hairline
Ti-Gold



Hairline
Ti-rose



Referance



RAL 9005
Jet Black



RAL 7032
Pebble Grey



RAL 9006
White Aluminium



RAL 1003
Signal Yellow



RAL 7043
Traffic Grey B



RAL 1013
Oyster White



RAL 1036
Pearl Gold



RAL 9010
Pure White



RAL MS185
Sml



RAL 3007
Black Red



Mirror Ti-Bronze



Mirror Ti-Gold



Mirror Silver

General Specifications

Maximum Travel	: 14 MT
Maximum Levels	: 5 Stops / 17.1 MT
Installation Place	: Inside – Outside
Drive Train	: Winding Drum Machine with Encoder (Made in Italy)
Machine Control	: Preprogrammed variable frequency drive (Made in Turkey)
Rope	: 8 mm standard: Turkish quality, on request: German quality.
Transmission	: Ultra-low vibration, 3-stage, right-angle, helical-bevel drive.
Noise Level	: 54db ventilator OFF – 56db with ventilator ON.
Encoder	: FNC 50 H(*EC)
Cabin Ceiling	: LED Spot Light – Spot Light
Cabin Operating Panel	: Intercom – Alarm – Emergency Stop Button (GENEMEK brand made in Turkey)
Overload Indication	: Built in on COP
Cabin Flooring	: Pvc – Wood
Cop	: Intercom – alarm – fan – emergency stop button (COP–LOP made in Turkey)
Cabinet Ceiling	: Etched steel or wood with spot light.
Shaft Construction	: Profil
Door interlocks	: Italian brand – (Made in Italy)

Customization



Adaptability

The technological simplicity of this product makes this lift an extremely adaptable elevator and helps you to make full usage of the space and elevation of your property. This lift can be installed without any additional reinforcement or structural changes in the building. That makes the elevator tremendously friendly for new or even vintage homes.




Flexibility

We strived to ensure full flexibility of this lift making sure that a G+1 elevator can be converted into a G+2 or a G+3 elevator in the future. If needed, the whole elevator can be completely dismantled and relocated to a new place in or out of the building or even to a new property.



Return to Home

The technology of this lift allows stationing the lift on any floor of your desire. Thanks to the installed timed electronic system, you can easily choose where your lift should land when not in use.

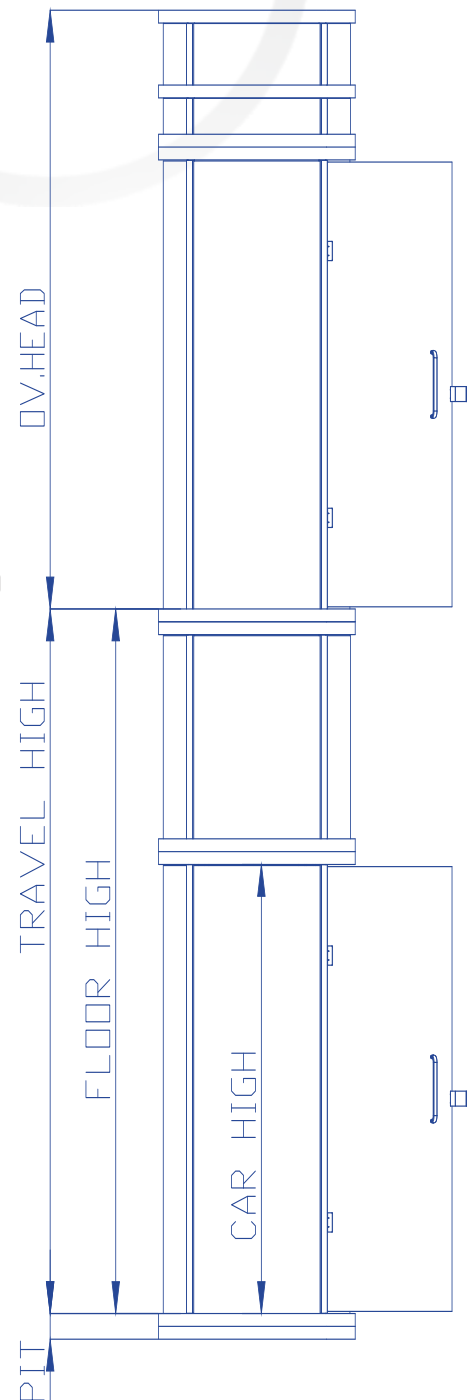

Order Form



REFERENCE :
OFFER ID :
DATE :

COMPANY NAME :
COUNTRY :
PHONE :
MAIL :

MODEL	:	☐ OCTAGON	☐ SQUARE	☐ AUTO SQUARE	☐ CIRCULAR	☐ SEMI CIRCULAR
		☐ OVL-1000	☐ SVL-1300	☐ SVLA-1500	☐ CVL-1100	☐ CVLA-1900
		☐ OVL-1200	☐ SVL-1400	☐ SVLA-1600	☐ CVL-1300	☐ CVLA-2000
		☐ OVL-1400	☐ SVL-1500	☐ SVLA-1700	☐ CVL-1500	
		☐ OVL-1600	☐ SVL-1600	☐ SVLA-1800	☐ CVL-1700	
PIT	:	☐ 120 MM	☐ 120 MM	☐ 250 MM	☐ 120 MM	☐ 250 MM
		☐ NO PIT	☐ NO PIT	☐ NO PIT	☐ NO PIT	☐ NO PIT
DOOR	:	☐ MANUAL	☐ MANUAL	☐ FULL AUTOMATIC	☐ MANUAL	☐ FULL AUTOMATIC
		☐ SEMI AUTOMATIC	☐ SEMI AUTOMATIC		☐ SEMI AUTOMATIC	
STRUCTURE COVERING	:	☐ Clear Glass ☐ Fume Black Glass ☐ Painted Glass ☐ Painted Sheet Code : ____			☐ Dark Acrylic ☐ Clear Acrylic ____	
CABIN COVERING	:	☐ Clear Glass ☐ Painted Glass ☐ S. Steel ☐ Sheet Metal Code : ____			☐ Dark Acrylic ☐ Clear Acrylic ____	
ENTRANCE	:	☐ SINGLE ☐ OPPOSITE ☐ THREE WAY " ONLY IN OCTAGON & CIRCULAR AVAILABLE "				
POWER	:	☐ 1 PHASE 220 VAC ☐ 3 PHASE 380 VAC				
STRUCTURE CLADDING	:	☐ EPOXY PAINTED RAL CODE : _____ ☐ S.STEEL CODE : _____				
CABIN CLADDING	:	☐ Epoxy Ral Code : _____ ☐ S. STEEL CODE : _____				
CEILING OF CABINET	:	☐ S. Steel With Spot Light ☐ Wood Pvc With Spot Light ☐ Painted Sheet With Spot Light				
FLOOR OF CABINET	:	☐ Solid Wooden Code ☐ Pvc Flooring Code				
FLOOR HIGH	:	☐ 1 Floor ____mm ☐ 2 Floor ____mm ☐ 3 Floor ____mm ☐ 4 Floor ____mm ☐ Over head: ____mm				

NOTE :