



INOXTEEL flex

## Design + Flexible + Metal Interior

**Color Stainless Steel** Interior Finishing Material for Easy and Convenient Installation.

The Best Premium Material with **Natural and Smooth Edges to create Perfect Joint Section.**

Flexible Finishing for Round Column and Curved Walls



### Easy Big-Scale Construction

PVC Formboard is applied to the back to facilitate Big-Scale Application, increasing the simplicity of construction by using A single Size for the Increased Productivity and Economic Efficiency



### Easy Curved Surface Construction

Due to the flexible nature of the material, it can be easily installed on Round Columns and curved walls.



### Anti-fingerprint function and easy cleaning

NCC coating (nanoceramic coating) has Anti-Fingerprint, Anti - Contamination, Scratch Resistant, Anti-bacterial, and Anti-Fungal functions, to minimizes maintenance.



### Highly Efficient Bog-scale Roll-to-Roll System

Roll-to-roll process, increases Productivity, Color Uniformity, and Quality consistency with mass production



### Relatively Light Weight

Minimizes weight by laminating PVC foam board to Stainless Steel. Easy to Fabricate and Convenient Installation.



### Eco-friendly material & high durability

Use of Authenticated STS.

Enhanced Surface Durability and Hardness achieved by NCC technology. Suppressed Corrosion with Weatherability.



**Maytaş Paslanmaz**

Marketing Office #8808 Woolim W-city, 618 Sampyeong-Dong, Bundang-Gu, Seongnam-Si, Gyeonggi-Do, Korea  
T +82 31 628 8715 F +82 31 628 8707

[www.colorstainless.com](http://www.colorstainless.com)



# INOXTEEL flex

# M

## Maytaş Paslanmaz






# 'ANYONE' can *flex* the interior with INOXTEEL *flex*; Color Stainless Steel


INOXTEEL *flex*

Patent Application No. 10-2650895  
Patent Application No. 10-2650221  
Patent Application No. 10-2519410

## Product Structure

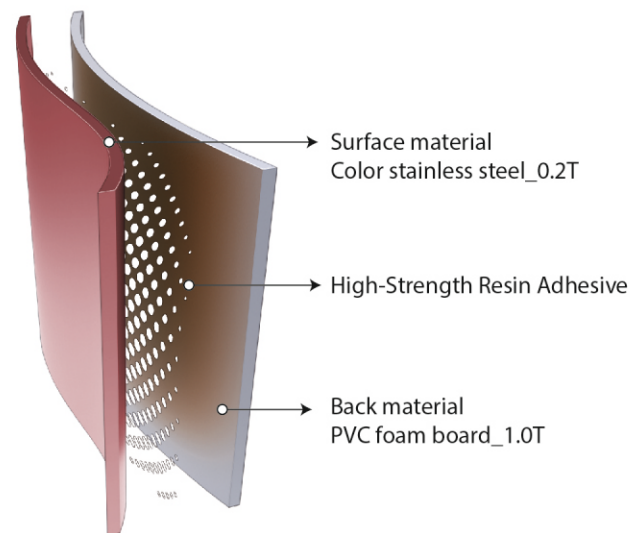

## Size (Unit:mm)

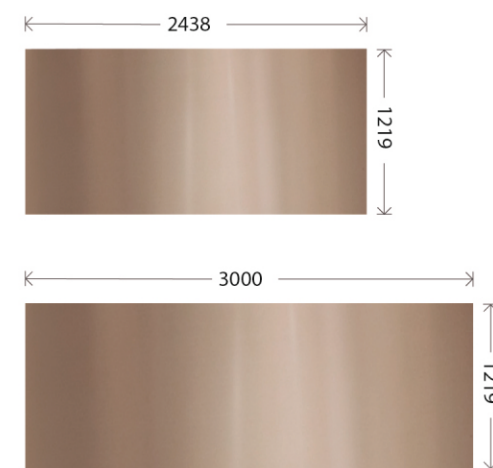

\* Customized Size Available

## Colors and Surfaces

\* Please note that colors may vary depending on printing and may differ slightly from the actual product.



MATT SILVER NO.4



MATT LIGHT GOLD NO.4



MATT LIGHT BRONZE NO.4



MATT LIGHT GRAY NO.4

## Installation Process



① Prepare the wall Flatness by gypsum board/plywood.




② Spread the Adhesive on a flat surface with a spatula. (Applying silicone to the joints will Enhance the Adhesion.)



③ Position it from the bottom and install adjacent to the Next product.



④ Ensure Adhesion with a towel or cloth.

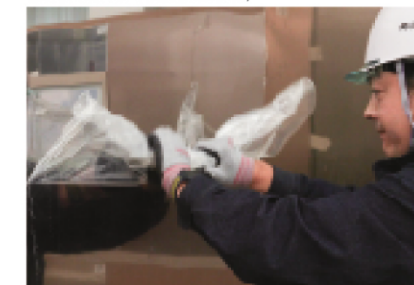

⑤ Remove the protective film.



## Finishing Methods



■ Finishing the edges using 'Corner Molding'



■ Finishing the floor using 'Gubdori' (Skirting)

