


Pinnacle Safety Products (PS-2)


Circuit Breaker Lockout System

Step 1: Prepare Mounting Surface

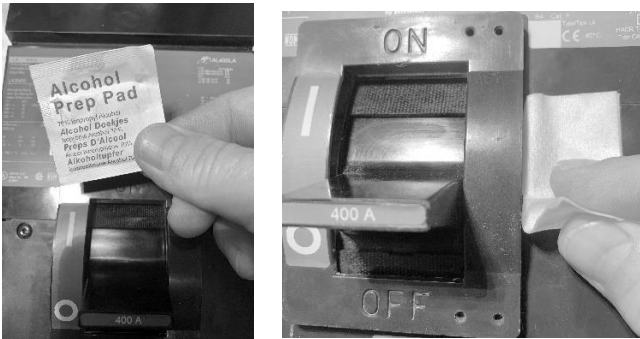

Clean dust and oils from circuit breaker lockout mounting area using an isopropyl alcohol wipe.

Step 2: Remove transfer tape and install device above, or adjacent to breaker handle in the OPEN/OFF position and insert locking pin through the device to secure the breaker handle from movement.

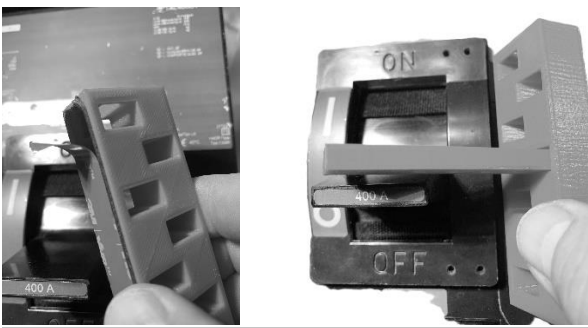


Ensure the locking pin position prevents closing of the circuit breaker handle.

Note: Seven rectangular pin holes are placed in the device to allow for selection of the most effective pin position. If the lower pin hole is blocked by an adjacent hub or raised housing, select the next serviceable opening to the top of the device.

Note: If removing PS-2 device attachment after use, a non-marring plastic device must be used to lift the attachment to prevent damage to painted finishes.

Step 3: Install a padlock through one of the adjustment holes in the locking pin to prevent closing of the circuit breaker handle.

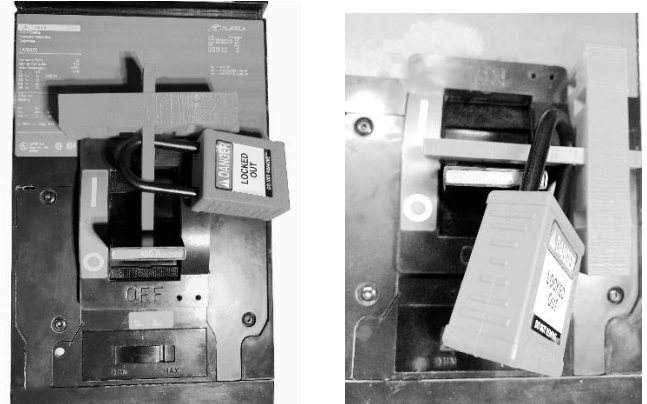

Note: The lockout device is designed to store the locking pins inside the device when not in use. A second locking pin is provided for convenience.

