



Worker Protection and Flawless Finishes in one package

Adding the SATA three stage filtration system and DanAmAir piping to your spray booth insures the highest quality air for both spraying and breathing. This filter panel provides 72CFM of technically 100% clean air – free from particulates and oil vapor.

The removal of oil vapor is especially important when using supplied air respirators and also for the application of waterborne coatings. The first stage is a cleanable/reusable 5 micron sintered bronze element, the second stage filters to 0.01 micron and the third stage activated charcoal removes any oil vapors or odors.


72 CFM is adequate air volume to supply two technicians with both spraying and breathing air (SATA HVLP gravity fed spray gun = max 15 CFM, SATA® air vision 5000 with air cooler accessory = 15 CFM – for a total of 30 CFM per technician)

The question is, do you want supplied air, positive pressure respirators for your technicians? If yes, a Carbon Monoxide monitor can be added to the filtration to insure that we meet OSHA regulations and we can also supply the complete NIOSH approved hood, belt unit and non-gassing breathing hose.





**SATA/DanAmAir Filtration Panel
for Two Booths and Supplied
Air Breathing**
Part #801622

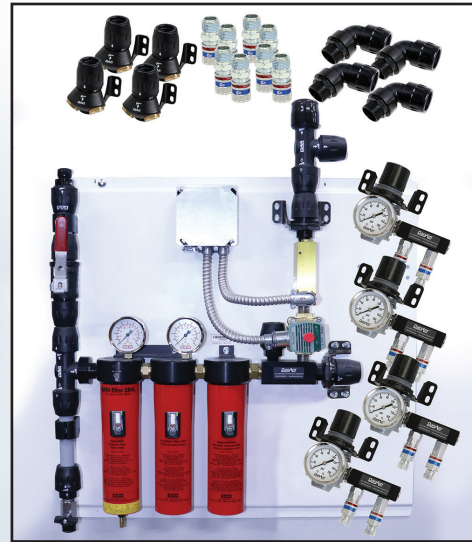

**SATA/DanAmAir Filtration Panel
for Two Booths**
Part #801620



**SATA/DanAmAir Filtration Panel
for One Booth and Supplied
Air Breathing**
Part #801612



**SATA/DanAmAir Filtration Panel
for One Booth**
Part #801610



SATA air vision 5000 regulator set
Compressed air-fed breathing protection equipment for
use in combo with wall-mounted three-stage filter unit
Part #1005603



SATA air cooler
The cooler refrigerates the breathing air from hot ambient
temp down to a comfortable level.
Part #1006990



**SATA Black
Breathing Hoses**
Top quality hose for breathing air and
air tools. 145 psi, NIOSH approved

25 ft Part #679025

35 ft Part #679035

50 ft Part #679050



Platinum Equipment
320-491-6207
platinum-equipment.com