





### **DETAILS**

- Ty-Gard DS<sup>®</sup> is 24" Wide
- New Stitch Bonded & Coated Rigid Backing Material
- Two bands of original Ty-Gard® (32") = 288,000 Fibers of Reinforcement
- One band of Ty-Gard DS® (24") = 288,000 Fibers of Reinforcement
- AAR Approved to <u>substitute</u> two bands of original Ty-Gard for one band of Ty-Gard-DS



### **ADVANTAGES**

- One band of Double Strength Ty-Gard = Two bands original version Ty-Gard
- Reduces labor / installation time by 50% making it the quickest and easiest to install system on the market
- Same total material cost as standard Ty-Gard
- Rigid fabric easier to handle and in many cases plywood is not required
- Improved lightweight tensioning tools easier to use




### **ADVANTAGES**

- One band per layer of cargo leads to consistent tension compared with two bands
- Half the number of bands to measure and mark
- Increased rigidity reduces wrinkling and no sagging / slack bands
- Passed 80 Drum AAR Impact TEST with almost no movement
- Pre Spliced Option
- Fastest to install and most effective approved system on the planet....






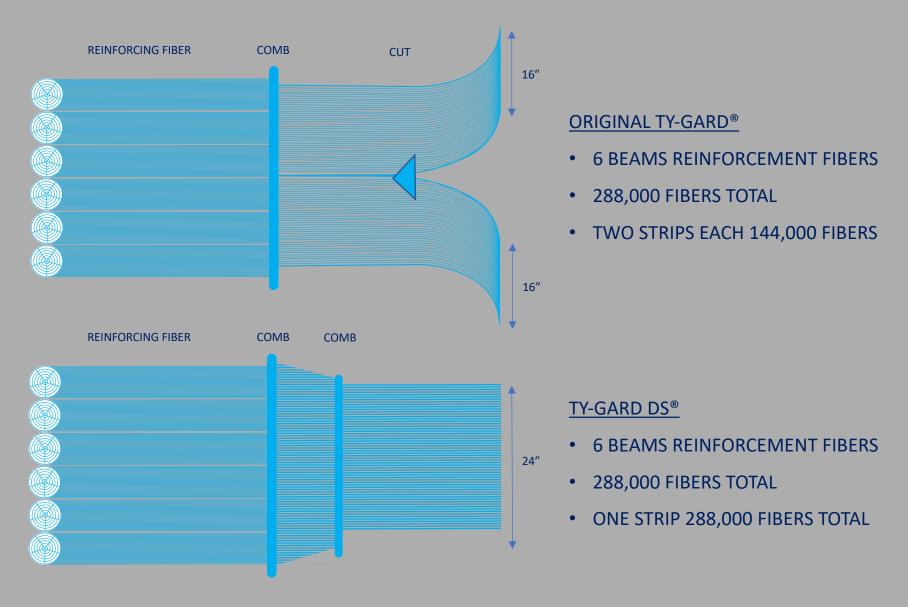





#### TWO BANDS ORIGINAL TY-GARD®

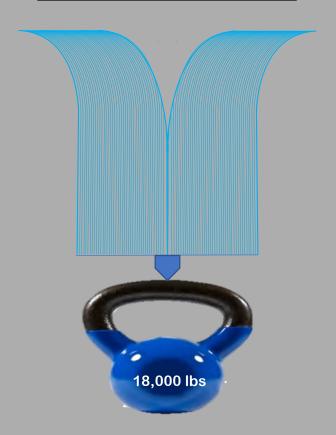


#### ONE BAND TY-GARD® DS






#### TWO BANDS ORIGINAL TY-GARD®



8 Minutes Labor to Install

#### ONE BAND TY-GARD® DS



3 Minutes Labor to Install







## **STITCHED & COATED CARRIER**





## **24" TOOL**

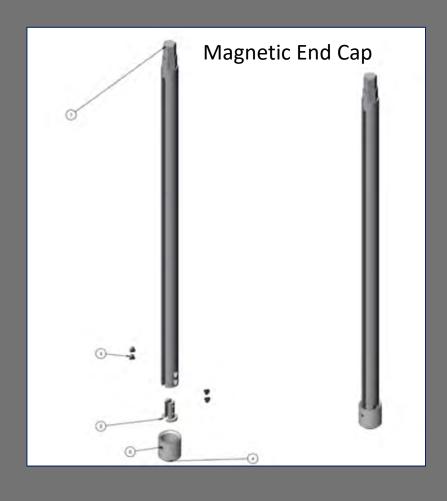

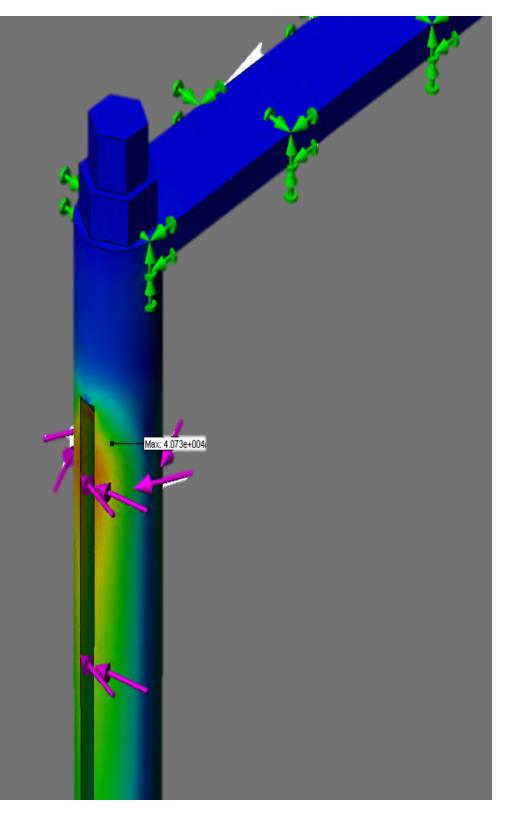

















Authorised UK Distributor: Steve Wilkinson. Tel: 07836 629899

e mail: stevew@packagingproducts.co.uk



## Authorised UK Distributor: Steve Wilkinson Tel: 07836 629899

78 DRUM EXAMPLE
SECURED WITH FOUR BANDS TY-GARD ORIGINAL
15-20 MINUTES LABOR

78 DRUM EXAMPLE
SECURED WITH TWO BANDS TY-GARD DS
10 MINUTES LABOR

