

CONTENTS

B5

Elite - Premium Range

	ONTENTS	
Pg#	Category	Brand
A1-	A6 Head Protect	ion
A1	Guard	
A1	Chin Strap	∆MERIZA=
A1	Suspension	
A2	3M H-700R Series Unvented	
A2	3M H-701V Vented	37/1
A2	3M H-801R	
А3	MSA V-Gard Unvented	
A3	MSA V-Gard 500 Vented	MSA
A3	MSA Full Brim	The Safety Company
A4	Bullard LTX Series	22 Sullard
A4	Clip Cap	
A4	Bump Cap	THE R VI
A5	Bullard S61 Non-Vented	
A5	Bullard S62 Vented	2000 Bullard
A5	Bullard S71 Full Brim	
A6	Ranger	600
A6	Maxxtra I	-
B1-	B10 Eye Protecti	on
B1	Hawk - Basic Plus Range	10
B1	Ryder - Basic Plus Range	10 OR VI
B2	Edge - Basic Plus	10
B2	Fargo - Basic Plus Range	THEN
В3	Super-Fit - Premium Range	- TP
B3	Vista - Premium Range	100000
B4	Sporty - Premium Range	10
B4	Metallic - Premium Range	TO THE VI
B5	Active - Premium Range	18
D.E	Elito - Promium Pango	Test Contract

Pg#	Category	Brand
B6 B6	Maxima - Premium Plus Range Flash - Premium Plus Range	THE WAY
B7 B7 B7	Vision Clear Vision Grey Vision Grey Visor Combo	TOTAL
B8 B8 B8	UltraSonic Goggle Tactical Spoggle RX Ultra Goggle Clear	TO THE TO
B9 B9	Virtua AP Series Virtua Lente Cinza	31/1
B10 B10 B10 B10	Welding Helmet PC Face Shield Balaclava / Face Hood Cotton Hood	Nomex.
01		
CI-	C5 Hearing Protec	tion
C1 - C1 C1 C1	Solo Light Solo Xtreme Ultra Solo	tion
C1 C1	Solo Light Solo Xtreme	tion
C1 C1 C1 C2 C2	Solo Light Solo Xtreme Ultra Solo Cap Solo Refill	tion
C1 C1 C1 C2 C2 C2 C2 C3	Solo Light Solo Xtreme Ultra Solo Cap Solo Refill Dispenser Ultra Ear Sync	

Pg#	Category	Brand
D1 -	D9 Respiratory P	rotection
D1	Makrite™ Sekura-N95	
D1	Makrite™ Sekura-N95V	Makrite
D1	Makrite™ 302P2w	##L
D1	Makrite™ 302P2Vw	
D2	Makrite™ 9600-N95	
D2	Makrite™ 9500-N95	Makrite
D2	Makrite™ 9500V-N95	#U1
D2	Makrite™ 9500-N95VOV	
D3	Makrite™ MK910-N95	_
D3	Makrite™ MK910V-N95	Makrite
D3	Makrite™ MKP3SLAVa	Mari IIC
D3	Makrite™ ENVI-P3VF	
D4	Makrite™ FIT-P3DSLAV	Makrite
D4	Surgical Mask 75	**
D4	3M 8210 N95	1 10 P. 1 T. 1
D4	3M 9010 N95	311/1
D5	3M 9010V N95	
D5	3M 8511 N95	274 H
D5	3M 8514 N95	31/1
D5	3M 8247 R95	
D6	3M 8233 N100	
D6	3M 8822 FFP2	31/4
D6	3M 9322+ FFP2	CHIL
D6	3M 8835 FFP3	
D7	3M 6200 M / 6300 L	_
D7	3M 7502 M / 7503 L	37/
D7	3M 6800 M / 6900 L	
D8	3M 6001	
D8	3M 6003	31/4
D8	3M 6006	CHIL
D8	3M 2091 P100	

CONTENTS

E12 Glitter

	ONTENTO						
Pg#	Category	Brand	Pg#	Category	Brand	Pg#	Category
D9 D9 D9	3M 2097 P100 3M 5N11 3M 501 Spiroscape EEBD (PSI)	3M INTERSPIRO	E13 E13 E13	Flare Glitz Star Shine	EMPIRAL	G3 G3	Gorilla Flex Cool II Gorilla Black I & II Gorilla Black III
E1-	E19 Body Prote	ection	E14 E14	Lumina Black Arctic II	EMPIRAL	G4 G4	Gorilla White I Regula Gorilla White II Premi
E1 E1	Chief C Chief PS	AMERIZA E	E15	Bulldozer Fireman Suit Torch Apron One & Two	Bulldess AMERIZA	G4 G5	Gorilla Grey I Regular
E2 E2	Chief C Tapes Chief PS Tapes	<u>AMERIZA</u>	E15 E16	Torch Sleeves Torch Shoe Cover	AMERIZA	G5 G5	Gorilla Bull I Gorilla Bull II Yellow
E3 E3	Comfort C Comfort PS	EMPIRAL	E16 E16 E17	Torch Jacket Golden Apron Golden Sleeve	EMPIRAL	G6 G6	Gorilla Bull II Blue Gorilla Force I Regular
E4 E4	European - PS European - PS	EMPIRAL	E17 E17	Golden Shoe Cover Golden Jacket	EMPIRAL	G6 G7	Gorilla Force II Premi
E5 E5	Safeguard PRO Safeguard C	EMPIRAL	E18	HDPE Apron Polar Jacket	<u> AMERIZA</u>	G7 G7	Gorilla Flex Oil I Gorilla Cut 5 PU
E6	Spartan I Spartan II	EMPIRAL.	E19	Polar Trouser	Thinsulate	G8 G8	Gorilla Cut 5 PU SL Gorilla Cut 5 PU PK
E7	Labcoat Disposable Coverall	EMPIRAL.	F1	F2 Fall Protection	on	G8 G9	Gorilla CUT 5 Microfo Gorilla Cut 5 Nitrile
E8 E8	Proguard Type 5/6 Proguard Type 4/5/6	T(S)GC	F1 F1 F1	Vertex Vertex Plus Comfort Belt	<u>AMERIZA</u>	G9 G9	Gorilla Cut 5 Microfo Gorilla Cut 5 Nitrile S Gorilla Flex Cut 4/D
E9 E9	Polo I Polo II Polo III	EMPIRAL	F2 F2	Vertex Web U Vertex Web Y	<u> AMERIZA</u>	G10 G10 G10	Gorilla Cut C3 Gorilla Cut C5
E10 E10 E10	Glow MultiGlow 3M MultiGlow	S.V.	F2 F2 G1	Vertex Rope U Vertex Rope Y -G26 Hand Prote	ection	G11 G11 G11	Gorilla Extreme I Gorilla Extreme II Gorilla Shield I
E11 E11 E11	3M Radiant Dazzle Twinkle	SM EMPIRAL	G1 G1 G1	Gorilla Active I Regular Gorilla Active II Premium Gorilla Active III	EMPIRAL BORILLA	G12	Gorilla Shield II Gorilla Shield Lite II Gorilla Flex Chem I
E12 E12 E12	Sparkle Bright Glitter	EMPIRAL	G2 G2	Gorilla Flex I Gorilla Flex II	E PRILA	G13	Industrial Rubber Glov Gorilla Chem I Gorilla Chem II

G2

Gorilla Flex Cool I

















CONTENTS

Pg#	Category	Brand
G14	Skydda Metal Mesh Empiral Original SDX2	KUNG
	DuPont Kevlar Sleeves Viking TG Tough Guard	KEVLAR
	Gorilla Vinyl I Gorilla Vinyl II Gorilla Nitro I	∆MERIZA≡
G17	Gorilla Nitro II HDPE Gloves PP Sleeves	∆MERIZAE
G18 G18 G18		∆MERIZA <u>=</u>
G19 G19 G19	Cotton BW600 Cotton BW840	∆MERIZA <u>=</u>
G20 G20 G20	1006-NT/ASK-1001 1006-YW/ASK-1001 1005-FL/1026	∆MERIZA=
G21 G21 G21	1008-GR/1034 / 1008E-GR/103 1002-OR/1034	34
G22 G22 G22		∆MERIZA=
G23 G23 G23	1001K-GD/ASK-2014 1001-RD/ASK-2014 RD 1001W-RD/ASK-2014 RD	∆MERIZA=
G24 G24 G24 G24	Driver Gloves 3602 - Freezer	∆MERIZA <u>=</u>

Pg #	: Category	Brand
G25	5 LP RB Rabbit	
G25	RF1 Multi Purpose	
G26	HD 27 NEO Latex Neop	rene
	•	
H1	-H5 Foot Prote	ction
H1	Best Run	_
H1	Best Sport	🌅 safetoe
H1	Best Jogger	And the quality seeds yes
H2	Best Workman	
H2	Best Climber	safetoe
H2	Best Boy	
H3	Best Slip-On	
Н3	Best Worker	safetoe
Н3	Best Manager	Too qualify swits you
H4	Best Sneaker	
H4	Best Welder	S safetoe
H4	Bamboo Cotton Socks	
H5	Memory Foam	S safetoe
H5	Shoe Cover	E
H5	Bulldozer	3 (2 H) (1)
I1	-I3 Fire Protec	tion
11	Flash Small	253
11	Flash Medium	GL 40 OUS
<u>I1</u>	Flash Large	
12	Flash Small PVC Box	2200
12	Flash Medium PVC Box	GL 90 0U5
12	Flash Large PVC Box	
13	Flash 0.4 mm	
13	Flash 0.8 mm	GL NO OUS
13	Flash 1.6 mm	*

Pg # Category Brand **J1-J6 Emergency First Aid** Matsuda P150 Matsuda Matsuda P100 Matsuda B100 J2 Matsuda E100 Matsuda Matsuda SS-B100 Matsuda S100 Matsuda SS-E100 Matsuda Matsuda SS-S100 EW-900 EW-904 RELIANCE MEDICAL Leading First Aid **EW-906** EW-2990 EW-919/F17899 **EW-955** J4 **Eye Wash Box Eye Wash Station** J5 FA-330 J5 FA-343 FA-348 J5 FA-156 RELIANCE MEDICAL FA-275 J5 FA-F30658 J5 FA-2030 J5 FA-2717 FAW5 (Micro Kit) FAW10 (Auto Kit) FAWB25 (Team Kit) FAG25 (Office Kit) **FAO50 (Sports Plus Kit)** FAW50 (Industry Kit) FA100 (Workplace Kit) J6 **Burn Kit J6**



Pg#	Category	Brand
K1	Gas Detector	
K1	BW C2-H H2S	
K1	BW C3-H H2S	
K1	BW MICRO CLIP XL	Technologies
K1	BW MAX XT II	
L1	Spill Kit	
<u></u>	Oil Spill Kit	- P
L1	Chemical Spill Kit	DETRAIL
M1	-M2 Safety Equipm	ent
M1	3M SS Cleaner & Polish	*DB.#
M1	Scaffolding Tags	13691
M2	Kit Arc 4 Power	₹BSD
M3	Arc Flash Jacket, 41.0cal/cm ²	₹BSD
М3	Arc Flash Bib Coverall, 41.0cal/	
M4	Balaclava ATPV: 34.0 cal/cm ²	A
M4	Arc Protection Hood Arc 4 Pow	er ^{ĘBSD}
M5	ErgoSintec plus, 14 cal/cm ²	4
M5	ErgoSIntec power, 28 cal/cm ²	∃BSD
M6	ErgoSplus , 10.7 cal/cm ²	
M6	ErgoS 2power, 26.0 cal/cm ²	₹BSD
M6	ErgoS 3plus, 12 cal/cm ²	
M6	Arc 2 Light, 8.7 cal/cm ²	
M6	Arc 2 18.0 cal/cm ²	₽SD
M6	Arc 3 31.0 cal/cm ²	1000
М6	Arc 4 45.0 cal/cm ²	



The Brain Game! Use Proper Head Protection

We are in our mission to make safety affordable to everyone. Our Head Protection ranges are designed to provide maximum protection from impact and penetration hazards caused by falling objects. Consult with our PPE Experts to select the right Head Protection for based on your workplace & hazard level.

There are two categories of impact protection for hard hats: Type I and Type II. Type I hard hats are intended to reduce the force of impact resulting from a blow only to the top of the head. Type II hard hats are intended to reduce the force of lateral impact resulting from a blow that is received off-center, from the side, or to the top of the head.

In addition, there are three classifications of hard hats: G, E and C. Class G (general) hard hats offer protection against electrical hazards of up to 2,200 volts (V). Class E (electrical) hard hats provide the greatest protection for electricians, linemen and wiremen, insulating against high-voltage shock, burns and electricity up to 20,000V. Class C (conductive) hard hats are not designed to be used in electrical work. Another form of head protection is a bump hat, which provides protection in low clearance areas. Unfortunately, this type of PPE does not offer protection from falling objects or electrical hazards.



Guard

O 0-0 0-				
Ventilated Helmet with Ratchet Suspension				
Standard	EN 397:2012			
Material	HDPE (High Density Polyethylene) Shell			
Suspension	4 Points Ratchet Suspension Quick ActionRatchet Wheel Universal Slot for Earmuff			
Features	Tested, Passed & Certified6 Points Ventilation to Support Air Flow			
Weight / Carton	11.86 kgs			
Carton Dimension	57.50 x 46.50 x 41 cms			
CBM / Carton	0.1096			
Packing / Carton	30 Pieces			
Origin	China			
Optional				
Accessories	 Nylon Suspension 			









3M H-700R Series Unvented

SPI II 700K SCHES OHVEHEEU				
Helmet with Ratchet Suspension				
Standard	ANSI / ISEA Z89.1-2009			
Material	HDPE (High Density Polyethylene) Shell			
Suspension	4 Points Ratchet Suspension			
Features	 Accessory Slots Replaceable Brow Pad Short Brim for Better Upward Visibility Customized Logo Options Comfortable, Tough Lightweight 			
Weight / Carton	8.70 kgs			
Carton Dimension	56 x 46 x 42 cms			
CBM / Carton				
Packing / Carton	20 Pieces			
Origin	LISA			









3M H-801R

SIT II OUTK				
Full Brim Helmet with Ratchet Suspension				
Standard	ANSI / ISEA Z89.1-2009			
Class	Type 1, Class C, G & E			
Material	HDPE (High Density Polyethylene) Shell			
Suspension	 4 Points Smooth & Easy Turning Ratchet Suspension 			
Features	Offers Extra Shielding From the Sun Splashes, Rain, Sleet, Snow etcOften Preferred in Hot & Sunny Locations			
Weight / Carton	12 kgs			
Carton Dimension	56 x 46 x 42 cms			
CBM / Carton	0.1082			
Packing / Carton	20 Pieces			
Origin	USA			

MSA V-Gard Unvented

MSA V-Garu Oliveliteu				
Safety Helmet with Ratchet Suspension				
Standard	ANSI/ISEA Z89.1-2014, CSA Z94.1-2005			
	Type I, Class E			
Material	Virgin (HDPE) with UV Inhibitor			
Features	 Polyethylene Shell Provides Superior Impact Protection Self Adjusting Crown Straps Ensure a Comfortable Fit Fas-Trac III Suspension is the Most Comfortable 			
Weight / Carton	8.20 kgs			
Carton Dimension	57 x 47 x 42 cms			
CBM / Carton				
Packing / Carton	20 Pieces			
Origin	USA			









Carton Dimension 57 x 47 x 42 cms

Shell: Mexico

Ratchet: USA

CBM / Carton 0.1125

Packing / Carton 15 Pieces





Dallala L	I A Del les
	Fire Fighting Helmet
Standard	Certified to NFPA 1971-2013
Suspension	4 Points Nylon Crown Straps & Crown Pad
Shell Material	Thermoplastic
Features	M-Pact Shell with Smart Ridge Design High-Heat Thermoplastic Outer Shell Comfortable Sure-Lock® Ratchet Headband Nomex® Chinstrap with Quick Release Buckle & Postman's Slide Fastener Scotchlite® Reflective Markings
Weight / Carton	6.12 kgs
Carton Dimension	62 x 34 x 32 cms
CBM / Carton	
Packing / Carton	3 Pieces
Origin	USA





Clip Cap

Non-Woven Clip Cap		
Standard	CE, CAT I	
Material	PP Non-Woven	
Style	Single Elastic	
Fabric Weight	10 GSM	
Color	White	
Size	21 Inches	
Features	 Elastic Around the Head for Secure Fit Low Linting, Soft, Light Weight & Breathable for User Comfort 	
Weight / Carton	2.50 kgs	
Carton Dimension	45 x 20 x 34 cms	
CBM / Carton	0.0306	
Packing / Carton	10 Bags	
Origin	China	





Bump Cap

Bump Cap		
Safety Bump Cap		
Standard	CE, CAT I	
Size	Standard (Adjustable)	
Features	 Velcro for Fit Adjustment ABS Shell Material Thermo Formed Foam Cushioning Cotton/Polyester Material for Sweat Absorber Long Hood for Greater Usage Air Holes for Ventilation 	
Colors	Red, Navy Blue, Grey, Black	
Weight / Carton	14.80 kgs	
Carton Dimension	60 x 54 x 38 cms	
CBM / Carton	0.1231	
Packing / Carton	24 Pieces	
Origin	China	









Bullard S61 Non-Vented

Danara Dol Hon Ventea		
ŀ	Half Brim with Ratchet	
Standard	ANSI/ISEA Classification: Z89.1-2014 Type I, Class E & G	
Shell Material	High Density Polyethylene (HDPE)	
Features	 4-Point Dielectric, Flex-Gear Ratchet Suspension (RS4RC) Replaceable Cotton Brow Pad is Pillowed for Maximum Comfort Features Accessory Slots for Attaching a Variety of Accessories Such as Earmuffs & Face Protection Pad Print Capability in up to Eight Different Locations on the Hat Vertical Height Adjustment Capability (Two Front, Two Rear) Allow for a Personal, Secure Fit One of the Lightest Helmets of its Class Distinctive Three-Rib Trademark 	
Weight / Carton	8.60 kgs	
Carton Dimension	50.90 x 40.80 x 40.25 cms	
CBM / Carton		
Packing / Carton		
Origin	USA	



Bullard S62 Vented			
Half	Half Brim Vented with Ratchet		
Standard	ANSI/ISEA Classification: Z89.1-2014 Type I, Class C		
Shell Material	High Density Polyethylene (HDPE)		
Features	 4-Point Dielectric, Flex-Gear Ratchet Suspension (RS4RC) Replaceable Cotton Brow Pad is Pillowed for Maximum Comfort Vented Shell Design for Increased Ventilation & Worker Comfort Features Accessory Slots for Attaching a Variety of Accessories Such as Earmuffs & Face Protection Vertical Height Adjustment Capability (Two Front, Two Rear) Allow for a Personal, Secure Fit One of the Lightest Helmets of its Class Distinctive Three-Rib Trademark 		
Weight / Carton	8.60 kgs		
Carton Dimension			
CBM / Carton			
Packing / Carton			
Origin	USA		



Bullard S71 Full Brim			
	Full Brim with Ratchet		
Standard	ANSI/ISEA Classification: Z89.1-2014 Type I, Class E and G		
Shell Material	High Density Polyethylene (HDPE)		
Features	 Hat Style Helps Protect Against Splash, Glare & Sun Exposure, & Features a Permanent Under-Brim Glare Guard 4-Point Dielectric, Flex-Gear® Ratchet Suspension (RS4RC) Vertical Adjustment Capability (Two In Front, Two in Rear) for a Secure Fit to Different Head Sizes Wide (3/4") Crown Straps Provide More Comfort & Helps the Suspension System Absorb Energy. The round, wide crown area also allows for good ventilation Replaceable Cotton Brow Pad is Pillowed for Maximum Comfort 		
Weight / Carton	5.10 kgs		
	50.95 x 30.40 x 40.60 cms		
CBM / Carton			
Packing / Carton			
Origin	USA		





Industrial Hard Hat (ANSI Certified)		
Standard	ANSI/ISEA Z89.1-2014 American National Standards for Industrial Head Protection	
Shell Material	High Density Polyethylene (HDPE)	
	 The Valpro® Industrial Hard Hat Model: Ranger Is Comfortable, Tough & Lightweigh Designed With A Low Profile For Stability & Balance, Helps Provide Ultimate Comfort & Protection Pinlock Suspension 6points Plastic Suspension 	

Features

Class: G

Classification: Type I

Third Party Tested

Universal Slot for Ear Muff

 Sweatband Made of Soft Absorbent Material With Soft Cushion

• Road Construction, Oil & Gas, Mining

Size: Universal

Metal Fabrication

Color: Blue, White, Yellow

Applications

Weight / Carton 20.40 kgs

Carton Dimension 68 x 56 x 45 cms

CBM / Carton 0.1714

Packing / Carton 50 Pieces

Origin India



Maxxtra I		
Indus	trial Hard Hat (CE Certified)	
Standard	BS EN 397:2012 +A1:2012 Industrial Safety Helmet, CE 0086	
Shell Material	High Density Polyethylene (HDPE)	
Features	 Excellent Shock Absorption Light in Weight & Strong Universal Slots on Both Sides for Accessory Mounting Like Ear Defenders, or Mask Ergonomic & Innovative Design 4 Wide Point Support for Maximum Comfort & Easy Impact Absorption Strong 25mm Plastics Webbings High Quality Material for Highly Absorbent Sweatband With Embedded Foam Widely Adjustable Size, Ranging From 52-62 Cm Angled Headband Terminals for a Perfect Fit Withstands Temperatures Down to -20 °C Color: White, Blue, Green 	
Applications	Road Construction, Oil & Gas, MiningMetal Fabrication	
Weight / Carton	8.71 kgs	

Carton Dimension 57 x 46 x 49 cms


Origin United Arab Emirates

CBM / Carton 0.128

Packing / Carton 20 Pieces




Glasses, Goggles & Masks



Types of filter

- 2 Ultraviolet (Perception of colour can be altered)
- **2C Ultraviolet (Perception of colour is not altered)**
- 3 Ultraviolet (good discernment of colour)
- 4 Infrared
- 5 Solar
- 6 Solar + Infrared

Features applicable to the different type of protectors



Optical class

Represents the refractive index, i.e. the ability to distort the Image, due to the tolerance of the production.

There are 3 classes, from 1 to 3 with growing deviation.

Class 3 can be used only for short period of time.



EN 166 Manufacture and performance specifications

EN 169 Filters for welding and related processed

EN 170 Ultraviolet filters

EN 171 Infrared filters

EN 172 Solar filters for industrial use

EN175 Equipment that protects the face and eye during welding and related processes

EN 379 Automatic filters for welding

EN 1731 Mesh face and eye protectors





Hawk Shade 5 Welding



Hawk CE Green



Hawk - Basic Plus Range

Hawk-Eye Safety Shades	
Standard	CE EN166, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light Optical Class 1 Lens Low Energy Impact Resistant Wraparound with Angle Side Protection
Frame	Nylon Built in Brow Protection
Nose Piece	Universal Nose Bridge
Temple	Nylon 4-Length Positions AdjustModern Temple Design and Spatula Extendable
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	14.40 kgs
Carton Dimension	82 x 22.50 x 60.50 cms
CBM / Carton	0.1116
Packing / Carton	· · ·
Origin	Taiwan
Optional	Pouch & Cord
	Standard Material Lens Coating Lens Frame Nose Piece Temple Screw Weight / Carton Carton Dimension CBM / Carton Packing / Carton Origin



Ryder Clear



Ryder Amber



Ryder Indoor/Outdoor Mirror



rtyaci Basic i las italige		
Empe	eror's Ryders Safety Shades	
Standard	CE EN166, ANSI Z87.1	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti UV Light	
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light Snug-Fitting Wrap Around Lens Provides Perfect Impact Protection Around the Eyes Close-Fitting Unitary Front with Dual 9.75 Base Curvature Offers Wide & Unobstructed Vision 	
Nose Piece	Universal, Integral to Lens	
Temple	 Modern Temple Design & Spatula Type with Soft Insert 	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	11.50 kgs	
Carton Dimension	83 x 22 x 61 cms	
CBM / Carton		
	25 Packets (300 Pieces)	
Origin	Taiwan	
Optional	Pouch & Cord	
	Standard Material Lens Coating Lens Coating Lens Nose Piece Temple Screw Weight / Carton Carton Dimension CBM / Carton Packing / Carton Origin	



Ryder Smoke



Ryder Silver Mirror



Edge - Basic Plus

Over Spectacle - Fits Most Prescription Glasses		
Standard	CE EN166, ANSI Z87.1	
Material	Polycarbonate	
Lens Coating	Full Front, Side & Top ProtectionHigh Velocity Impact ResistantAnti UV Light	
Lens	 Polycarbonate Lens Filters Out More Than 99.9% of Harmful UV Light Optical Class 1 Lens Low Energy Impact Resistant 	
Frame	Nylon Built in Brow Protection	
Nose Piece	Integral to Lens	
Temple	Ventilated, Wide Spatula With Side Protection	
Colour	Clear Smoke	
Origin	Taiwan	
Weight / Carton	19.24 kgs	
Carton Dimension	87 x 36 x 23 cms	
CBM / Carton	0.07203	
Packing / Carton	25 Packets (300 Pieces)	
Optional	Pouch & Cord	





Fargo Clear Orange



Fargo Indoor/Outdoor Mirror



Fargo Smoke Grey



Fargo Bronze Mirror



Fargo Silver Mirror

Fargo - Basic Plus Range

raigo - basic Pius Kalige		
	Far View Safey Shades	
Standard	CE EN166, ANSI Z87.1	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti UV Light	
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light One-Piece Lens, Lightweight, 22g only Dual 9.75 Base Curve Closely Fits Various Facial Contour The Lens Provides Users with Clearest & the Most Panoramic View Without Obstruction 	
Nose Piece	Universal, Integral to Lens	
Temple	 Modern Temple Design & Spatula Type with Soft TPR Insert 	
Temple Tip	Soft & non-slip rubber tips	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	11.50 kgs	
Carton Dimension	82 x 23 x 61 cms	
CBM / Carton	0.1150	
Packing / Carton	25 Packets (300 pieces)	
Origin	Taiwan	
Optional	Pouch & Cord	



Fargo Smoke Orange

Fargo Amber



Super-Fit Clear (Anti-Fog)



Super-Fit Smoke (Anti-Fog)



Super-Fit Blue Mirror

Super-Fit - Premium Range



Super-Fit Silver Mirror



Super-Fit Indoor/Outdoor Mirror



Super-Fit Bronze Mirror

	Super the fremmann Range		
		All Time Fit Shades	
	Standard	EN166, CE, ANSI Z87.1	
	Material	Polycarbonate	
	Lens Coating	Anti-Scratch, Anti UV Light	
	Lens	 Scratch-Resistant Polycarbonate Lens Provides 99.9% of UV Protection Full Wrap Around With 9.5 Curved Base Lens Provides Full Front & Side Eye Protection 	
	Frame	Lens Snapped in the Frame	
	Nose Piece	Soft TPE Universal Fit	
r	Temple	 Co-Moulded Unique Temple Width Adjustable & Rotatable Design for Customized Fitting 	
	Screw	Stainless Steel Standard Hinge Screw	
	Weight / Carton	13.03 kgs	
	Carton Dimension	84 x 23 x 64 cms	
	CBM / Carton	0.1236	
	Packing / Carton	25 Packets (300 Pieces)	
	Origin	Taiwan	
	Optional	Pouch & Cord	








5

Vista Smoke (Anti-Fog)

Vista - Premium Range

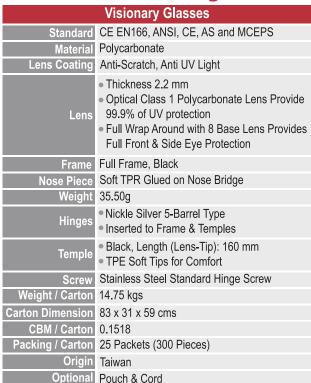



Vista Silver Mirror



Vista Indoor / Outdoor Mirror





Sporty Smoke (Anti-Fog)



Sporty Blue Mirror



Sporty Silver Mirror



Sporty Indoor/Outdoor Mirror



Sporty Bronze Mirror

Sporty - Premium Range

Athletic Safety Shades	
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Weight	28g
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 High Impact Resistance Lenses Provide 99.9% of UV Protection Full Wrap Around With 9 Curved Base Lens Provides More Coverage Without the Distraction of Seams or Traditional Type Side Shields
Frame	Brow Guard-TPE Co-MouldedSemi-Frame & Slim Temple Design
Nose Piece	Flexible Nose Bridge for Universal Fit
Temple	 Dual-Material Temples Polycarbonate Temple with Ultra-Soft TPR Tip for All Day Comfort
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	12.49 kgs
Carton Dimension	83 x 24 x 63 cms
CBM / Carton	0.1255
Packing / Carton	25 Packets (300 Pieces)
Origin	Taiwan
Optional	Pouch & Cord



Metallic Clear (Anti-Fog)



Metallic Smoke (Anti-Fog)



Metailic -	Premium Kange
Tough	n Metal Safety Frame Shades
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light Streamline Dual Lens Design 9.5 Base Curved Lens
Frame	Lens Clipped to Frame
Nose Piece	 Bridge –Polycarbonate Assemble to the Frame Nose Pad- TPR Soft Nose Pad Provides Pressure-Free Fitting Flexible Nose Bridge for Universal Fit
Temple	Black Fashion Design with Thin & Comfortable Fitting
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	12.50 kgs
Carton Dimension	83 x 24 x 63 cms
CBM / Carton	
Packing / Carton	,
Origin	Taiwan

Optional Pouch & Cord



Metallic Silver Mirror



Metallic Indoor / Outdoor Mirror





Active Clear (Anti-Fog)



Active Amber (Anti-Fog)

Active - Premium Range



Active Smoke (Anti-Fog)



Active Silver Mirror



Active Bronze Mirror

Act	tively Light Safety Shades
Standard	EN166, CE, ANSI Z87.1
	Polycarbonate
	Ultra Lightweight, 19g Only
Lens Coating	Anti-Scratch, Anti UV Light
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light One-Piece Lens 9.5 Base Curved Lens with Integral Extension of Side Shield Offering the Best Fit
Frame	Rim-Less
Nose Piece	Soft Finger-Type Design
Temple	Co-MoldedNon-SlipVentilated Temple for Snug Fitting
Temple Tip	TPE Co-Molded Inserted into Temple End
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	10.80 kgs
Carton Dimension	83 x 22.50 x 62.50 cms
CBM / Carton	0.1167
	25 Packets (300 Pieces)
	Taiwan
Optional	Pouch & Cord





Elite Smoke (Anti-Fog)





Elite Indoor / Outdoor Mirror



Elite Bronze Mirror

Elite - Premium Range

Elite - Premium Kange		
Ultimate Safety & Comfort Shades		
Standard	EN166, CE, ANSI Z87.1	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti UV Light	
Lens	 Scratch-Resistant Hard Coated Polycarbonate Lens Filters out more than 99.9% of Harmful UV Light One-Piece Lens 7 Base Curved Lens with Integral Extension of Side Shield Offering the Best Fit 	
Frame	 High Impact Resistant Brow-Bar Guards your Eyes from Flying Particles & Dust from Top 	
Nose Piece	TPR REACH Compliance Glued on Nose Bridge	
Temple	Co-MoldedVented TempleNon-Slip Temple for Snug Fitting	
Temple Tip	TPE Co-Molded Inserted into Temple End	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	15.09 kgs	
Carton Dimension	82 x 23.50 x 63 cms	
CBM / Carton		
Packing / Carton		
Origin	Taiwan	
Optional	Pouch & Cord	





Maxima Clear (Anti-Fog)



Maxima Bronze Mirror



Maxima Blue Mirror



Maxima I/O Mirror




Maxima Silver Mirror



Maxima - Premium Plus Range

	Safety To Its Max
Standard	EN166, CE, ANSI Z87.1
Material	Polycarbonate
Lens Coating	Anti-Scratch, Anti UV Light
Lens	9 Base Curved Lens Filters out more than 99.9% of Harmful UV Light
Frame	 Air Vented Lens Clip in Frame Co-Injected Brow Cushion Comfort & Protects from Injury Half-Frame & Slim Temple Design
Nose Piece	Non-Slip & Ventilated Nose Piece
Temple	 In/Out & Up/Down 3 Positions Temple Adjustments Ultra-Soft TPR Tip Straight Back Temples Provide Secure Fit
Screw	Stainless Steel Standard Hinge Screw
Weight / Carton	9.86 kgs
Carton Dimension	65 x 36 x 41 cms
CBM / Carton	0.0959
Packing / Carton	
Origin	Taiwan
Included	Pouch & Cord



Spectacle Cord



Flash Sky Red Mirror



Spectacle Pouch



Flash - Premium Plus Range		
	Flashily Shades	
Standard	EN166, CE, ANSI Z87.1	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti UV Light	
Lens	 8 Base Curved Lens Filters out more than 99.9% of Harmful UV Light 	
Frame	Dual Lens StyleFull FrameGloss Black Color	
Nose Piece	Non-Slip & Ventilated Nose Piece	
Temple	 Gloss Pearl Black Air Vented Straight Back Temples Provide Secure Fit Flexible Temples with Soft Temple Tips 	
Hinges	Nickle Silver 5-Barrel TypeInserted to Frame & Temples	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	17.59 kgs	
Carton Dimension	83 x 32 x 59 cms	
CBM / Carton		
	25 Packets (300 Pieces)	
Origin	Taiwan	

Included Pouch & Cord



Flash Smoke (Anti-Fog)



Flash Silver Mirror





Optimistic Splash Eyewear		
Standard	ANSI Z87.1, CE EN166	
Material	Polycarbonate	
Style	Fits Over Prescription Glasses	
Lens	 Polycarbonate Lens Protects Against Splash & Dust High Impact Resistance Against Flying Particles 	
Body	 Soft Vinyl Goggle Body Conforms to Facial Contours for a Very Comfortable Fit Indirect Vent with Perfect Over Ventilation Design 	
Nose Piece	PVC Universal Integral to Frame	
Headband	Fully Adjustable Textile Elastic Band	
Weight / Carton	13.90 kgs	
Carton Dimension	57 x 36 x 50 cms	
CBM / Carton	0.0612	
Packing / Carton	12 Packets (144 Pieces)	
Origin	Taiwan	





Vision Grey

Cloudy Chem Eyewear		
Standard	ANSI Z87.1, CE EN166	
Material	Polycarbonate	
Style	 Specific Design on the Sides of Goggle Body for Fitting Over Prescription Glasses 	
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light	
Lens	 Polycarbonate Lens Protects Against Splash & Dust High Velocity & Impact Resistance Against Flying Particles Lens Filters out more than 99.9% of Harmful UV Light 	
Body	 Cushion-Soft Vinyl Goggle Body & Ultra-Wide Elastic Headband for Comfortable Fitting 	
Nose Piece	PVC Universal Integral to Frame	
Headband	Fully Adjustable Textile Elastic Band	
Frame	 Translucent Frame for a Maximum Field of Vision 	
Weight / Carton	16.21 kgs	
Carton Dimension	58 x 37 x 53 cms	
CBM / Carton	0.1137	
Packing / Carton	15 Packets (90 Pieces)	
Origin	Taiwan	



Vision Grey Visor Combo

VISION GIEY VISON COMIDO		
l	ndirect-Vented Goggle	
Standard	ANSI Z87.1, CE EN166	
Material	Polycarbonate	
Style	A Pivot with 4 PositionAdjustable	
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light	
Lens	 Polycarbonate Lens Protects Against Splash & Dust High Velocity & Impact Resistance Against Flying Particles Lens Filters out more than 99.9% of Harmful UV Light 	
Body	 Cushion-Soft Vinyl Goggle Body & Ultra-Wide Elastic Headband for Comfortable Fitting 	
Nose Piece	PVC Universal Integral to Frame	
Headband	Fully Adjustable Textile Elastic Band	
Frame	 Translucent Frame for a Maximum Field of Vision 	
Weight / Carton	7.50 kgs	
Carton Dimension	51 x 40 x 30 cms	
CBM / Carton	0.0612	
Packing / Carton	30 Pieces	
Origin	Taiwan	



UltraSonic Goggle

Full Vision Lab Goggles		
Standard	ANSI Z87.1, CE EN166	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light	
Lens	 Single Lens Full Wraparound 6-Curved Base Lens Offers Superior Impact Protection & Coverage Single Lens Filters out more than 99.9% of Harmful UV Light 	
Head Band	Fully Adjustable Buckle with ClipSuitable for Elastic & Neoprene Strap	
Frame	 Indirect Ventilation for Splash & Dust Resistance Co-Material Frame PP (Polypropylene) & TPE 	
Nose Piece	 Universal Fit Nose Bridge Conforms to Facial Contours to Ensure a Comfortable Fit 	
Temple	 Black/Orange Unique Temple Design with Co-Injection Temple Tips for Extra Comfort 	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	10.17 kgs	
Carton Dimension	52 x 41 x 50 cms	
CBM / Carton	0.1066	
Packing / Carton	5 Packets (50 Pieces)	
Origin	Taiwan	



Tactical Spoggle

Foxy Eyewear		
Standard	ANSI Z87.1, CE EN166	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light	
Lens	 Single Lens Full Wraparound 8-Curved Base Lens Offers Superior Impact Protection & Coverage Single Lens Filters out more than 99.9% of Harmful UV Light 	
Sponge	EVA Foam Soft Cushion, Fire Retardant	
Frame	Black, Nylon Foam Padded Frame for Dust ProtectionDirect Ventilation	
Nose Piece	Nylon with CR Foam UniversalIntegral to Frame	
Temple	 Black/orange, Interchangeable Temples & Headband Type Unique Temple Design with Co-Injection Temple Tips for Extra Comfort 	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	22.50 kgs	
Carton Dimension	84 x 31 x 58.5 cms	
CBM / Carton	0.1523	
Packing / Carton	25 Packets (300 Pieces)	
Origin	Taiwan	



Included Pouch & Cord

RX Ultra Goggle Clear

Corrective Eye Goggles		
Standard	ANSI Z87.1, CE EN166	
Material	Polycarbonate	
Lens Coating	Anti-Scratch, Anti-Fog & Anti UV Light	
Lens	 9 Base Curved Lens Filters out more than 99.9% of Harmful UV Light Removable RX Insert Included - To Fit Prescription Lenses (less than - 4.0 Diopter) 	
Frame	 Black, Nylon Foam Padded Frame for Dust Protection Lens and Frame Vented to Increase Air Flow 	
Nose Piece	Nylon with CR Foam Universal Integral to Frame	
Temple	 Black, Interchangeable Temples & Headband Type Ultra-Soft TPR Tip Air Vented Straight Back Temples Provide Secure Fit 	
Screw	Stainless Steel Standard Hinge Screw	
Weight / Carton	12.60 kgs	
Carton Dimension	63 x 37 x 37 cms	
CBM / Carton	0.0862	
Packing / Carton	10 Packets (120 Pieces)	
Origin	Taiwan	



Virtua AP Series

VII Caa Ar	Series
	Smart Fit
Standard	ANSI/ISEA Z87.1-2010, CAN/CSA Z94.3-2007
Material	Polycarbonate
Lens Coating	Hard Coat Lens
Lens	Impact Resistant Polycarbonate Lens with 99.9% UV Protection
Features	 Frameless Design Unisex Styling A Selection of "Task-Specific" Lens Tints Comfortable, Lightweight Frame Weight Less than 1 oz High-Wrap Lenses Fit Snug Against the Face for a Better Viewing Area Polycarbonate Lenses Absorb 99.9% UV Rays
Applications	In Civil ConstructionChemical IndustriesPetrochemicalMining & Industries in General
Weight / Carton	0.73 kgs
Carton Dimension	37 x 17 x 15.5 cms
CBM / Carton	0.0098
Packing / Carton	20 Pieces
Origin	Taiwan



3M Linte Cinza Trans

Virtua Lente Cinza

Slim Fit	
Standard	ANSI Z87.1:2003
Material	Polycarbonate
Lens	 Impact Resistant Polycarbonate Lens with 99.9% UV Protection
Frame	Frameless Design
Features	Integrated Nose BridgeHighly Flexible Single Lens DesignLight Weight
Temple	Lens Colored Spatula Type Temple
Applications	In Civil ConstructionChemical IndustriesPetrochemicalMining & Industries in General
Weight / Carton	0.845 kgs
Carton Dimension	20 x 29.5 x 20.5 cms
CBM / Carton	0.0121
Packing / Carton	25 Pieces
Origin	Taiwan



Golden Welding Hood

Golden V	ciallig Hood
Weld	ing Hood, Golden Suede Leather
Standard	CE Cat. I, EN:388
Features	 Suede Leather Velcro Fastening Inside Mesh for Comfort Kevlar® Stitching Excellent Leather Thickness Protection Against Small Droplets of Molten Metals
Size	Universal
Applications	 Cutting Welding Small Particles of Molten Splash Short Contact with Flames Protection From Radiant Heat
Weight / Carton	27.4kgs
Carton Dimension	37 x 33 x 64 cms
CBM / Carton	
Packing / Carton	
Origin	Pakistan









DuPont"



Welding Helmet

welding neimet			
Welding Helr	Welding Helmet with Ratchet Fitting		
Shell Material	ABS		
Features	 Light Weight Comfortable Lift Up Front Lens Protects Upper Chest & Throat from Sparks & Spatter Adjustable Ratchet Suspension Curved Top Extends Well Over the Head for Added Protection 		
Weight / Carton	16 kgs		
Carton Dimension	50 x 46 x 53 cms		
CBM / Carton	0.1219		
Packing / Carton	30 Pieces		
Origin	Taiwan		

PC Face Shield

Vicor with	Ratchet Head Gear
Material	Polycarbonate
Features	 Adjustable Ratchet Type Provides Face Protection Against Liquid splashes Flying Objects, grinding Chips etc Light Weight-Visor Gives High Impact Resistance
Weight / Carton	16 kgs
Packing / Carton	40 Pieces
Origin	China

Balaclava / Face Hood

Fireman Balaclava	
Standard	BS EN 13911:2004
Features	 Nomex® IIIA Comfortable Knitted Fabric 200-210 g/m2 Single Layer Double Layers Customized Solution Available
Colors	NaturalBlack
Weight / Carton	10.50 kgs
Carton Dimension	71 x 41 x 25 cms
CBM / Carton	0.0727
Packing / Carton	100 Pieces
Origin	Pakistan

Cotton Hood

100% Cotton Face Cover		
Standard	CE CAT I	
Material	Cotton	
Features	Protect From Sun & Dust	
Colors	Petrol BlueKhaki	
Weight / Carton	13 kgs	
Carton Dimension	50 x 39 x 26 cms	
CBM / Carton		
Packing / Carton		
Origin	China	

Headphones

Earplugs

Headphones fitted on an industrial protection helmet
Headphones to suit specific ambient noise levels
Headphones with noise reduction active control
Headphones audio communications capability

Inserts that attenuate sound to suit specific ambient noise levels

Noise damping

It is the difference between the intensity of the "noise" to which the operator is exposed and that actually transmitted to the ear. The damping level is expressed in the following manners:

HML: this indicates the damping level based on the frequency of the noise: High (H), Medium (M), Low (L) frequency. The damping values are expressed through a number preceded by a letter of the frequency to which it refers. SNR: (Simplified Noise Reduction): it expresses the damping level of the protector through a single value

PPE and daily exposure level

According to art. 193 D.Lgs 81/08, if the operator is exposed daily to:

- > 80 dBA the employer provides the workers with hearing PPE
- > 85 dBA the employer demands the workers to use hearing PPE

The employer takes into account the attenuation provided by the personal protection devices worn by workers to assess the efficiency of PPE and compliance with maximum values of noise exposure [87 dB(A)] Workers exposed to levels exceeding 80 dB (A) receive proper training and practical instruction (art. 195).









Ultra Solo

Universal Headband Type Earmuff with Soft Foam

EPA Regulation Standard EN 352-1:2002 ANSI S3.19-1974, ANSI S12.6-1997 Black Cup & Red Hoop with Soft Foam Filled with Cushion for All Day Comfort Designed for High Noise Environment & Low

Frequency Sounds Combination of Specially Designed Spacer & Cup

Helps to Provide Excellent Protection Low Frequency Noise

 Metal Processing Automotive Construction Textile Manufacturing

Features

 Chemical & Pharmaceutical Manufacturing **Applications**

Cement Manufacturing

Printing, Wood Working, Heavy Engineering

Foundry, Steelworks

Mining & Quarrying

SNR 32dB NRR 26dB Weight / Carton 7.11 kgs Carton Dimension 50 x 41 x 43 cms

CBM / Carton 0.088

Packing / Carton 20 Pieces Origin Taiwan

Universal Headband Type Earmuff with Soft Foam

EPA Regulation Standard EN 352-1:2002

ANSI S3.19-1974, ANSI S12.6-1997

Black Cup & Red Hoop with Soft Foam Filled with Cushion for All Day Comfort Designed for High Noise Environment & Low

Frequency Sounds **Features** Combination of Specially Designed

Spacer & Cup Helps to Provide Excellent Protection

Low Frequency Noise

Metal Processing

Automotive Construction

Textile Manufacturing

Chemical & Pharmaceutical Manufacturing

Cement Manufacturing

Printing, Wood Working, Heavy Engineering

Foundry, Steelworks

Mining & Quarrying

SNR 33dB NRR 29dB

Weight / Carton 8.69 kgs

Applications

Carton Dimension 51 x 42 x 43 cms

CBM / Carton 0.092

Packing / Carton 20 Pieces Origin Taiwan

HD Universal Headband Stainless Steel Type Earmuff

EPA Regulation Standard EN 352-1:2002

ANSI S3.19-1974, ANSI S12.6-1997

Black Cup & Red Hoop with Soft Foam Filled with Cushion for All Day Comfort

 Designed for High Noise Environment & Low Frequency Sounds **Features**

Combination of Specially Designed Spacer & Cup

 Helps to Provide Excellent Protection Low Frequency Noise Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing **Applications** Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying SNR 32dB NRR 28dB Weight / Carton 12.00 kgs Carton Dimension 50 x 41 x 43 cms CBM / Carton 0.0882 Packing / Carton 20 Pieces Origin Taiwan












Refill

Universal Cap N	Nounted Stainless Steel Type Earmuff
Standard	EN352-1-2002 ANSI S3.19-1974 ANSI S12.6-1997
Features	 Black Cup & Red Hoop with Soft Foam Filled with Cushion for All Day Comfort Designed for High Noise Environment & Low Frequency Sounds Combination of Specially Designed Spacer & Cup Helps to Provide Excellent Protection Low Frequency Noise
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying
SNR	
NRR Weight / Carton	
Carton Dimension	-
CBM / Carton	
Packing / Carton	20 Pieces
Origin	Taiwan

Disposable	Uncorded PU Earplug Refill Pack
	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Material	Polyurethane
Features	 Orange, Soft Hypoallergenic PU Foam Plug Tapered Design for Easy Insertion & Removal Gently Expands & Self Adjusts to all Size Ear Canals Offers Excellent Noise Reduction Provides Comfortable Seal Without Pressure Smooth, Dirt-Resistant Surface for Hygiene
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying
SNR	37dB
NRR	32dB
Weight / Carton	8 kgs
Carton Dimension	40 x 39 x 32 cms
CBM / Carton	
	10 Bags (5000 Pairs)
Origin	Taiwan

Dispenser	
	orded Ear Plug Dispenser
Standard	CE, CAT I
Material	ABS Plastic
Features	 Accurately Dispenses One Earplug at a Time Dispenses Earplug Directly into Hand Durable ABS Plastic for Tough Environment Free-Standing or Wall-Mounted Shields Earplug from Wind & Rain Impact Resistant Temperature Tolerance & Smooth Operation
Applications	 Facility Maintenance Grinding Electrical Machine Operation Sanding Welding Painting Blasting Assembly Cleaning
Weight / Carton	6 kgs
Carton Dimension	69 x 49 x 36 cms
CBM / Carton	
Packing / Carton	
Origin	Taiwan



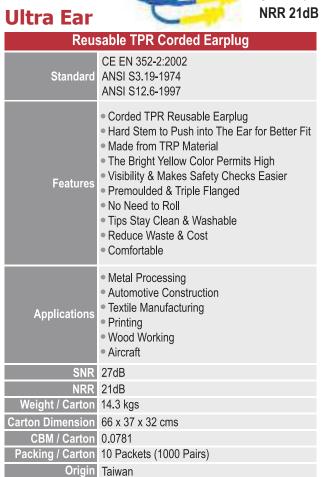



Sync	NRR 32dB
Disposal	ole PU Ear Plug (Without Cord)
Standard	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Material	Polyurethane
Features	 Soft Polyurethane Foam Ear Plugs Providing Extra Comfort The Tapered Shaped Is Designed to Fit Most Ear Canals Made from Soft Hypo-Allergenic Material The Bright Orange Color Permits High Visibility & Makes Safety Checks Easier
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying
SNR	37dB
NRR Weight / Carton	32dB 5.80 kgs
Carton Dimension	
CBM / Carton	
Packing / Carton Origin	



Sync Cord	14141 0232
Dispo	sable PU Ear Plug (Corded)
Standard	EN 352-2:2002 ANSI S3.19-1974 ANSI S12.6-1997
Material	Polyurethane
Features	 Soft Polyurethane Foam Ear Plugs Providing Extra Comfort The Tapered Shaped Is Designed to Fit Most Ear Canals Made from Soft Hypo-Allergenic Material The Bright Orange Color Permits High Visibility & Makes Safety Checks Easier
Applications	 Metal Processing Automotive Construction Textile Manufacturing Chemical & Pharmaceutical Manufacturing Cement Manufacturing Printing, Wood Working, Heavy Engineering Foundry, Steelworks Mining & Quarrying
SNR	37dB
NRR	32dB
Weight / Carton	•
Carton Dimension	
CBM / Carton	
	10 Packets (1000 Pairs)
Origin	Taiwan



3M H10A	NRR 30dB
3M™ PEI	LTOR™ Optime™ 105 Earmuffs
	ANSI S3.19 - 1974
Features	 Over-The-Head Earmuff Double-Shell Technology to Provide Effective Hearing Protection Proprietary Twin-Cup™ Design Stainless Steel Headband for Consistent Force & Effective Hearing Protection Earcup Pivot Points That Tilt for Optimum Comfort & Efficiency Liquid/Foam Filled Earmuff Cushions Color-Coding for Compliance Sighting
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	35dB
NRR	30dB
Weight / Carton	-
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	USA



3 M™ PE	LTOR™ Optime™ 98 Earmuffs
Standard	ANSI S3.19 - 1974
Material	ABS
Features	 Versatile Over The Head Earmuff Stainless Steel Headband for Consistent Force & Effective Hearing Protection Earcup Pivot Points That Tilt for Optimum Comfort & Efficiency Ultra Light Liquid/Foam Filled Earmuff Cushions Color-Coding for Compliance Sighting
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	30dB
NRR	25dB
Weight / Carton	3 kgs
Carton Dimension	49 x 27 x 20 cms
CBM / Carton	
Packing / Carton	
Origin	USA



3M™ Peltor™ Optime™ 98 Cap-Mount Earmuffs		
Standard	ANSI S3.19 - 1974	
Material	ABS	
Features	Cap-Mount Earmuff Earcup Pivot Points That Tilt for Optimum Comfort & Efficiency Ultra Light Weight Liquid/Foam Filled Earmuff Cushions Color-coding for Compliance Sighting	
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft 	
SNR	28dB	
NRR	23dB	
Weight / Carton	3.3 kgs	
Carton Dimension	49 x 27 x 20 cms	
CBM / Carton	0.0265	
Packing / Carton		
Origin	USA	



3M 1100

3M 1110

SNR 34dB NRR 29dB

3M

3M™ PU	Foam Earplugs 1100, Uncorded
Standard	Class AL CSA Z94.2 - 1994 ANSI S3.19 - 1974
Features	 Soft Hypoallergenic PU Foam Offers Maximum Wearer Comfort Tapered Design to Fit Comfortably in the Ear Canal Smooth & Dirt Resistant Surface for Hygiene
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	34dB
NRR	29dB
Weight / Carton	1.72 kgs
Carton Dimension	55 x 22 x 23 cms
CBM / Carton	
	5 Packets (1000 Pairs)
Origin	Brazil

3M™ PU	J Foam Earplugs 1110, Corded
Standard	CSA Class - AL AS/NZS 1269 : 2005 Class - 3 / SLC 80 Rating CSA Z94.2 - 1994 EN 352 - 2
Features	 Soft Hypoallergenic PU Foam Offers Maximum Wearer Comfort Tapered Design to Fit Comfortably in the Ear Canal Smooth & Dirt Resistant Surface for Hygiene, With Polyester Cord
Applications	 Metal Processing Automotive Construction Textile Manufacturing Printing Wood Working Aircraft
SNR	34dB
NRR	29dB
Weight / Carton	1.41 kgs
Carton Dimension	55 x 20 x 23.5 cms
CBM / Carton	
	5 Packets (500 Pairs)
Origin	Brazil



Breathing Apparatus Dust filtering face masks EN 149 EN 140 Semi and quarter masks **EN 136 Full masks EN 405** Anti-gas and/or dust filtering semi masks with valves **EN 143 Dust filters** EN 14387 Anti-gas and combined filters **Dust Filtering Face Masks** x = Classes of pertinence v = Durationz = Resistance to clogging 1 = Low efficiency R = ReusableD = Dolomite2 = Medium efficiency NR = Non reusable, only for one shift **F** у Z X 3 = High efficiency **Protection Type** FFP1 Suitable for use in the presence of: iron, rust, concrete, stone, filling materials. Restrictions: not suitable for filtering cancerogenous particles or radio-active substances. microorganisms (virus, bacteria, fungi and spore) and enzymes. FFP2 Suitable for use in the presence of: wood, steel, cement, paint, spray paint and anti-rust, fibreglass and mineral fiber, welding fumes, zinc, pesticides in water solution, flour, mould and spore, bacteria, soot. Restrictions: not suitable for filtering particles of radioactive substances, virus and enzymes. FFP3 Suitable for use in the presence of stainless steel, anti-vegetative paint, asbestos, tuberculosis bacteria. **Anti-Gas Filters** Classes of anti-gas filters The filters are classified according to the absorption capacity, in other words the amount contaminant that the filter can absorb: Class **Capacity** small medium large **Protection** Type Organic gas and vapours with boiling point above 65°C In organic gas and vapours Ε Sulfur dioxide and other acid gas and vapours **Ammonia and by-products** K Organic gas and vapours with boiling point lower or equal to 65°C AX SX Gas and vapours specifically indicated from manufacturer HgP3 **Mercury vapours** NOP3 **Nitrogenated fumes** Dust





Makrite™ Sekura-N95



Makrite™ Sekura-N95V Makrite™ 302P2w





Makrite™ 302P2Vw

N95 Foldable Respirator	
Standard	NIOSH Approved
Features	 Vertical Folded Style Which is More Flexible Around the Edges & Can Adapt to the Wearer's Facial Features Exceptional Inside Filter for Lower Breathing Resistance Individually Adjustable Plastic Nose Clip Allows User to Customize the Fit for Better Seal & Helps to Reduce Eyewear Fogging Ultrasonic Welded Head-straps for Secure Seal Neck-worn Adjustable Buckle Design for Proper Fit High Density Urethane Foam Nosepiece to Reduce Leakage Filter Penetration Nose Foam Filter Media
Applications	Painting, Coating, MixingCutting, Drilling, Construction
Weight / Carton	

Carton Dimension 16.25 x 11.75 x 15 inch

Origin China

Packing / Carton 15pcs/box, 12 boxes/carton

CBM / Carton 0.047

N95 Foldable	Respirator with Valve
Standard	NIOSH Approved
Features	 Vertical Folded Style Which is More Flexible Around the Edges & Can Adapt to the Wearer's Facial Features Exceptional Inside Filter for Lower Breathing Resistance Individually Adjustable Plastic Nose Clip Allows User to Customize the Fit for Better Seal & Helps to Reduce Eyewear Fogging Ultrasonic Welded Head-straps for Secure Seal Neck-worn Adjustable Buckle Design For Proper Fit High Density Urethane Foam Nosepiece to Reduce Leakage Exhalation Valve Membrane Reduces Heat & Moisture
Applications	Painting, Coating, MixingCutting, Drilling, Construction
Weight / Carton	3.48 kgs
arton Dimension	16.25 x 11.75 x 15 inch
CBM / Carton	0.047
Packing / Carton Origin	15pcs/box, 12 boxes/carton China
Origin	Ullila

FFP2 Respirator		
Standard	EN149:2001+A1:2009	
Features	 Vertical Fold Style that has a Soft Touch Makes it Exceptionally Easy to Wear & Provide excellent contour fit Excellent Filter Material for Low Breathing Resistance Comfortable & Lightweight Design Individually Adjustable Nose Clip Welded Head-Straps A Full Inside Foam is Adapted on FFP3 Grade to Provide Even Better Secure Seal Can Be Easily Equipped With Safety Goggle, Helmet, Glasses, Ear Muffs & Other Eye Wears 	
Applications	Construction & MaintenanceMetal WorkingMining and Quarrying	
Weight / Carton	3.29 kgs	
Carton Dimension	16.25 x 11.75 x 15 inch	
CBM / Carton	0.047	
Packing / Carton	20pcs/box, 12 Boxes/carton	
Origin	China	

makrite"	302P2VW
FFP2 Re	spirator with Valve
Standard	EN149:2001+A1:2009
Features	 Vertical Fold Style that has a Soft Touch Makes it Exceptionally Easy to Wear & Provide excellent contour fit Excellent Filter Material for Low Breathing Resistance Comfortable & Lightweight Design Individually Adjustable Nose Clip Welded Head-Straps A Full Inside Foam is Adapted on FFP3 Grade to Provide Even Better Secure Seal Can Be Easily Equipped With Safety Goggle, Helmet, Glasses, Ear Muffs & Other Eye Wears One-way Exhalation Valve
Applications	Metal WorkingMining and Quarrying
Weight / Carton	3.70 kgs
Carton Dimension	16.25 x 11.75 x 15 inch
CBM / Carton	0.047
Packing / Carton	20pcs/box, 12 Boxes/carton
Origin	China



Makrite™ 9600-N95

N95 Cone Respirator White Outer Layer

Standard NIOSH Approved Additional Benefit of Being Foldable for Easy Storage in a Worker's Pocket The Ergonomic Design Provides Excellent Fit & Comfort & Can Be Easily **Equipped With Safety** Goggles & Helmets Exceptional Inside Filter for Very Low Breathing **Features** Resistance Individually Adjustable Aluminum Nose Clip for Excellent Fit Ultrasonic Welded Head-straps for Secure Seal High Density Urethane Foam Nosepiece to Reduce Leakage & Improve Worker Comfort Sanding, Grinding, Cutting **Applications** Drilling, Construction Maintenance, Cleaning Weight / Carton 3.38 kgs 16.25 x 12.5 x 14.5 inch **Carton Dimension** CBM / Carton 0.048 20pcs/box, 12 boxes/carton Packing / Carton Origin China



Makrite™ 9500-N95

N95 Cone Respirator Standard NIOSH Approved

Designed To Protect Workers From Exposing to Solid Substances Free of Oil

 The Cone Style of N95 Mask is the Most Widely Used Mask Work Environments

Designed to Easily Meet NIOSH's Stringent Approval Requirements for Breathing Resistance & Filtration **Features** Efficiency

> Exceptional Inside Filter for Low Breathing Resistance

- Individually Adjustable Aluminum Nose Clip for Excellent Fit
- Ultrasonic Welded Head-straps for Secure Seal
- High Density Urethane Foam Nosepiece for Great Fitness & Worker Comfort

Applications

Sanding, Grinding, Cutting Drilling, Construction

Weight / Carton 4.11 kgs Carton Dimension 16.25 x 11.75 x 16.5 inch CBM / Carton 0.052 Packing / Carton 20pcs/box, 12 boxes/carton Origin China



Makrite™ 9500V-N95

Standard NIOSH Approved

N95 Respirator with Valve

 High Performance Respirator with an Exhalation Valve to Make it Easier to Breathe Through in Hot or Humid Work Conditions

- Valve Membrane
- Designed to Easily Meet NIOSH's Stringent Approval Requirements for Breathing Resistance & Filtration **Features** Efficiency
 - Exceptional Inside Filter for Low Breathing Resistance Individually Adjustable Aluminum Nose Clip for Excellent Fit
 - Ultrasonic Welded Head-straps for Secure Seal
 - High Density Urethane Foam Nosepiece for Great Fitness & Worker Comfort

Sanding, Grinding, Cutting

Drilling, Construction

Applications

Weight / Carton 3.17 kgs 16.25 x 11.75 x 14.5 inch **Carton Dimension** CBM / Carton 0.045 Packing / Carton 10pcs/box. 12 boxes/carton Origin China

Makrite™ 9500-N95VOV

N95 Respirator with Valve & OV

Standard NIOSH Approved High Performance Respirator with an Exhalation Valve to Make it Easier to Breathe Through in Hot or Humid Work Conditions Activated Carbon Designed to Easily Meet NIOSH's Stringent Approval Requirements for Breathing Resistance & Filtration **Features** Efficiency Exceptional Inside Filter for Low Breathing Resistance Individually Adjustable Aluminum Nose Clip for **Excellent Fit** Ultrasonic Welded Head-straps for Secure Seal High Density Urethane Foam Nosepiece for Great Fitness & Worker Comfort Sanding, Grinding, Cutting **Applications** Drilling, Construction Weight / Carton 3.58 kgs Carton Dimension 16.25 x 11.75 x 14.5 inch CBM / Carton 0.045 Packing / Carton 10pcs/box, 12 boxes/carton

Origin China



Makrite™ MK910-N95

N95 Respirator

Standard NIOSH Approved

 Breathing Resistance & Filtration Efficiency for Non-Oil & Smaller Size Particles

- Low Breathing Resistance Provide for a Verv Comfortable Wear
- Individually Adjustable Aluminum Nose Clip for **Excellent Fit**

Features

- Flanged Edge for Secure Facial Seal
- Ultrasonic Welded Head-straps for Secure Seal
- Thinner & Longer PVC Foam for Worker Comfort
- N95 Particulate Filter (95% Filter Efficiency Level) Effective Against Particulate Aerosols Free Of Oil

Applications

- Sanding, Grinding, Cutting
- Drilling, Construction
- Maintenance, Cleaning

Weight / Carton 4.32 kgs

Carton Dimension 16.25 x 11.75 x 16.5 inch

CBM / Carton 0.052

Packing / Carton 20pcs/box, 12 boxes/carton

Origin China



Makrite™ MK910V-N95

N95 Respirator with Valve

Standard NIOSH Approved

Breathing Resistance & Filtration Efficiency for Non-Oil & Smaller Size Particles

 Low Breathing Resistance Provide for a Very Comfortable Wear

 Individually Adjustable Aluminum Nose Clip for Excellent Fit

- Features Flanged Edge for Secure Facial Seal Ultrasonic Welded
 - Head-straps for Secure Seal Thinner & Longer PVC Foam for Worker Comfort
 - N95 Particulate Filter (95% Filter Efficiency Level) Effective Against Particulate Aerosols Free Of Oil
 - One-way Valve

Applications

- Painting, Coating, Mixing
- Cutting, Drilling, Construction

Weight / Carton 3.28 kgs

Carton Dimension 16.25 x 11.75 x 14.5 inch

CBM / Carton 0.045

Packing / Carton 10pcs/box, 12 boxes/carton Origin China



Makrite™ MKP3SLAVa

FFP3 Respirator with Valve

Standard EN149:2001+A1:2009

Flanged Sealed Edge Designed All Around Mask

> Face & Mask Adjustable Head Straps

- Filter Media
- Nose Clip & Foam
- Full Foam Seal
- Exhalation Valve & Membrane

for Excellent Seal Between

- Passed NaCL & Oil **Based Particles** Features
 - Ultrasonic Welded Head-straps for Secure Seal
 - Thinner & Longer PVC Foam for Worker Comfort
 - The Filtering Respirator is **Designed for Applications** Involving Fine Non-Toxic Dust & Fibers. Its Used to Protect the Wearer From Solid & Liquid Aerosols Only

Applications

- Painting, Coating, Mixing
- Cutting, Drilling, Construction

Weight / Carton 4.81 kgs

Carton Dimension 16.25 x 14.5 x 15.75 inch

CBM / Carton

Packing / Carton 10pcs/box, 12 boxes/carton Origin China

0.061



Makrite™ ENVI-P3VF

FFP3 Respirator with Valve

Standard EN149:2001+A1:2009

Makrite® ENVI Comfort Series Has Been Designed Without Any Metal & Foam in the Construction to Make them Environmentally Friendly

Excellent Filter Material for Low Breathing Resistance

- The Soft Inner Layer Provides for Maximum Comfort
- One-way Valve Reduces Heat & Moisture Accumulate Inside Features the Mask for Better Comfort
 - Easily Equipped With Safety Goggle, Helmet, Glasses, Earmuffs, & Other Eve Wears
 - FFP = Grade of Filtration Efficiency FFP3 is >99%
 - Flanged Edge for Secure Facial Seal
 - The Soft Pre-Shaped Nose Area Ensures Excellent Fit

Applications

Spray Painting, Plastering

Asbestos Handling

Weight / Carton 3.83 kgs

Carton Dimension 16.25 x 11.75 x 16.5 inch

CBM / Carton 0.052

Packing / Carton 10pcs/box, 12 boxes/carton Origin China



Makrite™ FIT-P3DSLAV

FFP3 NR Respirator with Valve

Standard EN149:2001+A1:2009

 Exceptional Inside Filter for Low Breathing Resistance

> Softer Outer & Inner Layer for Comfortable Fit

Individually Adjustable Plastic Concealed Nose Clip for Excellent Fit

 Fully Adjustable Loop Headbands for Proper Fit

One Way Valve Reduces Heat & Moisture Accumulate Inside the Mask for Better Comfort

 High Density Urethane Foam Nosepiece for Great Fitness & Worker Comfort

Can Be Easily Equipped With Safety Goggle, Helmet, Glasses, Ear Muffs & Other Eye Wears

Applications

Painting, Coating, Mixing

Cutting, Drilling, Construction

Weight / Carton 4.82 kgs

Features

Carton Dimension 20 x 12 x 19.625 inch

CBM / Carton 0.077

Packing / Carton 15pcs/box, 12 boxes/carton Origin China



Surgical Mask 75

PP-NON	PP-NON Woven 3 Ply Mask		
Standard	EN CAT 1		
Color	Sky Blue		
Weight	75 GSM		
Size	17.50 cm x 9.50 cm		
Features	 3 Ply Mask With Ear Loops Melt Blown Filter Very Low Resistance to Breathing High Filtration Capacity Soft Latex Free Elastic Loops Adjustable Nose Clip Embedded Comfortable to Wear Perfect Fit 		
Applications	MedicalDentalOccupationalConstructionPaintAllergies		
Weight / Carton	6.80 kgs		
Carton Dimension	52 x 31.50 x 38.50 cms		
CBM / Carton	0.0631		
Packing / Carton	40 Packets (2000 Pieces)		
Origin	China		



3M™ 8210 N95

Disposable	Particulate Respirator
Standard	NIOSH Approved
Features	 Cup Shaped Design With Welded Strap Attachment NIOSH Approved for At Least 95 Percent Filtration Efficiency Against Certain Non-Oil Based Particles Cushioning Nose Foam & Adjustable Nose Clip Helps Provide A Custom Fit & Secure Seal Lightweight Design to Increase Work & Wear Time Advanced Electrostatic Media Is Designed for Ease of Breathing
Applications	 Commercial Buildings Construction Design & Construction Food Processing Food Safety General Manufacturing Heavy Infrastructure
Weight / Carton	2.50 kgs
Carton Dimension	52 x 30 x 22 cms
CBM / Carton	
Packing / Carton	,
Origin	USA



3M™ 9010 N95

Disposable i	Particulate Respirator
Standard	NIOSH Approved
Standard	NIOSH Approved

 Vertical Flat Fold Design For Non-Oil Based Particles Adjustable Nose Clip Helps Provide a Custom Fit & Secure Seal Features Lightweight Design to Increase Work & Wear Time Advanced Electrostatic Media Is Designed for Ease of Breathing Commercial Buildings Constructio Design & Construction Food Processing **Applications** Food Safety General Manufacturin Heavy Infrastructure Mining, Oil & Gas Weight / Carton 6.50 kgs Carton Dimension 67 x 30 x 30 cms CBM / Carton 0.0603

Packing / Carton 10 Packets (500 Pieces)

Origin China



3M™ 9010V N95

Disposable Particulate Respirator

Standard NIOSH Approved

Features

- 3M[™] Cool Flow[™] Exhalation Valve Reduces Heat Build-up Inside the Respirator
- Two Strap Design With a Comfortable Nose Clip & Advanced Electret Media Help Make Breathing Easier & Cooler
- Adjustable Noseclip Helps Reduce Potential for Eyewear Fogging & Ensure a Better Seal & Fit
- Each Respirator is Individually Packaged to Offer Convenient Storage & Portability

Applications

- Commercial Buildings
- Construction
- Design & Construction
- Food Processing

Weight / Carton 5.10 kgs

Carton Dimension 67 x 30 x 30 cms

CBM / Carton 0.06

Packing / Carton 10 Packets (200 Pieces)

Origin China



3M™ 8511 N95

Disposable Particulate Respirator

Standard NIOSH Approved

 Ideally Suited for Hot/Dusty Work Settings that Require Long Periods of Wear
 At Least 95 Percent

At Least 95 Percent
 Filtration Efficiency
 Against Certain Non-Oil
 Based Particles 3M™
 Cool Flow™ Exhalation

- Features Valve Reduces Heat Build-Up Inside the Respirator
 - Braided Headbands
 - Spacious & Durable
 - Designed to Increase Comfort & Wearability
 - Advanced Electret Media Designed for Ease of Breathing
- Applications
- Agricultural
- Commercial Buildings
- General ManufacturingHeavy Infrastructure
- Industrial Maintenance
- Mining, Oil & Gas

Weight / Carton 2.34 kgs

Carton Dimension 52 x 33 x 23 cms

CBM / Carton 0.0395

Packing / Carton 8 Packets (80 Pieces)

Origin USA





3M 8514 N95

Disposable Particulate Respirator

Standard NIOSH Approved

• Used in Certain

Metal Fumes
• Flame Resistant Per
Modified ASTM D2859

Applications Involving

• Carbon Filter Layer
Reduces Exposure to
Nuisance Level Odors
• 3M™ Cool Flow™

3M[™] Cool Flow[™]
 Exhalation Valve Reduces
 Heat Build-up Inside the
 Respirator

 Soft Nose Foam Adjustable Noseclip & Straps

Applications

Agricultural
 Caparal Ma

General Manufacturing

MiningOil & Gas

Transportation

Weight / Carton 4.33 kgs

Carton Dimension 52 x 40 x 28 cms CBM / Carton 0.0582

Packing / Carton 8 Packets (80 Pieces)

Origin USA



3M 8247 R95

Disposable Particulate Respirator

Standard NIOSH Approved Carbon Layer Helps Reduce Nuisance Levels of Organic Vapors Collapse Resistant Shell Adjustable Noseclip Helps Provide a Custom Secure Seal **Features** Advanced Electrostatic Media - With Highly Charged Microfibers to Enhance the Capture of Airborne Particles While Allowing you to Breathe Easier Agricultural General Manufacturing Applications • Mining Oil & Gas Transportation Weight / Carton 2.70 kgs Carton Dimension 40 x 28 x 26 cms CBM / Carton 0.03 Packing / Carton 6 Packets (120 Pieces) Origin USA



3M 8233 N100

Disposable i	Particulate Respirator
Standard	NIOSH Approved
Features	 NIOSH's Highest Rated Filtration Efficiency in a Disposable Respirator N100 3M™ Cool Flow™ Exhalation Valve Reduce: Heat Build-Up Inside the Respirator Compatible With a Variety Of Protective Eyewear & Hearing Protection Adjustable Noseclip Help: Provide a Custom Secure Seal Individually Packaged Advanced Electret Media is Designed for Ease of Breathing
Applications	General ManufacturingMarineMiningOil & GasTransportation
Weight / Carton	12.75 kgs
Carton Dimension	52 x 30 x 22 cms
CBM / Carton	
Packing / Carton	, ,
Origin	USA



3M™ 8822 FFP2

Disposable Particulate Respirator Standard AS/NZ 1716:2012

 Lightweight Construction Promotes Greater Comfort & Contributes to Increased Wear Time The Cupped Shape, Twin Strap Design Adjustable

Steel Nose Clip Provides a Custom Fit With Fewer Pressure Points & a Secure Face Seal Patented One-Way Valve

Offers Easy Exhalation & Cooler, Drier Comfort for Use Against Both Mechanically Generated Particulates & Thermally Generated Fumes & Smokes

 All Filter Design Provides **Economical Protection** With No Cleaning Required

Applications

Weight / Carton 6 kgs CBM / Carton Origin UK

 Foundries, Light Welding Furnaces, Leadwork Carton Dimension 56 x 43 x 26 cms 0.0558

Packing / Carton 24 Packets (240 Pieces) Packing / Carton 12 Packets (120 Pieces) Origin UK



3M™ 9322+ FFP2

Disposable Particulate Respirator Standard AS/NZS 1716:2012

Foldable, Easy To Store, 3-panel Design Embedded Nose Clip is Concealed & is Metal

Detectable Nose Clip is Kept Securely in Place Within the Layers of the

Respirator 3M Low Breathing **Features** Resistance Filter Technology Gives

Effective Filtration

Embossed Top Panel of The Respirator Helps to Reduce Fogging of Evewear

3M™ Cool Flow™ **Exhalation Valve Offers** Improved Comfort in Hot **Humid Environments**

 Construction, Manufacture **Applications** Pharmaceutical Weight / Carton 3.30 kgs Carton Dimension 49 x 26.50 x 43 cms CBM / Carton 0.0558

3M™ 8835 FFP3

Disposable Particulate Respirator

Standard EN 149:2001+A1:2009

Soft Inner Ring Improves Face Seal. Wearer Comfort Robust Shell & Cup Design Provides Multi-shift Capability

 4 Point Adjustable Braided Headbands Help Achieve a More Secure Feel

• 3M™ Advance Electret Filter Material Gives Effective Filtration With Low Breathing Resistance for Consistent High Quality Performance

3M™ Cool Flow™ **Exhalation Valve Offers** Improved Comfort in Hot **Humid Environments**

 Adjustable Buckle Straps Lightweight, off-the-face Design

Applications

Features

Weight / Carton 3 kgs Carton Dimension 62 x 39 x 23 cms CBM / Carton 0.06

Origin UK

 Construction Metal Processing

Packing / Carton 10 Packets (50 Pieces)



3M™ 6200 M / 3M™ 6300 L

(TPR) Reusable Half Face Mask Respirator		
Standard	NIOSH / EN 140:1998	
Features	 This Series Combines Comfort & Convenience Comfortable Soft, Lightweight Face-piece With Easy-to-Adjust Head Straps NIOSH Approved For Negative Pressure Air Purifying & Supplied Air Dual Airline Applications Can Be Disassembled, Cleaned & Reused Replaceable Cartridges & Filters Allow Reuse of Face-piece for Cost Savings 	
Applications	 Construction Design & Construction General Manufacturing Heavy Infrastructure Industrial Maintenance Marine Mining Oil & Gas Transportation 	
Weight / Carton	3.40 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	USA / Poland	



3M™ 7502 M / 3M™ 7503 L

JI-1 / JU	2 14 / 314 / 303 L
Silicone	Half Face Mask Respirator
Standard	NIOSH / EN 140:1998
Features	 Advance Silicone Material for Increased Comfort & Greater Durability Proprietary 3M™ Cool Flow™ Valve Helps Makes Breathing Easier Dual-mode Head Harness Adjusts Easily for Either Standard or Drop-down Mode Exhalation Valve Cover Directs Exhaled Breath & Moisture Downward to Reduce Fogging
Applications	 Construction Food & Beverage Manufacturing General Manufacturing Heavy Industrial Manufacturing Marine & Oil & Gas Pharmaceutical
Weight / Carton	3 kgs
Carton Dimension	45 x 31 x 16 cms
CBM / Carton	
Packing / Carton	
Origin	USA



3M™ 6800 M / 3M™ 6900 L		
Silicone/T	PE Full Face Mask Respirator	
Standard	NIOSH OSHA EN-136:1998 CLASS 1	
Features	 Large Lens Provides a Wide Field of View for Excellent Visibility Lightweight Well-balanced Design & Silicone Face Seal for Enhanced Comfort, Durability & Ease of Cleaning Available in Air-purifying & Supplied Air Respirator Modes Center Adapter Directs Exhaled Breath Downward 3M Cool Flow™ Valve Makes Breathing Easier To Provide Cool, Dry Comfort 	
Applications	ConstructionDesign & ConstructionFood & Beverage ManufacturingGeneral ManufacturingHeavy Industrial	
Weight / Carton	3 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	USA	

3M

3M

3M

3M





3M™ 6001	
Organic	: Vapor Cartridge
Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
Features	 NIOSH Approved for Protection Against Certain Organic Vapors Swept-Back Design Allows An Enhanced Field of View & Comfort Bayonet Compatibility Allows Use With Many 3M Half & Full Face-piece Designs
Applications	ConstructionDesign & ConstructionFacility SanitationFood ProcessingFood Safety
Weight / Carton	6.30 kgs
Carton Dimension	52 x 24 x 20 cms
CBM / Carton	
Packing / Carton	30 Sets

Origin USA



3M™ 6003

Organic Vapor / acid Gas Cartridge		
Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134	
Features	 NIOSH Approved for Protection Against Certain Organic Vapors or Acid Gases Swept-back Design Allows An Enhanced Field of View & Comfort Bayonet Compatibility Allows Use With Many 3M Half & Full Face-piece Designs 	
Applications	Facility SanitationFood ProcessingFood SafetyGeneral ManufacturingOil & Gas	
Weight / Carton	6.50 kgs	
Carton Dimension	52 x 24 x 21 cms	
CBM / Carton		
Packing / Carton	30 Sets	
Origin	USA	



3M™ 6006

Universal Gas & Vapour Cartridge	
Standard	NIOSH / CSA Z94.4 OSHA 29 / CFR 1910.134
Features	 Niosh Approved for Protection Against Certain Organic Vapors, Acid Gases, Ammonia, Methylamine & Formaldehyde Swept-back Design Allows An Enhanced Field of View & Comfort Bayonet Compatibility Allows Use With Many 3M Half & Full Face-piece Designs
Applications	Facility Sanitation,General ManufacturingMining, Oil & Gas,
Weight / Carton	7.40 kgs
Carton Dimension	52 x 24 x 21 cms
CBM / Carton	0.0262

Packing / Carton 30 Sets

Origin USA



3M™ 2091 P100		
Part	iculate Filter	
Standard	NIOSH / A 120311	
Features	 Exceptional 99.97% Filter Efficiency Meets NIOSH P100-series Test Criteria Advanced Electret Media (AEM) Provides Lightweight, Easy Breathing Comfort Versatile Protection Against Many Oil & Non-oil Based Particulate Contaminants Bayonet Compatibility Allows Use With Many 3M™ Half & Full Face-piece Designs 	
Applications	ConstructionFacility SanitationFood ProcessingGeneral ManufacturingHeavy Infrastructure	
Weight / Carton	2.10 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	USA	

3M



3M™ 2097 P100

Particulate Filter Standard NIOSH / A 120311 Exceptional 99.97% Filter Efficiency Meets NIOSH P100-series Test Criteria Versatile Protection Against Many Oil & Non-oil Based Particulate Contaminants Nuisance Odor Relief for Features Organic Vapor Levels Below the Permissible Exposure Level (PEL) Bayonet Compatibility Allows Use With Many 3M™ Half & Full Face-piece Designs Construction Facility Sanitation, **Applications** Food Processing, General Manufacturing Weight / Carton 2.10 kgs Carton Dimension 44 x 26 x 23 cms **CBM / Carton 0.0263** Packing / Carton 50 Sets Origin USA

31




3M™ 5N11

Particulate Prefilter	
Standard	NIOSH / 22J1122
Features	 NIOSH Approved for Environments Containing Certain Non-oil-based Particles Use on Top of 3M Gas & Vapor Cartridges With 3M™ 501 Retainer When Particles Are Also Present Use On Top Of 3Mm™ 603 Filter Holder & 3M™ 501 Retainer To Reduce Particulate Exposure Replaceable Particle Filter for Cost Savings
Applications	Construction,Facility SanitationFood SafetyGeneral ManufacturingHeavy Industrial
Weight / Carton	0.91 kgs
Carton Dimension	46 x 23.50 x 10 cms
CBM / Carton	0.0108
Packing / Carton	10 Packets (100 Pieces)
Origin	USA

3M



3M™ 501

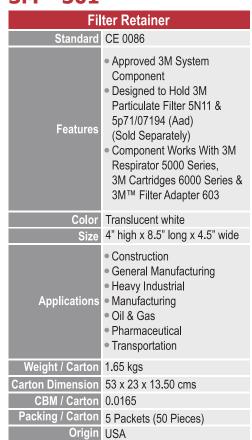





Spirosaca	ipe EEBD (PSI)
Emergency Es	scape Breathing Device
Approval	NIOSH 2014/90/EU Marine Equipment 42 CFR Part 84
Standard	
Features	 Unique Automatic Ambient Air Valve Eliminates Risk of Suffocation Unique Patented Air Supply System in the Hood Maximizes Duration & Minimizes Dead Space Two-layered Hood Positions the Inner Mask Correctly Very Flexible Neck Seal Makes it Easy to Don & Comfortable to Wear Quiet Air Delivery System Allows Voice Communication Bag Equipped With Carrying Strap
Technical Details	EEBD Steel Cylinder 15 Minutes Escape Time With 3000 PSI Cylinder
Connection	Cylinder Neck M18
Dimensions	20 x 9.0 x 5.0 inch
Weight	15 min - 9.2 lbs / 10 min - 9.5 lbs (empty cylinder)

EN 340 General requirements for protective clothing

This European Standard specifies general performance requirements for ergonomics, innocuousness, size designation, ageing, compatibility and marking of protective clothing and the information to be supplied by the manufacturer with the protective clothing

EN 471 High visibility clothing for professional use



Protective clothing able to visually indicate the presence of the user in daylight and in the light of vehicle headlights in the darkness

X = The surface area of fluorescent and retroreflective materials. Garment class (from 1 to 3)

Minimum surfaces of visible material (m2)	Class 3	Class 2	Class 1
Background material	0,8	0,5	0,14
Retro-reflective material	0,2	0,13	0,10
Combined performance material	-	-	0,2
Example	Jacket	Trouser	Belts

Y = Retro-reflective material class (from 1 to 2) Class 1 Reflectance of minor bands


EN 1150 Sets the standard that high visibility clothing needs to meet to ensure that the wearer is clearly visible to motorists against the background in ALL weather and lighting conditions (bright daylight as well as rain, mist, dusk and night-time). To achieve this, clothing must have a combination of fluorescent material for daytime visibility and reflective material for night-time and low light conditions.

EN 342 Protection against cold



Suits and clothing for body protection against cold environments at temperatures below - 5 $^{\circ}\text{C}$

- A Effective thermal insulation * (B, C or R) **
- B Resulting effective thermal insulation * (B, C or R) ** (Optional)
- C Air permeability (from 1 to 3)
- D Resistance to water penetration (from 1 to 2) (Optional)
- X Indicates that the garment has not been tested

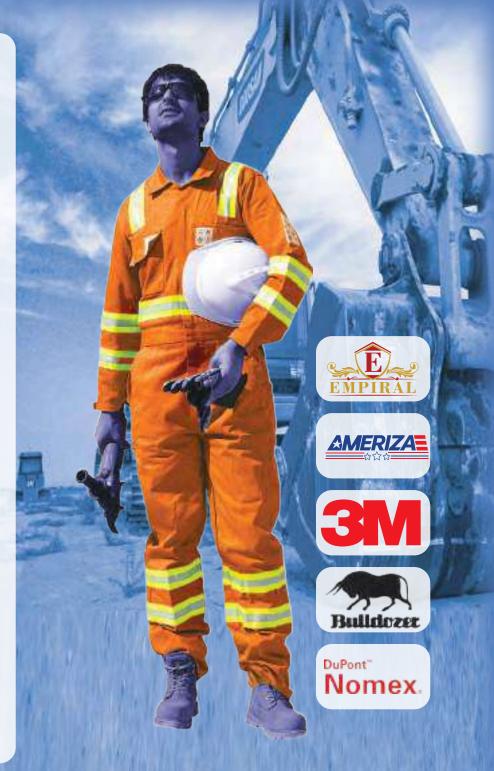

^{*} measured in m2 x K / W

^{**} type of underwear used in the test

∆MERIZA=

∆MERIZA=

Chief C

Cilici C	
100%	Twill Cotton Coverall
	CE, EN CAT 1
Fabric Weight	195 GSM
Features	 Full Sleeves Coverall Sanforized, Mercerized & Pre-shrunk Two Way Zipper With Storm Flap Pen Pocket on Arm Elasticated Waist Band for Extra Comfort 1 Upper Chest Snap Fastener 2 Chest Pockets With Velcro Flap Trouser With 2 Swing Pockets 2 Side Pockets With Velcro Flaps & 2 Patch Pockets
Sizes	S - 7XL
Applications	 Mechanical Workshop Construction Sites Crane/forklift & Other Moving Equipment Operation Protection From UV Light Food, Marine, Oil & Gas
Weight / Carton	16.33 kgs
Carton Dimension	51.50 x 39.00 x 32.50 cms
CBM / Carton	0.0653
Packing / Carton	25 Pieces
Origin	China





Chief PS

Chief PS		
100% T	will Cotton Pant/Shirt	
Standard	CE, EN CAT 1	
Fabric Weight	195 GSM	
Features	Sanforized, Mercerized & Pre-shrunk	
Shirt	 5 Metal Buttons Stitched on Shirt Full Sleeves Shirt Snap Fastener Stitched on Sleeves Cuff 2 Chest Pockets With Button Flap 2 Lower Swing Pockets 	
Pant	 2 Swing Pockets 2 Side Pockets With Velcro Flap 2 Back Pockets Elasticated Waist Band for Extra Comfort 	
Sizes	S - 4XL	
Applications	 Mechanical Workshop Construction Sites Crane/forklift & Other Moving Equipment Operation Protection From UV Light 	
Weight / Carton	18.24 kgs	
Carton Dimension	54.50 x 39.50 x 32.50 cms	
CBM / Carton		
Packing / Carton		
Origin	China	
Royal Blue Grey	Green Yellow Orange	

Navy Blue

White

Khaki

Red

Petrol Blue



∆MERIZA=





Chief C Tapes

	apes
100% Twill (Cotton Coverall with Tapes
	CE, EN CAT 1
Fabric Weight	195 GSM
Features	 Full Sleeves Coverall Sleeves With Slant Stitches One Chest Pocket On Left Side & Snap Fastener In The Middle Front Fly With Zipper Closure Having Both Sides With Horizontal Bartacks Upper With One Snap Fastener Elasticated Waist Band Trouser With Swing Pockets Back Pocket on Right With Four Eyelet Nylon Buttons Closure Ruler Pocket on Right Back 5 Cm Tape Shoulder, Sleeves & Leg Sanforized, Mercerized & Pre-shrunk
Sizes	S - 4XL
Applications	Mechanical WorkshopConstruction SitesFood, Marine, Oil & Gas
Weight / Carton	19 kgs
Carton Dimension	51 x 39 x 28 cms
CBM / Carton	0.0557





100% Twill Cotton Pant/Shirt with Tapes

Standard CE, EN CAT 1 Fabric Weight 195 GSM

Full Sleeves Shirt

• 5 Cm Tape Cross Shoulder Sleeves With Slant Stitches With 5 Cm Tape Around

 Two Chest Pocket, left Pocket Shirt With Flap, snap Button

• Two Big Insert Pocket on the Bottom

Pocket Opening With Vertical Bartack

Front Fly With Metal Button Closure

Sleeves Opening With Snap Fastener

Elasticated Waist Band With 6 Loops

• 1 Button in Front Zipper Closure • Insert Pocket on Both Sides

Back Pocket on Right With Four

Eyelet Nylon Buttons Closure

Ruler Pocket on Right Back

Sizes S - 4XL

Applications • Construction Sites

Mechanical Workshop

• Food, Marine, Oil & Gas

Weight / Carton 19 kgs

Carton Dimension 51 x 39 x 28 cms CBM / Carton 0.0557

Packing / Carton 25 Pieces

Origin China







king / Carton 25 Pieces

Origin China

Comfort C

	<u> </u>
100% Premiur	n Cotton Coverall with Tapes
	CE, EN CAT 1
Fabric Weight	270 GSM
Features	 Sanforized, Mercerized & Pre-shrunk 2 Inches 6 Sides Reflective Taps Adjustable Velcro Cuff Two Way HD Zipper With Metal Snap Elasticated Waist Band for Extra Comfort 3 Chest Pockets With Velcro Flap 1 Pen Pocket on Left Arm 2 Front Swing Pockets 2 Back Pockets in Trouser With Button
Sizes	S - 7XL
Applications	 Mechanical Workshop Construction Sites Crane/Forklift & Other Moving Equipment Operation Protection From UV Light Welding & Griding Works
Weight / Carton	18.50 kgs
Carton Dimension	60 x 40 x 32 cms
CBM / Carton	
Packing / Carton	
Origin	China





Comfort PS 100% Premium Cotton Pant / Shirt with Tapes Standard CE, EN CAT 1 Fabric Weight 270 GSM · Collar, Cuff, Chest Pocket, Button Flyer With Combination Color • 5 Cm Width Reflective Tape Round Sleeve, Shoulder, & Leg 4 Flap Pockets on The Jacket & Shirt Attached Arm Pocket Bellow Pocket With Combination Fabric Roll Up Seam Cuff With 5.5 cm Combination Fabric Inside 4 Cm Wide Waist Elastic With 4 Eyelet Button & 5 Ribs 2 Insert Pocket With Horizontal Bartacks Bellow Pocket With Combination Fabric Ruler Pocket 2 Back Pocket With Flap & Combination Fabric Sizes S - 4XL Mechanical Workshop **Applications** Welding & Griding Works Weight / Carton 22.64 kgs Carton Dimension 61.50 x 41.50 x 32.00 cms CBM / Carton 0.09 Packing / Carton 20 Pieces Origin China Petrol Blue Grey Yellow Orange Khaki Navy Blue



European - PS

Laropean	
100% Cott	on European Pant / Shirt
Standard	CE, CAT I
Fabric Weight	235 GSM
Material	100% Genuine Cotton
Feature	Sanforized & Mercerized
Shirt	 European Style Jacket Collar With Button for Adjustment One Pockets With Flap & Velcro on the Left Side of Sleeve Cuffs Front Closure With Zipper & Button Two Pockets at The Bottom With Flap & Velcro With Contrast Color Reflective Tape in Each Shoulder, Sleeve & Back
Pant	 Plastic Zipper Closure Two Lateral Front Pockets Mobile Phone Pocket With Flap & Velcro on The Left Leg Two Knee Pockets With Flap & Velcro With Contrast Color Two Back Pockets With Flap & Velcro With Contrast Color One Tool Pocket With Flap & Velcro on the Back Right Leg One Reflective Tape in Each Leg
Sizes	S - 4XL
Applications	Mechanical WorkshopConstruction SitesFood, Marine, Oil & Gas
Weight / Carton	27 kgs
Carton Dimension	39 x 39 x 32 cms
CBM / Carton	
Packing / Carton	20 Pieces





European - PS



 One Pen Pocket on the Left Chest Pocket

 Two Pockets at The Bottom With Flap & Velcro With Contrast Color

Cuffs With Button

 Plastic Zipper Closure Two Layers Insert Pockets Two Button Pockets With Flap & Velcro Under Contrast Flap & Pocket Attach Mobile Pocket With Flap

Pant • Inner Waist & Loops With Contrast Fabric, Two Sides Elastic

Two Knee Pockets With Flap & Velcro With Contrast Color

Tool Pocket on the Back Right Leg

Sizes	S - 4XL
Applications	Mechanical WorkshopConstruction SitesFood, Marine, Oil & Gas
Weight / Carton	22.84 kgs
rton Dimension	60 x 40 x 35 cms
CBM / Carton	0.09
acking / Carton	20 Pieces
Origin	China









Safeguard PRO

Sareguar	u PKO
FR Coverall	260 GSM - European Style
Standard	NFPA 2112: 2012 EN ISO 11612:2015 EN ISO 11611:2015 EN ISO 14116:2015
Fabric Weight	Heavy Duty 260 GSM
Material	100% Genuine Cotton
Features	 Dual Color Hi-viz Fr Reflective Tape Garment Tested For Heat, Flame & Electrostatic Sanforized & Mercerized 2 Front Chest Pockets 1 Pen Pocket 2 Swing Pockets on Leg 2 Back Pockets on Hip Velcro To Adjust The Sleeves Cuffs 2 Way HD Metal Zipper With Flap Elasticated Waist Band for Extra Comfort
Sizes	S - 4XL
Applications	Welding & Allied ProcessesHeat & Limited Flame SpreadElectrostatic Properties
Weight / Carton	26.28 kgs
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	China
Red Royal Blu	e Khaki Navy Blue Orange



Safeguard C

FR Coverall	320 GSM - European Style
	EN ISO 11612:2015 EN ISO 11611:2015 EN ISO 14116:2015 Heavy Duty 320 GSM
Material	100% Genuine Cotton
Features	 Dual Color Hi-viz FR Reflective Tape Garment Tested for Heat, Flame & Electrostatic Sanforized & Mercerized 2 Front Chest Pockets 1 Pen Pocket 2 Swing Pockets on Leg 2 Back Pockets on Hip Velcro To Adjust The Sleeves Cuffs Two Way HD Metal Zipper With Flap Elasticated Waist Band for Extra Comfort
Sizes	S - 4XL
Applications	Welding & Allied ProcessesHeat & Limited Flame SpreadElectrostatic Properties
Weight / Carton	-
Carton Dimension	63 x 40 x 34 cms
CBM / Carton	
Packing / Carton	
Origin	China







Spartan I

Cargo Pants, 6	5/35 Polyester/Cotton Fabric
Standard Fabric Weight Material	
Features	 Abrasion Resistant Anti-wear With Knee Pad Insert Knee Area Designed For Extra Comfort & Durability Tool Hammer & Ruler Loops Two Tone Double Reinforced Side Pocket on Left Leg Triple Pocket With Key-chain Holder on the Right Leg Dual Contrast Bar Tacks Large Belt Loop With Waist Band Extra Long Open Pocket for Tools
Sizes	S - 4XL
Applications	WarehousingManufacturingAirportsShipping & Marine Industry
Weight / Carton	18 kgs
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	China









Spartan II

Cargo Pan	ts, 100% Cotton Canvas
Standard	
Fabric Weight	240 GSM
Material	100% cotton canvas fabric
Features	 Abrasion Resistant Anti-wear with Knee Pad Insert Double Reinforced Side Pocket On The Right Leg With Velcro & Flap Plus Ruler, Hammer & Tools Loop Side Pocket On The Left Leg With Velcro & Flap + Pen & Mobile Pocket Large Belt Loop With Waist Band Dual Contrast Bartacks Elastic Two Sides & 7 Loops Waist Oxford Fabric Combination Under Waist Belt, Bottom of Back Pocket
Sizes	S - 4XL
Applications	WarehousingManufacturingAirportsShipping & Marine Industry
Weight / Carton	18 kgs
Carton Dimension	51 x 39 x 35 cms
CBM / Carton	0.0617
Packing / Carton	30 Pieces
Origin	China















PP N	on-Woven Lab Coat
Standard	
Fabric Weight	30 GSM
Material	PP Non-Woven
Style	Classic Style With Collar
Size	110 cm x 140 cm
Color	White
Features	 4 Buttons Without Pocket & Open Cuffs PP Non-woven to Protect From Fluids Nontoxic & Do Not Cause Irritation on Skin Light Weight Comfortable to Wear Breathable
Applications	LaboratorySchoolsDentalHospitals
Weight / Carton	4.26 kgs
Carton Dimension	49 x 32 x 33.50 cms
CBM / Carton	0.0525
Packing / Carton	50 Pieces
Origin	China



Disposable Coverall

Non-Woven Breathable Polypropylene	
Standard	EN CATI
Fabric Weight	40 GSM - White 50 GSM - White
Material	PP Non-Woven
Style	Disposable Coverall With Elastic Hood & Wrist
Features	 Soft & Light Weight Full Body Coverage With Protection From Dust, Grinding Paint, Liquid, Light Chemical Elasticated Cuff, Ankles, Waist Design, Zipper With Front Closure Flap, Serged Seams & Attached Hood Excellent Quality, Durable & Long-lasting Protection
Sizes	M - 3XL
Applications	 Spray Painting, Manufacturing Food Services, Medical, clean Room Industrial & Pharmaceutical Processing Asbestos Inspection, Insulation Laying Vehicle & Machine Maintenance
Weight / Carton	5.52 kgs
Carton Dimension	49 x 34 x 27 cms
CBM / Carton	
Packing / Carton	
Origin	China







Proguard	Type 5/6
Proguar	d Type 5/6 SMS Coverall
Standard	EN13982-1(&2):2004(Type 5) EN13034:2005:A1:2009(Type 6) EN1073-2:2002
Fabric Weight	55 GSM
Color	White
Features	 Water Prof Fabric Light Base Chemicals Resistant Coverall With Elastic Hood, Waist, Ankle Protection Against Hazardous Substances & Contamination of Both Products & Personnel Zipper Front With Storm Flap 3 Thread Stitching Serged Seam
Sizes	M - 3XL
Applications	 Chemical Industry Pharmaceutical Industry Petroleum & Crude Oil Environments Tank Cleaning, Inspection & Maintenance Agrochemicals Handling Decommission of Production Plants Disposal of Hazardous Materials
Weight / Carton	10.80 kgs
Carton Dimension	21.50 x 14.50 x 19 cms
0.0014.4.0	

CBM / Carton 0.006 Packing / Carton 50 Pieces Origin China



Proguard	Type 4/5/6
Proguard Typ	e 4/5/6 Microporous Coverall
Standard	EN14126:2003 EN1073-2:2002 EN1149-5:2008 With EN1149-1:2006
Fabric Weight	63 GSM
Features	 Waterproof Chemical Splashes Resistant Fabric Design As Barrier to Infective Agents & Radio Active Particulates Anti Static Properties Coverall With Taped Seam, Hood, Elastic Wrist/waist/ankle Zipper Front With Storm Flap 3 Thread Stitching Serged Seam
Sizes	M - 3XL
Applications	 Chemical Industry Pharmaceutical Industry Petroleum & Crude Oil Environments Tank Cleaning, Inspection & Maintenance Agrochemicals Handling Decommission of Production Plants Disposal of Hazardous Materials
Weight / Carton	13.5 kgs
	21.5 x 14.5 x 19 cms
CBM / Carton	
Packing / Carton	50 Pieces

Origin China





130 GSM with Retro Reflective Tapes

130 GSM with Retro Reflective Tapes		
	CE, CAT I	
Fabric Weight	130 GSM	
Color	Fluorescent Yellow & Orange	
Material	100% Polyester birdeye fabric	
Features	 Full Sleeves T-shit Navy Blue Collar & Elasticated Cuffs 3 Nylon Buttons Design With a Comfort Fit Hi-viz Fabric One Pocket on Chest Left Side 	
Tapes	2 Horizontal 2 Vertical 2 on each sleeve	
Sizes	S - 4XL	
Applications	 Airports, Maintenance works, Warehouse Roads constructions, Industrial & factory Design & Construction, Mining Transportation 	
Weight / Carton	14 kgs	
Carton Dimension	52 x 45 x 33 cms	
CBM / Carton		
Packing / Carton	50 Pieces	
Origin	China	



130 GSI	M with Retro Reflective Tapes
Standard	CE, CAT I
Fabric Weight	
	Fluorescent Yellow & Orange
Material	100% Polyester birdeye fabric
Features	 Full Sleeves T-shit Navy Blue Collar & Elasticated Cuffs 3 Nylon Buttons Design With a Comfort Fit Hi-viz Fabric One Pocket on Chest Left Side
Tapes	2 Horizontal 2 on each sleeve
Sizes	S - 4XL
Applications	 Airports, Maintenance works, Warehouse Roads constructions, Industrial & factory Design & Construction Mining Transportation
Weight / Carton	14 kgs
Carton Dimension	52 x 45 x 33 cms
CBM / Carton	
Packing / Carton	50 Pieces
Origin	China



0	0	Ш	

150 GSM v	vith Perforated Reflective Tapes
	CE, CAT I
Fabric Weight	150 GSM
	Fluorescent Yellow
Material	55% Cotton / 45% Polyester
Features	 Full Sleeves T-shit Lightweight Hi-viz Fabric Butter Soft on the Inside Rib Knit Collar & 3 Buttoned Placket Cotton Mixture in Fabric Makes It Suitable to Wear in Hot Temperatures.
Tapes	2 Horizontal 2 Vertical 2 on each sleeve
Sizes	S - 4XL
Applications	 Airports, Maintenance works, Warehouse Roads constructions, Industrial & factory Design & Construction, Mining Transportation
Weight / Carton	14 kgs
Carton Dimension	52 x 45 x 33 cms
CBM / Carton	
Packing / Carton	
Origin	China



Glow

HD Hi-Vis Breathable Mesh (Net) Type Vest

HD Hi-Vis B	reathable Mesh (Net) Type Vest
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Mesh (Net) Type
Features	 9 cm (3.5 Inches) Reflective Tape With Double Side Fluorescent Edges Two Lower Flap Pockets, One Right Side Flap Pocket With Additional Mobile Pocket Over it On Left Side Open Pocket & Attached on it 4 Pen Pockets Side Black Ventilation for Executive Look Loop Closures on Front Shoulder Sides HD Nylon Zipper Closure in Black Black Knitted Piping for Daytime Visibility
Sizes	S - 4XL
Applications	Utility Workers, Surveyors, FlaggersEmergency Responders, Warehouse
Weight / Carton	12.90 kgs
Carton Dimension	50 x 45 x 30 cms
CBM / Carton	0.068
Packing / Carton	
Origin	China



MultiGlow

HD Executive Fabric Type Vest		
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	120 GSM	
Color	Fluorescent Yellow & Orange	
Material	100% Polyester Knit Fabric Type	
Features	 5 cm Retro Reflective Tape Two Lower Flap Pockets With Velcro Enclosures One Id Pocket on Left Side & One Mobile Pocket With Velcro on Right Side Fluorescent Orange Cloth Knitted Piping for Day/night Time Visibility HD Nylon Zipper Closure in Black 	
Sizes	S - 4XL	
Applications	Emergency RespondersUtility WorkersSurveyorsFlaggersWarehouse	
Weight / Carton	8.70 kgs	
Carton Dimension	45 x 25 x 32 cms	
CBM / Carton	0.036	
Packing / Carton	50 Pieces	
Origin	China	





3M MultiGlow

HD Executive Fabric Type Vest		
Standard Fabric Weight Color	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
	 5 cm 3M 2925 Reflective Tape With 25 Wash 3M Watermark Two Lower Flap Pockets With Velcro Enclosures One Id Pocket on Left Side & One Mobile Pocket With Velcro On Right Side Fluorescent Orange Cloth Knitted Piping for Day/night Time Visibility HD Nylon Zipper Closure in Black 	
Sizes	S - 4XL	
Applications	Utility WorkersSurveyors, FlaggersEmergency RespondersWarehouse	
Weight / Carton	9.50 kgs	
Carton Dimension	45 x 25 x 32 cms	
CBM / Carton		
Packing / Carton		
Origin	China	



3M Radiant

HD Executive Fabric Type Vest		
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	120 GSM	
Color	Fluorescent Yellow & Orange	
Material	100% Polyester Fabric Type	
Features	 5 cm 3M 2925 Reflective Tape With 25 Wash 3M Watermark HD Nylon Zipper Closure in Black Black Knitted Piping for Daytime Visibility 	
Sizes	S - 4XL	
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers Surveyors Emergency Responders Flaggers 	
Weight / Carton	14.90 kgs	
Carton Dimension	-	
CBM / Carton		
Packing / Carton	100 Pieces	
Origin	China	



HD Executive Combination Fabric Type Vest

	7 1
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Red & Fluorescent Yellow With Navy Blue
Material	100% Polyester Fabric Type
Features	 5 cm Retro Reflective Tape Two Lower Bellow Pockets With Combination Fabric, Having Flap & Velcro Enclosures One Id Pocket on Left Side & One Mobile Pocket With Velcro on Right Side Black Knitted Piping for Daytime Visibility HD Nylon Zipper Closure in Black D-ring for Hanging/clipping Device/radio
Sizes	S - 4XL
Applications	Warehouse WorkersDelivery Truck DriversUtility Workers, SurveyorsEmergency Responders, Flaggers
Weight / Carton	9.11 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



Twinkle

Executive Back Ventilation & Fabric Type	Executive	Back '	Ventilation	& Fat	oric Type
--	-----------	--------	-------------	-------	-----------

Executive	Back Ventilation & Fabric Type
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	 9 Cm (3.5 Inches) Reflective Tape With Double Side Fluorescent Edges Lower Two Flap Pockets With Velcro Enclosures Having Side Buckels One Right Side & One Left Pocket Side Fron Flap Pocket Along With Pen Pocket Knitted Cloth Piping of Contrasting Color In Each Model for Hi-visibility 110 GSM Mesh (Net) Type From Backside & 120 GSM Fabric Type Front
Sizes	S - 4XL
Applications	Warehouse WorkersDelivery Truck DriversUtility Workers, Surveyors
Weight / Carton	9.11 kgs
Carton Dimension	45 x 25 x 32 cms
CBM / Carton	0.036
Packing / Carton	50 Pieces
Origin	China



Sparkle

Sparkie		
Executive I	Back Ventilation & Fabric Type	
Fabric Weight Color	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013 120 GSM Fluorescent Yellow & Orange 100% Polyester Fabric Type	
Features	 9 cms (3.5 Inches) Reflective Tape With Double Side Fluorescent Edges Lower Two Flap Pockets With Velcro Enclosures One Left Side 4 Pens Pocket & Right Side Mobile With Pen Pocket Same Fabric Color Nylon Zipper Closure Knitted Cloth Piping of Contrasting Color In Each Model for Hi-visibility 110 GSM Mesh (Net) Type From Backside & 120 GSM Fabric Type Front 	
Sizes	S - 4XL	
Applications	Emergency Responders, Utility WorkersSurveyors, Flaggers, Warehouse	
Weight / Carton	9.11 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	China	



HD Managerial Fabric Type Vest	
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fabric Type
Features	 Two Horizontal, Two Front Vertical & Backside Cross Type Retro-Reflective Tapes Lower Two Flap Pockets With Velcro Enclosures One Left Side Mobile Pocket & Right Side Flap Pocket HD Nylon Zipper Closure in Black Black Knitted Piping for Daytime Visibility
Sizes	S - 4XL
Applications	Shopping Cart RetrieversWarehouse WorkersUtility WorkersSurveyorsFlaggers
Weight / Carton	8.48 kgs
Carton Dimension	45 x 25 x 30 cms
CBM / Carton	0.034
Packing / Carton	
Origin	China



Glitter

Gitter		
HD Sup	pervisory Fabric Type Vest	
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	120 GSM	
Color	Fluorescent Yellow, Orange, Green, Blue White, Red	
Material	100% Polyester Fabric Type	
Features	5 cms Retro Reflective TapeVelcro EnclosureBlack Net Type Piping	
Sizes	S - 4XL	
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers Surveyors Emergency Responders Flaggers 	
Weight / Carton	12.13 kgs	
Carton Dimension	45 x 25 x 42 cms	
CBM / Carton		
Packing / Carton		
Origin	China	



Flare

- 141 -	
Hi	-Vis Fabric Type Vest
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	120 GSM
Color	Fluorescent Yellow & Orange
Material	100% Polyester Fluorescent Fabric
Features	 PVC Tape Crush Type Hi-vis Reflective For Day & Night Piping Same as Fabric Color 2 Vertical, 2 Horizontal Hi-vis Tapes Velcro Enclosure Provides Enhanced Visibility During Inclement Weather
Size	S - 4XL
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers, Surveyors Emergency Responders
Weight / Carton	13.70 kgs
Carton Dimension	45 x 25 x 48 cms
CBM / Carton	0.054
Packing / Carton	100 Pieces
Origin	China



Glitz	
Hi-\	/iz Mesh (Net) Type Vest
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013
Fabric Weight	
	Fluorescent Yellow & Orange
Material	100% Polyester Fluorescent Fabric
Features	 2-inch Retro Reflective Tape Piping In Contrast HD Nylon Zipper Closure 2 Vertical, 2 Horizontal Hi-vis Tapes Contrasting Trim Piping/borders Maximizes Daytime Visibility Generous Fit for Wearer Comfort
Size	S - 4XL
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers, Surveyors Emergency Responders
Weight / Carton	12 kgs
Carton Dimension	45 x 25 x 50 cms
CBM / Carton	
Packing / Carton	
Origin	China



С.	-	14
5		

HD Supervisory Fabric Type Vest		
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	110 GSM	
Color	Fluorescent Yellow / Orange	
Material	100% Polyester Fabric Type	
Features	5 cm Retro Reflective TapeVelcro EnclosureBack Net Type Piping	
Sizes	S - 4XL	
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers Surveyors Emergency Responders Flaggers 	
Weight / Carton	11.73 kgs	
Carton Dimension	45 x 25 x 50 cms	
CBM / Carton		
Packing / Carton		
Origin	China	



Shine

•••••		
Lightwe	ight Hi-Vis Fabric type vest	
Standard	Class 2 Level 2 ANSI/ISEA 107-2010 EN ISO 20471:2013	
Fabric Weight	60 GSM	
Color	Fluorescent Yellow & Orange	
Material	100% Polyester Fluorescent Fabric	
Features	 2-inch Retro Reflective Tape Piping In Contrast HD Nylon Zipper Closure 2 Vertical, 2 Horizontal Hi-vis Tapes Contrasting Trim Piping/borders Maximizes Daytime Visibility Generous Fit for Wearer Comfort 	
Size	2XL	
Applications	 Shopping Cart Retrievers Warehouse Workers Delivery Truck Drivers Roadway Construction Workers Utility Workers, Surveyors Emergency Responders 	
Weight / Carton	9 kgs	
Carton Dimension	45 x 25 x 36 cms	
CBM / Carton		
Packing / Carton	100 Pieces	
Origin	China	



LUMINA Black

Packing / Carton 50 Pieces
Origin China

HD Executive Combination Fabric Type Vest Class 2 Level 2 Standard ANSI/ISEA 107-2010 EN ISO 20471:2013 Fabric Weight 120 GSM Color Yellow/ Black Material 100% Polyester Fabric Type 5 cm Retro Reflective Tape Two Lower Bellow Pockets With Combination Fabric, Having Flap & Velcro Enclosures Features One Id Pocket on Left Side & One Mobile Pocket With Velcro on Right Side Black Knitted Piping for Daytime Visibility HD Nylon Zipper Closure in Black D-ring for Hanging/clipping Device/radio Sizes S1 - S8 Warehouse Workers Delivery Truck Drivers **Applications** Utility Workers, Surveyors Emergency Responders, Flaggers Weight / Carton 10.70 Kgs Carton Dimension 44 x 26 x 43 cms CBM / Carton 0,049





Arctic II

Arctic II	
	Winter Jacket Parka Type
Standard	CE EN343
Fabric Weight	210g
Material	300d Oxford, Water Pressure 500mm
Features	 Black Polyester Taffeta 10x10cm Twill Slant Stitch 160g Collodion Cotton Spray Padding Hi-Vis Retro-reflective Tapes 2 Horizontal 2 Vertical & 2 Each on Sleeves Black Nylon Zipper Two-way Separating Resin 5 Plastic Buttons From Collar to Lower Waterproof Polyester Material In-penetrable Moisture Barrier to Guarantee Dryness Fold-able Hood With Zip Lock Pocket Elasticated Cuffs & Bottom Designed to Trap Hot Ar Inside, Which Helps Increase in Warmness Lower Two Deep Pockets With Flap Lids Closure Cold Temperature Resistant Up-to -50 °C
Color	Yellow
Sizes	S - 3XL
Applications	Protects in Cold & Rainy SeasonField WorksMaintenance Jobs on Site Etc.
Weight / Carton	•
Carton Dimension	67 x 46 x 61 cms
CBM / Carton	
Packing / Carton	
Origin	China



Bulldozer Fireman Suit

Heavy Duty Fire Fighting Suit

NFPA 2112 NFPA 70E EN ISO 11612 Standard EN 14116 EN 61482-1-2 CAT II

Fabric Weight 260 GSM

Material 100% Cotton Fire Retardant Pyrovatex

 Built of Three Layers - The Outer Layer, Detachable Thermo Isolating Lining

 High Up Collar for Extra Protection Cuff HD Velcro Closure

Features

 Special Reflective Liner On Sleeves, Back & Bottom

Pockets for Detectors, Torches

Protection for Knees

Color Navy Blue

Protects From Flash Fire

Welding

Applications • Electric Arc Protection

Protection From Heat & Flame

Protection From Molten Metal Splash

Weight / Carton 20 kgs

Carton Dimension 60 x 40 x 50 cms

CBM / Carton 0.12

Packing / Carton 5 Pieces

Origin United Kingdom





Torch Apron One & Two Piece

Leather Welding Apron		
Standard	CE CAT 1, EN 388	
Material	Leather	
Length	36 Inches	
Width	24 Inches	
Features	 Natural Split Leather Cloth Fastening With Hook To Wear Over Clothing Size: 24x 36inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals 	
Applications	CuttingWeldingSmall Particles of Molten SplashProtection From Radiant Heat	
Weight / Carton	23.85 kgs	
Carton Dimension	70 x 35 x 30 cms	
CBM / Carton	0.074	
Packing / Carton	50 Pieces	
Origin	Pakistan	





Torch Sleeves

TOTAL DICCYCS		
Leather Welding Sleeves		
Standard	CE CAT 1, EN 388	
Material	Leather	
Length	22 Inches	
Features	 Natural Split Leather Cloth Fastening With Hook To Wear Over Clothing Size: 22inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals 	
Applications	CuttingWeldingSmall Particles of Molten SplashProtection From Radiant Heat	
Weight / Carton	21.67 kgs	
Carton Dimension	60 x 38 x 30 cms	
CBM / Carton	0.0648	
Packing / Carton	50 Pairs	
Origin	Pakistan	



Torch Cover

Loothon Wolding Chao Cours		
	ner Welding Shoe Cover	
Standard	CE CAT 1, EN 388	
Material	Leather	
Features	 Natural Split Leather Cloth Fastening With Hook To Wear Over Clothing Size: 12inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals 	
Applications	CuttingWeldingSmall Particles of Molten SplashProtection From Radiant Heat	
Weight / Carton	21.67 kgs	
Carton Dimension	60 x 38 x 30 cms	
CBM / Carton	0.0648	
Packing / Carton	50 Pairs	
Origin	Pakistan	



Torch Jacket

Welding Jacket, Crust Leather	
Standard	CE, Cat. I, EN 388
Features	 Natural Split Leather Button Closing To Wear Over Clothing Full Leather Collar. Size: XL (One Size Fits All) Two Large Front Pockets Excellent Leather Thickness Protection Against Small Droplets of Molten Metals.
Applications	Cutting, WeldingShort Contact With FlamesProtection From Radiant Heat
Weight / Carton	14.90 kgs
Carton Dimension	42 x 31 x 40 cms
CBM / Carton	0.0520
Packing / Carton	10 Pieces
Origin	Pakistan



Golden Apron

Goldell A	pron
Welding A	Apron, Golden Suede Leather
Standard	CE, Cat. I, EN 388
Features	 Suede Leather Nylon Fastening With Hook Two Pockets on Front To Wear Over Clothing Size: 24x 36inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals
Applications	Cutting, WeldingSmall Particles of Molten SplashShort Contact With FlamesProtection From Radiant Heat
Weight / Carton	35.85 kgs
Carton Dimension	38 x 35 x 66 cms
CBM / Carton	0.0877
Packing / Carton	
Origin	Pakistan





dolden Siceve		
Welding S	leeve, Golden Suede Leather	
Standard	CE, Cat. I, EN 388	
Features	 Suede Leather Nylon Fastening With Hook To Wear Over Clothing Size: 22inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals 	
Applications	CuttingWeldingSmall Particles of Molten SplashShort Contact With FlamesProtection From Radiant Heat	
Weight / Carton	27.90 kgs	
Carton Dimension	62 x 37 x 30 cms	
CBM / Carton		
Packing / Carton	50 Pairs	
Origin	Pakistan	





Golden Shoe Cover

Welding Shoe Cover, Golden Suede Leather

Standard	CE, Cat. I, EN 388
Features	 Suede Leather Velcro Fastening To Wear Over Clothing Size: 12inches (One Size Fits All) Excellent Leather Thickness Protection Against Small Droplets of Molten Metals.
Applications	CuttingWeldingSmall Particles of Molten SplashShort Contact With FlamesProtection From Radiant Heat
Weight / Carton	20.14 kgs
Carton Dimension	36 x 40 x 39 cms
CBM / Carton	0.0561
Packing / Carton	50 Pairs
Origin	Pakistan



Golden Jacket

Welding Jacket, Golden Suede Leather		
Standard	CE, Cat. I, EN 388	
Features	 Suede Leather Button Closing to Wear Over Clothing Full Leather Collar. Size: One Size Fits All Two Large Front Pockets Excellent Leather Thickness Protection Against Small Droplets of Molten Metals 	
Applications	Cutting, WeldingShort Contact With FlamesProtection From Radiant Heat	
Weight / Carton	20.14 kgs	
Carton Dimension	41 x 32 x 40 cms	
CBM / Carton	0.0524	
Packing / Carton	10 Pieces	
Origin	Pakistan	



HDPE Apron

Powder Free, 7g, Transparent		
Standard	CE CAT 1	
Features	 Light Weight Durable Resist Tearing Latex Free Offers Effective General-purpose Barrier Protection Ideal for Food Processing Task 	
Applications	Food ProcessingBeautyManufacturingConstructionHygienicDaily Use	
Weight / Carton	6.40 Kgs	
Carton Dimension	37 x 30 x 18 cms	
CBM / Carton		
Packing / Carton		
Origin	China	



Polar Jacket

Cold Storage (I	Freezer) Jacket with 3M™ Thinsulate™ Insulation
Standard	3M™ Thinsulate™ Insulation Type G Thermal Resistance: (Rcf) ASTM F 1868
Specification	 Material: Oxford Polyester Insulation: 3M™ Thinsulate™ Insulation Type G, 120g/m2 Coating: Taffeta Colour: Navy Blue Size: M to 3XL
Features	 3M™ Thinsulate Insulation Layer for Maximum Warmth 120g/m2 Insulation Thickness Offers Protection upto -20 Degree Celsius Ultra-Light Weight Cold Storage Jacket to Ensure Maximum Comfort to Workers 3 Layer with 3M Layer Inside Cold Storage Jacket with Hood Flexible Nylon Outer to Allow Unrestricted Movement & Maximum Comfort Closed Cuffs in Arms Hypoallergenic
Applications	Refrigerated Warehouses, Frozen Food Processing General Maintenance in Cold Weather, Material Handling
Weight / Carton	12 kgs
Packing / Carton	
Origin	China





Polar Trouser Cold Storage (Freezer)

0 1104 /	· · · · · · · · · · · · · · · · · · ·	AL ALITH HILL	
Cold Storage (F	Freezer) Trouser wi	th 3M™ Thinsu	late™ Insulation

Cold Storage	(Freezer) Housel with Swim Hillisulate in Histiation
Standar	d 3M™ Thinsulate™ Insulation Type G Thermal resistance: (Rcf) ASTM F 1868
Specificatio	 Material: Oxford Polyester Insulation: 3M™ Thinsulate™ Insulation Type G, 120g/m2 Coating: Taffeta Colour: Navy Blue Size: M to 3XL
Feature	 3M™ Thinsulate Insulation Layer for Maximum Warmth 120g/m2 Insulation Thickness Offers Protection upto -20 Degree Celsius Ultra-Light Weight Cold Storage Jacket to Ensure Maximum Comfort to Workers 3 Layer with 3M Layer Inside Cold Storage Trouser with Pockets Flexible Nylon Outer to Allow Unrestricted Movement & Maximum Comfort Hypoallergenic
Application	Refrigerated Warehouses s Frozen Food Processing General Maintenance In Cold Weather, Material Handling
Weight / Carto	n 12 kgs
Packing / Carto	n 10 Pieces
Origi	n China













rtex	Vertex Plus	Comfort Belt
Full Body Harness	Full Body Harness with Comfort Belt	Safety Belt with two Lateral D-rings
Standard EN 361:2002	Standard EN 361:2002	Standard CE 0194,EN 420,EN 358:1999
 Shoulder D-Ring Side D-Ring Loops on Harness for Body Belt High Visibility Webbing Lanyard Attached Directly to D-Ring or Attachment Element Snap Fastener on Shoulder Strap for Retaining Lanyard 	 Shoulder D-Ring Side D-Ring Loops on Harness for Body Belt High Visibility Webbing Lanyard Attached Directly to D-Ring or Attachment Element Snap Fastener on Shoulder Strap for Retaining Lanyard 	 Waist Circumference: Approx 80-120cm (Adjustable) Black Part Dimension: Approx 64x9cm Band Width: 4.3cm Equipped With 2 D-rings Easy Connection & Quick Release High-strength Polyester & Carbon Steel Wear-resistant & Durable
 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction 	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction 	Material Polyester, Carbon Steel Great for Outdoor Climbing Mountaineering Personal Riding Climbing Rappelling etc
Color Green / Black	Color Green / Black	Color Green / Black
Sizes Universal	Sizes Universal	Sizes Universal
/eight / Carton 11.8 kgs	Weight / Carton 15 kgs	Weight / Carton 12 kgs
on Dimension 49 x 26 x 24 cms	Carton Dimension 40 x 28 x 34 cms	Carton Dimension 61 x 35 x 26 cms
CBM / Carton 0.0305	CBM / Carton 0.032448	CBM / Carton 0.0555
cking / Carton 10 Pieces	Packing / Carton 10 Pieces	Packing / Carton 20 Pieces
Origin China	Origin China	Origin China









Vertex Web II

ACITEX MACD O		
Webbing Lanyard U Type		
Standard	EN 355:2002	
Features	 Standard 1.8 Length (6 ft.) Shock Absorber High Strength Webbing, 22kN (5000 Lbs.) High Visibility Webbing One Scaffolding Hook, 16kN (3600 Lbs.) One Carabiner Hook Capacity of 310 Lbs. at Tree Fall upto 6 ft. 	
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction 	
Color	Green / Black	Ī
	Universal	
Weight / Carton	•	
Carton Dimension		
CBM / Carton		
Packing / Carton	20 Pieces	

Origin China

Vertex Web Y

ACITEX MED I		
Webbing Lanyard Y Type		
Standard	EN 355:2002	
Features	 Standard 1.8m Length (6 ft.) Plus Shock Absorber High Strength Webbing, 22kN(5000lbs) Hi Visibility Rope Two Scaffolding Hooks, 16kN (3600lbs) One Carabiner Hook Capacity of 310lbs at Free Fall up to 6 ft. 	
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction 	
Color	Green / Black	
Sizes	Universal	
Weight / Carton		
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	China	

Vertey Rone II

vertex Rope U		
Rope I	Lanyard U Type	
Standard	EN 354:2010	
Features	 Standard 1.8 Metres (6 ft.) without Shock Absorber One Side Karabiner & One Side Scaffolding Hook U-Type Rope Lanyard One Side Easy 308 Karabiner One Side Silver Plated Scaffolding with Easy SH 60 Hook 	
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction 	
Color	White / Black	
Sizes	Universal	
Weight / Carton	18.90 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton		
Origin	China	

vertex Ko	рре т
Rope	Lanyard Y Type
Standard	EN 355:2002
Features	 Standard 1.8 Length (6 ft.). Shock Absorber High Strength Webbing, 22kN (5000 Lbs.) High Visibility Webbing Two Scaffolding Hook, 16kN (3600 Lbs.) One Carabiner Hook Capacity of 310 Lbs. at Tree Fall upto 6 ft.
Applications	 Personal Fall Arrest Restraint Work Positioning Personal Riding Climbing Rescue Construction
Color	White / Black
	Universal
Weight / Carton	20 kgs
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	China

EN 420 PROTECTIVE GLOVES - GENERAL REQUIREMENTS

Gloves "just for minor risks"

Protection for:

- Mechanical actions, the effects of which are superficial (gerdening gloves etc.);
- Bland cleaning materials with easily reversible effects (gloves that protect against diluted detergents etc.);
- Risks encountered when handling hot components that do not expose the user to a higher temperature that 50 OC or to hazardous impact;
- Atmospheric agents that are neither exceptional nor extreme (seasonal clothing);
- Minor impact and vibrations that do not involve vital parts of the body, the effects of which cannot cause irreversible injuries.

EN 388 MECHANICAL RISKS



Protection against physical and mechanical aggression caused by abrasion, blade cutting, tearing, puncture.

a Resistance to abrasion (level from 0 to 4)

b Resistance to blade cutting (level from 0 to 5)

c Resistance to tear (level from 0 to 4)

d Resistance to puncture (level from 0 to 4)

0: glove failed specific test

X: glove was not tested

EN 1082-1 GLOVES AND SLEEVES THAT PROTECT AGAINST BLADE CUTTING



They offer a certain protection against stabbing. They are used in particular in slaughterhouses where hand knives are used and in any place where meat, fish and shellfish are processed, in catering and in manual meat boning premises. They also offer suitable protection to those who use hand knives in the plastic, leather, textile and paper industries and in laying floors and similar activities.





Gorilla Active I Regular

Palm Coated, NBR (Nitrile Butadine Rubber)	
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
	Robust Thick Nitrile Coating for Increased Durability & Ideal of Oily Environment Translant Par Orig

Excellent Dry Grip
 Light Weight Liner for Comfort & Dexterity
 Excellent Abrasion & Tear Resistance

Knit Wrist Cuff & Breathable Back

• 13 Gauge White Polyester Liners
• Grey Nitrile Palm Coated

Binding / Sizes Yellow / 8/M Brown / 9/L Black / 10/XL

Automotive IndustryBody Shop

Applications

Features

AssemblyGeneral Maintenance

Light Metal CarpentryMechanical Industry

Weight / Carton 7 kgs

Carton Dimension 45 x 26 x 25 cms

CBM / Carton 0.0292

Packing / Carton 20 Dozen (240 Pairs)

Origin China



Gorilla Active II Premium

Palm Coated, NBR (Nitrile Butadine Rubber)

Palm Coate	d, NDK (Nitrile Butadine Rubber)
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	 Robust Thick Nitrile Coating for Increased Durability & Ideal of Oily Environment Excellent Dry Grip Light Weight Liner for Comfort & Dexterity Excellent Abrasion & Tear Resistance Knit Wrist Cuff & Breathable Back
Coating	13 Gauge White Polyester LinersGrey Nitrile Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Automotive Industry Body Shop Assembly General Maintenance Light Metal Carpentry Mechanical Industry
Weight / Carton	10 kgs
Carton Dimension	45 x 26 x 25 cms.
CBM / Carton	0.0292
Packing / Carton	
Origin	China



Gorilla Active III

Palm Coated NITRILON (Grip, Durability, Dexterity)

Pallii Coaled N	in Rillon (Grip, Durability, Dexterity)
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	 Excellent Fit, Flexible Wearing Comfort Seamless Liner Allowing to Breath And Provide Minimal Lint Recommended for Precise Operations Requiring Maximum Dexterity Ideal for Detailed Assembly, Inspection, Light Fabricatio
Coating	Black Flat Nitrile Coatin15 Gauge White Polyester Liner
Length	23.5 cm
Sizes	Medium, Large, XLarge
Applications	Automotive Assembly Mechanical
Weight / Carton	7.77 kgs
Carton Dimension	38 x 28 x 29 cms
CBM / Carton	0.0309
Packing / Carton	12 Dozen (144 Pairs)
Origin	Bangladesh



Gorilla Flex I

Coated, NBR	Microfoam (Nitrile Butadine Rubber)
Standard	CE, CATII EN388:2016 4121X EN420:2003/A1:2009
Features	 Microfoam Nitrile Provides Excellent Durability, Dexterity & Tactile Sensitivity Microfoam Nitrile Coating Provides Great Grip in Oily Conditions, Lint Free Liner Ergonomic Hand Shape for Comfortable Fit Breathable Polymer & Liner Fluid/grease Repellent Polymer & Liner for Clear & Comfortable Hands
Coating	13 Gauge Grey Polyester LinersBlack Microfoam Nitrile Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	Assembly in Presence of Oil/GreaseHydraulics/Wood WorkingAutomotive IndustryAir/sea Transport
Weight / Carton	6 kgs
Carton Dimension	53 x 29 x 21.50 cms
CBM / Carton	
Packing / Carton	,
Origin	China



Gorilla Flex II

Palm Coated Nitrilon Sponge

Standard	CE, CATII EN388:2016 3121X EN420:2003/A1:2009
Features	 Excellent Fit, Excellent Protection Seamless, Flexible for Wearing Comfort Sponge Nitrile Coating Gives Resistance Against Abrasion High Dexterity Level Open Back Keeps Hand Cool & Perspiration Free
Coating	Grey Foam Nitrile Sponge Coating13gg White Polyester Line
Length	23.5 cm
Sizes	Medium, Large, XLarge
Applications	 Automotive Assembly Mechanical General Industry Electronics Industrial Manufacturing
Weight / Carton	7.62 kgs
Carton Dimension	38 x 28 x 29 cms
CBM / Carton	
Packing / Carton	
Origin	Bangladesh



Gorilla Flex Cool I

Superior Grip, Second-skin Comfort	
Standard	CE, Cat. II EN388:2016 4121X EN420:2003/A1:2009
Features	 Fine Gauge Synthetic Liner Excellent Grip in Dry, Wet Conditions Spandex Content Gives a Snug Fit Soft, Breathable & Flexible Low-Particulate Shedding Abrasion Resistance (10,000+ Cycles)
Coating	DexTec™ Coating
Liner	15 gg Nylon, Spandex, Polyester
Length	23.5 cm
Sizes	Medium, Large, XLarge
Applications	 Automotive Assembly Mechanical General Industry Electronics Industrial Manufacturing
Weight / Carton	8.75 kgs
Carton Dimension	59 x 32 x 33 cms
CBM / Carton	
	12 Dozen (144 Pairs)
Origin	Pakistan



Gorilla Flex Cool II

Guilla Fi	ex Cool II
Nitril	e Foam Finish Palm Coated
Standard	CE Cat. II EN 388:2016 4131X EN ISO 21420:2020, EN 407:2004
Features	 Unique NBR Micro Foam Finish Provides Excellent Dry, Wet & Oil Grip Performance 360 Degree Breathable Coating Keeps Hand Cool & Wet & Oil Grip Performance Special Blend of Engineered Covered Yarn for High Cut Performance & Protection Excellent Abrasion Resistance Allows Long Term Use & Better Durability Coating: Black Nitrile Rubber Coating Liner: 15gg Machine Knitted Grey, Black & Red Nylon & Spandex Length: 220-280mm Size: Medium, Large, Xlarge
Applications	 General Maintenance, Agriculture, Automotive Construction, Mechanical Assemble Precision Machinery, Engineering Workshops
Weight / Carton	7.33 kgs
Carton Dimension	42 x 29 x 40 cms
CBM / Carton	
	12 Dozen (144 Pairs)
Origin	Sri Lanka



Gorilla Black I Regular Gorilla Black II Premium

Palm Coated, PU (Poly Urethane)

Paim	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	Black Polyester LinerBlack PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry
Weight / Carton	Black I - 6.67 kgs Black II - 7.54 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	
Packing / Carton	,
Origin	China



Gorilla Black III

Gorilla Black III	
Palm	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 3121X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	Black Polyester LinerBlack PU Palm Coated
Binding / Sizes	Green / 8/M Yellow / 9/L Brown / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	6.67 kgs
Carton Dimension	
CBM / Carton	
	20 Dozen (240 Pairs)
Origin	Sri Lanka



Gorilla White I Regular

Palm	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	White Polyester Liner White PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	7 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	
Packing / Carton	,
Origin	China



Gorilla White II Premium

Palm	Palm Coated, PU (Poly Urethane)	
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009	
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back 	
Coating	White Polyester Liner White PU Palm Coated	
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL	
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc. 	
Weight / Carton	7 kgs	
Carton Dimension		
CBM / Carton		
Packing / Carton	,	
Origin	China	



Gorilla Grey I Regular

	cy i Regulai
Palm	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	Grey Polyester Liner With Grey PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	7 kgs
Carton Dimension	42 x 25 x 45 cms
CBM / Carton	
	20 Dozen (240 Pairs)
Origin	China



Gorilla Grey II Premium

Palm	Coated, PU (Poly Urethane)
Standard	CE, CATII EN388:2016 4131X EN420:2003/A1:2009
Features	 Lightweight, Elastic, With Excellent Tactile Sensitivity Exceptional Dry Grip Excellent Abrasion Resistance & Durability Ergonomic Design With Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	Grey Polyester Liner WithGrey PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Assembly of Micro Component & Printed Circuits. Delicate & Precision Handling of Little Objects Assembly of Dry Components/electronics Car Manufacturing Industry. Preparation of Cosmetics, Medicines, Etc.
Weight / Carton	7 kgs
Carton Dimension	
CBM / Carton	
Packing / Carton	, ,
Origin	China



Gorilla Bull I

Palm Coated, Latex (Natural Rubber)	
Standard	CE, CATII EN388:2016 2142X EN420:2003/A1:2009
Features	 Palm Coated With Latex Wrinkle Finish For Extraordinary Dry & Wet Grip Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back High Grip Resistance
Coating	5 Yarns Yellow Polycotton LinerPalm Coated/green Latex
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Building/ Construction/ Carpentry Forestry/ Public Gardens/ Nurseries Waste Collection Transport Industry Car Dismantlers Glass Industry
Weight / Carton	13 kgs
Carton Dimension	51 x 26 x 35 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	China



Gorilla Bull II Yellow

Palm C	Palm Coated, Latex (Natural Rubber)		
Standard	CE, CAT II EN388:2016 2142X EN I420		
Features	 Palm Coated With Latex Wrinkle Finish For Extraordinary Dry & Wet Grip Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back High Grip Resistance 		
Coating	5 Yarns Yellow Polycotton LinerPalm Coated/Green Latex		
Binding / Sizes	Yellow 8/M Brown 9/L Black 10/XL		
Applications	 Building/ Construction/ Carpentry Forestry/ Public Gardens/ Nurseries Waste Collection Transport Industry Car Dismantlers Glass Industry 		
Weight / Carton			
Carton Dimension	48 x 31 x 43 cms		
CBM / Carton			
	10 Dozen pair (120pairs)		
Origin	Sri Lanka		



Gorilla Bull II Blue

Gorma De	III II DidC	
Palm C	Palm Coated, Latex (Natural Rubber)	
Standard	CE, CAT II EN388:2016 2142X EN I420	
Features	 Palm Coated With Latex Wrinkle Finish For Extraordinary Dry & Wet Grip Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back High Grip Resistance 	
Coating	5 Yarns GreyPolycotton LinerPalm Coated/Blue Latex	
Binding / Sizes	Yellow 8/M Brown 9/L Black 10/XL	
Applications	 Building/ Construction/ Carpentry Forestry/ Public Gardens/ Nurseries Waste Collection Transport Industry Car Dismantlers Glass Industry 	
Weight / Carton		
Carton Dimension	48 x 31 x 43 cms	
CBM / Carton		
	10 Dozen pair (120pairs)	
Origin	Sri Lanka	



Gorilla Force I Regular

Palm C	Palm Coated, Latex (Natural Rubber)		
Standard	CE, CATII EN388:2016 2131X EN420:2003/A1:2009		
Features	 Palm Coated With Ultralight Weight Latex Crinkle Finish Coating Maximum Flexibility & Durability Wrinkle Finish for Extraordinary Dry & Wet Grip High Wear & Tear Resistance Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back 		
Coating	13 Gauge Red PolyesterBlack Crinkled Latex Palm Coated		
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL		
Applications	 Building/Construction/Carpentry Forestry/Public Gardens/Nurseries Waste Collection Transport Industry Scaffolding Applications 		
Weight / Carton	21.40 kgs		
Carton Dimension	47 x 25 x 43 cms		
CBM / Carton			
	20 Dozen (240 Pairs)		
Origin	China		



Gorilla Force II Premium

Gorilla Force 11 Premium	
Palm C	oated, Latex (Natural Rubber)
Standard	CE, CATII EN388:2016 2131X EN420:2003/A1:2009
Features	 Palm Coated With Ultralight Weight Latex Crinkle Finish Coating Maximum Flexibility & Durability Wrinkle Finish for Extraordinary Dry & Wet Grip High Wear & Tear Resistance Ergonomic Design for a Comfortable Fit Knit Wrist Cuff & Breathable Back
Coating	13 Gauge Red PolyesterBlack Crinkled Latex Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Building/Construction/Carpentry Forestry/Public Gardens/Nurseries Waste Collection Transport Industry Scaffolding Applications
Weight / Carton	21.40 kgs
Carton Dimension	47 x 25 x 43 cms
CBM / Carton	
	20 Dozen (240 Pairs)
Origin	China



Gorilla Defender I

Gorilla De	Gorilla Delelluer 1	
3/4 Coate	d, NBR (Nitrile Butadiene Rubber)	
Standard	CE, CAT II, EN420, EN388:2016 4121X	
Features	 Double Dip Liquid Repellant Nitrile Coating On The Palm, Finger & Knuckles Extra Nitrile Coating on The Palm That Provides Extra Grip In Wet, Dry & Oily Conditions Excellent Abrasion Resistance. High Protection From Liquids up to Knuckle Area Lightweight, Comfortable, Flexible With Non-slippery Finish & Knit Wrist Cuff 	
Coating	13 Gauge Black Polyester Shell3/4 Blue Nitrile + Black Sandy Nitrile Coated	
Binding / Sizes	Black / 10/XL	
Applications	 Light & Precision Handling Quality Control & Finishing Work General Maintenance/Assembly Handling of Abrasive Objects in the Presence of Oil & Grease Hydraulics/Wood Working Light Metal Carpentry 	
Weight / Carton	8 kgs	
Carton Dimension	57 x 29 x 27 cms	
CBM / Carton		
	10 Dozen (120 Pairs)	
Origin	China	



Gorilla Flex Oil I

Lightv	veight, Oil & Water-repellent
Standard	CE, Cat. II EN388:2016 3121X EN420:2003/A1:2009
Features	 Eco-Friendly, Breathable, Touch Screen Encapsulated Air Pockets Provide High Resistance to Wear & Tear Lightweight for All-Day Wear Vibration Absorption Excellent Wet Grip HPT® Coating
Coating	HPT® Coating
Liner	15gg Ingenia™- Blend Liner
Length	24 cm
Sizes	Medium, Large, XLarge
Applications	 Automotive Assembly Warehousing General Purpose Materials Handling & Assembly Precision-based Applications Shipping & Receiving
Weight / Carton	7.4 Kgs
Carton Dimension	42 x 29 x 33 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	Pakistan



Gorilla Cut 5 PU

Cut5 (ISO C)	, Palm Coated, PU (Cut Resistant)
Standard	CE, CATII EN388:2016 4X43C EN420:2003/A1:2009
Features	 HDPE Fibers In The Lining Ensures Excellent Cut Resistance With Reduced Thinness For Good Dexterity Palm Coated With Polyurethane Excellent Mechanical Resistance & Durability + Flexibility Ergonomic Design for Comfortable Fit Knit Wrist Cuff With Breathable Back
Coating	Grey HPPE Gloves Liner/Grey PU Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Handling Small, Sharp-edged Items Automotive Industry, Metal Fabrication Assembly of Dry Components Photo Labs Electrical Components Etc
Weight / Carton	9 kgs
Carton Dimension	55 x 26 x 26 cms
CBM / Carton	0.0372
	10 Dozen (120 Pairs)
Origin	China



Gorilla Cut 5 PU SL

Cut5 (ISO C), Palm Coated, PU (Cut Resistant) CE, CATII Standard EN388:2016 4X43C EN420:2003/A1:2009 Cut Resistance With Reduced Thinness For Good Dexterity Palm Coated With Polyurethane Features + Flexibility Ergonomic Design for Comfortable Fit Knit Wrist Cuff With Breathable Back Coating Grey HPPE Gloves Liner/Grey PU Palm Coated

 HDPE Fibers In The Lining Ensures Excellent Excellent Mechanical Resistance & Durability Yellow / 8/M Binding / Sizes Brown / 9/L Black / 10/XL Handling Small, Sharp-edged Items Automotive Industry, Metal Fabrication Applications • Assembly of Dry Components Photo Labs Electrical Components Etc Weight / Carton 8.70 kgs Carton Dimension 29.50 x 40 x 42 cms CBM / Carton 0.049 Packing / Carton 10 Dozen (120 Pairs) Origin Sri Lanka



Gorilla Cut 5 PU PK

Carton Dimension 53 x 32 x 23 cms

Origin Pakistan

CBM / Carton 0.0390

Cut 5 (ISO C), Palm Coated, PU (Cut Resistant) CE Cat. II Standard EN388:2016 4X44C EN 407:2020 HDPE Fibers In The Lining Ensures Excellent Cut Resistance with Reduced Thinness for Good Dexterity Palm Coated With Polyurethane Excellent Mechanical Resistance & Durability + Flexibility Ergonomic Design for Comfortable Fit Features Knit Wrist Cuff With Breathable Back Black HPPE Glove Liner/ Black PU Palm Coating Size: Medium, Large, Xlarge Handling Small, Sharp-edged Items Automotive Industry, Metal Fabrication Assembly of Dry Components **Applications** Photo Labs Electrical Components Etc



Gorilla CHT 5 Microfoam

Gorilla CC) i 5 Microroam
Cut5 (ISO C), Palm Coated, Nitrile, MicroFoam
Standard	42 x 2CE, CATII EN388:2016 4544C EN420:2003/A1:2009
Features	 Palm Coated With Special Microfoam Nitrile Offers Durability, Dexterity & Tactile Sensitivity Maximum Cut Protection Level Excellent Grip in Both Dry & Oily Environment 365-Degree Breathability Breathable Coating & Breathable Liner High Level of Flexibility
Coating	Grey U2 Weave HPPE Glove LinersBlack Microfoam Nitrile Palm Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Glass Industry Plastic Material Injection & Molding Metal Working Industry Metal Carpentry Automotive Industry
Weight / Carton	10.50 kgs
Carton Dimension	
CBM / Carton	
_	10 Dozen (120 Pairs)
Origin	China



Gorilla CUT 5 Nitrile

Gorina Co) i S Mittile
Cut5 (ISO	D), Palm Coated, Nitrile, Sandy
Standard	CE, CATII EN388:2016 4X44D EN420:2003/A1:2009
Features	 Palm Coated With Sandy Nitrile for Superior Grip + Increased Anti Slip Effect Maximum Dexterity, Sensitivity & Touch Breathable Liner Allows Keep Hands Dry Good Abrasion & Wear Resistance High Cut Resistance
Coating	Grey HPPE Glove LinersBlack Sandy Nitrile Coated
Binding / Sizes	Yellow / 8/M Brown / 9/L Black / 10/XL
Applications	 Machining & Assembly Handling Small, Sharp-Edged Items Abrasive Materials Etc. Automotive Industry Metal Fabrication
Weight / Carton	10.47 kgs
Carton Dimension	58 x 26 x 28 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	China



Gorilla Cut 5 Microfoam SL

Palm Coated, Nitrile, MicroFoam with Thumb crotch	
Standard	CE, CAT II EN388:2016 4X44C EN ISO 21420:2020
Features	 Palm Coated With Special Microfoam Nitrile Offers Durability, Dexterity & Tactile Sensitivity Maximum Cut Protection Level Excellent Grip in Both Dry & Oily Environment 365-Degree Breathability Breathable Coating & Breathable Liner High Level of Flexibility Thumb Crotch for Extra Protection
Coating	Grey U2 Weave HPPE Glove Liners Black Microfoam Nitrile Palm Coated
Binding / Sizes	Yellow 8/M Brown 9/L Black 10/XL
Applications	Glass IndustryPlastic Material Injection & MoldingMetal Working IndustryMetal Carpentry
Carton Dimension	42 x 29 x 40 cms
CBM / Carton	0.04872
Packing / Carton	10 Dozen pair (120pairs)
Origin	Sri Lanka



Gorilla Cut 5 Nitrile SL

Cut 5 (ISO	C), Palm Coated, Nitrile, Smooth
Standard	CE, CAT II EN388:2016 4X44C EN ISO 21420:2020
Features	 Palm Coated With Smooth Nitrile for Superior Grip + Increased Anti Slip Effect Maximum Dexterity, Sensitivity & Touch Breathable Liner Allows Keep Hands Dry Good Abrasion & Wear Resistance High Cut Resistance
Coating	Palm Grey HPPE Glove LinersBlack Sandy Nitrile Coated
Binding / Sizes	Yellow 8/M Brown 9/L Black 10/XL
Applications	 Machining & Assembly Handling Small Sharp-Edged Items Abrasive Materials Etc. Automotive Industry Metal Fabrication
Carton Dimension	42 x 29 x 40 cms
CBM / Carton	
	10 Dozen pair (120pairs)
Origin	Sri Lanka



Gorilla Flex Cut 4/D

High Level	of Cut Resistance, Superior Grip
	CE, Cat. II
Ctanaland	EN1200-2046 AVA2D

riigii Lovei	or out reconstance, caperior one
Standard	CE, Cat. II EN388:2016 4X42D ANSI A4 CUT
Features	 Polyester/steel/nylon/spandex Liner Excellent Grip in Dry, Wet Conditions High Abrasion Resistance Soft, Breathable & Flexible Low-particulate Shedding Comfort & Dexterity Ergonomically Designed
Coating	 Dextec™ Coating Polyester, Steel. Nylon, Spandex Liner
Sizes	Medium, Large, XLarge
Applications	Glass OperationHandling Stationary BladesAuto ManufacturingCeramics Industries
Weight / Carton	-
Carton Dimension	59 x 32 x 32 cms
CBM / Carton	0.0604
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan



Gorilla Cut C3

Nitrile Foam Finish Palm Coated Cut Resistant

nitriie Foam	Finish Paim Coated Cut Resistant
Standard	CE Cat. II EN 388:2016 4X43B EN ISO 21420:2020, EN 407:2004
Features	 Unique NBR Micro Foam Finish Provides Excellent Dry, Wet & Oil Grip Performance 360 Degree Breathable Coating Keeps Hand Cool & Comfortable Special Blend of Engineered Covered Yarn for High Cut Performance & Protection Excellent Abrasion Resistance Allows Long Term Use & Better Durability Coating: Black Nitrile Rubber Coating Liner: 18gg Machine Knitted Melange Green & Melange Orange HPPE, Polyester, Glass, Nylon & Spandex Length: 210-280mm Size: Medium, Large, Xlarge
Applications	 Automotive, Construction Mechanical Assembly, Precision Machinery Engineering, Workshop & Oil & Gas Industry
Weight / Carton	9.26 kgs
Carton Dimension	42 x 29 x 40 cms
CBM / Carton	
Packing / Carton	12 Dozen (144 Pairs)
Origin	Sri Lanka



Gorilla Cut C5

Nitrile Foam Finish Palm Coated Cut Resistant

Millie Foaiii	Fillish Failh Coaled Gul Resistant
Standard	CE Cat. II, EN 388:2016 4X43C EN ISO 21420:2020 EN 407:2004, ANSI-ISEA 105:2016
Features	 Unique NBR Micro Foam Finish Provides Excellent Dry, Wet & Oil Grip Performance 360 Degree Breathable Coating Keeps Hand Cool & Comfortable Special Blend of Engineered Covered Yarn for High Cut Performance & Protection Excellent Abrasion Resistance Allows Long Term Use & Better Durability Coating: Black Nitrile Rubber Coating Liner: 15gg Machine Knitted Melange Blue & Melange Green HPPE, Polyester, Glass, Nylon & Spandex Length: 210-280mm Size: Medium, Large, Xlarge
Applications	Automotive, ConstructionMechanical Assembly, Precision MachineryEngineering, Workshop & Oil & Gas Industry
Weight / Carton	9.84 kgs
Carton Dimension	42 x 29 x 40 cms
CBM / Carton	
	12 Dozen (144 Pairs)
Origin	Sri Lanka



3/4 Coated, N	BR, Jersey (Nitrile Butadine Rubber)
Standard	CE, CATII EN388:2016 3111X EN420:2003/A1:2009
Features	 Palm, Finger & Knuckle Coated N.B.R. Coating Provides Excellent Resistance to Solvents, Hydrocarbons & Its Derivatives Oils & Grease Excellent Resistance to Abrasion Cotton Canvas Safety Cuff for Protection Jersey Lining for Comfort & Sweat Absorption Protection Against Heavy Duty Jobs
Coating	Jersey Liners With Safety CuffBlue Nitrile 3/4 Coated
Binding / Sizes	Large, XLarge
Applications	 Road Construction General Maintenance Waste Collection/Forestry Mechanical Engineering Processing of Metals, Steel Bars
Weight / Carton	14 kgs
Carton Dimension	70 x 27 x 37 cms
CBM / Carton	
Packing / Carton	,
Origin	China



Gorilla Extreme II

Full Nitrile Dipped Jersey (Heavy Weight Nitrile)

i all ittatio bi	ppod colocy (lloary troight ithans)
Standard	CE, CATII EN388:2016 3111X EN420:2003/A1:2009
Features	 The Gloves Have a Heavy Weight Nitrile Full Coated The Inner is a 100% Jersey With a Cotton Wristing Canvas Safety Cuff The Gloves Are Excellent for All Round General Handling Situations
Coating	Jersey Liner, Safety cufV9900 Series Nitrile Smooth Coating, Blue
Length	26 cm
Sizes	Medium, Large, XLarge
Applications	 Cargo Handling Handling Boxes Recycling Industrial Manufacturing Mechanical Warehousing
Weight / Carton	20.30 kgs
Carton Dimension	56 x 45 x 33 cms
CBM / Carton	0.0832
	12 Dozen (144 Pairs)
Origin	Bangladesh



Gorilla Shield I

Gorilla Si	lieia 1
Doub	le Dipped PVC Coated Glove
Standard	CE, CATI
Features	 Double Dipped PVC Coated Glove PVC Gloves Provides Excellent Barrier Against Acid, Bases, Cutting Oils, Oils & Derivatives Provides Excellent Resistant to Abrasion Good Mechanical & Chemical Protection, Even In Very Humid Conditions Extremely Durable & Wear Resistant Sandy Finish for Excellent Grip Interlock Cotton Lining for Comfort & Sweat Absorption Length: 40cm Resistant & Flexible at Low Temperatures
Coating	Sandy PVC Glove, Jersey, Gauntlet, 40cm
Sizes	10 XL
Applications	 Chemical/Petro Chemical Industry Oil Refining/chemical Refining Plants Machining Handling Oils, Acids, Caustics & Alcohols Janitorial Activities
Weight / Carton	13 kgs
Carton Dimension	41 x 28 x 46 cms
CBM / Carton	
	6 Dozen (72 Pairs)
Origin	China



Gorilla Shield II

PVC Double Dip, 40cm length CE, CATIII EN388:2016 4121X	
Standard EN ISO 374-1:2016/TYPE A - AKLMPST EN ISO 374-5:2016 - VIRUS EN420:2003/A1:2009	
 Tough Flexible PVC Coating With Additional Granular Coating on Hand Portion to Confer Excellent Grip In Wet & Dry Applications Increased Thickness Gives Additional Wear & Abrasion Resistance Ideally Suited for General Handling 	
Coating Coa	ets
Sizes Medium, Large, XLarge	
 Automotive Assembly Mechanical General Industry Electronics Industrial Manufacturing 	
Weight / Carton 21.73 kgs	
Carton Dimension 41 x 41 x 31 cms	
CBM / Carton 0.0521	
Packing / Carton 6 Dozen (72 Pairs) Origin Bangladesh	



Gorilla Shield Lite II

PVC Single Dip, 40cm length		
Standard	CE, CATII EN388:2016 4111X EN420:2003/A1:2009	
Features	 General Purpose Handling Glove Tough Flexible Smooth PVC Coating Will Withstand Abrasion in Dry Handling Conditions Flared Gauntlet for Ease Of Removal Actifresh or Sanitized Treated to Provide Some Protection Against Organisms Which Give Rise to Bad Odour & Cross Infection 	
Coating	 Smooth Shield 50 Gauntlet Series B-200-50-G Gauntlets Pvc Fully Coated Cotton Lined Gauntlet 	
Sizes	Medium, Large, XLarge	
Applications	 Cargo Handling Handling Boxes Recycling Industrial Manufacturing Mechanical Warehousing 	
Weight / Carton	18.28 kgs	
Carton Dimension		
CBM / Carton		
	6 Dozen (72 Pairs)	
Origin	Bangladesh	



Gorilla Flex Chem I

Gorilla Flex Chelli I		
Ultim	ate in Chemical Resistance	
Standard	CE, Cat. III EN388:2016 4131X EN ISO 374-1:2016/TYPE A AKLMPT EN ISO 374-5:2016 EN374-4:2013 - EN420:2003/A1:2009	
Features	 Ultra-soft & Flexible Chemical Resistant Unique Textured Bi-Polymer Coating Exceptional Grip in Wet & Dry Ergonomic Hand Shape Ergonomic Design Low Risk of Particle Shedding 	
Coating	15 gg Nylon	
Liner	Bi-polymer coating finish	
Sizes	Medium, Large, XLarge	
Applications	 Chemical Handling Agrochemicals Agriculture/Harvesting Fishing Household Cleaning Industrial Painting 	
Weight / Carton	14.74 kgs	
Carton Dimension	42 x 40 x 42 cms	
CBM / Carton		
	6 Dozen (72 Pairs)	
Origin	Pakistan	





Illuusula	i Kubbei Giove - D-36
Natural R	lubber Diamond Grip Glove 13"
Standard	EN 388:2016 1010X EN:420:2003+A1 :2009
Features	 Comfortable, Excellent Flexibility of Natural Latex Have Great Hand Protection Good Chemicals Corrosive Resistance Air-Tightness, Weather-Ability Good Grip in Dry & Wet Working Environment
Color	Black
Material	Natural Latex
Inside liner	Unlined
Palm	Diamond Pattern Grip
Cuff	Gaunlet Beaded Cuff
Outside treatment	Chlorination
Applications	 Building Works & Construction Chemical & Industrial Works Machine Operations Maintenance Industrial Works
Weight / Carton	15 kgs
Carton Dimension	37 x 31 x 26 cms
CBM / Carton	0.029822
Packing / Carton	12pairs/Bundle,120pairs/Carton
Origin	China



Gorilla Chem I

Green, Nitrile, Flock	lined, 15mil(C	chemical Res	istant)
-----------------------	----------------	--------------	---------

Standard	CE, CATII EN388:2016 3102X EN420:2003/A1:2009
Features	 Cotton Flock Lining Absorbs Perspiration & Improves Comfort Good Barrier for Handling Solvents, Oil Based Chemical Agents, Oils, Animal Fats, Oil Derivatives Nonslip Pattern for Extra Grip Excellent Abrasion Resistance
Coating	Green Nitrile Glove, Thickness15 Mil(0.38mm), Length: 30cm
Sizes	Medium, Large, XLarge
Applications	 Chemical Industry Food Industry Refineries Printing Industry/Publishing Production And Application of Pants & Varnishes, Degreasing Handling/assembly of Oily Parts
Weight / Carton	9 kgs
Carton Dimension	36 x 32 x 24 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	China



Gorilla Chem II

- 1	imill	(0.038mr	n) Fl	nck l	lined	Nitri	ΔG	OV
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	いいいしついけい	117 1 14	ノレト			$\mathbf{c} \mathbf{c}$	UW

15mill (0.0	38mm) Flock Lined Nitrile Glove
	ASTM D4679-02 (Re-approved 2015) EN 420:2003+AI:2009 EN 388:2016 4001X EN ISO 374-5:2016 EN ISO 374-1:2016 21CFR 177.2600
	 Nitrile Rubber Glove, Washed Comfortable, Reusable Fingertip Precision, Good Dexterity Good Grip - Reverse Lozenge Grip Pattern Good Solvent Resistance Reduced Risk of Allergic Reactions Free of Extractable Proteins Silicon Free
	Medium, Large, XLarge
Applications	 Printing Industry, Petrochemical Industry Metal Fabrication, Chemical Processing, Oil Refining, Cleaning & Degreasing Chemical Plants & Transportation Food Processing/Food Handling
	12.40 kgs
	38 x 30 x 30 cms
	0.0342
	12 Dozen (144 Pairs)
	Sri Lanka



Skydda Metal Mesh

5 Fingers Metal Chain Glove		
Standard	CE, EN 1082-1	
Features	 5 Fingers Metal Mesh Glove With Textile Strap & Elastic Grip Improved Cleanliness & Sanitation Properties Flexibility & Durability Reduced Bacteria Retention Improved Comfort & Fit, Extreme Cut & Puncture Resistant Non Corrosive & Appropriate For Wet Environments 21 Cfr Compliant 	
Sizes	Small - White Cuff Medium - Red Cuff Large - Blue Cuff	
Applications	Meat ProcessingSheet Metal Cutting/HandlingCarpentryTextile Cutting	
Weight / Carton	12.50 kgs	
Carton Dimension	53.50 x 23 x 19 cms	
CBM / Carton		
	50 Packets (50 Pieces)	
Origin	China	



Empiral Original SDX2

Impact Protection Gloves		
Standard	CE Cat. II, EN 388:2016 4232 XP	
Features	 Exclusive Palm Material 28% More Abrasion Resistant Than Normal Synthetic Leather Empiral® Metacarpal Protection 90% Impact Absorption Empiral® Kunckle Protection 90% Impact Absorption Empiral® Pending Finger Protection 82% Coverage of Impact Protection Offers Sidewall & Complete Fingertip Protection Machine Wash · Hang Dry 	
Applications	 Oil & Gas Drilling Extraction & Refining Fracking, Tool Pushing Mining, Demolition Heavy Construction Rigging 	
Origin	Pakistan	



Kong Original Impact Gloves		
	CE, EN 388:4242, Category 2	
Features	 Co-Developed By The Oil & Gas Industry's Safety Committee KONG® Knuckle Protection: 90% Impact Absorption 25% More Abrasion Resistant Than Normal Synthetic Leather 76.4% Impact Absorption Offers Sidewall & Complete Fingertip Protection KONG® Metacarpal Protection: 80% Impact Absorption High Contrast Palm / Back of Hand 	
Applications	 Oil & Gas Drilling Extraction & Refining Fracking, Tool Pushing Mining, Demolition Heavy Construction Rigging 	
Weight / Carton	17 kgs	
Carton Dimension	57.5 x 50.5 x 39.5 cms	
CBM / Carton		
Packing / Carton		
Origin	Indonesia	





Kevlar Arm / Hand Protection		
Standard	ISO 9001:2008	
Length	22inch With Thumb-Hole	
Features	 Double Ply 100% Dupont™ Kevlar® Brand Fiber Cut Resistant Sleeves Good Cut Protection & Heat Resistance Properties Thumb Slot, Flared Forearm 	
Applications	 Assembly and finishing Sheet metals and metalwork Body assembly Stamping operations Assembly of white goods Glass repair 	
Weight / Carton	15.77 kgs	
Carton Dimension	35 x 66 x 35 cms	
CBM / Carton	0.08085	
Packing / Carton	100 Pairs	
Origin	Pakistan	



Kevlar® / Steel, 7gg, 64 Grams, Cut 5 Glove		
Standard	EN388:3521 EN407:X1XXXX	
Features	 Effective Protection, for Brief Instants From the Heat By Contact (Max. 100 °C) Resistance for Limited To Open Frames Excellent Dexterity & Tactility Knit Wrist Cuff Lightweight 	
Applications	 Suitable For Sharp & Abrasive Work Chassis Assembly, Body Trimming Seizing Structural & Body Parts Inspection (Picking, Checking & Marking) 	
Weight / Carton	3.90 kgs	
Carton Dimension	46 x 41 x 20 cms	
CBM / Carton	0.03772	
Packing / Carton	50 Pairs	
Origin	Pakistan	



Tough Guard

rough Gu	iaiu
Cut 5	High Heat 300 Degree Glove
Standard	EN388:2543 EN407:X3XXXX
Features	 Knitting: Seamless 7gg Double Glove Outer Shell: 5 Ply 100% Kevlar® +Glass Filament Inner Shell: 100% Cotton Ring Spun Yarn Shell Weight: 300 G / Pair Sizes: L - XL
Applications	 Steel Works, Foundries Metal Works & Workshops Bakeries/ Ovens Furnaces & Kilns Glass, Ceramics, Cement Industries
Weight / Carton	3.90 kgs
Carton Dimension	46 x 41 x 20 cms
CBM / Carton	
Packing / Carton	
Origin	Pakistan



Gorilla Vinyl I

	<u>, </u>
Powder	Free Vinyl Disposable Glove
Standard	CE Cat. III EN 420:2003 +A:2009 EN 16523-1:2015 EN 374-4:2013 EN 374-2:2014
Features	 Non-Sterile Ambidextrous Resistance to Permeation by Chemical Degradation by Chemical Tested for Air Leak & Water Leak Size: Small, Medium, Large, XLarge Color: Blue Thickness: 3.2mil Average Weight (Size: Xlarge): 6.4g
Applications	 Transferring Liquids & Solids Sample Taking Processing Meat Fish & Food Processing Maintenance Laboratory Analysis Chemical Handling
Weight / Carton	6 kgs
Carton Dimension	32 x 22 x 22 cms
CBM / Carton	
Packing / Carton	
Origin	China



Gorilla Vinyl II

Origin China

Powder	r Free Vinyl Disposable Glove
Standard	CE Cat. III EN 420:2003 +A:2009 EN 16523-1:2015 EN 374-4:2013 EN 374-2:2014
Features	 Non-Sterile Ambidextrous Resistance to Permeation by Chemical Degradation by Chemical Tested for Air Leak & Water Leak Size: Small, Medium, Large, XLarge Color: Transparent Thickness: 3.2mil Average Weight (Size: Xlarge): 6.4g
Applications	 Transferring Liquids & Solids Sample Taking Processing Meat Fish & Food Processing Maintenance Laboratory Analysis Chemical Handling
Weight / Carton	6 kgs
Carton Dimension	32 x 22 x 22 cms
CBM / Carton	
Packing / Carton	10 Packets



Gorilla Nitro I

Powder Free Co-Polymer Nitrile Examination Glove

Powder Free C	o-Polymer Nitrile Examination Glove
Standard	EN 374-4:2019 EN 374-2:2019 EN 16523-1+A1 2018 EN 455-1 :2020 EN 455-3:2015,PROP65
Features	 Powder Free Co-Polymer Nitrile Examination Glove with Finger Texture Thickness: 3.2mil Average weight (Size: L): 5.5gram Material: Nitrile (NBR)+ Dioctyl Terephthalate + Polyvinyl chloride Type: Powder Free Finish: Chlorinated Quality Level (AQL):1.5 (Premium), Length: 230mm (min) Tensile Strength: 16Mpa (min) Elongation at Break: 450% (min)
Applications	 Transferring Liquids & Solids Sample Taking & Processing Meat Fish & Food Processing Maintenance Laboratory Analysis Chemical Handling
Weight / Carton	6.50 kgs
Carton Dimension	31.00 x 24.60 x 23.80 cms
CBM / Carton	
Packing / Carton	
Origin	China



Gorilla Nitro II

Powder Free Co-Polymer Nitrile Examination Glove

EN 374-4:2019 EN 374-2:2019 EN 16523-1+A1 2018 EN 455-1 :2020 EN 455-3:2015,PROP65

> Powder Free Co-Polymer Nitrile Examination Glove with Finger Texture

Thickness: 3.2mil

Average weight (Size: L): 5.5gram

Material: Nitrile (NBR)+ Dioctyl Terephthalate
 Polyginal oblogida Type: Boundar Free

+ Polyvinyl chloride Type: Powder Free
 Finish: Chlorinated

 Quality Level (AQL):1.5 (Premium), Length: 230mm (min) Tensile Strength: 16Mpa (min) Elongation at Break: 450% (min)

Applications

Transferring Liquids & SolidsSample Taking & Processing Meat

Fish & Food Processing Maintenance

Laboratory Analysis

Chemical Handling

Weight / Carton 6.50 kgs

Carton Dimension 31.00 x 24.60 x 23.80 cms

CBM / Carton 0.018

Packing / Carton 10 Packets

Origin China

0.018



HDPE Gloves

Origin China

0.6g, Transparent Standard CE CAT 1 Light Weight, Durable Resist Tearing Latex Free Easy Application & Remove of Glove From Hand **Features** Seamless & Ambidextrous Material: HDPE Style: Powder Free Color: Transparent Size: Universal Manufacturing & Food **Applications** Processing Handling, Hygiene Weight / Carton 6 kgs Carton Dimension 37 x 27 x 17 cms CBM / Carton 0.017 Packing / Carton 100 Bags



PP Sleeves

PP Sieeves		
Arm Sleeves with Elastic Cuff		
Standard	CE CAT 1	
Features	 Protects From Paint Powder, Dirt, Grease & Grime to Keep the Skin Safe Latex Free Elastic Cuff, to Protect Against Contamination Light Weight Safety & Comfort 	
Material	PP Non-Woven	
Weight	20 GSM	
Color	Blue	
Size	16 Inches	
Applications	HospitalJanitorialClean RoomBeauty Salons	
Weight / Carton	3.50 kgs	
Carton Dimension	38 x 26 x 36 cms	
CBM / Carton		
Packing / Carton	-	
Origin	China	




Blue KNDDA Blue KNDDA II

Double Side Dotted Gloves Blue KNDDA Standard EN 388 : 2003 Knitted on 10guage Machine Durable T/C Yarm Double Side Blue PVC Dots Features Knitted Wrist With Overlock Tiger Paw & Parallel Dots for Extra Grip & Comfort Color Navy Blue Multipurpose Reusable Gloves Engineering Automobile Battery Working With Molten Metals Cement **Applications** Petrochemicals Ferrous & Non-ferrous Metallurgical Industries Fertilizer Foundries Origin Pakistan













Drill Dotted Gloves

8 / 10 / 12 / 14 / 16 Ounce	
Standard	CE CAT 1
Features	 Cotton With PVC Dots Knitted Wrist Seals Out Dirt & Debris PVC Polka Dots Provides Superior Grip in Dry Conditions for Safe & Secure Handing Comfort
Weight	8 / 10 / 12 / 14 / 16 Ounce
Applications	General PurposeMaintenanceManufacturingWarehouse OperationParts Handling etc
Weight / Carton	19.60 kgs
Carton Dimension	54 x 22 x 52 cms
CBM / Carton	0.0618
Packing / Carton	25 Dozen (300 Pairs)
Origin	Pakistan













Cotton BW600

Bleach	White Cotton Knitted Gloves
Standard	CE CAT I
Features	 Knitted on 7 Gauge Machine Durable T/c Yarm Knitted Wrist With White Overlock Minimum Lint
Weight	600 Grams
Applications	 Multipurpose Reusable Gloves Ceramics Dyes & Dyestuffs Glass Etching Grinding Paper Processing Paints & Pigments
Weight / Carton	13.65 kgs
Carton Dimension	55 x 44 x 27 cms
CBM / Carton	
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan





Cotton BW840

Cotton Di	10-10
Bleach	White Cotton Knitted Gloves
Standard	CE CAT I
Features	Knitted on 7 Gauge MachineDurable T/c YarmKnitted Wrist With White OverlockMinimum Lint
Weight	840 Grams
Applications	 Multipurpose Reusable Gloves Ceramics Dyes & Dyestuffs Glass Etching Grinding Paper Processing Paints & Pigments
Weight / Carton	18.90 kgs
Carton Dimension	48 x 26 x 60 cms
CBM / Carton	
Packing / Carton	20 Dozen (240 Pairs)
Origin	Pakistan











1006-NT/ASK-1001

Leathe	r Rigger Glove, Double Palm
Standard	CE Cat. II EN 388:2016 4244X EN 420:2003 +A1:2010
Features	 Cow Split Leather Double Palm Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Natural Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	20 kgs
Carton Dimension	44.50 x 26.50 x 43 cms
CBM / Carton	
	6 Dozen (72 Pairs)
Origin	Pakistan

1006-YW/ASK-1001

Leathe	r Rigger Glove, Double Palm
Standard	CE Cat. II EN 388:2016 4244X EN 420:2003 +A1:2010
Features	 Cow Split Leather Double Palm Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Yellow Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	29 kgs
Carton Dimension	28 x 28 x 83.80 cms
CBM / Carton	0.0657
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan

1005-FL/1026

T002-LF\	1020
Leathe	er Rigger Glove, Single Palm
Standard	CE Cat. II EN 388:2016 4133X EN 420:2003 +A1:2010
Features	 Cow Split Leather Single Palm Premium Ref. Tape Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Fluorescent Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	18.5 kgs
Carton Dimension	40.5 x 26.5 x 43 cms
CBM / Carton	0.0461
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan



1007-RD/1026

Leather Rigger Glove, Single Palm Premium

Leather Ric	gger Glove, Single Palm Premium
Standard	CE Cat. II EN 388:2016 4133X EN 420:2003 +A1:2009
Features	 Cow Split Leather Single Palm Premium Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Red Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	17 kgs
Carton Dimension	40.5 x 26.5 x 43 cms
CBM / Carton	0.0461
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan



1008-GR/1034 1008E-GR/1034

Leather Rigger Glove, Single Palm

	,	
Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2011	
Features	 Cow Split Leather Single Palm Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Green Stripes Size:10.5 	
Applications	ConstructionUtilityEngineeringManufacturingAutomotive	
Packing / Carton	6 Dozen (72 Pairs)	
Origin	Pakistan	



1002-OR/1034

1002-OK/ 1054		
Leathe	Leather Rigger Glove, Single Palm	
Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2009	
Features	 Cow Split Leather Single Palm Economy Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Orange Size:10.5 	
Applications	ConstructionUtilityEngineeringManufacturingAutomotive	
Weight / Carton	28 kgs	
	28 x 28 x 78.74 cms	
CBM / Carton		
	10 Dozen (120 Pairs)	
Origin	Pakistan	











1009-YW/1034

Leather Rigger Glove, Patch Palm	
Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2010
Features	 Cow Split Leather Patch Palm Economy Cotton Lined on Palm Rubberized Cuff Wing Thumb Colour:Yellow Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	28 kgs
Carton Dimension	28 x 28 x 83 cms
CBM / Carton	
Packing / Carton	10 Dozen (120 Pairs)
Origin	Pakistan

1010-YW/1034

Leath	er Rigger Glove, Patch Palm
Standard	CE Cat. II EN 388:2016 4122X EN 420:2003 +A1:2010
Features	 Yellow Cow Hide Split Patch Palm Leather Reinforced Palm Thumb & Index Finger Safety Cuff for Extra Protection With Yellow Back Size:10.5
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	27.30 kgs
Carton Dimension	29 x 28 x 84 cms
CBM / Carton	
	10 Dozen (120 Pairs)
Origin	Pakistan

1001H-YW/ASK-2014

TOOTII- I	W/A3K-2014
Leather	Welding Glove, Hockey Palm
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	 Welding Glove Hockey Palm Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Yellow Size:16
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	28.50 kgs
Carton Dimension	40.66 x 33 x 56 cms
CBM / Carton	
	5 Dozen (60 Pairs)
Origin	Pakistan







Leatner	Welding Glove, Kevlar Stitched	
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X	
Features	 Welding Glove Kevlar Stitched Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Golden Size:16" 	
Applications	ConstructionUtilityEngineeringManufacturingAutomotive	
Weight / Carton	28 kgs	
Carton Dimension	40.66 x 33 x 56 cms	
CBM / Carton	0.075	
Packing / Carton	5 Dozen (60 Pairs)	
Origin	Pakistan	





1001-RD/ASK-2014 RD

Leather	Welding Glove without Piping
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X
Features	 Welding Glove Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Red Size:16"
Applications	ConstructionUtilityEngineeringManufacturingAutomotive
Weight / Carton	31 kgs
Carton Dimension	40.66x33x67.30 cms
CBM / Carton	0.0903
Packing / Carton	6 Dozen (72 Pairs)
Origin	Pakistan





1001W-RD/ASK-2014 RD

1001M-KD/A2K-2014 KD		
Leather	Welding Glove, Welted Seams	
Standard	CE Cat. II EN 388:2016 4244X EN 407:2004 41324X	
Features	 Welding Glove Welted Seams Cow Split Leather Cotton Lined on Palm Canvas lining Inside on the Cuff Wing Thumb Colour:Red Size:16" 	
Applications	ConstructionUtilityEngineeringManufacturingAutomotive	
Weight / Carton	27 kgs	
	40.66 x 33 x 56 cms	
CBM / Carton		
	5 Dozen (60 Pairs)	
Origin	Pakistan	

















TIG Welding Gloves

Premium A+	Grain & Split Leather
Standard	CE CAT 1
Features	 Size: 14inch Wing Thumb Full Grain Leather Durable, Flexible, Excellent Comfort Breathable, Long-wearing, It Has Excellent Dexterity & High Mechanical Resistance
Applications	General MaintenanceTIG/MIG WeldingDo it yourself
Weight / Carton	22.64 kgs
Carton Dimension	59 x 37 x 33 cms
CBM / Carton	0.072
Packing / Carton	10 Dozen (120 Pairs)

Origin Pakistan

Driver Gloves

Full Grain Pr	Full Grain Premium Driver Gloves		
Standard	CE CAT 1		
Features	 Size: 10.5inch Wing Thumb Full Grain Leather Durable, Flexible Excellent Comfort Breathable, Long-wearing It Has Excellent Dexterity & High Mechanical Resistance 		
Applications	 General Maintenance Building / Construction Warehousing / Logistics Automotive industry Transportation 		
Weight / Carton	12.62 kgs		
Carton Dimension	61 x 25 x 26 cms		
CBM / Carton			
Packing / Carton	10 Dozen (120 Pairs)		
Origin	Pakistan		

3602 - Freezer

Freezer Glove	es With Fleece Flinning
Standard	CE Cat. I, EN 388
Features	 Size: 10,5inch Straight Thumb Full Grain Leather Polyester Fleece Linning to Resist Cold Durable, Flexible Excellent Comfort Breathable, Long-wearing It HasExcellent Dexterity & High Mechanical Resistance Elastic Knit Wrist
Applications	Freezer & Cold StorageFood Handling
Weight / Carton	8.10 kgs
Carton Dimension	28 x 83 x 26 cms
CBM / Carton	
Packing / Carton	100 pairs
Origin	Pakistan

3601- Freezer

2001- LIE	
Freezer Glove	s With Fleece Flinning
Standard	CE Cat. I, EN 388
Features	 Size: 10.5inch Straight Thumb Full Grain Leather Polyester Fleece Linning to Resist Cold Durable, Flexible Excellent Comfort Breathable, Long-wearing It Has Excellent Dexterity & High Mechanical Resistance Elastic Knit Wrist
Applications	 Cold Environment Handling Cold Objects General Maintenance Building / Construction Warehousing / Logistics
Weight / Carton	11 kgs
Carton Dimension	28 x 83 x 26 cms
CBM / Carton	
Packing / Carton	·
Origin	Pakistan





LP RB Rabbit

Unlined Latex Industrial Rubber Gloves, Chlorinated

- EN 388:2016+A1:2018, EN 420:2003+A1:2009
- EN ISO 374-1:2016+A1:2018
- Dexterity: Level 5
- PH of Glove & Lining: Greater Than 3.5 & Lower Than 9.5

- Standard Chromium VI is Lower Than The Detection Limit Size Within Confirmity
 - The Glove Meets The Essential Requiremnts of
 - The Protection Equipment Directive (R 2016/425)
 - This Glove is Designed for Mechanical Risks & it is a Category II Product
 - Good Chemical Corrosive Resistance
 - · Air-Tightness, Liquid Permeability
 - Comfortable & Excellent Flexibility
 - Good Grip in Dry & Wet Working Conditions

- Features Colour: Black
 - Material: Natural Latex
 - Inside Liner: Unlined
 - Palm: Diamond Griip
 - Thickness: 21.6mil/ 0.55mm

Applications

Refrigerated Warehouses, Material Handling Frozen Food Processing

Weight / Carton 8.2 kgs

CBM / Carton 0.253

Packing / Carton 12pairs/bundle, 120pairs/Carton

Origin China

Carton Dimension 36 x 32 x 22 cms



CBM / Carton 0.30

Packing / Carton 12pairs/bundle, 144pairs/Carton

Origin Malaysia

RF1 Multi	Purpose
Natı	ıral Rubber, Flocklined Glove
Standard	EN 388: 2016 + A1: 2018 EN ISO 374-1:2016 + A1: 2018 / TYPE B EN ISO 374-5:2016, EN 421:2010
Features	 Material: Natural Rubber Colour: Yellow, Type of Lining: Cotton Flock Size: S, M, L, XL
Weight/pair (g)	53 +/- 2 (M), 58 +/- 2 (L), 63 +/- 2 (XL), Length (mm): 300 +/- 10
Compliance with	 Food Contact Materials – Regulation (EC) No 1935/2004 Personal Protective Equipment Regulation (EU) 2016/425 Under Category III Complex Design EU Type Examination & Ongoing Conformity (Module D) Issued by SATRA EUROPE (NB 2777) FDA Part 21 CFR 177.260
Applications	Household ChoresFood ProcessingCleaning & Janitorial
Weight / Carton	9.35 kgs
Carton Dimension	37 x 27 x 29 cms







HD 27 NEO Latex Neoprene

	O Latex Neoprene
Neoprene	e/Natural Rubber, Flocklined Glove
Standard	EN 388: 2016 + A1: 2018 EN ISO 374-1:2016 + A1: 2018 / TYPE A EN ISO 374-5:2016
Features	 Material: Neoprene/ Natural Rubber Colour: Black Type of Lining: Cotton Flock Size: M, L, XL Thickness (mm): 0.68 +/- 0.03 Length (mm): 320 +/- 10
Compliance with	 Food Contact Materials – Regulation (EC) No 1935/2004 Personal Protective Equipment Regulation (EU) 2016/425 Under Category III Complex Design EU Type Examination & Ongoing conformity (Module D) Issued by SATRA EUROPE (NB 2777) FDA Part 21 CFR 177.260
Applications	Heavyduty IndustriesFood ProcessingGardening & Janitoria
Weight / Carton	17.80 kgs
Carton Dimension	37 x 29 x 36.8 cms
CBM / Carton	
	12pairs/bundle, 144pairs/Carton
Origin	Malaysia



EN ISO 20344* EN 344	Test methods for shoes
EN ISO 20345	Safety shoes with toe cap that withstands impact force up to 200 J and compressions up to 15 kN (S CATEGORY)
EN ISO 20347 EN 347	Work shoes without toe cap (O CATEGORY)
EN ISO 17249	Safety shoes that offer protection against chainsaw cutting
EN ISO 13287	Method for testing resistance to slipping
*DDC contition of	inea 2000

^{*}PPE certified since 2006

CLASSIFICATION

GLASSIFIGAT	1011						
TYPE I O SAFETY REQUIREMENTS TYPE II	TYPE I Leather shoes and other materials			TYPE II Completely rubber of polymeric shoes			
Safety footwear	SB	S1P	S1	S2	S 3	S4	S 5
Safety footwear Working footwear	ОВ	01P	01	02	03	04	05
Base requirements	Х	Х	х	х	Х	X	х
Slip resistance SR A/B/C*	X	X	X	X	X	X	X
Anti-static A	0	Х	Х	X	X	X	X
Heel protection against impact E	0	х	X	X	X	X	Х
Water penetration and absorption WRU (Applicable Only for Type I shoes)	0	0	0	Х	X		
Perforation resistance P	0	х	0	0	х	0	Х
Conductivity C	0	0	0	0	0	0	0
Heat insulation HI	0	0	0	0	0	0	0
Cold insulation CI	0	0	0	0	0	0	0
Heat by contact resistance HRO	0	0	0	0	0	0	0
Water resistance WR (Only for Type I shoes)	0	0	0	0	0	0	0
Ankle protection AN	0	0	0	0	0	0	0
Cutting resistance CR	0	0	0	0	0	0	0
Metatarsal protection M	0	0	0	0	0	0	0
(Only for safety shoes)							
Hydrocarbons resistance FO	0	X	X	X	X	X	X
Optional for all the categories of working footwear and for the SB category, base or all the other categories of safety foot	requi						

*PPE certified since 2009 x: mandatory requirement o: optional requirement







Low Anklo Shoo S2 SBC		
Low Ankle Shoe S3 SRC		
	EN ISO 20345: 2011	
Category		
Upper	High Quality Embossed Cow Leather	
Lining	Breathable & Abrasion Resistant Oxford Mesh	
Insock	Anti-Static Breathable EVA	
Outsole	PU/PU Injection, Dual Density	
Toe	Steel Toe Cap to Resist 200 Joules impact	
Penetration	Steel Plate to Resist 1100 Newtons Puncture	
Tested By	UK Intertek lab (Approved body:0362)	
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health 	
Color	Black	
	38-46	
Warranty	6 Months Against Manufacturing Defects	
Weight / Carton	14.49 kgs	
Carton Dimension	62 x 45 x 35 cms	
CBM / Carton	0.09765	
Packing / Carton	10 Pairs	
Origin	China	



Best Sport

Law Ankla Shaa S1D SDC		
Low Ankle Shoe S1P SRC		
Standard	EN ISO 20345: 2011	
Category	S1P SRC	
Upper	Breathable Yellow Cow Suede Leather	
Lining	Breathable & Abrasion Resistant Sandwich	
Insock	Anti-Static Breathable EVA	
Outsole	PU/PU Injection, Dual Density	
Toe	Steel Toe Cap to Resist 200 Joules impact	
Penetration	Steel Plate to Resist 1100 Newtons Puncture	
Tested By	UK Intertek lab (Approved body:0362)	
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health 	
Color	Camel	
Sizes	38-46	
Warranty	6 Months Against Manufacturing Defects	
Weight / Carton	15.62 kgs	
Carton Dimension	60 x 45 x 34.5 cms	
CBM / Carton		
Packing / Carton	10 Pairs	
Origin	China	



Best Jogger

Dest Jogger		
Lo	ow Ankle Shoe S1P SRC	
Standard	EN ISO 20345: 2011	
Category	S1P SRC	
	Breathable Blue Cow Suede Leather	
Lining	Breathable & Abrasion Resistant Sandwich	
	Anti-Static Breathable EVA	
Outsole	PU/PU Injection, Dual Density	
Toe	Composite Toecap to Resist 200 Joules Impact	
Penetration	Flexible Kevlar Sole	
Tested By	UK Intertek lab (Approved body:0362)	
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health 	
Color	Blue	
	38-46	
	6 Months Against Manufacturing Defects	
Weight / Carton	14.74 kgs	
Carton Dimension	60 x 44 x 34 cms	
CBM / Carton		
Packing / Carton	10 Pairs	
Origin	China	













Best Climber

	High Ankle Shoe S1P
Standard	EN ISO 20345: 2011
Category	S1P
Upper	High Quality Suede Cow Leather
Lining	Breathable & Abrasion Resistant Sandwich
Insock	Anti-Static Breathable EVA Insock
	PU/PU injection, Dual Density
Toe	Composite Toecap to Resist 200 Joules Impact
	Kevlar Plate to Resist 1100 Newtons Puncture
Tested By	By UK Intertek Lab (Approved Body:0362)
Applications	 Basic Workplace Construction Logistics Mechanics Glasses Installation Farming Gardening Car Repair Shop
Color	Black
Sizes	38-46
	6 Months Against Manufacturing Defects
Weight / Carton	14 kgs
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	China





Best Boy

High Ankle	Shoe with Side Reflectors S3 SRC
Standard	EN ISO 20345: 2011
Category	S3 SRC
Upper	High Quality Embossed Cow Leather
Lining	Breathable & Abrasion Resistant Sandwich
Insock	Anti-static & Breathable EVA
Outsole	PU/PU Injection, Dual Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body:0362)
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health
Color	Black
Sizes	38-46
Warranty	6 Months Against Manufacturing Defects
Weight / Carton	15.96 kgs
Carton Dimension	61.5 x 44 x 34 cms
CBM / Carton	0.09200
Packing / Carton	10 Pairs
Origin	China






Best Slip-On

High Ankle	Laceless Safety Shoes S3 SRC
Standard	EN ISO 20345: 2011
Category	S3 SRC
Upper	Black Cow Smooth Leather
Lining	Breathable & Abrasion Resistant BK Mesh
	Anti-static & Breathable EVA
Outsole	PU/PU Injection, Dual Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
	Steel Plate to Resist 1100 Newtons Puncture
Tested By	UK Intertek lab (Approved body:0362)
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health
Color	Black
Sizes	38-46
Warranty	6 Months Against Manufacturing Defects
Weight / Carton	15.78 kgs
Carton Dimension	62.5 x 49 x 36 cms
CBM / Carton	
Packing / Carton	
Origin	China





Best Worker

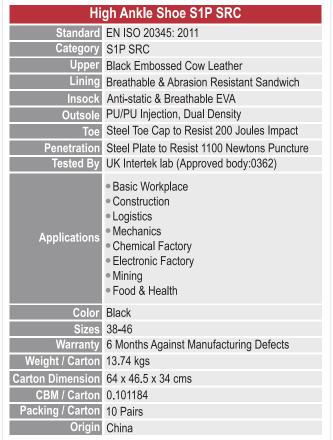





Best Manager

Dest Man	agei
	S3 SRC
Standard	EN ISO 20345:2011
Category	S3 SRC
Upper	High Quality Smooth Grain Cow Leather
Lining	Abrasion Resistant BK Mesh
Insock	Breathable EVA Insock
Outsole	PU/PU injection, Dual Density
Toe	Composite Toecap to Resist 200 Joules Impact
Penetration	kevlar Plate to Resist 1100 Newtons Puncture
Tested By	Composite Toecap to Resist 200 Joules Impact
Applications	 Basic workplaces Construction Logistics Mechanics Glasses installation Workshop Farming Garden, Car repair shop etc.
Color	Black
Sizes	38-46
Warranty	6 Months Against Manufacturing Defects
Weight / Carton	13 kgs
Carton Dimension	62 x 47 x 33 cms
CBM / Carton	
Packing / Carton	
Origin	China











Best Sneaker

Low Ankle Shoes S1P SRC		
Standard	EN ISO 20345:2011	
Category	S1P SRC	
Upper	Sanvlar-Tech Woven Fabric	
Lining	Breathable Sandwich Air Mesh	
Insock	Comfortable Mesh Coated EVA	
Outsole	PU/PU Dual Density	
Toe	Steel Toecap to Resist 200 Joules Impact	
	Steel Plate to Resist 1100 Newtons Puncture	
Tested By	UK SGS Lab (Approval Body: 0120)	
Applications	 Basic workplaces Construction Logistics Mechanics Glasses installation Workshop Farming Garden, Car repair shop etc. 	
Color	Black & Yellow	
	Euro 36-47	
	6 Months Against Manufacturing Defects	
Weight / Carton	13 kgs	
Carton Dimension	62 x 43 x 33 cms	
CBM / Carton	0.08798	
Packing / Carton	10 Pairs	
Origin	China	

Best Welder

	Rigger Boot S3 SRC
Standard	EN ISO 20345: 2011
Category	S3 SRC
Upper	Brown Cow Palm Embossed Leather
Lining	Breathable & Abrasion Resistant Sandwich
	Antistatic & Breathable EVA
	PU/PU Injection, Dual Density
Toe	Steel Toe Cap to Resist 200 Joules Impact
Penetration	Steel Plate 1100 to Resist Newtons Puncture
Tested By	UK Intertek lab (Approved body:0362)
Applications	 Basic Workplace Construction Logistics Mechanics Chemical Factory Electronic Factory Mining Food & Health
Color	Brown
Sizes	38-46
Warranty	6 Months Against Manufacturing Defects
Weight / Carton	20.54 kgs
Carton Dimension	72 x 66 x 37 cms
CBM / Carton	
Packing / Carton	
Origin	China

Bamboo Cotton Socks

Branded Bam	boo Cotton Socks for Safety Shoes
Standard	FZ/T73001-2008
Features	 Natural Bamboo Cotton is Very Comfortable Itching Breathable Protect Foot Absorb Sweat Anti-Static Pilling Resistance Can Effectively Regulating the Nervous System Clear the Meridians Improve Life Quality
Ingredient	95% Cotton5% Spandex
Sizes	37-42 43-47
Category	First Grade
Weight / Carton	
Carton Dimension	
CBM / Carton	
Packing / Carton	
Origin	China









Shoe Cover

PP Shoe Cover		
Standard	EN CAT 1	
	PP Non-Woven	
Weight	30 GSM	
Features	 Extra Thick Provides Lasting Protection, Water Resistant Safe Guard Environment from Contamination Prevents Scuffs on Floor Enhances Traction While Walking Easy on/off Elasticated Shoe Cover 	
Applications	HospitalJanitorialClean RoomIndustrialPharmaceutical Facility	
Color	Blue	
Sizes	15 x 40 cm	
Weight / Carton	4.60 kgs	
Carton Dimension	40 x 27 x 28 cms	
CBM / Carton	0.03	
Packing / Carton	10 Packets (1000 Pieces)	
Origin	China	



Bulldozer

	Dullactor		
Fire	e Fighting Boot - BD9788		
Standard	CSA, CE Approved EN 345-2:1996		
Feature	Vulcanized RubberUpper & SoleHypalon Lacquer FinishingChemical Resistant		
Upper	 Resistant Towards Mild Acids & Alkali 		
Sole	Resistant Towards Mild Acids		
Sole Protection	Black in Colour80% Chloroprene Rubber20% Nitrile RubberOil Resistant		
Steel Toe	Meets EN 345Impact & Compression		
Color	Black / Yellow		
	38 - 46		
Weight / Carton	-		
Carton Dimension			
CBM / Carton			
Packing / Carton			
Origin	China		







Fire	Blanket (1.2 m x 1.2 m)
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m ²
Material	Fiber Glass Fabric
Color	Gold
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	25 Pieces
Origin	China
Size	1.2 Metres x 1.2 Metres (4 feets X 4 feets)



Flash Medium

Fire	Blanket (1.2 m x 1.8 m)
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m ²
Material	Fiber Glass Fabric
Color	
	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	39 x 37 x 23 cms
CBM / Carton	0.033
Packing / Carton	20 Pieces
Origin	China
Size	1.2 Metres x 1.8 Metres (4 feets X 6 feets)



Flash Large

	riabir zarge	
Fire	Blanket (1.8 m x 1.8 m)	
Standard	EN 1869:1997	
Thickness		
Weight	430gm/m ²	
Material	Fiber Glass Fabric	
Color		
Boiling Point	2226° Centigrade	
Melting Point	>1648° Centigrade	
Class	E Class, Certificate & Test Report Available	
Temperatures Point	500° Centigrade	
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc. 	
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)	
Weight / Carton	25.30 kgs	
Carton Dimension	37 x 37 x 24 cms	
CBM / Carton	0.033	
Packing / Carton	15 Pieces	
Origin	China	
Size	1.8 Metres x 1.8 Metres (6 feets X 6 feets)	





Fire	Blanket (1.2 m x 1.2 m)
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m ²
Material	Fiber Glass Fabric
Color	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	20 Pieces
Origin	China
Size	1.2 Metres x 1.2 Metres (4 feets X 4 feets)



Flash Medium PVC Box

Fire Blanket (1.2 m x 1.8 m)	
Standard	EN 1869:1997
Thickness	0.43mm
Weight	430gm/m ²
Material	Fiber Glass Fabric
Color	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	22.60 kgs
Carton Dimension	35 x 24 x 38 cms
CBM / Carton	0.0319
Packing / Carton	10 Pieces
Origin	China
Size	1.2 Metres x 1.8 Metres (4 feets X 6 feets)





Flash Large PVC Box

Fire	Blanket (1.8 m x 1.8 m)
Standard	EN 1869:1997
Thickness	
Weight	430gm/m ²
Material	Fiber Glass Fabric
	White
Boiling Point	2226° Centigrade
Melting Point	>1648° Centigrade
Class	E Class, Certificate & Test Report Available
Temperatures Point	500° Centigrade
Applications	 Fire Escape, Wrap the Fire Blanket & Escape from the Scene Effectively Reduce the High Temperature as a Result of Fire Seismic Escape, Reduce the Impact of Falling Object by Wrapping the Fire Blanket To Extinguish Small Fire at Home, Office, Caravan, Boat, Garage etc.
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)
Weight / Carton	25.30 kgs
Carton Dimension	37 x 37 x 24 cms
CBM / Carton	0.033
Packing / Carton	10 Pieces
Origin	China
Size	1.8 Metres x 1.8 Metres (6 feets X 6 feets)



Flash 0.4 mm

Fire Roll Made of Fiber Glass Woven Fabric		
Standard	CE AS/NZS 3504-2006	
Thickness	0.4mm	
Weight	840gm/m ²	
Material	Fiber Glass Fabric	
Color	White	
Boiling Point	2226° Centigrade	
Melting Point	>1648° Centigrade	
Class	E Class, Certificate & Test Report Available	
Temperatures Point	500° Centigrade	
Applications	Industrial SafetySteel MillsElectric Arc Welding ProcessBoiler Room SparkWelding Application	
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609	
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)	
Weight / Carton	43.50 kgs	
Carton Dimension	105 x 25 x 25 cms	
CBM / Carton	0.0656	
Packing / Carton	1 Roll	
Origin	China	
Size	1 Metre Width x 100 Metres Roll Length	



Flash 0.8 mm

Fire Roll Made	Fire Roll Made of Fiber Glass Woven Fabric		
Standard	CE AS/NZS 3504-2006		
Thickness	0.8mm		
Weight	840gm/m ²		
Material	Fiber Glass Fabric		
Color	Gold		
Boiling Point	2226° Centigrade		
Melting Point	>1648° Centigrade		
Class	E Class, Certificate & Test Report Available		
Temperatures Point	500° Centigrade		
Applications	Industrial SafetySteel MillsElectric Arc Welding ProcessBoiler Room SparkWelding Application		
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609		
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)		
Weight / Carton	42 kgs		
Carton Dimension	103 x 24 x 24 cms		
CBM / Carton	0.0593		
Packing / Carton	1 Roll		
Origin	China		
Size	(1 Metre Width X 50 Metres Roll Length)		



Flash 1.6 mm

1 10311 110 1	I Idolf III	
Fire Roll Made	e of Fiber Glass Woven Fabric	
Standard	CE AS/NZS 3504-2006	
Thickness	1.6mm	
Weight	840gm/m ²	
Material	Fiber Glass Fabric	
Color	Gold	
Boiling Point	2226° Centigrade	
Melting Point	>1648° Centigrade	
Class	E Class, Certificate & Test Report Available	
Temperatures Point	500° Centigrade	
Applications	Industrial SafetySteel MillsElectric Arc Welding ProcessBoiler Room SparkWelding Application	
Temperature	550 Degree Centigrade, Compact & Portable Highly Flame Resistant, Breaking Strength (N/50mm) Warp:5933; Weft: 4609	
Composition	Fiber Glass Cloth + Silicon Rubber (50g to 80g per sq. M of Fiberglass Cloth)	
Weight / Carton	43.50 kgs	
Carton Dimension	104 x 24 x 25 cms	
CBM / Carton	0.062	
Packing / Carton	1 Roll	
Origin	China	
Size	(1 Metre Width X 25 Metres Roll Length)	





Matsuda P150

Portable Eye Washer, 9-Gallon	
Standard	EN 15154-4:2009
Application	 Self-Contained 9-Gallon Gravity Flow Eyewash Unit Uses Gravity to Deliver Water Through Dual Spray Heads The Unit Delivers Over Six Gallons (22.5 Liters) of Water for Fifteen Minutes & is Ideal for Use Where A Continuous Supply of Potable Water Is Not Available, Especially in Remote Plant Areas, Low Traffic And/or Low Hazard Areas
Tank	 9-gallon Capacity Safety Yellow Polyethylene Tank Tank has Handles on Top & Side to Allow for Easy Handling A Wide-Fill Opening With A Threaded Cap Permits Easy Inspection, Cleaning, & Filling
Operation	 Water Flow is Activated By Pulling Down the Yellow Eyewash Tray Integral Full Flow Nozzles Deliver A Soft Spray of Water Swing Tray Up To A Storage Position to Stop the Flow
Drain	 Wastewater is Directed to Discharge Into the Floor Drain A Storage Tank or Other Receptor Could Be Used to Collect Waste Water to Avoid Pollution (Not Included)
Mounting	 Stainless Steel Bracket for A Mounting Unit on the Wall The Unit Can Also Be Placed on A Countertop or Other Flat Surfaces
Discharge Time	15 Minutes (Minimum) At the Flow Rate of 1.5l/Minutes (Minimum)
Origin	China





Matsuda P100

	Portable Eye Washer, 16-Gallon
Standard E	EN 15154-4:2009
	Self-Contained 16-Gallon Gravity Flow Eyewash Unit Uses Gravity to Deliver Water Through Dual Spray Heads The Unit Delivers Over Seven Gallons (26 Liters) of Water for Fifteen Minutes & is Ideal for Use Where A Continuous Supply of Potable Water Is Not Available, Especially in Remote Plant Areas, Low Traffic And/or Low Hazard Areas
Tonk	 16-Gallon Capacity Safety Yellow Polyethylene Tank Tank has Handles on Top & Side to Allow for Easy Handling A Wide-Fill Opening With A Threaded Cap Permits Easy Inspection, Cleaning, & Filling
Operation	 Water Flow is Activated By Pulling Down the Yellow Eyewash Tray Integral Full Flow Nozzles Deliver A Soft Spray of Water Swing Tray Up To A Storage Position to Stop the Flow
	 Wastewater is Directed Into the Drain Opening in the Tank Basin, 3 Ft Long Drain Hose in Basin Directs Discharge into A Floor Drain, Storage Tank, or Other
	 Stainless Steel Bracket for A Mounting Unit on the Wall The Unit Can Also Be Placed on A Countertop or Other Flat Surfaces
	15 Minutes (Minimum) At the Flow Rate of 1.5I/Minutes (Minimum)
Origin (China





Matsuda

Matsuda	SS-B100
Wall	Mounted Eye Washer, SS
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities from the Water Flow 1/2" IPS Stainless Steel Stay-Open ball valve The Valve is Activated By a Flag Handle The Unit Remains in Operation Until the Handle is Returned to the Closed Position 11-1/2" Diameter. Bowl is Stainless Steel
Application	 Wall Mounted Eye Washer is Using in Rushing to Deal With An Emergency Quickly Cleaning the Deleterious Material Attached to the Eyes
Origin	China

Matsuda B100

Matsuua	PTOO
Wall	Mounted Eye Washer, Gl
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities from the Water Flow 1/2" Stainless Steel Stay-Open Ball Valve The Valve is Activated By a Flag Handle The Unit Remains in Operation Until the Handle is Returned to the Closed Position 11-1/2" Diameter. Bowl is ABS plastic
Application	 Wall Mounted Eye Washer is Using in Rushing to Deal With An Emergency Quickly Cleaning the Deleterious Material Attached to the Eyes
Origin	China

Matsuda E100 Eye Washer, GI EN 15154-1:2006 **Standard** EN 15154-2:2006 Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User • Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second **Features** Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities from the Water Flow • 1/2" Stainless Steel Stay-Open Ball Valve • The Unit Remains in Operation Until the Handle is Returned to the Closed Position Supply: 1/2" NPT Male Inlet Waste: 1-1/4"NPT Female Outlet • Free-standing, Pedestal Mounted Eye/Face Wash **Application** Water Flow Is Activated By Either a Flag Handle or a Foot Treadle Origin China





Matsuda S100

Matsuua	3100
Safet	y Shower & Eye Washer, Gl
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Connect Unit to an Uninterruptible Water Supply Capable of Delivering Required Flow When All Components Are Operated Simultaneously Shower Can Provide 76 Liters of Water Per Minute Center of The Water Pattern 16" from Any Obstructions Large Area Cover of Water Flow, At 60", The Water Pattern Cover 20" in Diameter Ball Valve Activates Within One Second Easily Located, Accessible Actuator No Higher Than 69" Controlled, Low-Velocity Flow Completely Rinses Eyes & Face is Not Injurious to the User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne
Application	 The Shower is Activated By A Pull Rod & Eyewash is Activated By A Flag Handle or Foot Treadle Two Spray-Type Outlet Heads Deliver A Flood of Water for Rinsing Eyes
Origin	China



Matsuda SS-E100

	Free Weather 00
	Eye Washer, SS
Standard	N 15154-1:2006 N 15154-2:2006
Features	Controlled, Low Velocity Flow Completely Rinses Eyes & Face is Not Injurious to User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne Contaminants Valve Actuator Are Easy to Locate & Readily Accessible to User Hands-Free Stay Open Valve Activate Within One Second Connect Unit to Uninterruptible Water Supply Delivering at 3 GPM Two Spray Heads, Each Head Has a Dust Cover, Internal Flow Control, & Filter to Remove Impurities From the Water Flow 1/2" 304 Stainless Steel Stay-Open Ball Valve The Unit Remains In Operation Until the Handle is Returned to the Closed Position 11-1/2" Diameter. Bowl Is Stainless Steel Schedule 1-1/4" & 1/2" Stainless Steel
Application	Free-standing, Pedestal Mounted Eye/Face Wash Water Flow Is Activated By Either a Flag Handle or a Foot Treadle
Origin C	hina



Matsuda

Matsuda SS-S100

Matsuua	22-2100
Safety	y Shower & Eye Washer, SS
Standard	EN 15154-1:2006 EN 15154-2:2006
Features	 Connect Unit to an Uninterruptible Water Supply Capable of Delivering Required Flow When All Components Are Operated Simultaneously Shower Can Provide 76 Liters of Water Per Minute Center of The Water Pattern 16" from Any Obstructions Large Area Cover of Water Flow, At 60", The Water Pattern Cover 20" in Diameter Ball Valve Activates Within One Second Easily Located, Accessible Actuator No Higher Than 69" Controlled, Low-Velocity Flow Completely Rinses Eyes & Face is Not Injurious to the User Eye Washer Unit Deliver 11.5 Liters of Water Per Minute Protect Spray Heads from Airborne
Application	 The Shower is Activated By A Pull Rod & Eyewash is Activated By A Flag Handle or Foot Treadle Two Spray-Type Outlet Heads Deliver A Flood of Water for Rinsing Eyes
Origin	China





EW-900

Reliwash Saline Eye Wash 500ml

Description

 Mandatory Under HSE Regulations Sterile Safe & Non-Toxic Twist-Seal Cap

Sodium Chloride 0.9%w/v Ph.Eur

Origin UK





EW-919/F17899

Premier Eyewash Station

- Eye Wash Station Contents:
- 2 Eye Pad Dressings
- Description 2 Eye Wash 500ml Bottles
 - 5 Eye Wash 20ml Pods
 - 1 Mirror

Origin UK





EW-904

Double Eye Wash Station in Aura Box

Description

- Contents: 2pcs 500ml Saline Eve Wash
- 2 No.16 Eyepad Dressing
- Standard Aura 27.5cmH x 27cmW x 9.5cmD

Origin UK





EW-955

Eyewash Station Deluxe Complete

- Content:
- 2 Eye Pad Dressings
- Description 2 Eye Wash 500ml **Bottles**
 - 1 Bracket

Origin UK





EW-906

Eyewash Station with Content

- Green High Visibility
- Eye Wash Station
- Description Holds Two 500ml Sterile Saline Solution Bottles
 - 2 Eye Pad Dressings

Origin UK

Eye Wash Box

Description

Origin UK

Wall Mounted Eyewash Station

Needed

Visible & Readily Available

Easily Mounted on The Wall

Close To The Workplace &

Immediate Washing May Be











EW-2990

Eyewash Bottle 500ml with Eyebath Cap

Description

Sodium Chloride 0.9% w/v Ph.Eur.

- Available In 500ml Bottle Suitable For Boxed
- First Aid Kits.

Origin UK





Eye Wash Station

High-Density Green Polyethylene Tank

Visible & Readily Available

 Easily Mounted on The Wall Close To The Workplace &

 Immediate Washing May Be Needed

Origin UK

Description



FA-330

BS8599-1:2019 Small Workplace Kit

- Low Risk 25 Employees
- High Risk 5 Employees
- Description Compliant to BSI Standard
 - Colour-Coded Carry Case
 - All Content HSE Approved

Origin UK





FA-275

Riga Bum Bag First Aid Bag

Description

- Suitable For Outdoor Walking Trips or Climbing
- Fits Around The Waist Lightweight & Not Cumbersome

Origin UK



FA-343

BS8599-1:2019 Me dium Workplace Kit

Low Risk 25-100 Employees

- High Risk 5-25 Employees
- Compliant to BSI Standard
- Colour-Coded Carry Case
- All Content HSE Approved

Origin UK

Description

APPROVED



FA-F30658

BS8599-1 Medium Standard Workplace

Description

- Conforms With British Standard BS 8599-1:2019
- For 25 To 50 People Fully Stocked With First Aid Supplied With Wall Bracket

Origin UK





FA-348

BS8599-1:2019 Large Workplace Kit

Description

- Low Risk 100 Employees
- High Risk 25 Employees
- Compliant to BSI Standard Colour-Coded Carry Case
- All Content HSE Approved

Origin UK

RELIANCE MEDICAL 'Leading First Aid'



FA-2030

Burns kit in Compact Aura Box

Description

General Purpose Compact Burns Kit. Includes Various Size Burn Dressings Suitable for Smaller Work Environments

Origin UK





FA-156

SUV First Aid Kit in Stockholm Bag

Description

Provides for Extended Travel Periods

- Larger Capacity for Multiple Use
- Kit to Cover Several People

Origin UK

RELIANCE MEDICAL 'Leading First Aid'



Application Body Fluid Clean Up Kit

Description

- Everything Required to
- Clean Up in One Simple Pack
- Provides Containment & Disposal in Each Application Meets HSE Requirements

Origin UK



FAW5 (Micro Kit)

First Aid Kit (Upto 5 Persons)

Description • With Its Mini Size, It is Fairly

 Especially Designed for Travel Use

Handy When you Take Care of Small Medical Treatment

Origin China



FAO50 (Sports Plus Kit) FAW50 (Industry Kit)

First Aid Kit (Upto 50 Persons)

Description

 Made of Strong ABS Plastic Which is Shiny & Easy to Clean

A Neoprene Seal is Fitted to Make The Kit Dust-Proof

Origin China



FAW10 (Auto Kit)

First Aid Kit (Upto 10 Persons)

Description

Perfect for Auto. Home & Office Use

 The Kit is Roomy, Durable, Easy to Carry & Simple to Open

Origin China



First Aid Kit (Upto 50 Persons)

Description

 High Class Metal Design in White Color with Three Compartment

 It is Recommended for Industrial Companies, Hotels

Origin China



FAWB25 (Team Kit)

First Aid Kit (upto 25 Persons)

Description

Cleaning & Covering Small Wounds, Removing Ticks & Other Embedded Objects

This is The Perfect Kit to Keep in Your Car

Origin China



FA100 (Workplace Kit)

First Aid Kit (Upto 100 Persons)

Description

Made of Strong ABS Plastic Which is Shiny & Easy to Clean

A Neoprene Seal is Fitted to Make The Kit Dust-Proof

Origin China



FAG25 (Office Kit)

First Aid Kit (upto 25 Persons)

Description

Made of Strong ABS Plastic Which is Shiny, Smooth & Easy to Clean

Contains Neoprene Seal Which Makes it Dust-Proof

Origin China



Burn Kit

First Aid Kit with Bracket

Burn First Aid Kit is a Vital Product for Burn Injuries

Description • The Contents are Apt for Small Burns & The Box Comes With The Brackets

Origin China





BW C2-H H2S



BW C3-H H2S



BW MICRO CLIP XL



BW	M	ΔX	XT	TT

		211 00 11	
H2S Persona	ll Monitor, 24 Months	H2S Persona	I Monitor, 36 Months
Standard	UL Class 1/ATEX/IECEx/CE	Standard	UL Class 1/ATEX/IECEx/CE
Size	2.8 x 5.0 x 8.6 cms	Size	2.8 x 5.0 x 8.6 cms
Weight	92 g	Weight	92 g
Features	 Detector Complete With Specified Sensor Stainless Steel Alligator Clip & Concussion-Proof Housing Test Cap, Instructions 	Features	 Detector Complete With Specified Sensor Stainless Steel Alligator Clip & Concussion-Proof Housing Test Cap, Instructions
Weight / Carton	1.55 kgs	Weight / Carton	1.55 kgs
Carton Dimension	31 x 17 x 14 cms	Carton Dimension	31 x 17 x 14 cms
CBM / Carton	0.0007	CBM / Carton	0.0007
Packing / Carton	10 Pieces	Packing / Carton	10 Pieces
Origin	Mexico	Origin	Mexico

W I-ITOI	O CLII AL	DII PIAX	/ I II
Multi-Gas D	etector Micro Clip XL	Multi-Gas	Detector MAX XT II
Standard	EMI/RFI: Complies with EMC Directive 89/336/EEC IP 66/67	Standard	EMI/RFI: Complies with EMC Directive 2004/108/EC IP66/67
Approvals	ATEX: II 1 G, Ex ia IIC T4 Ga	Approvals	ATEX: II 1 G Ga Ex ia IIC T4
	11.3 x 6.0 x 2.9 cms		13.1 x 7.0 x 5.2 cms
Weight	171 g	Weight	328 g
Features	 Choose The GasAlertMicroClip XL for Cold Weather Performance Intelliflash™ Verifies Operation & Compliance to Both the User & Supervisor Tamper-proof, One Button Operation Powered By a Rechargeable Lithium Polymer Battery Monitors H2S Co, O2 & LEL Compatible With Microdock Ii Quick Specs 	Features	 Continuous LCD Shows Real Time Gas Concentrations Water-Resistant Simple Automatic Calibration Procedure; Compatible with Bw Microdock II Automatic Test & Calibration Station Full Function Self-Test of Sensor, Battery Status, Circuit Integrity & Audible/Visual Alarms on Start Up Bright Visual Alarm Bars Built-in Concussion-Proof Boot Monitors H2S, CO, O2 & LEL
Packing / Carton	1 Piece	Packing / Carton	1 Piece
Origin	Mexico	Origin	Mexico







Spill Kit Bin with Wheel (30, 60 Gallon)

Spill Kit Bag (5, 10 Gallon)
WELLS SELECT

Spill Kit Bin with Pedal (20 Gallon)

OIL SPILL KIT		Oil Spill Kit Contents				
Contents	Origin	5 Gallons	10 Gallons	20 Gallons	30 Gallons	60 Gallons
Sorbent Pad,EP100,15"x18"	USA	10 Pieces	25 Pieces	50 Pieces	100 Pieces	150 Pieces
WSOC440 White Oil-Only Socks 3" dia X 4'	USA	2 Piece	3 Piece	4 Piece	4 Piece	10 Pieces
WPIL818 White Oil-Only Pillows 8" X 18"	USA	-	-	2 Piece	4 Piece	8 Pieces
HD Disposal bag	China	1 Piece	1 Piece	2 Pieces	2 Pieces	4 Pieces
Plastic Scoop & Brush	China	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Instruction Sheet	-	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Empiral Vision Clear Goggle	Taiwan	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Nitrile Gloves	Sri Lanka	1 Pair	1 Pair	1 Pair	1 Pair	1 Pair
Spill Kit bag	China	1 Piece	1 Piece	-	-	-
Spill Kit Bin without wheel with Pedal (70L)	China	-	-	1 Bin	-	-
Spill Kit Bin with wheel (120L)	China	-	-	-	1 Bin	-
Spill Kit Bin with wheel (240L)	China	-	-	-	-	1 Bin

CHEMICAL SPILL KIT		Chemical Spill Kit Contents				
		5 Gallons	10 Gallons	20 Gallons	30 Gallons	60 Gallons
Contents BYP100S Yellow Chemical Light Weight MeltBlown Pads 20"L x 16"W	Origin USA	10 Pieces	25 Pieces	50 Pieces	100 Pieces	150 Pieces
YSOC440 3" X 4' Yellow Chemical Socks	USA	2 Piece	3 Piece	4 Piece	4 Piece	10 Pieces
YPIL818 Yellow Chemical Pillows 8" x 18"	USA	-	-	2 Piece	4 Piece	8 Pieces
HD Disposal bag	China	1 Piece	1 Piece	2 Pieces	2 Pieces	4 Pieces
Plastic Scoop & Brush	China	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Instruction Sheet	-	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Empiral Vision Clear Goggle	Taiwan	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Nitrile Gloves	Sri Lanka	1 Pair	1 Pair	1 Pair	1 Pair	1 Pair
Spill Kit bag	China	1 Piece	1 Piece	-	-	-
Spill Kit Bin without wheel with Pedal (70L)	China	-	-	1 Bin	-	-
Spill Kit Bin with wheel (120L)	China	-	-	-	1 Bin	-
Spill Kit Bin with wheel (240L)	China	-	-	-	-	1 Bin



3M

3M SS Cleaner & Polish

Stainless Steel Cleaner & Polish, 21 oz Aerosol

Stainless Stee	el Cleaner & Polish, 21 oz Aerosol
Standard	NSF A-7 Registered
Features	 Cleans & Polishes in One Step Leaves No Greasy Build-up on Surfaces Pleasant Citrus Fragrance Resists Streaking NSF® Certified for Use in Federally-Inspected Meat & Poultry Processing Plants
Applications	 Stainless Steel, Chrome Architectural Aluminum Other Interior Metal Surfaces Appliances, Bathrooms Fixtures/Equipment, Fryers, Griddles Grills, Hoods, Kitchens/Dining
Weight / Carton	9.43 Kgs
Carton Dimension	31 x 24 x 24 cms
CBM / Carton	0.01786
Packing / Carton	12 Bottles
Origin	USA







Scaffolding Tags

Scarrolding rags	
	Danger Tag
Features	 Insert in Each Holder 2 Pcs Marking Pen UV Resistant Impact Resistant Safety Approved Background Color: White Legend Style: Text Legend Color: Red Header: Danger
Applications	 Construction Industry Work on Scaffolds Frequently From Steel Erectors to Building Equipment Installers, Bricklayers, Window Washers Carpenters & Painters
Weight / Carton	8.57 kgs
Carton Dimension	34 x 22 x 34 cms
CBM / Carton	
Packing / Carton	
	10 Holders + 20 Tags + 2 Marking Pens
Origin	India / China



Kit Arc 4 Power

Arc Flash Kit "Power", HRC 4, 41.0 cal/cm2, Class 2, 12 oz/yd2

ASTM F2178. ATPV: 40.0 cal/cm2 DGUV GS-ET-29, APC 2 (class 2) W(LBP)= 630 kJ

EN 166 with CE-labelling

Standard IEC 61482-1-1: ASTM F1959, ATPV: 41,0 cal/cm²

EN ISO 11612:2015 A1/B1/C1/F1 EN ISO 11611:2015 class 2-A1

EN 31092 / ISO 11092: RET= 7.10 m² Pa/W

EN ISO 15797

- Arc Flash Hood with Integrated Hard Hat & Bracket Tested According to ASTM F2178, ATPV: 40.0 cal/cm²
- Arc Flash Tested According to DGUV GS-ET-29, APC 2 (class 2)
- Additional Tested with a Higher Test Level W(LBP)= 630 kJ
- EN 166 "personal Eye-protection Requirements" with CE-Labeling
- Jacket & Dungarees Arc Flash Tested According to IEC 61482-1-1: ASTM F1959, ATPV: 41,0 cal/cm²
- Jacket & Dungarees Arc Flash Tested to IEC 61482-1-2, class 2
- Features Heat & Flame Protection According to EN ISO 11612:2015 A1/B1/C1/F1
 - Welding Protection According to EN ISO 11611:2015 class 2-A1
 - Extreme Breathable According to EN 31092 / ISO 11092: RET= 7,10 m² Pa/W for the Highest Arc Flash Protection
 - Clothing Industry Washing Suitable According to EN ISO 15797
 - Ultra-light Grammage: 410g/m² (12 oz.yd2)
 - Outer Layer 240 g/m², 75% Aramid (Nomex®), 13% Modacrylic, 10.5% Cotton, 1.5% Antistatic Component
 - Inner Layer 170 g/m², 100% Aramid (Nomex®)
 - Bag to Transport And Storage the KIT

Color Grey Blue

- Substations
- Applications Utilities Power Generators
 - Industrial Electrical Maintenance & Installations

Origin Germany











FBSD



Arc Flash Jacket, 41.0cal/cm²

Arc Flash Jac	ket "Power", HRC 4, 41.0 cal/cm², Class 2, 12 oz/yd²
Standard	IEC 61482-2:2018 (Class 2) DIN EN ISO 11611:2015 Class 2 A1+A2 DIN EN ISO 11612:2015 (A1+A2/B1/C1/F1)
Features	 High Wearing Comfort Through Ultralow Weight, 410 g/m2 / 12 oz/yd2 Yarn Dyeing, No Leaching of the Textile Fabric Good Moisture Regulation & Extremely Breathable, RET-Value According EN 31092 / ISO 11092: 7.1 m2 PA/W Mixed Fabric Aramid (Nomex®), Modacryl, Cotton & Antistatic Components Can be Used Together with Bsd HRC 4 Gloves & BSD Power Hood as Switching Kit
Color	Dark Blue
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations
Origin	Germany



₹BSD

Arc Flash Bib Coverall, 41.0cal/cm²

Arc Flash	Bib Coverall "Power", HRC 4, 41.0 cal/cm², Class 2
	IEC 61482-2:2018 (Class 2) DIN EN ISO 11611:2015 Class 2 A1+A2 DIN EN ISO 11612:2015 (A1+A2/B1/C1/F1)
Features	 High Wearing Comfort Through Ultralow Weight, 410 g/m2 / 12 oz/yd2 Yarn Dyeing, No Leaching of the Textile Fabric Good Moisture Regulation & Extremely Breathable, RET-Value According EN 31092 / ISO 11092: 7.1 m2 PA/W Mixed Fabric Aramid (Nomex®), Modacryl, Cotton & Antistatic Components Can be Used Together with BSD HRC 4 Gloves & BSD Power Hood as Switching Kit
Color	Dark Blue
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations
Origin	Germany



Balaclava ATPV: 34.0 cal/cm²

Balaciava All VI 5-110 cal/cill		
AT	ATPV: 34.0 cal/cm², Double Layer Fabric 7.8 oz/yd²	
Standard	ASTM F1959 Certificate of Conformity PPE Regulation (EU) 2016/425	
Features	 Arc Flash Tested According to ASTM F1959, ATPV: 34.0 cal/cm² For Wearing Under Face Shields For A Higher Arc Flash Protection of the Head Double Layer Fabric: 7.8 oz/yd² Univeral-Size 	
Color	Dark Blue	
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations	
Origin	Germany	



FBSD

Arc Protection Hood Arc 4 Power

Alc Protection Hood Alc 4 Power		
ATPV: 40.0 cal/	/cm², Double Layer Fabric 7.8 oz/yd², Arc Protection Balaclava	
Standard	IEC 61482-1-1: ASTM F2178, ATPV: 40.0 cal/cm² DGUV GS-ET-29, APC 2 (class 2) W(LBP)= 630 kJ	
Features	 Arc-flash-tested According to IEC 61482-1-1: ASTM F2178, ATPV: 40.0 cal/cm² Arc Flash Tested According to DGUV GS-ET-29, APC 2 (class 2) Additional Tested with a Higher Test Level W(LBP)= 630 kJ EN 166 "personal Eye-Protection Requirements" with CE-Labeling Ultra-Light Grammage 410 g/m² (12 oz.yd2) True Color Visor For The Highest Arc Flash Protection with Integrated Hard Hat & Bracket Universal-Size 	
Color	Dark Blue	
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations	
Origin	Germany	



ErgoS_{Intec plus}, 14 cal/cm²

211000 pius	
Class2, HRC2, 14Cal/cm ² , Helmet with integrated Face Shield	
Standard	ASTM F2178 -17 b ANSI/ISEA Z89.1 Class E DIN EN 166: 2001 DIN EN 170: 2002 DGUV GS-ET-29: 2011 EN 397:2012+A1:2012 EN 50365:2002 Certificate of Conformity
Features	 Electrician Face Shield with Integrated Visor & the Real View Technology by BSD. The Visor Can be Pushed into the Hard Hat When not in Use. Electric Arc Tested According to DGUV GS-ET-29, class 2 (APC 2) Electric arc tested according to ASTM F2178, 14.0 cal/cm² Visor EN 166, EN 170 & ANSI/ISEA Z87.1 Hard Hat EN 397, EN 50365 (Class 0) & ANSI/ISEA Z89.1 Real View Technology by BSD Color ReproductionIndex > 95 %, Visor has no Aging Permanent Anti-Fog Protection Available Accessory: Ear-Defender, Hard Hat Lamp
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations
Origin	Germany



ErgoS_{Intec power}, 28 cal/cm²

Class 2 UDC2 29Cal/am? Halmat with Integrated Face Chiefe		
Classz, nk	Class2, HRC3, 28Cal/cm², Helmet with Integrated Face Shield	
Standard	ASTM F2178 ANSI/ISEA Z89.1 Class E DIN EN 166: 2001 DIN EN 170: 2002 EN 397:2012+A1:2012 EN 50365:2002 Certificate of Conformity PPE Regulation (EU) 2016/425 Marking Helmet BSD -40°C, 440 Vac MM, LD Klasse 0 1437 ANSI/ISEA Z89.1 Class E Marking Visor 2C-2 BSD 1 B N 166	
Features	 Electric arc Tested According to ASTM F2178, 28.0 cal/cm² Visor EN 166, EN 170 & ANSI/ISEA Z87.1 Hard Hat EN 397, EN 50365 (class 0) & ANSI/ISEA Z89.1 Real View Technology by BSD Color Reproduction Index >95%, visor has no Aging Permanent Anti-Fog Protection Available Accessory: Ear-Defender, Hard Hat Lamp 	
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations	
Origin	Germany	



P. 0.0	
Face Shie	ld, Class 2,HRC 2,10.7cal/cm²,Uni
Standard	DIN EN 166: 2001, DIN EN 170: 2002 DGUV GS-ET-29: 2010 ASTM F2178 Certificate of Compliance ANSI / ISEA Z.87.1-2010 Certificate of Conformity EU Directive 89/686/EWG Marking visor carrier BSD 166 8 F Marking visor 1000 V, CE 1883 2C-2 BSD 1 B 8-2-2, ATPV 10.7 cal/cm²
Features	 Arc flash tested according to ASTM F2178, ATPV: 10.7 cal/cm² EN 166, "personal eye-protection requirement" ANSI / ISEA Z87.1 - 2010 Tue color visor, through not tinted visor > 95% Useful life up to 10 years Tested according to DGUV GS-ET-29, class 2 318 kJ Universal-bracket matching on common electrian hard hats Slot-bracket suitable for all hard hats with 30 mm Euro-slots Brackets for other hard hats on request

Delivery with anti-fog protective spray

• Industrial electrical maintenance & installations

Substations Applications • Utilities Power Generators

Origin Germany



E

ergoS 2 _{power} , 26.0 cal/cm ²		
Arc Flash	Face Shield "ErgoS 2power" HRC 3	
Standard	DIN EN 166: 2001, DIN EN 170: 2002 DGUV GS-ET-29: 2010 ASTM F2178 Certificate of Compliance ANSI / ISEA Z.87.1-2010 Certificate of Conformity EU Directive 89/686/EWG Marking Visor Carrier BSD 166 8 F, Marking Visor 1000 V, CE 1883 2C-2 BSD 1 B 8-2-2 ATPV 26.0 cal/cm²	
Features	 Arc Flash Tested According to ASTM F2178, ATPV: 10.7 cal/cm² EN166, "Personal Eye-Protection Requirement" ANSI / ISEA Z87.1 - 2010 Tue Color Visor, Through Not Tinted Visor > 95% Useful Life Up To 10 Years Tested According to DGUV GS-ET-29, Class 2 318 kJ Universal-Bracket Matching on Common Electrian Hard Hats Slot-bracket Suitable for all Hard Hats with 30 mm Euro-Slots Brackets for other Hard Hats on Request Delivery with Anti-Fog Protective Spray 	
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations	
Origin	Germany	



FraoS 3 12 cal/cm²

ergos 3 _{plus} , 12 cai/cm ²		
Face Shield, Class 2, HRC 2,12cal/cm ²		
Standard	Arc Flash Protection GS-ET-29 (Box-Test): Class 2 / APC 2 ASTM F2178: ATPV 12.0 cal/cm², HRC 2	
Features	 Arc Flash Faceshield of the Latest Generation, Light, Transparent Chin Protection, Perfect Weight Balance for the Helmet Arc Flash Tested According to ASTM F2178, ATPV: 12.0 cal/cm² EN 166, "Personal Eye-protection Requirement" ANSI / ISEA Z87.1 - 2010 True Color Visor, Through not Tinted Visor > 95% Useful Life up to 10 Years Tested According to DGUV GS-ET-29, Class 2 318 kJ Weight: 420 g Universal-Bracket Matching on Common Electrian Hard Hats Slot-Bracket Suitable for all Hard Hats with 30 mm Euro-Slots Slot-Bracket Suitable for Helmets Petzl Vertex Euro-Slot Brackets for other Hard Hats on Request Delivery with Anti-Fog Protective Spray 	
Applications	SubstationsUtilities Power GeneratorsIndustrial Electrical Maintenance & Installations	
Origin	Germany	



Arc 2 Light, 8.7 cal/cm²

Arc Flash Gloves, HRC 2, ARC2Light 8 EN388:2003 0X2X

Standard EN407:2004 4121XX IEC61482-1-1 APTV 8.7Cal/cm2 IEC61482-1-2 Class 1

- Light Gloves for Workplaces with Arc Flash Hazard Risks
- Features Perfect Fitting Through Soft & Pliant Knit Fabric
 - Also Excellent Undergloves for Insulating Gloves
 - Less Sweating, Therfor Longer Working with Insulating Gloves
 - Arc Flash Teste According to IEC 61482-1-2:2007 (APC 1)
 - Acr Flash Testet According to IEC 61482-1-1: ATPV 8,7 cal/cm²
 - Tested According to EN 407:2004 Heat Protection
 - Tested According to EN 388:2003 Mechanical Risks
 - Super Sensitivity

Applications

- Substations
- Utilities Power Generators
- Industrial Electrical Maintenance & Installations

Origin Germany



Arc 2 18.0 cal/cm²

Arc protection Gloves HRC 2, Class 2

Arc Protection Classification Standard IEC 61482-1-2 APC 2 / Class 2 WLBP = 395 kJASTM F2675 / ATPV 18.0 cal/cm2

- Arc Flash Tested According to IEC 61482-1-1: ATPV 18 cal/cm²
- Arc Flash Tested According to IEC 61482-1-2:2007 class 2 (APC 2)
- Additional Tested with a Higher Tesl Leve W(LBP)= 395 kJ
- Protection Against Mechanic Risks According to EN 388:2003
- Protection Against Thermal Risks
- According to EN 407:2004 Back Side of Glove made of
- Double Textile
- Inside Seams, with aramid Thread
- Perfect Fit via Soft & Flexible Leather
- Excellent Delicacy of Feeling

Applications

Features

- Substations
- Utilities Power Generators
- Industrial Electrical Maintenance & Installations

Origin Germany



Arc 3 31.0 cal/cm²

Arc Protection Gloves HRC 2, Class 2

IFC 61482-1-1: ATPV 31 cal/cm² IEC 61482-1-2:2007 class 2 Standard (APC 2)

W(LBP)= 395 kJ

- Arc Flash Tested According to IEC 61482-1-1: ATPV 31 cal/cm²
- Arc Flash Tested According to IEC 61482-1-2:2007 class 2 (APC 2)
- Additional Tested with a Higher Tesl Leve W(LBP)= 395 kJ
- Protection Against Mechanic Risks **Features** According to EN 388:2003
 - Protection Against Thermal Risks According to EN 407:2004
 - Back Side of Glove Made of Double Textile
 - Perfect Fit Via Soft & Flexible Leather
 - Excellent Delicacy of Feeling

Applications

- Substations
- Utilities Power Generators
- Industrial Flectrical Maintenance & Installations

Origin Germany



Arc 4 45.0 cal/cm²

Arc Protection Gloves HRC 4, Class 2 IEC 61482-1-1: ATPV 45 cal/cm²

Standard IEC 61482-1-2:2007 Class 2 (APC 2) W(LBP)= 630 kJ

Features

- Arc Flash Tested According to IEC 61482-1-1: ATPV 45 cal/cm²
- Arc Flash Testet According to IEC 61482-1-2:2007 class 2 (APC 2)
- Additional Tested with a Higher Tesl Leve W(LBP)= 630 kJ
- Protection Against Mechanic Risks According to EN 388:2003
- Protection Against Thermal Risks According to EN 407:2004
- Back Side of Glove Made of Double-textile
- Perfect Fit Via Soft & Flexible Leather
- Excellent Delicacy of Feeling

Applications

- Substations
- Utilities Power Generators
- Industrial Electrical Maintenance & Installations

Origin Germany

М7



CONNECT WITH US



Head Office:

2nd Industrial Area Building No: 7880,

Secondary NO: 2758 Post Code: 34344

Dammam Region Kingdom of Saudi Arabia

Abdul Samad

(Sales Manager)
samad@toofaanksa.com

Ahamed Mansoor

(Transport Manager)
mansoor@toofaanksa.com

Branch Office:

Toofaan Transport Riyadh, KSA



+966 53 589 2124



admin@toofaanksa.com



www. toofaanksa.com