


# MiniTurbo™ VF

## APPLIED MODERNISATION FOR THE VF HATCHER

Our popular Turbo-Hatch concept is now scaled for use in vertical fan-frame hatcher to radically improve performance

- 3-stage water delivery system with up to 50% increase in cooling.
- Greater fan size with 18" pulley offers superior airflow and cooling efficiency.
- Operates with dramatic rise in chilled water temperature up to 17°C (63°F) that creates far less coil condensation and reduced chiller energy consumption.
- Integrated safety door switch and fan fail alarm creates a safe environment for your staff and chicks.
- Permanently connected power and chilled water services.
- Stainless steel assembly with integral roof support to extend hatcher life.
- Energy efficient 3-phase roof mounted fan motor with VFD for power savings and optional basket drying.

HAVE YOU  
TURBO'D  
YOUR VFs?

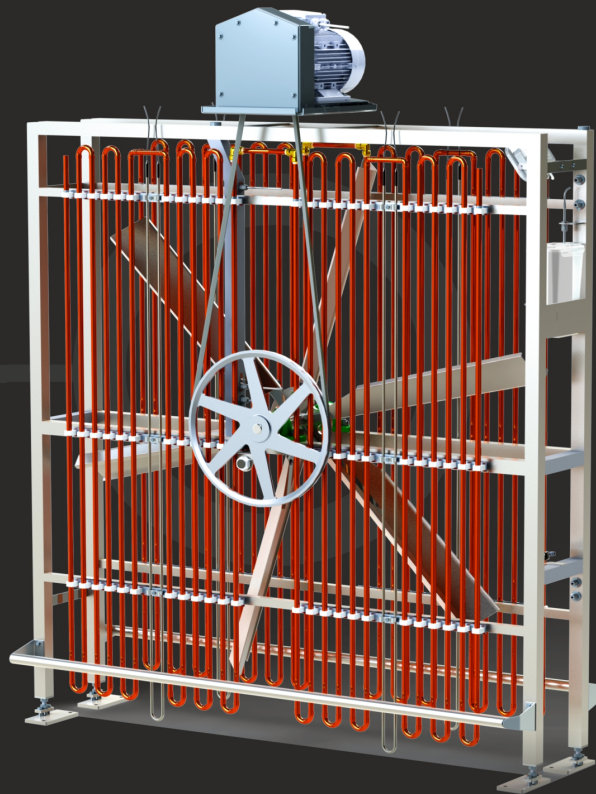

A SIMPLE REPLACEMENT FOR OUTDATED FAN-FRAME SYSTEMS

UPGRADE SYSTEMS