



**Maximum Load Capacity:** 6,600 Lbs  
**Maximum Lift Height:** 28' 3"  
**Maximum Reach:** 18' 8"  
**Load Capacity at Max. Reach:** 1,200 Lbs  
**Load Capacity at Max. Lift:** 2,400 Lbs

PERFORMANCE	
Unladen Weight (lbs)	14,770
Maximum Load Capacity (lbs)	6,600
Lift Height (ft)	28' 3"
Maximum Reach (ft)	18' 8"
Load Capacity at Max. Lift Height (lbs)	2,400
Load Capacity at Max. Reach (lbs)	1,200
Boom Side-Shift (in)	-
Frame Leveling	-
Boom Sections	3

POWERTRAIN	
Engine	Deutz
Displacement/Cylinders	3.6/4
Engine Power (HP)	115
Reversible Fan	●
Maximum Speed (mph)	25
Fuel Tank Capacity (gal)	22.4
AdBlue Tank Capacity (gal)	3.2
Hydrostatic Transmission	● -2V
EPD	Top
Axles	Axial
Reducers	Epicyclic
Brakes	Dry Discs
Automatic Parking Brake	●

HYDRAULIC	
Hydraulic Pump	LS + FS
Delivery/Pressure (psi-gal/min)	3,045-33
Hydraulic Oil Tank Capacity (gal)	22.4
Auxiliar Hydraulic Service on Boom	●
Rear Service Line	○


● Standard    ○ Optional

DIMENSIONS			
Width (ft)	6' 10"	Length (ft)	14' 3"
Height (ft)	7' 0"	Wheelbase (ft)	9' 0"
Ground Clearance	1' 1"	Turning Radius Over Tires	12' 10"

The technical data and other information in this document are not binding. We reserve the right to modify our products without prior notice as part of our policy of continuous improvement

CAB	
Cab Finishing	ECO
MCDC	Light
FOPS II Cab	●
ROPS Cab	●
Controls	Electronic Joystick
Reverse Shuttle	Dual Reverse

CONFIGURATION	
Hydropneumatic Suspension CS Merlo	-
Hydropneumatic Suspension BSS Merlo	○
Hydropneumatic Suspension EAS Merlo	-
Work lights on cab	●
Sun-shade in the cab	○
Tac-lock	●
Pre-arrangement for aerial work platform	○
Two floating forks	●
Pedal Inching-Control	●
Permanent four-wheel drive	●
4 Wheel Drive	●
3 Steering Modes	●
Standard tires	405/70-20"
Hydraulically controlled stabilizers	-
Turret rotation	-
Tractor type approval	○
PTO	-
3-point rear linkage	-

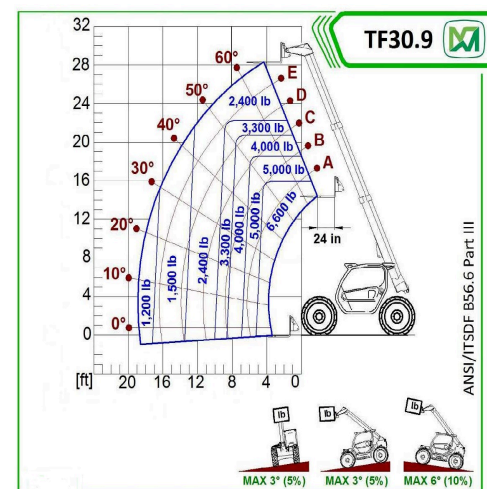

September 2020

IMPORTED & DISTRIBUTED BY



ams-merlo.com

803-327-4949

1205 Galleria Blvd., Rock Hill, SC 29730