

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Volume (vph)	6	49	133	51	35	81	46	303	31	60	338	7
Future Volume (vph)	6	49	133	51	35	81	46	303	31	60	338	7
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	14	14	14	11	11	11	13	13	13
Storage Length (ft)	150		150	150		150	150		150	150		150
Storage Lanes	0		0	0		0	0		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor		0.94			0.92			0.99			1.00	
Frt		0.905			0.935			0.989			0.998	
Flt Protected		0.998			0.985			0.994			0.993	
Satd. Flow (prot)	0	1522	0	0	1342	0	0	1477	0	0	1652	0
Flt Permitted		0.991			0.857			0.910			0.890	
Satd. Flow (perm)	0	1512	0	0	1168	0	0	1352	0	0	1481	0
Right Turn on Red			No			No			No			No
Satd. Flow (RTOR)												
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		113			249			300			234	
Travel Time (s)		2.6			5.7			6.8			5.3	
Confl. Peds. (#/hr)			52			111			63			41
Peak Hour Factor	0.89	0.89	0.89	0.86	0.86	0.86	0.90	0.90	0.90	0.92	0.92	0.92
Heavy Vehicles (%)	2%	2%	2%	9%	9%	9%	3%	3%	3%	11%	11%	11%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	14	0
Parking (#/hr)		10			10			10				
Adj. Flow (vph)	7	55	149	59	41	94	51	337	34	65	367	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	211	0	0	194	0	0	422	0	0	440	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	0.92	1.13	0.92	1.04	1.28	1.04	0.96	1.03	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases	1			1			2			2		
Permitted Phases	1			1			2			2		
Detector Phase	1	1		1	1		2	2		2	2	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	34.0	34.0		34.0	34.0		32.0	32.0		32.0	32.0	
Total Split (s)	34.0	34.0		34.0	34.0		41.0	41.0		41.0	41.0	
Total Split (%)	45.3%	45.3%		45.3%	45.3%		54.7%	54.7%		54.7%	54.7%	
Maximum Green (s)	29.0	29.0		29.0	29.0		36.0	36.0		36.0	36.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0			0.0			0.0			0.0		
Total Lost Time (s)	5.0			5.0			5.0			5.0		
Lead/Lag	Lead	Lead		Lead	Lead		Lag	Lag		Lag	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Max	Max		Max	Max		C-Max	C-Max		C-Max	C-Max	
Walk Time (s)	15.0	15.0		15.0	15.0		15.0	15.0		15.0	15.0	
Flash Dont Walk (s)	14.0	14.0		14.0	14.0		12.0	12.0		12.0	12.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)	29.0			29.0			36.0			36.0		
Actuated g/C Ratio	0.39			0.39			0.48			0.48		
v/c Ratio	0.36			0.43			0.65			0.62		
Control Delay	18.7			20.7			12.2			19.2		
Queue Delay	0.0			0.0			0.0			0.3		
Total Delay	18.7			20.7			12.3			19.5		
LOS	B			C			B			B		
Approach Delay	18.7			20.7			12.3			19.5		
Approach LOS	B			C			B			B		
Queue Length 50th (ft)	68			65			36			144		
Queue Length 95th (ft)	120			114			52			238		
Internal Link Dist (ft)	33			169			220			154		
Turn Bay Length (ft)												
Base Capacity (vph)	584			451			648			710		
Starvation Cap Reductn	0			0			4			0		
Spillback Cap Reductn	0			0			0			44		
Storage Cap Reductn	0			0			0			0		
Reduced v/c Ratio	0.36			0.43			0.66			0.66		

Intersection Summary


Area Type: Other
 Cycle Length: 75
 Actuated Cycle Length: 75
 Offset: 0 (0%), Referenced to phase 2:NBSB, Start of Green
 Natural Cycle: 70

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Wekday AM Peak Hour

Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.65	
Intersection Signal Delay: 17.1	Intersection LOS: B
Intersection Capacity Utilization 76.6%	ICU Level of Service D
Analysis Period (min) 15	

Splits and Phases: 1: Buena Vista Avenue & Main Street



Lanes, Volumes, Timings
2: Buena Vista Avenue & North Driveway/Hudson Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Volume (vph)	3	43	8	29	7	20	7	357	45	53	467	2
Future Volume (vph)	3	43	8	29	7	20	7	357	45	53	467	2
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	11	11	11	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor					0.95			1.00				1.00
Frt		0.979			0.951			0.985				
Flt Protected		0.997			0.975			0.999			0.995	
Satd. Flow (prot)	0	1818	0	0	1574	0	0	1507	0	0	2022	0
Flt Permitted		0.968			0.975			0.989			0.918	
Satd. Flow (perm)	0	1765	0	0	1494	0	0	1492	0	0	1862	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		9			25			9				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		117			240			235				300
Travel Time (s)		2.7			5.5			5.3				6.8
Confl. Peds. (#/hr)				48					4	20		
Peak Hour Factor	0.92	0.92	0.92	0.81	0.92	0.81	0.92	0.93	0.93	0.83	0.83	0.92
Heavy Vehicles (%)	2%	2%	2%	9%	2%	9%	2%	23%	23%	6%	6%	2%
Parking (#/hr)				10				5				
Adj. Flow (vph)	3	47	9	36	8	25	8	384	48	64	563	2
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	59	0	0	69	0	0	440	0	0	629	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		30			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.04	1.04	1.04	0.85	1.01	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Split	NA		Perm	NA		Perm	NA	

Lanes, Volumes, Timings
2: Buena Vista Avenue & North Driveway/Hudson Street

Mitigation Condition
Wekday AM Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases		4		8	8			2				6
Permitted Phases	4						2			6		
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	22.0	22.0		22.0	22.0		25.0	25.0		25.0	25.0	
Total Split (s)	22.0	22.0		22.0	22.0		31.0	31.0		31.0	31.0	
Total Split (%)	29.3%	29.3%		29.3%	29.3%		41.3%	41.3%		41.3%	41.3%	
Maximum Green (s)	17.0	17.0		17.0	17.0		25.0	25.0		25.0	25.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		5.0			5.0			6.0			6.0	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		C-Min	C-Min		C-Min	C-Min	
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	
Flash Dont Walk (s)	10.0	10.0		10.0	10.0		12.0	12.0		12.0	12.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)		7.6			7.8			51.2			51.2	
Actuated g/C Ratio		0.10			0.10			0.68			0.68	
v/c Ratio		0.32			0.37			0.43			0.49	
Control Delay		31.3			27.3			10.6			8.8	
Queue Delay		0.0			0.0			0.0			0.3	
Total Delay		31.3			27.3			10.6			9.1	
LOS		C			C			B			A	
Approach Delay		31.3			27.3			10.6			9.1	
Approach LOS		C			C			B			A	
Queue Length 50th (ft)		22			19			106			130	
Queue Length 95th (ft)		54			54			221			169	
Internal Link Dist (ft)		37			160			155			220	
Turn Bay Length (ft)												
Base Capacity (vph)		407			376			1021			1271	
Starvation Cap Reductn		0			0			0			206	
Spillback Cap Reductn		0			0			0			0	
Storage Cap Reductn		0			0			0			0	
Reduced v/c Ratio		0.14			0.18			0.43			0.59	

Intersection Summary

Area Type:	Other
Cycle Length:	75
Actuated Cycle Length:	75
Offset:	12 (16%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green
Natural Cycle:	80
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.49
Intersection Signal Delay:	11.8
Intersection Capacity Utilization	73.6%
Intersection LOS:	B
ICU Level of Service	D













Analysis Period (min) 15

Splits and Phases: 2: Buena Vista Avenue & North Driveway/Hudson Street



Lanes, Volumes, Timings
3: Buena Vista Avenue & Prospect Street

Mitigation Condition
Wekday AM Peak Hour

						
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	104	273	144	194	412	179
Future Volume (vph)	104	273	144	194	412	179
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	9	9	9	9
Storage Length (ft)	0	0		50	150	
Storage Lanes	1	1		1	1	
Taper Length (ft)	25				25	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor	0.96			0.98	0.99	
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1719	1538	1385	1346	1438	1513
Flt Permitted	0.950				0.475	
Satd. Flow (perm)	1646	1538	1385	1323	709	1513
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)		317		228		
Link Speed (mph)	30		30			30
Link Distance (ft)	256		433			284
Travel Time (s)	5.8		9.8			6.5
Confl. Peds. (#/hr)	17			5	20	
Peak Hour Factor	0.86	0.86	0.85	0.85	0.82	0.82
Heavy Vehicles (%)	5%	5%	8%	8%	13%	13%
Parking (#/hr)			5			
Adj. Flow (vph)	121	317	169	228	502	218
Shared Lane Traffic (%)						
Lane Group Flow (vph)	121	317	169	228	502	218
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	20		9			9
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.35	1.14	1.14	1.14
Turning Speed (mph)	15	9		9	15	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (ft)	20	20	100	20	20	100
Trailing Detector (ft)	0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0	0
Detector 1 Size(ft)	20	20	6	20	20	6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)			94			94
Detector 2 Size(ft)			6			6
Detector 2 Type			Cl+Ex			Cl+Ex

Lanes, Volumes, Timings
3: Buena Vista Avenue & Prospect Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Detector 2 Channel						
Detector 2 Extend (s)			0.0			0.0
Turn Type	Prot	Perm	NA	Perm	pm+pt	NA
Protected Phases	8		2		1	6
Permitted Phases		8		2	6	
Detector Phase	8	8	2	2	1	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	23.0	23.0	31.0	31.0	10.0	31.0
Total Split (s)	23.0	23.0	31.0	31.0	36.0	67.0
Total Split (%)	25.6%	25.6%	34.4%	34.4%	40.0%	74.4%
Maximum Green (s)	18.0	18.0	26.0	26.0	31.0	62.0
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag			Lag	Lag	Lead	
Lead-Lag Optimize?			Yes	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None	Min	Min	None	Min
Walk Time (s)	7.0	7.0	7.0	7.0		7.0
Flash Dont Walk (s)	11.0	11.0	19.0	19.0		19.0
Pedestrian Calls (#/hr)	0	0	0	0		0
Act Effct Green (s)	9.9	9.9	13.2	13.2	36.2	36.2
Actuated g/C Ratio	0.17	0.17	0.23	0.23	0.64	0.64
v/c Ratio	0.40	0.60	0.53	0.47	0.74	0.23
Control Delay	28.5	9.1	27.7	7.3	13.1	5.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.5	9.1	27.7	7.3	13.1	5.0
LOS	C	A	C	A	B	A
Approach Delay	14.4		16.0			10.7
Approach LOS	B		B			B
Queue Length 50th (ft)	35	0	47	0	72	24
Queue Length 95th (ft)	98	56	121	43	144	53
Internal Link Dist (ft)	176		353			204
Turn Bay Length (ft)				50	150	
Base Capacity (vph)	581	730	677	763	914	1432
Starvation Cap Reductn	0	0	0	0	1	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.21	0.43	0.25	0.30	0.55	0.15

Intersection Summary


Area Type: Other
 Cycle Length: 90
 Actuated Cycle Length: 56.8
 Natural Cycle: 70
 Control Type: Actuated-Uncoordinated
 Maximum v/c Ratio: 0.74

Lanes, Volumes, Timings
 3: Buena Vista Avenue & Prospect Street

Mitigation Condition
 Weekday AM Peak Hour







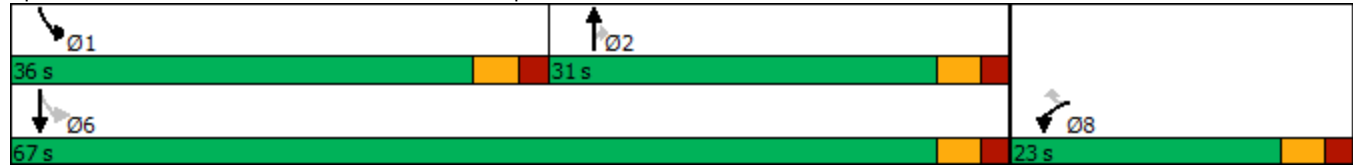









Intersection Signal Delay: 13.1	Intersection LOS: B
Intersection Capacity Utilization 50.8%	ICU Level of Service A
Analysis Period (min) 15	

Splits and Phases: 3: Buena Vista Avenue & Prospect Street



Lanes, Volumes, Timings
4: Hawthorne Avenue & Main Street

Mitigation Condition
Wekday AM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	113	27	27	139	0	18	0	32	4	0	10
Future Volume (vph)	0	113	27	27	139	0	18	0	32	4	0	10
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	15	15	15	15	12	12	12	12	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.974						0.865			0.901	
Flt Protected					0.992		0.950					0.987
Satd. Flow (prot)	0	1602	0	0	1647	0	1770	0	0	0	1657	0
Flt Permitted					0.992		0.950					0.987
Satd. Flow (perm)	0	1602	0	0	1647	0	1770	0	0	0	1657	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		249			526			222			176	
Travel Time (s)		5.7			12.0			5.0			4.0	
Peak Hour Factor	0.92	0.89	0.89	0.86	0.86	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	2%	8%	8%	7%	7%	2%	2%	2%	2%	2%	2%	2%
Parking (#/hr)		10			10							
Adj. Flow (vph)	0	127	30	31	162	0	20	0	35	4	0	11
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	157	0	0	193	0	20	35	0	0	15	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			-50	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.09	0.88	0.88	1.09	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization Err%	ICU Level of Service H
Analysis Period (min)	15

Lanes, Volumes, Timings
5: Hawthorne Avenue & Hudson Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Volume (vph)	1	140	0	0	0	0	24	49	58	22	0	32
Future Volume (vph)	1	140	0	0	0	0	24	49	58	22	0	32
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	12	12	12	16	16	16	13	13	13
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor												
Frt								0.940			0.919	
Flt Protected								0.991			0.980	
Satd. Flow (prot)	0	1422	0	0	0	0	0	1581	0	0	1607	0
Flt Permitted								0.991			0.980	
Satd. Flow (perm)	0	1422	0	0	0	0	0	1581	0	0	1607	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		240			538			516			81	
Travel Time (s)		5.5			12.2			11.7			1.8	
Confl. Peds. (#/hr)			22				21		14			39
Peak Hour Factor	0.82	0.82	0.82	0.92	0.92	0.92	0.86	0.86	0.86	0.81	0.81	0.81
Heavy Vehicles (%)	13%	13%	13%	2%	2%	2%	11%	11%	11%	10%	10%	10%
Parking (#/hr)		5						5				
Adj. Flow (vph)	1	171	0	0	0	0	28	57	67	27	0	40
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	172	0	0	0	0	0	152	0	0	67	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.04	1.24	1.04	1.00	1.00	1.00	0.85	1.01	0.85	0.96	0.96	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	29.5%
ICU Level of Service	A
Analysis Period (min)	15

Lanes, Volumes, Timings
6: Warburton Avenue & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↖	↗			↕		↖	↗	
Traffic Volume (vph)	17	245	45	59	163	84	23	240	62	113	250	14
Future Volume (vph)	17	245	45	59	163	84	23	240	62	113	250	14
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	10	9	13	13	16	16	16	9	11	11
Storage Length (ft)	0		0	60		0	0		0	100		0
Storage Lanes	0		0	1		0	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.980			0.949			0.974			0.992	
Fl _t Protected		0.997		0.950				0.996		0.950		
Satd. Flow (prot)	0	1354	0	1518	1741	0	0	1589	0	1562	1752	0
Fl _t Permitted		0.977		0.477				0.961		0.318		
Satd. Flow (perm)	0	1326	0	762	1741	0	0	1534	0	523	1752	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		9			27			15			5	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		239			672			1367			278	
Travel Time (s)		5.4			15.3			31.1			6.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.86	0.86	0.86	0.92	0.92	0.92
Heavy Vehicles (%)	12%	12%	12%	7%	7%	7%	15%	15%	15%	4%	4%	4%
Parking (#/hr)		5						5				
Adj. Flow (vph)	18	266	49	64	177	91	27	279	72	123	272	15
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	333	0	64	268	0	0	378	0	123	287	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			9			0			9	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	1.29	1.09	1.14	0.96	0.96	0.85	1.01	0.85	1.14	1.04	1.04
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lanes, Volumes, Timings
6: Warburton Avenue & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		Perm	NA		pm+pt	NA	
Protected Phases		2			6			8		7	4	
Permitted Phases	2			6			8			4		
Detector Phase	2	2		6	6		8	8		7	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		10.0	10.0		5.0	10.0	
Minimum Split (s)	32.0	32.0		32.0	32.0		32.0	32.0		10.0	32.0	
Total Split (s)	36.0	36.0		36.0	36.0		47.0	47.0		17.0	64.0	
Total Split (%)	36.0%	36.0%		36.0%	36.0%		47.0%	47.0%		17.0%	64.0%	
Maximum Green (s)	31.0	31.0		31.0	31.0		42.0	42.0		12.0	59.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0		0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0		5.0	5.0			5.0		5.0	5.0	
Lead/Lag							Lag	Lag		Lead		
Lead-Lag Optimize?							Yes	Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Ped	Ped		C-Max	C-Max		Ped	Ped		Max	Ped	
Walk Time (s)	15.0	15.0		15.0	15.0		15.0	15.0			15.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		12.0	12.0			12.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0			0	
Act Effct Green (s)		41.7		41.7	41.7			31.3		48.3	48.3	
Actuated g/C Ratio		0.42		0.42	0.42			0.31		0.48	0.48	
v/c Ratio		0.60		0.20	0.36			0.77		0.33	0.34	
Control Delay		29.2		26.6	23.6			40.6		15.9	16.2	
Queue Delay		0.0		0.0	0.0			0.0		0.0	0.0	
Total Delay		29.2		26.6	23.6			40.6		15.9	16.2	
LOS		C		C	C			D		B	B	
Approach Delay		29.2			24.2			40.6			16.1	
Approach LOS		C			C			D			B	
Queue Length 50th (ft)		150		22	82			216		44	112	
Queue Length 95th (ft)		#313		m41	m151			263		63	137	
Internal Link Dist (ft)		159			592			1287			198	
Turn Bay Length (ft)				60						100		
Base Capacity (vph)		557		317	741			652		377	1035	
Starvation Cap Reductn		0		0	0			0		0	0	
Spillback Cap Reductn		0		0	0			0		0	0	
Storage Cap Reductn		0		0	0			0		0	0	
Reduced v/c Ratio		0.60		0.20	0.36			0.58		0.33	0.28	

Intersection Summary

Area Type:	Other
Cycle Length:	100
Actuated Cycle Length:	100
Offset:	0 (0%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	75
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.77
Intersection Signal Delay:	27.3
Intersection LOS:	C

Lanes, Volumes, Timings
 6: Warburton Avenue & Ashburton Avenue

Mitigation Condition
 Weekday AM Peak Hour

Intersection Capacity Utilization 74.0% ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 6: Warburton Avenue & Ashburton Avenue

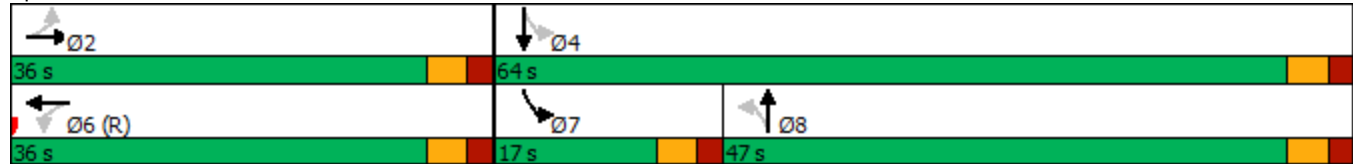

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↖	↗			↑			↘	↙
Traffic Volume (vph)	2	0	10	334	50	113	31	272	0	0	399	7
Future Volume (vph)	2	0	10	334	50	113	31	272	0	0	399	7
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	13	9	9	14	14	14	14	14	14
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.890			0.896							0.998
Flt Protected		0.991		0.950				0.995				
Satd. Flow (prot)	0	1643	0	1600	1502	0	0	1680	0	0	1686	0
Flt Permitted		0.890		0.950				0.925				
Satd. Flow (perm)	0	1475	0	1600	1502	0	0	1562	0	0	1686	0
Right Turn on Red			Yes			No			Yes			Yes
Satd. Flow (RTOR)		81										1
Link Speed (mph)		30			30			30				30
Link Distance (ft)		49			114			382				1367
Travel Time (s)		1.1			2.6			8.7				31.1
Peak Hour Factor	0.80	0.80	0.80	0.91	0.91	0.91	0.86	0.86	0.86	0.85	0.85	0.85
Parking (#/hr)				5		5		10				10
Adj. Flow (vph)	3	0	13	367	55	124	36	316	0	0	469	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	16	0	367	179	0	0	352	0	0	477	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		13			13			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.14	1.14	1.14	0.92	1.13	0.92	0.92	1.13	0.92
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2				2
Detector Template	Left	Thru		Left	Thru		Left	Thru				Thru
Leading Detector (ft)	20	100		20	100		20	100				100
Trailing Detector (ft)	0	0		0	0		0	0				0
Detector 1 Position(ft)	0	0		0	0		0	0				0
Detector 1 Size(ft)	20	6		20	6		20	6				6
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex				Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				0.0
Turn Type	Perm	NA		Split	NA		Perm	NA				NA
Protected Phases		4		3	3			2				2
Permitted Phases	4						2	2				
Detector Phase	4	4		3	3		2	2				2

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0				5.0
Minimum Split (s)	24.0	24.0		28.0	28.0		39.0	39.0				39.0
Total Split (s)	25.0	25.0		29.0	29.0		40.0	40.0				40.0
Total Split (%)	26.6%	26.6%		30.9%	30.9%		42.6%	42.6%				42.6%
Maximum Green (s)	20.0	20.0		24.0	24.0		35.0	35.0				35.0
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0				3.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0				2.0
Lost Time Adjust (s)		0.0		0.0	0.0			0.0				0.0
Total Lost Time (s)		5.0		5.0	5.0			5.0				5.0
Lead/Lag	Lag	Lag		Lead	Lead							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0				3.0
Recall Mode	None	None		Ped	Ped		Ped	Ped				Ped
Walk Time (s)	7.0	7.0		11.0	11.0		24.0	24.0				24.0
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		10.0	10.0				10.0
Pedestrian Calls (#/hr)	5	5		0	0		0	0				0
Act Effct Green (s)		7.8		23.9	23.9			34.7				34.7
Actuated g/C Ratio		0.10		0.32	0.32			0.47				0.47
v/c Ratio		0.07		0.72	0.37			0.48				0.61
Control Delay		0.6		34.5	24.9			18.9				21.4
Queue Delay		0.0		0.0	0.0			0.4				0.0
Total Delay		0.6		34.5	24.9			19.3				21.4
LOS		A		C	C			B				C
Approach Delay		0.6			31.3			19.3				21.4
Approach LOS		A			C			B				C
Queue Length 50th (ft)		0		126	54			87				127
Queue Length 95th (ft)		0		#372	153			241				332
Internal Link Dist (ft)		1			34			302				1287
Turn Bay Length (ft)												
Base Capacity (vph)		461		523	491			744				804
Starvation Cap Reductn		0		0	0			103				0
Spillback Cap Reductn		0		0	0			0				0
Storage Cap Reductn		0		0	0			0				0
Reduced v/c Ratio		0.03		0.70	0.36			0.55				0.59


Intersection Summary

Area Type:	Other
Cycle Length:	94
Actuated Cycle Length:	74.6
Natural Cycle:	95
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.72
Intersection Signal Delay:	24.5
Intersection LOS:	C
Intersection Capacity Utilization:	73.7%
ICU Level of Service:	D
Analysis Period (min):	15
# 95th percentile volume exceeds capacity, queue may be longer.	
Queue shown is maximum after two cycles.	

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Wekday AM Peak Hour

Splits and Phases: 7: Warburton Avenue & Wells Avenue



Lanes, Volumes, Timings

Mitigation Condition

8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square Weekday AM Peak Hour



Lane Group	NBL2	NBL	NBT	NBR	SBL	SBT	SBR	SBR2	NEL2	NEL	NER	NER2
Lane Configurations												
Traffic Volume (vph)	1	82	291	168	17	633	4	89	8	12	38	21
Future Volume (vph)	1	82	291	168	17	633	4	89	8	12	38	21
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	16	16	16	12	12	16	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor			0.97			0.99				0.89		
Frt			0.945			0.983				0.899		
Flt Protected		0.950				0.999				0.987		
Satd. Flow (prot)	0	1583	1296	0	0	1801	0	0	0	1341	0	0
Flt Permitted		0.340				0.983				0.987		
Satd. Flow (perm)	0	567	1296	0	0	1772	0	0	0	1341	0	0
Right Turn on Red				Yes				Yes				Yes
Satd. Flow (RTOR)			41			10				85		
Link Speed (mph)			30			30				30		
Link Distance (ft)			431			382				174		
Travel Time (s)			9.8			8.7				4.0		
Confl. Peds. (#/hr)				60			67				23	
Peak Hour Factor	0.86	0.86	0.86	0.86	0.93	0.93	0.93	0.93	0.81	0.81	0.81	0.81
Heavy Vehicles (%)	14%	14%	14%	14%	10%	10%	10%	10%	11%	11%	11%	11%
Bus Blockages (#/hr)	0	0	0	0	0	13	0	0	0	0	0	0
Parking (#/hr)			10							5		
Adj. Flow (vph)	1	95	338	195	18	681	4	96	10	15	47	26
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	96	533	0	0	799	0	0	0	98	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Left	Right	Right	Left	Left	Right	Right
Median Width(ft)			12			0				16		
Link Offset(ft)			0			0				80		
Crosswalk Width(ft)			16			16				16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.23	1.00	0.85	0.91	0.85	1.00	1.00	1.01	1.00	1.00
Turning Speed (mph)	15	15		9	15		9	9	15	15	9	9
Number of Detectors	1	1	2		1	2			1	1		
Detector Template	Left	Left	Thru		Left	Thru			Left	Left		
Leading Detector (ft)	20	20	100		20	100			20	20		
Trailing Detector (ft)	0	0	0		0	0			0	0		
Detector 1 Position(ft)	0	0	0		0	0			0	0		
Detector 1 Size(ft)	20	20	6		20	6			20	20		
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex		
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0		
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0		
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0		
Detector 2 Position(ft)			94			94						
Detector 2 Size(ft)			6			6						
Detector 2 Type			Cl+Ex			Cl+Ex						
Detector 2 Channel												
Detector 2 Extend (s)			0.0			0.0						

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Lane Util. Factor	
Ped Bike Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Confl. Peds. (#/hr)	
Peak Hour Factor	
Heavy Vehicles (%)	
Bus Blockages (#/hr)	
Parking (#/hr)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	

Lanes, Volumes, Timings

Mitigation Condition

8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square Weekday AM Peak Hour



Lane Group	NBL2	NBL	NBT	NBR	SBL	SBT	SBR	SBR2	NEL2	NEL	NER	NER2
Turn Type	Perm	Perm	NA		Perm	NA			Perm	Prot		
Protected Phases			3			3				1		
Permitted Phases	3	3			3				1			
Detector Phase	3	3	3		3	3			1	1		
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0			5.0	5.0		
Minimum Split (s)	13.0	13.0	13.0		13.0	13.0			13.0	13.0		
Total Split (s)	47.0	47.0	47.0		47.0	47.0			16.0	16.0		
Total Split (%)	52.2%	52.2%	52.2%		52.2%	52.2%			17.8%	17.8%		
Maximum Green (s)	39.0	39.0	39.0		39.0	39.0			8.0	8.0		
Yellow Time (s)	4.0	4.0	4.0		4.0	4.0			4.0	4.0		
All-Red Time (s)	4.0	4.0	4.0		4.0	4.0			4.0	4.0		
Lost Time Adjust (s)		0.0	0.0			0.0				0.0		
Total Lost Time (s)		8.0	8.0			8.0				8.0		
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0			3.0	3.0		
Recall Mode	Max	Max	Max		Max	Max			Max	Max		
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		39.8	39.8			39.8				8.2		
Actuated g/C Ratio		0.58	0.58			0.58				0.12		
v/c Ratio		0.29	0.69			0.77				0.42		
Control Delay		13.6	18.3			20.3				16.7		
Queue Delay		0.0	0.0			6.7				0.0		
Total Delay		13.6	18.3			27.0				16.7		
LOS		B	B			C				B		
Approach Delay			17.6			27.0				16.7		
Approach LOS			B			C				B		
Queue Length 50th (ft)		14	102			180				4		
Queue Length 95th (ft)		76	#433			#716				44		
Internal Link Dist (ft)			351			302				94		
Turn Bay Length (ft)												
Base Capacity (vph)		330	770			1035				234		
Starvation Cap Reductn		0	0			191				0		
Spillback Cap Reductn		0	0			0				0		
Storage Cap Reductn		0	0			0				0		
Reduced v/c Ratio		0.29	0.69			0.95				0.42		

Intersection Summary

Area Type:	Other
Cycle Length:	90
Actuated Cycle Length:	68.4
Natural Cycle:	90
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.77
Intersection Signal Delay:	22.4
Intersection Capacity Utilization:	73.2%
Intersection LOS:	C
ICU Level of Service:	D

Lane Group	Ø9
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	1.0
Minimum Split (s)	27.0
Total Split (s)	27.0
Total Split (%)	30%
Maximum Green (s)	25.0
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	10.0
Flash Dont Walk (s)	15.0
Pedestrian Calls (#/hr)	5
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
Intersection Summary	

8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square Wekday AM Peak Hour

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square



Lanes, Volumes, Timings
9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↖	↗		↖	↕			↗	
Traffic Volume (vph)	51	0	98	76	66	84	32	407	0	0	586	68
Future Volume (vph)	51	0	98	76	66	84	32	407	0	0	586	68
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	13	15	15	9	13	13	12	12	12
Storage Length (ft)	0		0	0		0	75		0	0		0
Storage Lanes	0		0	1		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	0.95
Ped Bike Factor		0.97			0.96						0.99	
Frt		0.911			0.916						0.984	
Flt Protected		0.983		0.950			0.950					
Satd. Flow (prot)	0	1366	0	1622	1357	0	1438	3033	0	0	2928	0
Flt Permitted		0.835		0.616			0.300					
Satd. Flow (perm)	0	1160	0	1052	1357	0	454	3033	0	0	2928	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		102			67						14	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		526			497			325			431	
Travel Time (s)		12.0			11.3			7.4			9.8	
Confl. Peds. (#/hr)			41			65			58			58
Peak Hour Factor	0.81	0.81	0.81	0.86	0.86	0.86	0.89	0.89	0.89	0.96	0.96	0.96
Heavy Vehicles (%)	16%	16%	16%	15%	15%	15%	13%	13%	13%	11%	11%	11%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	10	0	0	0	0
Parking (#/hr)		10			10			5			10	
Adj. Flow (vph)	63	0	121	88	77	98	36	457	0	0	610	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	184	0	88	175	0	36	457	0	0	681	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			13			12			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	0.96	1.09	0.88	1.14	1.07	0.96	1.00	1.11	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2				2
Detector Template	Left	Thru		Left	Thru		Left	Thru				Thru
Leading Detector (ft)	20	100		20	100		20	100				100
Trailing Detector (ft)	0	0		0	0		0	0				0
Detector 1 Position(ft)	0	0		0	0		0	0				0
Detector 1 Size(ft)	20	6		20	6		20	6				6
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex				Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6

Lanes, Volumes, Timings
9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		NA		
Protected Phases	4			4			2	5		1		
Permitted Phases	4			4			5					
Detector Phase	4	4		4	4		2	5		1		
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0		
Minimum Split (s)	37.0	37.0		37.0	37.0		11.0	11.0		40.0		
Total Split (s)	38.0	38.0		38.0	38.0		21.0	62.0		41.0		
Total Split (%)	38.0%	38.0%		38.0%	38.0%		21.0%	62.0%		41.0%		
Maximum Green (s)	32.0	32.0		32.0	32.0		15.0	56.0		35.0		
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0		4.0		
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0		
Lost Time Adjust (s)	0.0			0.0			0.0			0.0		
Total Lost Time (s)	6.0			6.0			6.0			6.0		
Lead/Lag							Lag		Lead			
Lead-Lag Optimize?							Yes		Yes			
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0		
Recall Mode	Ped	Ped		Ped	Ped		Max	Max		C-Max		
Walk Time (s)	10.0	10.0		10.0	10.0					18.0		
Flash Dont Walk (s)	21.0	21.0		21.0	21.0					16.0		
Pedestrian Calls (#/hr)	0	0		0	0					0		
Act Effct Green (s)	31.0			31.0			57.0		57.0	36.0		
Actuated g/C Ratio	0.31			0.31			0.57		0.57	0.36		
v/c Ratio	0.43			0.27		0.38	0.09		0.26	0.64		
Control Delay	16.0			28.8		19.0	11.1		11.4	29.4		
Queue Delay	0.0			0.0		0.0	0.0		0.7	0.0		
Total Delay	16.0			28.8		19.0	11.1		12.1	29.4		
LOS	B			C		B	B		B	C		
Approach Delay	16.0			22.3			12.0			29.4		
Approach LOS	B			C			B			C		
Queue Length 50th (ft)	39			42		51	9		72	183		
Queue Length 95th (ft)	82			80		103	23		100	247		
Internal Link Dist (ft)	446			417			245			351		
Turn Bay Length (ft)							75					
Base Capacity (vph)	440			336		479	406		1728	1063		
Starvation Cap Reductn	0			0		0	0		897	0		
Spillback Cap Reductn	0			0		0	0		0	0		
Storage Cap Reductn	0			0		0	0		0	0		
Reduced v/c Ratio	0.42			0.26		0.37	0.09		0.55	0.64		

Intersection Summary


Area Type: Other
 Cycle Length: 100
 Actuated Cycle Length: 100
 Offset: 0 (0%), Referenced to phase 1:SBT, Start of Green
 Natural Cycle: 90

Lanes, Volumes, Timings
 9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
 Weekday AM Peak Hour

Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.64	
Intersection Signal Delay: 21.4	Intersection LOS: C
Intersection Capacity Utilization 95.0%	ICU Level of Service F
Analysis Period (min) 15	

Splits and Phases: 9: Riverdale Avenue/Warburton Avenue & Main Street

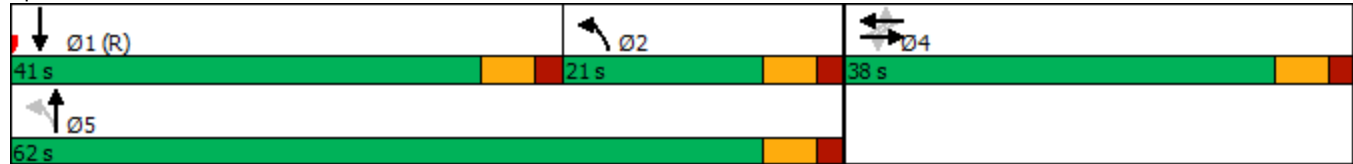

Lanes, Volumes, Timings
10: Riverdale Avenue & Hudson Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕		↕	↕	
Traffic Volume (vph)	16	149	55	0	0	0	0	423	118	151	609	0
Future Volume (vph)	16	149	55	0	0	0	0	423	118	151	609	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	11	11	11	9	12	12
Storage Length (ft)	0		0	0		0	0		0	125		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	1.00
Ped Bike Factor		0.97						0.99				
Frt		0.966						0.967				
Flt Protected		0.996								0.950		
Satd. Flow (prot)	0	1437	0	0	0	0	0	2828	0	1438	2825	0
Flt Permitted		0.996								0.381		
Satd. Flow (perm)	0	1437	0	0	0	0	0	2828	0	577	2825	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		16						41				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		538			379			525				325
Travel Time (s)		12.2			8.6			11.9				7.4
Confl. Peds. (#/hr)			82			72			23			42
Peak Hour Factor	0.84	0.84	0.84	0.92	0.92	0.92	0.93	0.93	0.93	0.93	0.93	0.93
Heavy Vehicles (%)	19%	19%	19%	2%	2%	2%	14%	14%	14%	13%	13%	13%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	15	0	0	22	0
Parking (#/hr)		10									10	
Adj. Flow (vph)	19	177	65	0	0	0	0	455	127	162	655	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	261	0	0	0	0	0	582	0	162	655	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			8			8	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	1.00	1.00	1.00	1.04	1.09	1.04	1.14	1.17	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	

Lanes, Volumes, Timings
10: Riverdale Avenue & Hudson Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex						Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)	0.0						0.0			0.0		
Turn Type	Perm	NA					NA			pm+pt	NA	
Protected Phases	3						5			6	1	
Permitted Phases	3									1		
Detector Phase	3	3					5			6	1	
Switch Phase												
Minimum Initial (s)	10.0	10.0					5.0			10.0	5.0	
Minimum Split (s)	30.0	30.0					30.0			16.0	30.0	
Total Split (s)	36.0	36.0					46.0			21.0	67.0	
Total Split (%)	35.0%	35.0%					44.7%			20.4%	65.0%	
Maximum Green (s)	30.0	30.0					40.0			15.0	61.0	
Yellow Time (s)	4.0	4.0					4.0			4.0	4.0	
All-Red Time (s)	2.0	2.0					2.0			2.0	2.0	
Lost Time Adjust (s)	0.0						0.0			0.0	0.0	
Total Lost Time (s)	6.0						6.0			6.0	6.0	
Lead/Lag							Lead			Lag		
Lead-Lag Optimize?							Yes			Yes		
Vehicle Extension (s)	3.0	3.0					3.0			3.0	3.0	
Recall Mode	Ped	Ped					C-Max			Max	C-Max	
Walk Time (s)	10.0	10.0					10.0				10.0	
Flash Dont Walk (s)	14.0	14.0					14.0				14.0	
Pedestrian Calls (#/hr)	0	0					0				0	
Act Effct Green (s)	25.7						44.3			65.3	65.3	
Actuated g/C Ratio	0.25						0.43			0.63	0.63	
v/c Ratio	0.71						0.47			0.33	0.37	
Control Delay	43.9						21.3			13.0	10.0	
Queue Delay	0.0						0.0			0.0	1.2	
Total Delay	43.9						21.3			13.0	11.2	
LOS	D						C			B	B	
Approach Delay	43.9						21.3				11.6	
Approach LOS	D						C				B	
Queue Length 50th (ft)	151						125			38	93	
Queue Length 95th (ft)	206						194			78	150	
Internal Link Dist (ft)	458						299			445	245	
Turn Bay Length (ft)										125		
Base Capacity (vph)	429						1239			491	1791	
Starvation Cap Reductn	0						0			0	862	
Spillback Cap Reductn	0						0			0	0	
Storage Cap Reductn	0						0			0	0	
Reduced v/c Ratio	0.61						0.47			0.33	0.71	

Intersection Summary


Area Type: Other
 Cycle Length: 103
 Actuated Cycle Length: 103
 Offset: 0 (0%), Referenced to phase 1:SBTL and 5:NBT, Start of Green
 Natural Cycle: 80

Lanes, Volumes, Timings
 10: Riverdale Avenue & Hudson Street

Mitigation Condition
 Weekday AM Peak Hour

Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.71	
Intersection Signal Delay: 20.1	Intersection LOS: C
Intersection Capacity Utilization 63.5%	ICU Level of Service B
Analysis Period (min) 15	

Splits and Phases: 10: Riverdale Avenue & Hudson Street

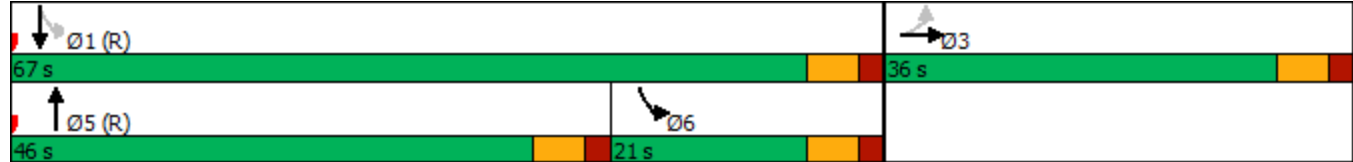

Lanes, Volumes, Timings
11: Riverdale Avenue & Prospect Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔		↖	↗	↗	↖	↕↕	↗	↖	↕↕	↗
Traffic Volume (vph)	13	427	97	488	535	154	111	374	421	155	432	31
Future Volume (vph)	13	427	97	488	535	154	111	374	421	155	432	31
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	10	11	11	10	11	11
Storage Length (ft)	0		50	160		0	100		250	155		0
Storage Lanes	0		0	1		1	1		1	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.97				0.87			0.91			0.93
Frt		0.973				0.850			0.850			0.850
Flt Protected		0.999		0.950			0.950			0.950		
Satd. Flow (prot)	0	3510	0	1671	1792	1369	1560	3202	1473	1392	3202	1220
Flt Permitted		0.844		0.284			0.226			0.508		
Satd. Flow (perm)	0	2965	0	500	1792	1187	371	3202	1336	745	3202	1138
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		24				82						129
Link Speed (mph)		30			30			30				30
Link Distance (ft)		511			403			1044				525
Travel Time (s)		11.6			9.2			23.7				11.9
Confl. Peds. (#/hr)			167			116			75			51
Peak Hour Factor	0.86	0.86	0.86	0.96	0.96	0.96	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	58%	7%	14%	8%	6%	18%	8%	9%	6%	21%	9%	28%
Adj. Flow (vph)	15	497	113	508	557	160	123	416	468	172	480	34
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	625	0	508	557	160	123	416	468	172	480	34
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			10				16
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	1.00	1.00	1.00	1.09	1.04	1.04	1.09	1.04	1.04
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100		20	100	20	20	100	20	20	100	20
Trailing Detector (ft)	0	0		0	0	0	0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0	0	0	0	0	0	0	0
Detector 1 Size(ft)	20	6		20	6	20	20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				Cl+Ex
Detector 2 Channel												

Lanes, Volumes, Timings
11: Riverdale Avenue & Prospect Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		pm+pt	NA	pm+ov	pm+pt	NA	pm+ov	pm+pt	NA	Perm
Protected Phases		7		8	3	6	1	5	8	6	2	
Permitted Phases	7			3		3	5		5	2		2
Detector Phase	7	7		8	3	6	1	5	8	6	2	2
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	37.0	37.0		11.0	39.0	11.0	11.0	38.0	11.0	11.0	36.0	36.0
Total Split (s)	37.0	37.0		24.0	61.0	11.0	13.0	38.0	24.0	11.0	36.0	36.0
Total Split (%)	33.6%	33.6%		21.8%	55.5%	10.0%	11.8%	34.5%	21.8%	10.0%	32.7%	32.7%
Maximum Green (s)	31.0	31.0		18.0	55.0	5.0	9.0	32.0	18.0	5.0	30.0	30.0
Yellow Time (s)	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)		0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)		6.0		6.0	6.0	6.0	4.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead		Lag		Lag	Lead	Lead	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Ped	Ped		Max	C-Max	Max	Max	Ped	Max	Max	Ped	Ped
Walk Time (s)	7.0	7.0			7.0			12.0			12.0	12.0
Flash Dont Walk (s)	24.0	24.0			24.0			18.0			18.0	18.0
Pedestrian Calls (#/hr)	0	0			0			0			0	0
Act Effct Green (s)		31.0		55.0	55.0	62.0	32.0	30.0	48.0	30.0	30.0	30.0
Actuated g/C Ratio		0.28		0.50	0.50	0.56	0.29	0.27	0.44	0.27	0.27	0.27
v/c Ratio		0.73		1.15	0.62	0.22	0.60	0.48	0.77	0.70	0.55	0.08
Control Delay		40.3		104.8	8.1	1.4	51.7	47.6	42.0	55.1	37.1	0.4
Queue Delay		0.0		0.0	0.4	0.0	0.0	0.0	1.9	76.7	0.0	0.0
Total Delay		40.3		104.8	8.5	1.4	51.7	47.6	43.9	131.7	37.1	0.4
LOS		D		F	A	A	D	D	D	F	D	A
Approach Delay		40.3			47.5			46.4			59.0	
Approach LOS		D			D			D			E	
Queue Length 50th (ft)		202		~169	54	3	86	159	328	101	153	0
Queue Length 95th (ft)		253		#369	69	m8	m97	m166	m351	#188	206	0
Internal Link Dist (ft)		431			323			964			445	
Turn Bay Length (ft)				160			100		250	155		
Base Capacity (vph)		852		441	896	716	205	931	605	244	873	404
Starvation Cap Reductn		0		0	80	0	0	0	0	0	0	0
Spillback Cap Reductn		4		0	0	0	0	0	49	155	0	0
Storage Cap Reductn		0		0	0	0	0	0	0	0	0	0
Reduced v/c Ratio		0.74		1.15	0.68	0.22	0.60	0.45	0.84	1.93	0.55	0.08

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 25 (23%), Referenced to phase 3:WBTL, Start of Green
 Natural Cycle: 110
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 1.15

Lanes, Volumes, Timings
 11: Riverdale Avenue & Prospect Street

Mitigation Condition
 Weekday AM Peak Hour

Intersection Signal Delay: 48.1 Intersection LOS: D

Intersection Capacity Utilization 107.6% ICU Level of Service G


Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.
 Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 11: Riverdale Avenue & Prospect Street

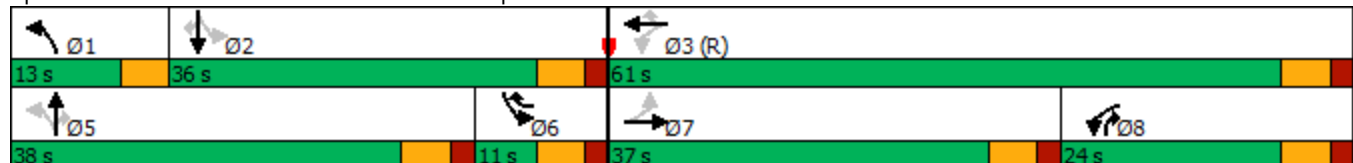

Lanes, Volumes, Timings
12: Riverdale Avenue & Vark Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↕	↕↔		↕	↕↔	
Traffic Volume (vph)	147	58	33	38	17	35	20	724	136	114	839	64
Future Volume (vph)	147	58	33	38	17	35	20	724	136	114	839	64
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	13	13	13	16	16	16	9	12	12	10	13	13
Storage Length (ft)	0		0	0		0	165		0	125		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	0.95
Fr _t		0.981			0.947			0.976			0.989	
Fl _t Protected		0.970			0.979		0.950			0.950		
Satd. Flow (prot)	0	1832	0	0	1713	0	1593	3200	0	1652	3346	0
Fl _t Permitted		0.766			0.807		0.143			0.118		
Satd. Flow (perm)	0	1446	0	0	1412	0	240	3200	0	205	3346	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		7			26			20			7	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		236			1171			291			1044	
Travel Time (s)		5.4			26.6			6.6			23.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.90	0.90	0.90
Bus Blockages (#/hr)	0	0	0	0	0	0	0	6	0	0	0	0
Parking (#/hr)					5			5			10	
Adj. Flow (vph)	160	63	36	41	18	38	22	787	148	127	932	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	259	0	0	97	0	22	935	0	127	1003	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			10			10	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.96	0.96	0.96	0.85	1.01	0.85	1.14	1.10	1.00	1.09	1.06	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lane Group	Ø3
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Bus Blockages (#/hr)	
Parking (#/hr)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	

Lanes, Volumes, Timings
12: Riverdale Avenue & Vark Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			4		2	5		6	1	
Permitted Phases	4			4			5			1		
Detector Phase	4	4		4	4		2	5		6	1	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.0	11.0		11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	28.0	28.0		28.0	28.0		15.0	40.0		15.0	40.0	
Total Split (%)	25.5%	25.5%		25.5%	25.5%		13.6%	36.4%		13.6%	36.4%	
Maximum Green (s)	22.0	22.0		22.0	22.0		9.0	34.0		9.0	34.0	
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0		4.0	4.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0			0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)		6.0			6.0		6.0	6.0		6.0	6.0	
Lead/Lag	Lag	Lag		Lag	Lag		Lag	Lead		Lag	Lead	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Max	Max		Max	Max		None	C-Max		None	C-Max	
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		45.1			45.1		40.9	34.0		45.7	42.1	
Actuated g/C Ratio		0.41			0.41		0.37	0.31		0.42	0.38	
v/c Ratio		0.43			0.16		0.13	0.93		0.66	0.78	
Control Delay		28.6			19.2		22.7	53.0		47.2	29.4	
Queue Delay		0.0			0.0		0.0	0.0		0.0	0.0	
Total Delay		28.6			19.2		22.7	53.0		47.2	29.4	
LOS		C			B		C	D		D	C	
Approach Delay		28.6			19.2			52.3			31.4	
Approach LOS		C			B			D			C	
Queue Length 50th (ft)		117			29		9	330		54	225	
Queue Length 95th (ft)		#294			89		23	#460		m71	m292	
Internal Link Dist (ft)		156			1091			211			964	
Turn Bay Length (ft)							165			125		
Base Capacity (vph)		597			594		204	1002		205	1283	
Starvation Cap Reductn		0			0		0	0		0	0	
Spillback Cap Reductn		0			0		0	0		0	0	
Storage Cap Reductn		0			0		0	0		0	0	
Reduced v/c Ratio		0.43			0.16		0.11	0.93		0.62	0.78	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	0 (0%), Referenced to phase 1:SBTL and 5:NBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.93
Intersection Signal Delay:	38.8
Intersection LOS:	D

Lane Group	Ø3
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	24.0
Total Split (s)	27.0
Total Split (%)	25%
Maximum Green (s)	24.0
Yellow Time (s)	3.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	Lead
Lead-Lag Optimize?	Yes
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	6.0
Flash Dont Walk (s)	15.0
Pedestrian Calls (#/hr)	5
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
Intersection Summary	

Lanes, Volumes, Timings
 12: Riverdale Avenue & Vark Street

Mitigation Condition
 Weekday AM Peak Hour

Intersection Capacity Utilization 65.5% ICU Level of Service C













Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 12: Riverdale Avenue & Vark Street

 Ø1 (R)	 Ø2	 Ø3	 Ø4
			
 Ø5 (R)	 Ø6		
			

Lanes, Volumes, Timings
13: North Broadway & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↕	↕	
Traffic Volume (vph)	46	370	4	88	251	102	5	240	117	168	252	50
Future Volume (vph)	46	370	4	88	251	102	5	240	117	168	252	50
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	10	14	14	14	16	16	16	10	13	13
Storage Length (ft)	0		0	0		0	0		0	80		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.999			0.969			0.956			0.975	
Fl _t Protected		0.995			0.990			0.999		0.950		
Satd. Flow (prot)	0	1497	0	0	1784	0	0	1836	0	1560	1772	0
Fl _t Permitted		0.913			0.798			0.995		0.261		
Satd. Flow (perm)	0	1374	0	0	1438	0	0	1828	0	429	1772	0
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		1			18							14
Link Speed (mph)		30			30			30				30
Link Distance (ft)		672			208			1727				316
Travel Time (s)		15.3			4.7			39.3				7.2
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	3%	3%	3%	9%	9%	9%	8%	8%	8%	8%	8%	8%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	9	0	0	0	0
Parking (#/hr)		5										
Adj. Flow (vph)	50	402	4	96	273	111	5	261	127	183	274	54
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	456	0	0	480	0	0	393	0	183	328	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			10	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	1.29	1.09	0.92	0.92	0.92	0.85	0.89	0.85	1.09	0.96	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												

Lanes, Volumes, Timings
13: North Broadway & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		Perm	NA		pm+pt	NA	
Protected Phases		2			6			8		7	4	
Permitted Phases	2			6			8			4		
Detector Phase	2	2		6	6		8	8		7	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		10.0	10.0		5.0	10.0	
Minimum Split (s)	10.0	10.0		32.0	32.0		32.0	32.0		10.0	32.0	
Total Split (s)	46.0	46.0		46.0	46.0		39.0	39.0		15.0	54.0	
Total Split (%)	46.0%	46.0%		46.0%	46.0%		39.0%	39.0%		15.0%	54.0%	
Maximum Green (s)	41.0	41.0		41.0	41.0		34.0	34.0		10.0	49.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0			0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0			5.0			5.0		5.0	5.0	
Lead/Lag							Lag	Lag		Lead		
Lead-Lag Optimize?							Yes	Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Max	Max		C-Max	C-Max		Ped	Ped		Max	Ped	
Walk Time (s)				15.0	15.0		15.0	15.0			15.0	
Flash Dont Walk (s)				12.0	12.0		12.0	12.0			12.0	
Pedestrian Calls (#/hr)				0	0		0	0			0	
Act Effct Green (s)		46.0			46.0			29.0		44.0	44.0	
Actuated g/C Ratio		0.46			0.46			0.29		0.44	0.44	
v/c Ratio		0.72			0.72			0.74		0.61	0.42	
Control Delay		25.3			22.4			41.2		26.4	19.8	
Queue Delay		0.0			0.0			0.0		0.0	0.0	
Total Delay		25.3			22.4			41.2		26.4	19.8	
LOS		C			C			D		C	B	
Approach Delay		25.3			22.4			41.2			22.2	
Approach LOS		C			C			D			C	
Queue Length 50th (ft)		152			132			233		75	138	
Queue Length 95th (ft)		#415			#414			311		109	185	
Internal Link Dist (ft)		592			128			1647			236	
Turn Bay Length (ft)										80		
Base Capacity (vph)		632			670			621		302	875	
Starvation Cap Reductn		0			0			0		0	0	
Spillback Cap Reductn		0			0			0		0	0	
Storage Cap Reductn		0			0			0		0	0	
Reduced v/c Ratio		0.72			0.72			0.63		0.61	0.37	

Intersection Summary


Area Type: Other
 Cycle Length: 100
 Actuated Cycle Length: 100
 Offset: 97 (97%), Referenced to phase 6:WBTL, Start of Green
 Natural Cycle: 75
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.74

Lanes, Volumes, Timings
 13: North Broadway & Ashburton Avenue

Mitigation Condition
 Weekday AM Peak Hour

Intersection Signal Delay: 27.1	Intersection LOS: C
Intersection Capacity Utilization 89.3%	ICU Level of Service E
Analysis Period (min) 15	
# 95th percentile volume exceeds capacity, queue may be longer.	
Queue shown is maximum after two cycles.	

Splits and Phases: 13: North Broadway & Ashburton Avenue

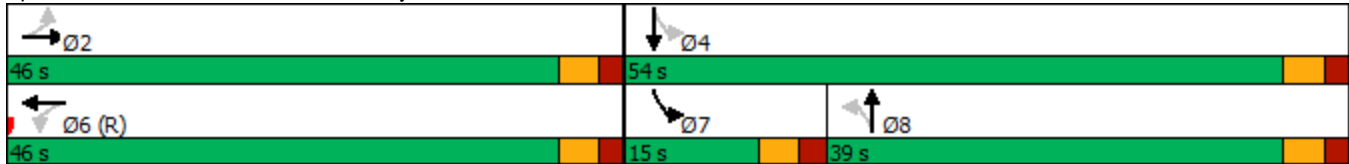

Lanes, Volumes, Timings
 14: North Broadway & Manor House Square

Mitigation Condition
 Weekday AM Peak Hour

















Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	223	0	0	428	0	0
Future Volume (vph)	223	0	0	428	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt						
Flt Protected	0.950					
Satd. Flow (prot)	1705	0	0	1794	0	0
Flt Permitted	0.950					
Satd. Flow (perm)	1705	0	0	1794	0	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	226			563	1727	
Travel Time (s)	5.1			12.8	39.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Parking (#/hr)	10			10		
Adj. Flow (vph)	242	0	0	465	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	242	0	0	465	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	16			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.05	0.85	0.85	1.05	0.85	0.85
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	41.5%
Analysis Period (min)	15
	ICU Level of Service A

Lanes, Volumes, Timings
15: North Broadway & Main Street

Mitigation Condition
Wekday AM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	0	161	138	65	290	0	0	0	0
Future Volume (vph)	0	0	0	0	161	138	65	290	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	16	16	16	16	16	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.938							
Flt Protected								0.991				
Satd. Flow (prot)	0	0	0	0	1980	0	0	2092	0	0	0	0
Flt Permitted								0.991				
Satd. Flow (perm)	0	0	0	0	1980	0	0	2092	0	0	0	0
Right Turn on Red			Yes			Yes	Yes		Yes			Yes
Satd. Flow (RTOR)					62			73				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		497			81			184				563
Travel Time (s)		11.3			1.8			4.2				12.8
Peak Hour Factor	0.92	0.92	0.92	0.86	0.86	0.86	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	0	187	160	71	315	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	347	0	0	386	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.85	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors					2		1	2				
Detector Template					Thru		Left	Thru				
Leading Detector (ft)					100		20	100				
Trailing Detector (ft)					0		0	0				
Detector 1 Position(ft)					0		0	0				
Detector 1 Size(ft)					6		20	6				
Detector 1 Type					Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)					0.0		0.0	0.0				
Detector 1 Queue (s)					0.0		0.0	0.0				
Detector 1 Delay (s)					0.0		0.0	0.0				
Detector 2 Position(ft)					94			94				
Detector 2 Size(ft)					6			6				
Detector 2 Type					Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0				
Turn Type					NA		Perm	NA				
Protected Phases					2 6			3				
Permitted Phases							3					
Detector Phase					2 6		3	3				
Switch Phase												

Lane Group	Ø1	Ø2	Ø6
Lane Configurations			
Traffic Volume (vph)			
Future Volume (vph)			
Ideal Flow (vphpl)			
Lane Width (ft)			
Lane Util. Factor			
Frt			
Flt Protected			
Satd. Flow (prot)			
Flt Permitted			
Satd. Flow (perm)			
Right Turn on Red			
Satd. Flow (RTOR)			
Link Speed (mph)			
Link Distance (ft)			
Travel Time (s)			
Peak Hour Factor			
Adj. Flow (vph)			
Shared Lane Traffic (%)			
Lane Group Flow (vph)			
Enter Blocked Intersection			
Lane Alignment			
Median Width(ft)			
Link Offset(ft)			
Crosswalk Width(ft)			
Two way Left Turn Lane			
Headway Factor			
Turning Speed (mph)			
Number of Detectors			
Detector Template			
Leading Detector (ft)			
Trailing Detector (ft)			
Detector 1 Position(ft)			
Detector 1 Size(ft)			
Detector 1 Type			
Detector 1 Channel			
Detector 1 Extend (s)			
Detector 1 Queue (s)			
Detector 1 Delay (s)			
Detector 2 Position(ft)			
Detector 2 Size(ft)			
Detector 2 Type			
Detector 2 Channel			
Detector 2 Extend (s)			
Turn Type			
Protected Phases	1	2	6
Permitted Phases			
Detector Phase			
Switch Phase			

Lanes, Volumes, Timings
15: North Broadway & Main Street


Mitigation Condition
Wekday AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)							5.0	5.0				
Minimum Split (s)							45.0	45.0				
Total Split (s)							45.0	45.0				
Total Split (%)							42.9%	42.9%				
Maximum Green (s)							40.0	40.0				
Yellow Time (s)							3.0	3.0				
All-Red Time (s)							2.0	2.0				
Lost Time Adjust (s)								0.0				
Total Lost Time (s)								5.0				
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)							3.0	3.0				
Recall Mode							Ped	Ped				
Walk Time (s)							30.0	30.0				
Flash Dont Walk (s)							10.0	10.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)					55.0			40.0				
Actuated g/C Ratio					0.52			0.38				
v/c Ratio					0.33			0.46				
Control Delay					0.6			21.5				
Queue Delay					0.0			0.0				
Total Delay					0.6			21.5				
LOS					A			C				
Approach Delay					0.6			21.5				
Approach LOS					A			C				
Queue Length 50th (ft)					0			154				
Queue Length 95th (ft)					0			238				
Internal Link Dist (ft)		417			1			104			483	
Turn Bay Length (ft)												
Base Capacity (vph)					1066			842				
Starvation Cap Reductn					0			0				
Spillback Cap Reductn					0			0				
Storage Cap Reductn					0			0				
Reduced v/c Ratio					0.33			0.46				

Intersection Summary

Area Type: Other
 Cycle Length: 105
 Actuated Cycle Length: 105
 Natural Cycle: 105
 Control Type: Semi Act-Uncoord
 Maximum v/c Ratio: 0.63
 Intersection Signal Delay: 11.6
 Intersection Capacity Utilization 44.1%
 Analysis Period (min) 15
 Intersection LOS: B
 ICU Level of Service A

Splits and Phases: 15: North Broadway & Main Street

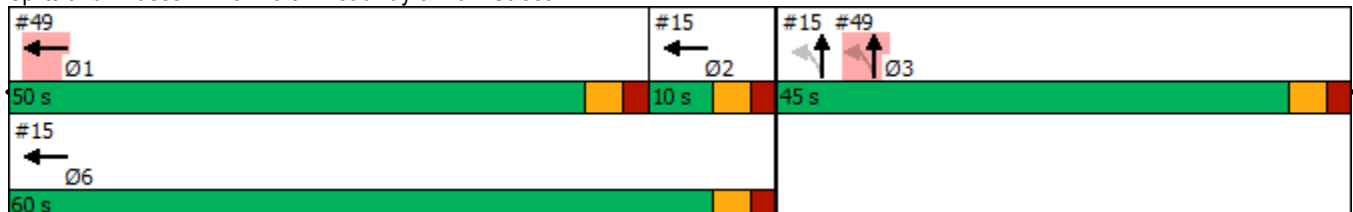

Lane Group	Ø1	Ø2	Ø6
Minimum Initial (s)	5.0	2.0	5.0
Minimum Split (s)	50.0	7.0	10.0
Total Split (s)	50.0	10.0	60.0
Total Split (%)	48%	10%	57%
Maximum Green (s)	45.0	5.0	55.0
Yellow Time (s)	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0
Lost Time Adjust (s)			
Total Lost Time (s)			
Lead/Lag	Lead	Lag	
Lead-Lag Optimize?	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0
Recall Mode	Ped	Max	Max
Walk Time (s)	35.0		
Flash Dont Walk (s)	10.0		
Pedestrian Calls (#/hr)	0		
Act Effct Green (s)			
Actuated g/C Ratio			
v/c Ratio			
Control Delay			
Queue Delay			
Total Delay			
LOS			
Approach Delay			
Approach LOS			
Queue Length 50th (ft)			
Queue Length 95th (ft)			
Internal Link Dist (ft)			
Turn Bay Length (ft)			
Base Capacity (vph)			
Starvation Cap Reductn			
Spillback Cap Reductn			
Storage Cap Reductn			
Reduced v/c Ratio			
Intersection Summary			

Lanes, Volumes, Timings
 16: South Broadway/North Broadway & Hudson Street

Mitigation Condition
 Weekday AM Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	228	190	0	293	0	0
Future Volume (vph)	228	190	0	293	0	0
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	14	14	12	16	12	12
Storage Length (ft)	0	75	0			0
Storage Lanes	1	1	0			0
Taper Length (ft)	25		25			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor						
Frt		0.850				
Flt Protected	0.950					
Satd. Flow (prot)	1707	1552	0	1727	0	0
Flt Permitted	0.950					
Satd. Flow (perm)	1707	1552	0	1727	0	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	379			514	155	
Travel Time (s)	8.6			11.7	3.5	
Confl. Peds. (#/hr)	174		161			
Peak Hour Factor	0.86	0.86	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	11%	11%	6%	6%	2%	2%
Bus Blockages (#/hr)	4	0	0	0	0	0
Parking (#/hr)				10		
Adj. Flow (vph)	265	221	0	318	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	265	221	0	318	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	14			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	0.94	0.92	1.00	1.05	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Stop	Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	34.7%
ICU Level of Service	A
Analysis Period (min)	15

Lanes, Volumes, Timings
 17: South Broadway & Prospect Street/Nepperhan Avenue

Mitigation Condition
 Weekday AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	33	869	101	368	1048	104	100	156	171	91	70	29
Future Volume (vph)	33	869	101	368	1048	104	100	156	171	91	70	29
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	13	12	12	12	13	10	12	12	12	16	16
Grade (%)		0%			7%			0%			0%	
Storage Length (ft)	107		0	315		0	120		200	100		0
Storage Lanes	1		0	1		1	1		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor		0.97				0.91			0.94		0.99	
Frt		0.984				0.850			0.850		0.956	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1543	2961	0	1628	3256	1505	1532	1727	1468	1612	1536	0
Flt Permitted	0.114			0.161			0.680			0.580		
Satd. Flow (perm)	185	2961	0	276	3256	1374	1096	1727	1387	984	1536	0
Right Turn on Red			No			Yes			No			Yes
Satd. Flow (RTOR)						107						19
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		403			838			1248			514	
Travel Time (s)		9.2			19.0			28.4			11.7	
Confl. Peds. (#/hr)			156			50			43			20
Peak Hour Factor	0.92	0.92	0.92	0.97	0.97	0.97	0.84	0.84	0.84	0.82	0.82	0.82
Heavy Vehicles (%)	17%	17%	17%	7%	7%	7%	10%	10%	10%	12%	12%	12%
Bus Blockages (#/hr)	0	15	0	0	0	0	0	0	0	0	9	0
Parking (#/hr)											5	
Adj. Flow (vph)	36	945	110	379	1080	107	119	186	204	111	85	35
Shared Lane Traffic (%)												
Lane Group Flow (vph)	36	1055	0	379	1080	107	119	186	204	111	120	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.05	1.05	1.00	1.09	1.00	1.00	1.00	1.06	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1	1	2	
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100		20	100	20	20	100	20	20	100	
Trailing Detector (ft)	0	0		0	0	0	0	0	0	0	0	
Detector 1 Position(ft)	0	0		0	0	0	0	0	0	0	0	
Detector 1 Size(ft)	20	6		20	6	20	20	6	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	

Lanes, Volumes, Timings
 17: South Broadway & Prospect Street/Nepperhan Avenue

Mitigation Condition
 Weekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Size(ft)	6				6		6		6			
Detector 2 Type	Cl+Ex				Cl+Ex		Cl+Ex		Cl+Ex			
Detector 2 Channel												
Detector 2 Extend (s)	0.0				0.0		0.0		0.0		0.0	
Turn Type	pm+pt	NA	pm+pt		NA	Perm	Perm	NA	Perm	Perm	NA	
Protected Phases	5	1	2		6			3			3	
Permitted Phases	1		6			6	3		3	3		
Detector Phase	5	1	2		6	6	3	3	3	3	3	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	41.0	11.0		46.0	46.0	38.0	38.0	38.0	38.0	38.0	38.0
Total Split (s)	11.0	46.0	26.0		61.0	61.0	38.0	38.0	38.0	38.0	38.0	38.0
Total Split (%)	10.0%	41.8%	23.6%		55.5%	55.5%	34.5%	34.5%	34.5%	34.5%	34.5%	34.5%
Maximum Green (s)	5.0	40.0	20.0		55.0	55.0	32.0	32.0	32.0	32.0	32.0	32.0
Yellow Time (s)	4.0	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0		6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead	Lag		Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes						
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Max	Ped	Max		C-Max	C-Max	Ped	Ped	Ped	Ped	Ped	Ped
Walk Time (s)		10.0			20.0	20.0	7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)		25.0			20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0
Pedestrian Calls (#/hr)		0			0	0	0	0	0	0	0	0
Act Effct Green (s)	40.0	40.0	55.0		55.0	55.0	32.0	32.0	32.0	32.0	32.0	32.0
Actuated g/C Ratio	0.36	0.36	0.50		0.50	0.50	0.29	0.29	0.29	0.29	0.29	0.29
v/c Ratio	0.28	0.98	0.99		0.66	0.14	0.37	0.37	0.51	0.39	0.26	
Control Delay	28.5	53.5	52.9		3.5	0.3	35.3	33.6	37.7	36.1	26.9	
Queue Delay	0.0	22.7	0.0		0.1	0.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	28.5	76.1	52.9		3.5	0.3	35.3	33.6	37.7	36.1	26.9	
LOS	C	E	D		A	A	D	C	D	D	C	
Approach Delay		74.6			15.3			35.7			31.3	
Approach LOS		E			B			D			C	
Queue Length 50th (ft)	17	337	216		13	0	67	104	120	63	54	
Queue Length 95th (ft)	m22	#524	m#372		16	m0	112	156	179	104	92	
Internal Link Dist (ft)		323			758			1168			434	
Turn Bay Length (ft)	107		315				120		200	100		
Base Capacity (vph)	129	1076	383		1628	740	318	502	403	286	460	
Starvation Cap Reductn	0	79	0		0	0	0	0	0	0	0	
Spillback Cap Reductn	0	0	0		42	0	0	0	0	0	0	
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	
Reduced v/c Ratio	0.28	1.06	0.99		0.68	0.14	0.37	0.37	0.51	0.39	0.26	

Intersection Summary
 Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 16 (15%), Referenced to phase 6:WBTL, Start of Green

Lanes, Volumes, Timings
 18: South Broadway & Vark Street/Park Hill Avenue

Mitigation Condition
 Weekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕	↕		↕	
Traffic Volume (vph)	27	191	90	161	49	76	24	324	101	32	490	17
Future Volume (vph)	27	191	90	161	49	76	24	324	101	32	490	17
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	14	14	14	15	15	10	16	16	16
Storage Length (ft)	0		0	0		0	0		50	0		0
Storage Lanes	0		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.961			0.964				0.850		0.996	
Fl _t Protected		0.996			0.973			0.997			0.997	
Satd. Flow (prot)	0	2021	0	0	1864	0	0	2043	1478	0	1782	0
Fl _t Permitted		0.996			0.973			0.934			0.957	
Satd. Flow (perm)	0	2021	0	0	1864	0	0	1914	1478	0	1710	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		19			17				78			2
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		1171			125			465			1248	
Travel Time (s)		26.6			2.8			10.6			28.4	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.82	0.82	0.82
Parking (#/hr)											10	
Adj. Flow (vph)	29	208	98	175	53	83	26	352	110	39	598	21
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	335	0	0	311	0	0	378	110	0	658	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	0.92	0.92	0.92	0.88	0.88	1.09	0.85	1.05	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2	1	1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100	20	20	100	
Trailing Detector (ft)	0	0		0	0		0	0	0	0	0	
Detector 1 Position(ft)	0	0		0	0		0	0	0	0	0	
Detector 1 Size(ft)	20	6		20	6		20	6	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Split	NA		Split	NA		Perm	NA	Perm	Perm	NA	

Lanes, Volumes, Timings
18: South Broadway & Vark Street/Park Hill Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases	4	4		3	3			1				1
Permitted Phases							1		1	1		
Detector Phase	4	4		3	3		1	1	1	1		1
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0	5.0	5.0		5.0
Minimum Split (s)	25.0	25.0		10.0	10.0		39.0	39.0	39.0	39.0		39.0
Total Split (s)	26.0	26.0		25.0	25.0		47.0	47.0	47.0	47.0		47.0
Total Split (%)	26.5%	26.5%		25.5%	25.5%		48.0%	48.0%	48.0%	48.0%		48.0%
Maximum Green (s)	21.0	21.0		20.0	20.0		41.0	41.0	41.0	41.0		41.0
Yellow Time (s)	3.0	3.0		3.0	3.0		4.0	4.0	4.0	4.0		4.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0		2.0
Lost Time Adjust (s)		0.0			0.0			0.0	0.0			0.0
Total Lost Time (s)		5.0			5.0			6.0	6.0			6.0
Lead/Lag	Lag	Lag		Lead	Lead							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0		3.0
Recall Mode	Ped	Ped		Max	Max		Ped	Ped	Ped	Ped		Ped
Walk Time (s)	5.0	5.0					20.0	20.0	20.0	20.0		20.0
Flash Dont Walk (s)	15.0	15.0					13.0	13.0	13.0	13.0		13.0
Pedestrian Calls (#/hr)	0	0					0	0	0	0		0
Act Effct Green (s)		20.6			20.0			39.4	39.4			39.4
Actuated g/C Ratio		0.21			0.21			0.41	0.41			0.41
v/c Ratio		0.75			0.77			0.48	0.17			0.94
Control Delay		45.3			49.0			23.3	7.4			50.0
Queue Delay		0.0			0.0			0.0	0.0			0.0
Total Delay		45.3			49.0			23.3	7.4			50.0
LOS		D			D			C	A			D
Approach Delay		45.3			49.0			19.7				50.0
Approach LOS		D			D			B				D
Queue Length 50th (ft)		186			175			166	12			376
Queue Length 95th (ft)		#305			#307			249	45			#511
Internal Link Dist (ft)		1091			45			385				1168
Turn Bay Length (ft)									50			
Base Capacity (vph)		457			402			818	676			732
Starvation Cap Reductn		0			0			0	0			0
Spillback Cap Reductn		0			0			0	0			0
Storage Cap Reductn		0			0			0	0			0
Reduced v/c Ratio		0.73			0.77			0.46	0.16			0.90

Intersection Summary


Area Type:	Other
Cycle Length:	98
Actuated Cycle Length:	96
Natural Cycle:	90
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.94
Intersection Signal Delay:	40.7
Intersection LOS:	D
Intersection Capacity Utilization:	98.5%
ICU Level of Service:	F
Analysis Period (min):	15

Lanes, Volumes, Timings
18: South Broadway & Vark Street/Park Hill Avenue

Mitigation Condition
Wekday AM Peak Hour
















95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 18: South Broadway & Vark Street/Park Hill Avenue



Lanes, Volumes, Timings
 19: James Street/Locust Hill Avenue & Palisade Avenue

Mitigation Condition
 Weekday AM Peak Hour




















												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	90	181	60	0	0	0	0	51	23	159	50	0
Future Volume (vph)	90	181	60	0	0	0	0	51	23	159	50	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	12	12	12	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.976						0.958				
Flt Protected		0.987									0.963	
Satd. Flow (prot)	0	2034	0	0	0	0	0	1785	0	0	1794	0
Flt Permitted		0.987									0.963	
Satd. Flow (perm)	0	2034	0	0	0	0	0	1785	0	0	1794	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		254			212			222			499	
Travel Time (s)		5.8			4.8			5.0			11.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	98	197	65	0	0	0	0	55	25	173	54	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	360	0	0	0	0	0	80	0	0	227	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	42.9%
ICU Level of Service	A
Analysis Period (min)	15

Lanes, Volumes, Timings
20: New Main Street & Nepperhan Avenue

Mitigation Condition
Wekday AM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	25	1068	38	238	1434	281	17	121	371	0	0	0
Future Volume (vph)	25	1068	38	238	1434	281	17	121	371	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	12	12	12	10	10	10	12	12	12
Grade (%)		7%			0%			0%			0%	
Storage Length (ft)	360		0	165		0	0		200	0		0
Storage Lanes	1		0	1		1	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	1.00	0.91	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.995				0.850			0.850			
Flt Protected	0.950			0.950				0.994				
Satd. Flow (prot)	1651	4883	0	1770	5085	1419	0	1728	1478	0	0	0
Flt Permitted	0.095			0.137				0.994				
Satd. Flow (perm)	165	4883	0	255	5085	1419	0	1728	1478	0	0	0
Right Turn on Red			Yes			No			No			Yes
Satd. Flow (RTOR)		5										
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		838			378			724			411	
Travel Time (s)		19.0			8.6			16.5			9.3	
Peak Hour Factor	0.92	0.92	0.92	0.97	0.97	0.97	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	26	0	0	0	0	0	0
Adj. Flow (vph)	27	1161	41	245	1478	290	18	132	403	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	27	1202	0	245	1478	290	0	150	403	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	1.05	1.05	1.00	1.00	1.15	1.09	1.09	1.09	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1			
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right			
Leading Detector (ft)	20	100		20	100	20	20	100	20			
Trailing Detector (ft)	0	0		0	0	0	0	0	0			
Detector 1 Position(ft)	0	0		0	0	0	0	0	0			
Detector 1 Size(ft)	20	6		20	6	20	20	6	20			
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 2 Position(ft)		94			94			94				
Detector 2 Size(ft)		6			6			6				
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				

Lanes, Volumes, Timings
20: New Main Street & Nepperhan Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA		pm+pt	NA	Perm	Perm	NA	pm+ov			
Protected Phases	5	2		1	6			3	1			
Permitted Phases	2			6		6	3		3			
Detector Phase	5	2		1	6	6	3	3	1			
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0			
Minimum Split (s)	11.0	46.0		11.0	46.0	46.0	40.0	40.0	11.0			
Total Split (s)	21.0	48.0		21.0	48.0	48.0	41.0	41.0	21.0			
Total Split (%)	19.1%	43.6%		19.1%	43.6%	43.6%	37.3%	37.3%	19.1%			
Maximum Green (s)	15.0	42.0		15.0	42.0	42.0	35.0	35.0	15.0			
Yellow Time (s)	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0			
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0			
Lost Time Adjust (s)	0.0	0.0		0.0	0.0	0.0		0.0	0.0			
Total Lost Time (s)	6.0	6.0		6.0	6.0	6.0		6.0	6.0			
Lead/Lag	Lead	Lag		Lead	Lag	Lag			Lead			
Lead-Lag Optimize?	Yes	Yes		Yes	Yes	Yes			Yes			
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0			
Recall Mode	Max	Ped		Max	C-Max	C-Max	Ped	Ped	Max			
Walk Time (s)		20.0			20.0	20.0	7.0	7.0				
Flash Dont Walk (s)		20.0			20.0	20.0	27.0	27.0				
Pedestrian Calls (#/hr)		0			0	0	0	0				
Act Effct Green (s)	58.0	42.0		58.0	42.0	42.0		34.0	56.0			
Actuated g/C Ratio	0.53	0.38		0.53	0.38	0.38		0.31	0.51			
v/c Ratio	0.09	0.64		0.69	0.76	0.54		0.28	0.54			
Control Delay	9.4	20.5		44.6	20.5	20.2		30.6	21.5			
Queue Delay	0.0	0.0		0.0	0.9	0.8		0.0	0.0			
Total Delay	9.4	20.6		44.6	21.4	21.0		30.6	21.5			
LOS	A	C		D	C	C		C	C			
Approach Delay		20.3			24.1			24.0				
Approach LOS		C			C			C				
Queue Length 50th (ft)	4	154		128	125	67		80	185			
Queue Length 95th (ft)	m6	m166		m162	147	m83		135	278			
Internal Link Dist (ft)		758			298			644			331	
Turn Bay Length (ft)	360			165					200			
Base Capacity (vph)	303	1867		354	1941	541		549	752			
Starvation Cap Reductn	0	0		0	209	78		0	0			
Spillback Cap Reductn	0	36		0	0	0		0	0			
Storage Cap Reductn	0	0		0	0	0		0	0			
Reduced v/c Ratio	0.09	0.66		0.69	0.85	0.63		0.27	0.54			

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	10 (9%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.76
Intersection Signal Delay:	22.9
Intersection LOS:	C

Lanes, Volumes, Timings
 20: New Main Street & Nepperhan Avenue

Mitigation Condition
 Weekday AM Peak Hour

Intersection Capacity Utilization 57.0% ICU Level of Service B
 Analysis Period (min) 15
 m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 20: New Main Street & Nepperhan Avenue

 Ø1 21 s	 Ø2 48 s	 Ø3 41 s
 Ø5 21 s	 Ø6 (R) 48 s	

Lanes, Volumes, Timings
21: Palisade Avenue & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	85	458	116	199	380	123	72	196	108	0	0	0
Future Volume (vph)	85	458	116	199	380	123	72	196	108	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	9	9	15	10	11	11	10	10	10	12	12	12
Storage Length (ft)	75		100	70		0	0		100	0		0
Storage Lanes	1		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t			0.850		0.963				0.850			
Fl _t Protected	0.950			0.950				0.987				
Satd. Flow (prot)	1533	1574	1676	1604	1684	0	0	1621	1312	0	0	0
Fl _t Permitted	0.274			0.317				0.987				
Satd. Flow (perm)	442	1574	1676	535	1684	0	0	1621	1312	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			84		22				99			
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		436			2061			549			169	
Travel Time (s)		9.9			46.8			12.5			3.8	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	6%	6%	6%	5%	5%	5%	8%	8%	8%	2%	2%	2%
Bus Blockages (#/hr)	0	6	0	0	0	0	0	0	15	0	0	0
Adj. Flow (vph)	92	498	126	216	413	134	78	213	117	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	92	498	126	216	547	0	0	291	117	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.14	1.18	0.88	1.09	1.04	1.04	1.09	1.09	1.18	1.00	1.00	1.00
Turning Speed (mph)	15		9	15			9	15	9	15		9
Number of Detectors	1	2	1	1	2		1	2	1			
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right			
Leading Detector (ft)	20	100	20	20	100		20	100	20			
Trailing Detector (ft)	0	0	0	0	0		0	0	0			
Detector 1 Position(ft)	0	0	0	0	0		0	0	0			
Detector 1 Size(ft)	20	6	20	20	6		20	6	20			
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0			
Detector 2 Position(ft)		94			94			94				
Detector 2 Size(ft)		6			6			6				
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				

Lanes, Volumes, Timings
21: Palisade Avenue & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	pm+pt	NA		Perm	NA	Prot			
Protected Phases	5	2		1	6			8	8			
Permitted Phases	2		2	6			8					
Detector Phase	5	2	2	1	6		8	8	8			
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0	5.0			
Minimum Split (s)	10.0	37.0	37.0	10.0	37.0		28.0	28.0	28.0			
Total Split (s)	17.0	51.0	51.0	17.0	51.0		32.0	32.0	32.0			
Total Split (%)	17.0%	51.0%	51.0%	17.0%	51.0%		32.0%	32.0%	32.0%			
Maximum Green (s)	12.0	46.0	46.0	12.0	46.0		27.0	27.0	27.0			
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0			
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0	2.0			
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0			0.0	0.0			
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0			5.0	5.0			
Lead/Lag	Lead	Lag	Lag	Lead	Lag							
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes							
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0			
Recall Mode	Max	Ped	Ped	Max	C-Max		Ped	Ped	Ped			
Walk Time (s)		20.0	20.0		20.0		10.0	10.0	10.0			
Flash Dont Walk (s)		12.0	12.0		12.0		13.0	13.0	13.0			
Pedestrian Calls (#/hr)		0	0		0		0	0	0			
Act Effct Green (s)	60.4	46.0	46.0	60.4	46.0			24.6	24.6			
Actuated g/C Ratio	0.60	0.46	0.46	0.60	0.46			0.25	0.25			
v/c Ratio	0.22	0.69	0.15	0.45	0.70			0.73	0.30			
Control Delay	7.1	22.4	6.3	8.2	10.9			46.2	10.3			
Queue Delay	0.0	0.0	0.0	0.0	0.0			0.0	0.0			
Total Delay	7.1	22.4	6.3	8.2	10.9			46.2	10.3			
LOS	A	C	A	A	B			D	B			
Approach Delay		17.6			10.1			35.9				
Approach LOS		B			B			D				
Queue Length 50th (ft)	15	172	11	16	60			175	9			
Queue Length 95th (ft)	m34	307	m37	m34	m98			258	52			
Internal Link Dist (ft)		356			1981			469			89	
Turn Bay Length (ft)	75		100	70					100			
Base Capacity (vph)	424	724	816	477	786			437	426			
Starvation Cap Reductn	0	0	0	0	0			0	0			
Spillback Cap Reductn	0	0	0	0	0			0	0			
Storage Cap Reductn	0	0	0	0	0			0	0			
Reduced v/c Ratio	0.22	0.69	0.15	0.45	0.70			0.67	0.27			

Intersection Summary

Area Type:	Other
Cycle Length:	100
Actuated Cycle Length:	100
Offset:	94 (94%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	75
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.73
Intersection Signal Delay:	18.5
Intersection LOS:	B

Lanes, Volumes, Timings
 21: Palisade Avenue & Ashburton Avenue

Mitigation Condition
 Weekday AM Peak Hour

Intersection Capacity Utilization 61.9% ICU Level of Service B
 Analysis Period (min) 15
 m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 21: Palisade Avenue & Ashburton Avenue



Lanes, Volumes, Timings
22: New School Street & Palisade Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Volume (vph)	70	225	66	0	0	0	0	270	191	145	185	0
Future Volume (vph)	70	225	66	0	0	0	0	270	191	145	185	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.975						0.944				
Flt Protected		0.990									0.978	
Satd. Flow (prot)	0	1783	0	0	0	0	0	1993	0	0	2056	0
Flt Permitted		0.990									0.475	
Satd. Flow (perm)	0	1783	0	0	0	0	0	1993	0	0	999	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		18						64				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		331			728			251				1216
Travel Time (s)		7.5			16.5			5.7				27.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	1	0
Parking (#/hr)		5										
Adj. Flow (vph)	76	245	72	0	0	0	0	293	208	158	201	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	393	0	0	0	0	0	501	0	0	359	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		-10			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.01	0.85	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	
Turn Type	Perm	NA						NA		Perm	NA	
Protected Phases		3						2			6	
Permitted Phases		3									6	

Lanes, Volumes, Timings
22: New School Street & Palisade Avenue

Mitigation Condition
Wekday AM Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	3	3						2		6	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0						5.0		5.0	5.0	
Minimum Split (s)	34.0	34.0						39.0		10.0	10.0	
Total Split (s)	35.0	35.0						40.0		40.0	40.0	
Total Split (%)	46.7%	46.7%						53.3%		53.3%	53.3%	
Maximum Green (s)	30.0	30.0						35.0		35.0	35.0	
Yellow Time (s)	3.0	3.0						3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0						2.0		2.0	2.0	
Lost Time Adjust (s)		0.0						0.0			0.0	
Total Lost Time (s)		5.0						5.0			5.0	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	Ped	Ped						Ped		Max	Max	
Walk Time (s)	9.0	9.0						14.0				
Flash Dont Walk (s)	20.0	20.0						20.0				
Pedestrian Calls (#/hr)	0	0						0				
Act Effct Green (s)		29.0						35.0			35.0	
Actuated g/C Ratio		0.39						0.47			0.47	
v/c Ratio		0.55						0.51			0.76	
Control Delay		20.3						13.9			29.2	
Queue Delay		0.0						0.0			0.0	
Total Delay		20.3						13.9			29.2	
LOS		C						B			C	
Approach Delay		20.3						13.9			29.2	
Approach LOS		C						B			C	
Queue Length 50th (ft)		129						130			129	
Queue Length 95th (ft)		212						211			#274	
Internal Link Dist (ft)		251			648			171			1136	
Turn Bay Length (ft)												
Base Capacity (vph)		733						976			472	
Starvation Cap Reductn		0						0			0	
Spillback Cap Reductn		0						0			0	
Storage Cap Reductn		0						0			0	
Reduced v/c Ratio		0.54						0.51			0.76	

Intersection Summary

Area Type:	Other
Cycle Length:	75
Actuated Cycle Length:	74
Natural Cycle:	75
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.76
Intersection Signal Delay:	20.3
Intersection LOS:	C
Intersection Capacity Utilization:	75.9%
ICU Level of Service:	D
Analysis Period (min):	15
# 95th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.	

Splits and Phases: 22: New School Street & Palisade Avenue

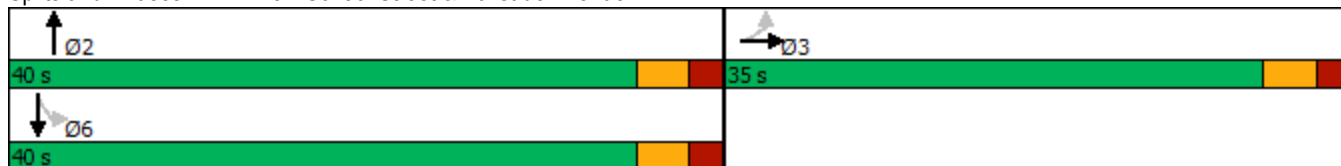

Lanes, Volumes, Timings
23: New School Street & Maple Street & Nepperhan Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	SBL2	SBL	SBT	SBR
Lane Configurations	↶	↶↶↶					↶	↶↶↶	↶		↷	
Traffic Volume (vph)	123	1260	45	11	22	25	1755	299	146	41	6	198
Future Volume (vph)	123	1260	45	11	22	25	1755	299	146	41	6	198
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	12	12	11	12	11	16	16	16	16
Grade (%)		0%					-5%				0%	
Storage Length (ft)	100		0			210		0		0		0
Storage Lanes	1		0			1		1		0		0
Taper Length (ft)	25					25				25		
Lane Util. Factor	1.00	0.91	0.91	0.91	0.91	1.00	0.91	1.00	1.00	1.00	1.00	1.00
Frt		0.994						0.850			0.932	
Flt Protected	0.950					0.950					0.977	
Satd. Flow (prot)	1711	5055	0	0	0	1753	5212	1569	0	0	1922	0
Flt Permitted	0.091					0.091					0.977	
Satd. Flow (perm)	164	5055	0	0	0	168	5212	1569	0	0	1922	0
Right Turn on Red				Yes				Yes				Yes
Satd. Flow (RTOR)		1						279			50	
Link Speed (mph)		30					30				30	
Link Distance (ft)		378					492				339	
Travel Time (s)		8.6					11.2				7.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.97	0.97	0.97	0.97	0.92	0.92	0.92	0.92
Adj. Flow (vph)	134	1370	49	12	23	26	1809	308	159	45	7	215
Shared Lane Traffic (%)												
Lane Group Flow (vph)	134	1431	0	0	0	49	1809	308	0	0	426	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Right	Left	Left	Left	Right	Left	Left	Left	Right
Median Width(ft)		12					12				0	
Link Offset(ft)		0					0				0	
Crosswalk Width(ft)		16					16				16	
Two way Left Turn Lane												
Headway Factor	1.04	1.00	1.00	1.00	0.97	1.01	0.97	1.01	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	9	15	15		9	15	15		9
Number of Detectors	1	2			1	1	2	1	1	1	2	
Detector Template	Left	Thru			Left	Left	Thru	Right	Left	Left	Thru	
Leading Detector (ft)	20	100			20	20	100	20	20	20	100	
Trailing Detector (ft)	0	0			0	0	0	0	0	0	0	
Detector 1 Position(ft)	0	0			0	0	0	0	0	0	0	
Detector 1 Size(ft)	20	6			20	20	6	20	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94					94				94	
Detector 2 Size(ft)		6					6				6	
Detector 2 Type		Cl+Ex					Cl+Ex				Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0					0.0				0.0	
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Perm	Perm	NA	

Lanes, Volumes, Timings
23: New School Street & Maple Street & Nepperhan Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	SBL2	SBL	SBT	SBR
Protected Phases	5	2			1	1	6					3
Permitted Phases	2				6	6		6	3	3		
Detector Phase	5	2			1	1	6	6	3	3		3
Switch Phase												
Minimum Initial (s)	5.0	5.0			5.0	5.0	5.0	5.0	5.0	5.0		5.0
Minimum Split (s)	11.0	46.0			11.0	11.0	46.0	46.0	40.0	40.0		40.0
Total Split (s)	18.0	50.0			18.0	18.0	50.0	50.0	42.0	42.0		42.0
Total Split (%)	16.4%	45.5%			16.4%	16.4%	45.5%	45.5%	38.2%	38.2%		38.2%
Maximum Green (s)	12.0	44.0			12.0	12.0	44.0	44.0	36.0	36.0		36.0
Yellow Time (s)	4.0	4.0			4.0	4.0	4.0	4.0	4.0	4.0		4.0
All-Red Time (s)	2.0	2.0			2.0	2.0	2.0	2.0	2.0	2.0		2.0
Lost Time Adjust (s)	0.0	0.0					0.0	0.0				0.0
Total Lost Time (s)	6.0	6.0					6.0	6.0				6.0
Lead/Lag	Lead	Lag			Lead	Lead	Lag	Lag				
Lead-Lag Optimize?	Yes	Yes			Yes	Yes	Yes	Yes				
Vehicle Extension (s)	3.0	3.0			3.0	3.0	3.0	3.0	3.0	3.0		3.0
Recall Mode	Max	Ped			Max	Max	C-Max	C-Max	Ped	Ped		Ped
Walk Time (s)		20.0					20.0	20.0	7.0	7.0		7.0
Flash Dont Walk (s)		20.0					20.0	20.0	27.0	27.0		27.0
Pedestrian Calls (#/hr)		0					0	0	0	0		0
Act Effct Green (s)	57.6	44.0				57.6	44.0	44.0				34.4
Actuated g/C Ratio	0.52	0.40				0.52	0.40	0.40				0.31
v/c Ratio	0.48	0.71				0.17	0.87	0.39				0.67
Control Delay	34.8	17.8				23.5	42.6	14.1				34.8
Queue Delay	0.0	0.3				0.0	0.4	0.0				0.0
Total Delay	34.8	18.1				23.5	43.1	14.1				34.8
LOS	C	B				C	D	B				C
Approach Delay		19.6					38.5					34.8
Approach LOS		B					D					C
Queue Length 50th (ft)	56	141				18	369	58				232
Queue Length 95th (ft)	m114	158				m53	390	m165				335
Internal Link Dist (ft)		298					412					259
Turn Bay Length (ft)	100					210						
Base Capacity (vph)	277	2022				284	2084	795				662
Starvation Cap Reductn	0	142				0	56	0				0
Spillback Cap Reductn	0	160				0	3	0				1
Storage Cap Reductn	0	0				0	0	0				0
Reduced v/c Ratio	0.48	0.77				0.17	0.89	0.39				0.64

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	10 (9%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.87
Intersection Signal Delay:	31.0
Intersection Capacity Utilization	78.5%
Intersection LOS:	C
ICU Level of Service	D


Lanes, Volumes, Timings
 23: New School Street & Maple Street & Nepperhan Avenue

Mitigation Condition
 Weekday AM Peak Hour

Analysis Period (min) 15


m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 23: New School Street & Maple Street & Nepperhan Avenue

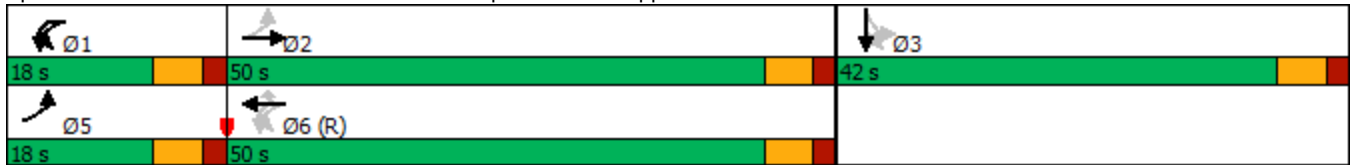

Lanes, Volumes, Timings
24: Waverly Street & Nepperhan Avenue

Mitigation Condition
Weekday AM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø9
Lane Configurations	↑↑↑		↙	↑↑↑	↘		
Traffic Volume (vph)	1406	0	0	2040	61	161	
Future Volume (vph)	1406	0	0	2040	61	161	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Width (ft)	12	12	12	15	15	15	
Grade (%)	5%			-5%	0%		
Storage Length (ft)		0	120		0	0	
Storage Lanes		0	1		1	0	
Taper Length (ft)			25		25		
Lane Util. Factor	0.91	0.91	1.00	0.91	1.00	1.00	
Frt					0.902		
Flt Protected					0.986		
Satd. Flow (prot)	4752	0	1909	5535	1822	0	
Flt Permitted					0.986		
Satd. Flow (perm)	4752	0	1909	5535	1822	0	
Right Turn on Red		Yes				Yes	
Satd. Flow (RTOR)					99		
Link Speed (mph)	30			30	30		
Link Distance (ft)	492			401	154		
Travel Time (s)	11.2			9.1	3.5		
Peak Hour Factor	0.92	0.92	0.97	0.97	0.92	0.92	
Bus Blockages (#/hr)	0	0	0	26	0	0	
Parking (#/hr)	5						
Adj. Flow (vph)	1528	0	0	2103	66	175	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	1528	0	0	2103	241	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	12			12	15		
Link Offset(ft)	0			0	0		
Crosswalk Width(ft)	16			16	16		
Two way Left Turn Lane							
Headway Factor	1.09	1.03	0.97	0.89	0.88	0.88	
Turning Speed (mph)		9	15		15	9	
Number of Detectors	2		1	2	1		
Detector Template	Thru		Left	Thru	Left		
Leading Detector (ft)	100		20	100	20		
Trailing Detector (ft)	0		0	0	0		
Detector 1 Position(ft)	0		0	0	0		
Detector 1 Size(ft)	6		20	6	20		
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex		
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0	0.0		
Detector 1 Queue (s)	0.0		0.0	0.0	0.0		
Detector 1 Delay (s)	0.0		0.0	0.0	0.0		
Detector 2 Position(ft)	94			94			
Detector 2 Size(ft)	6			6			
Detector 2 Type	Cl+Ex			Cl+Ex			
Detector 2 Channel							

Lanes, Volumes, Timings
 24: Waverly Street & Nepperhan Avenue

Mitigation Condition
 Weekday AM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø9
Detector 2 Extend (s)	0.0			0.0			
Turn Type	NA		Perm	NA	Prot		
Protected Phases	1			6	3		9
Permitted Phases			6				
Detector Phase	1		6	6	3		
Switch Phase							
Minimum Initial (s)	5.0		5.0	5.0	5.0		5.0
Minimum Split (s)	11.0		11.0	11.0	11.0		42.0
Total Split (s)	48.0		48.0	48.0	20.0		42.0
Total Split (%)	43.6%		43.6%	43.6%	18.2%		38%
Maximum Green (s)	42.0		42.0	42.0	14.0		40.0
Yellow Time (s)	4.0		4.0	4.0	4.0		2.0
All-Red Time (s)	2.0		2.0	2.0	2.0		0.0
Lost Time Adjust (s)	0.0		0.0	0.0	0.0		
Total Lost Time (s)	6.0		6.0	6.0	6.0		
Lead/Lag							
Lead-Lag Optimize?							
Vehicle Extension (s)	3.0		3.0	3.0	3.0		3.0
Recall Mode	Max		C-Max	C-Max	Min		None
Walk Time (s)							20.0
Flash Dont Walk (s)							20.0
Pedestrian Calls (#/hr)							5
Act Effct Green (s)	77.2			77.2	12.4		
Actuated g/C Ratio	0.70			0.70	0.11		
v/c Ratio	0.46			0.54	0.83		
Control Delay	5.4			5.6	50.6		
Queue Delay	0.0			0.2	0.4		
Total Delay	5.4			5.8	51.0		
LOS	A			A	D		
Approach Delay	5.4			5.8	51.0		
Approach LOS	A			A	D		
Queue Length 50th (ft)	35			37	98		
Queue Length 95th (ft)	454			m#626	#213		
Internal Link Dist (ft)	412			321	74		
Turn Bay Length (ft)							
Base Capacity (vph)	3336			3886	318		
Starvation Cap Reductn	270			722	0		
Spillback Cap Reductn	267			5	5		
Storage Cap Reductn	0			0	0		
Reduced v/c Ratio	0.50			0.66	0.77		

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 30 (27%), Referenced to phase 6:WBTL, Start of Green
 Natural Cycle: 90
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.83

Lanes, Volumes, Timings
25: Nepperhan Avenue & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	107	514	45	71	426	70	76	574	115	120	324	115
Future Volume (vph)	107	514	45	71	426	70	76	574	115	120	324	115
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	11	10	10	11	11	10	13	13	10	12	11
Storage Length (ft)	150		80	120		0	185		0	120		0
Storage Lanes	1		1	1		0	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	1.00
Frt			0.850		0.979			0.975				0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1504	1640	1346	1546	1650	0	1546	3337	0	1518	3252	1406
Flt Permitted	0.123			0.150			0.950			0.950		
Satd. Flow (perm)	195	1640	1346	244	1650	0	1546	3337	0	1518	3252	1406
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			98		8			24				125
Link Speed (mph)		30			30			30				30
Link Distance (ft)		2061			390			1273				212
Travel Time (s)		46.8			8.9			28.9				4.8
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	12%	12%	12%	9%	9%	9%	9%	9%	9%	11%	11%	11%
Adj. Flow (vph)	116	559	49	77	463	76	83	624	125	130	352	125
Shared Lane Traffic (%)												
Lane Group Flow (vph)	116	559	49	77	539	0	83	749	0	130	352	125
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			10				10
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.09	1.04	1.09	1.09	1.04	1.04	1.09	0.96	0.96	1.09	1.00	1.04
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2		1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100		20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0		0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0		0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6		20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				0.0
Turn Type	pm+pt	NA	pm+ov	pm+pt	NA		Prot	NA		Prot	NA	pm+ov

Lanes, Volumes, Timings
25: Nepperhan Avenue & Ashburton Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases	7	4	5	3	8		5	2		1	6	7
Permitted Phases	4		4	8								6
Detector Phase	7	4	5	3	8		5	2		1	6	7
Switch Phase												
Minimum Initial (s)	5.0	10.0	5.0	5.0	10.0		5.0	10.0		5.0	10.0	5.0
Minimum Split (s)	11.0	36.0	11.0	11.0	36.0		11.0	30.0		11.0	30.0	11.0
Total Split (s)	16.0	36.0	16.0	16.0	36.0		16.0	37.0		11.0	32.0	16.0
Total Split (%)	16.0%	36.0%	16.0%	16.0%	36.0%		16.0%	37.0%		11.0%	32.0%	16.0%
Maximum Green (s)	10.0	30.0	10.0	10.0	30.0		10.0	31.0		5.0	26.0	10.0
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0		4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	6.0
Lead/Lag	Lead	Lag	Lead	Lead	Lag		Lead	Lag		Lead	Lag	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes		Yes	Yes		Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	3.0
Recall Mode	None	Ped	None	None	Ped		None	C-Max		None	Ped	None
Walk Time (s)		7.0			7.0			7.0			7.0	
Flash Dont Walk (s)		23.0			23.0			17.0			17.0	
Pedestrian Calls (#/hr)		0			0			0			0	
Act Effct Green (s)	41.9	34.2	49.2	39.1	30.9		9.0	31.0		5.0	29.4	44.5
Actuated g/C Ratio	0.42	0.34	0.49	0.39	0.31		0.09	0.31		0.05	0.29	0.44
v/c Ratio	0.58	1.00	0.07	0.38	1.05		0.60	0.71		1.73	0.37	0.18
Control Delay	35.2	58.4	0.7	21.5	87.1		61.4	34.0		410.1	30.6	4.0
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Delay	35.2	58.4	0.7	21.5	87.1		61.4	34.0		410.1	30.6	4.0
LOS	D	E	A	C	F		E	C		F	C	A
Approach Delay		50.8			78.9			36.7			106.4	
Approach LOS		D			E			D			F	
Queue Length 50th (ft)	23	~400	1	27	~382		51	214		~123	97	0
Queue Length 95th (ft)	m68	#626	m2	55	#589		#102	283		#242	141	34
Internal Link Dist (ft)		1981			310			1193			132	
Turn Bay Length (ft)	150		80	120			185			120		
Base Capacity (vph)	213	561	724	229	515		154	1051		75	957	707
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	0
Reduced v/c Ratio	0.54	1.00	0.07	0.34	1.05		0.54	0.71		1.73	0.37	0.18

Intersection Summary

Area Type:	Other
Cycle Length:	100
Actuated Cycle Length:	100
Offset:	0 (0%), Referenced to phase 2:NBT, Start of Green, Master Intersection
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.73
Intersection Signal Delay:	65.0
Intersection LOS:	E
Intersection Capacity Utilization:	78.8%
ICU Level of Service:	D

Lanes, Volumes, Timings
 25: Nepperhan Avenue & Ashburton Avenue

Mitigation Condition
 Weekday AM Peak Hour

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.









Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 25: Nepperhan Avenue & Ashburton Avenue

 Ø1	 Ø2 (R)	 Ø3	 Ø4
11 s	37 s	16 s	36 s
 Ø5	 Ø6	 Ø7	 Ø8
16 s	32 s	16 s	36 s

Lanes, Volumes, Timings
26: Nepperhan Avenue & Copcutt Lane

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↑↑	↑↑		↘	
Traffic Volume (vph)	0	709	440	0	56	31
Future Volume (vph)	0	709	440	0	56	31
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	16	16
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.952	
Flt Protected					0.969	
Satd. Flow (prot)	0	3245	3447	0	1947	0
Flt Permitted					0.969	
Satd. Flow (perm)	0	3245	3447	0	1947	0
Right Turn on Red				No		Yes
Satd. Flow (RTOR)					27	
Link Speed (mph)		30	30		30	
Link Distance (ft)		427	310		81	
Travel Time (s)		9.7	7.0		1.8	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	11	13	0	0	0
Parking (#/hr)		5				
Adj. Flow (vph)	0	771	478	0	61	34
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	771	478	0	95	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		16	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.12	1.03	1.00	0.85	0.85
Turning Speed (mph)	15			9	15	9
Number of Detectors		2	2		1	
Detector Template		Thru	Thru		Left	
Leading Detector (ft)		100	100		20	
Trailing Detector (ft)		0	0		0	
Detector 1 Position(ft)		0	0		0	
Detector 1 Size(ft)		6	6		20	
Detector 1 Type		Cl+Ex	Cl+Ex		Cl+Ex	
Detector 1 Channel						
Detector 1 Extend (s)		0.0	0.0		0.0	
Detector 1 Queue (s)		0.0	0.0		0.0	
Detector 1 Delay (s)		0.0	0.0		0.0	
Detector 2 Position(ft)		94	94			
Detector 2 Size(ft)		6	6			
Detector 2 Type		Cl+Ex	Cl+Ex			
Detector 2 Channel						
Detector 2 Extend (s)		0.0	0.0			
Turn Type		NA	NA		Prot	
Protected Phases		2	6		3	
Permitted Phases						

Lanes, Volumes, Timings
 26: Nepperhan Avenue & Copcutt Lane

Mitigation Condition
 Weekday AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Detector Phase		2	6		3	
Switch Phase						
Minimum Initial (s)		5.0	5.0		5.0	
Minimum Split (s)		10.0	10.0		35.0	
Total Split (s)		35.0	35.0		35.0	
Total Split (%)		33.3%	33.3%		33.3%	
Maximum Green (s)		30.0	30.0		30.0	
Yellow Time (s)		3.0	3.0		3.0	
All-Red Time (s)		2.0	2.0		2.0	
Lost Time Adjust (s)		0.0	0.0		0.0	
Total Lost Time (s)		5.0	5.0		5.0	
Lead/Lag						
Lead-Lag Optimize?						
Vehicle Extension (s)		3.0	3.0		3.0	
Recall Mode		Max	Max		None	
Walk Time (s)					7.0	
Flash Dont Walk (s)					23.0	
Pedestrian Calls (#/hr)					5	
Act Effct Green (s)		30.5	30.5		11.3	
Actuated g/C Ratio		0.36	0.36		0.13	
v/c Ratio		0.66	0.39		0.34	
Control Delay		28.4	23.5		27.7	
Queue Delay		0.0	0.0		0.0	
Total Delay		28.4	23.5		27.7	
LOS		C	C		C	
Approach Delay		28.4	23.5		27.7	
Approach LOS		C	C		C	
Queue Length 50th (ft)		175	95		34	
Queue Length 95th (ft)		#334	190		74	
Internal Link Dist (ft)		347	230		1	
Turn Bay Length (ft)						
Base Capacity (vph)		1164	1237		716	
Starvation Cap Reductn		0	0		0	
Spillback Cap Reductn		0	0		0	
Storage Cap Reductn		0	0		0	
Reduced v/c Ratio		0.66	0.39		0.13	

Intersection Summary






















Area Type:	Other
Cycle Length:	105
Actuated Cycle Length:	85
Natural Cycle:	75
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.66
Intersection Signal Delay:	26.6
Intersection LOS:	C
Intersection Capacity Utilization:	32.9%
ICU Level of Service:	A
Analysis Period (min):	15
# 95th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.	

Splits and Phases: 26: Nepperhan Avenue & Copcutt Lane



Lanes, Volumes, Timings
27: Nepperhan Avenue & Elm Street

Mitigation Condition
Wekday AM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	395	148	18	428	0	133	0	1408	159	122	1594	0
Future Volume (vph)	395	148	18	428	0	133	0	1408	159	122	1594	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	10	10	10	12	12	12	11	12	12
Grade (%)		0%			0%			5%			0%	
Storage Length (ft)	0		0	0		50	0		0	140		0
Storage Lanes	1		0	1		1	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.91	1.00	1.00	0.91	1.00
Frt		0.983				0.850			0.850			
Flt Protected	0.950			0.950						0.950		
Satd. Flow (prot)	1454	1770	0	1652	0	1478	0	4958	1544	1711	5085	0
Flt Permitted	0.950			0.629						0.095		
Satd. Flow (perm)	1454	1770	0	1094	0	1478	0	4958	1544	171	5085	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		7				30			165			
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		728			401			401			720	
Travel Time (s)		16.5			9.1			9.1			16.4	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.97	0.97	0.97
Parking (#/hr)	10											
Adj. Flow (vph)	429	161	20	465	0	145	0	1530	173	126	1643	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	429	181	0	465	0	145	0	1530	173	126	1643	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		11			11			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.28	1.04	1.04	1.09	1.09	1.09	1.03	1.03	1.03	1.04	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1		1		2	1	1	2	
Detector Template	Left	Thru		Left		Right		Thru	Right	Left	Thru	
Leading Detector (ft)	20	100		20		20		100	20	20	100	
Trailing Detector (ft)	0	0		0		0		0	0	0	0	
Detector 1 Position(ft)	0	0		0		0		0	0	0	0	
Detector 1 Size(ft)	20	6		20		20		6	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	

Lanes, Volumes, Timings
27: Nepperhan Avenue & Elm Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm		pm+ov		NA	Perm	pm+pt	NA	
Protected Phases		3				1		2		1	6	
Permitted Phases	3			7		7			2	6		
Detector Phase	3	3		7		1		2	2	1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0		5.0		5.0	5.0	5.0	5.0	
Minimum Split (s)	40.0	40.0		40.0		11.0		39.0	39.0	11.0	39.0	
Total Split (s)	53.0	53.0		53.0		15.0		42.0	42.0	15.0	57.0	
Total Split (%)	48.2%	48.2%		48.2%		13.6%		38.2%	38.2%	13.6%	51.8%	
Maximum Green (s)	47.0	47.0		47.0		9.0		36.0	36.0	9.0	51.0	
Yellow Time (s)	4.0	4.0		4.0		4.0		4.0	4.0	4.0	4.0	
All-Red Time (s)	2.0	2.0		2.0		2.0		2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.0	6.0		6.0		6.0		6.0	6.0	6.0	6.0	
Lead/Lag						Lead		Lag	Lag	Lead		
Lead-Lag Optimize?						Yes		Yes	Yes	Yes		
Vehicle Extension (s)	3.0	3.0		3.0		3.0		3.0	3.0	3.0	3.0	
Recall Mode	Ped	Ped		Ped		Max		Ped	Ped	Max	C-Max	
Walk Time (s)	7.0	7.0		7.0				20.0	20.0		20.0	
Flash Dont Walk (s)	27.0	27.0		27.0				13.0	13.0		13.0	
Pedestrian Calls (#/hr)	0	0		0				0	0		0	
Act Effct Green (s)	47.0	47.0		47.0		62.0		36.0	36.0	51.0	51.0	
Actuated g/C Ratio	0.43	0.43		0.43		0.56		0.33	0.33	0.46	0.46	
v/c Ratio	0.69	0.24		1.00		0.17		0.94	0.28	0.61	0.70	
Control Delay	32.7	20.3		73.4		9.7		30.0	2.6	27.0	20.2	
Queue Delay	0.0	0.0		0.0		0.0		8.7	0.0	0.0	0.2	
Total Delay	32.7	20.3		73.4		9.7		38.7	2.6	27.0	20.4	
LOS	C	C		E		A		D	A	C	C	
Approach Delay		29.0			58.2			35.1			20.9	
Approach LOS		C			E			D			C	
Queue Length 50th (ft)	241	76		320		36		359	2	41	402	
Queue Length 95th (ft)	363	126		#541		68		#461	m10	m70	m409	
Internal Link Dist (ft)		648			321			321			640	
Turn Bay Length (ft)						50				140		
Base Capacity (vph)	621	760		467		846		1622	616	205	2357	
Starvation Cap Reductn	0	0		0		0		97	0	0	0	
Spillback Cap Reductn	0	0		0		0		0	0	0	155	
Storage Cap Reductn	0	0		0		0		0	0	0	0	
Reduced v/c Ratio	0.69	0.24		1.00		0.17		1.00	0.28	0.61	0.75	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	22 (20%), Referenced to phase 6:SBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.00
Intersection Signal Delay:	31.9
Intersection LOS:	C

Lanes, Volumes, Timings
 27: Nepperhan Avenue & Elm Street

Mitigation Condition
 Weekday AM Peak Hour

Intersection Capacity Utilization 86.6% ICU Level of Service E


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 27: Nepperhan Avenue & Elm Street

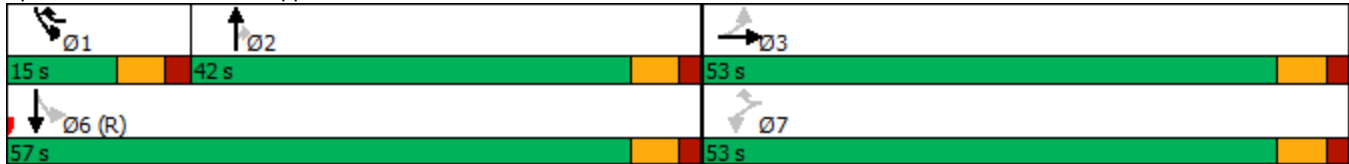

Lanes, Volumes, Timings
28: Walnut Street & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	91	1107	29	83	1147	62	33	311	230	50	266	65
Future Volume (vph)	91	1107	29	83	1147	62	33	311	230	50	266	65
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	13	13	10	13	13	14	14	14	12	12	12
Storage Length (ft)	105		0	130		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.996			0.992			0.946			0.977	
Fl _t Protected	0.950			0.950				0.997			0.994	
Satd. Flow (prot)	1652	3643	0	1652	3541	0	0	1874	0	0	1532	0
Fl _t Permitted	0.117			0.133				0.901			0.554	
Satd. Flow (perm)	203	3643	0	231	3541	0	0	1694	0	0	854	0
Right Turn on Red			No			Yes			Yes			No
Satd. Flow (RTOR)					7			30				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		1431			1109			369			272	
Travel Time (s)		32.5			25.2			8.4			6.2	
Peak Hour Factor	0.92	0.92	0.92	0.97	0.97	0.97	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	12	0	0	0	0	0	8	0
Parking (#/hr)											5	
Adj. Flow (vph)	99	1203	32	86	1182	64	36	338	250	54	289	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	99	1235	0	86	1246	0	0	624	0	0	414	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	0.96	0.96	1.09	0.99	0.96	0.92	0.92	0.92	1.00	1.23	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lanes, Volumes, Timings
28: Walnut Street & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	5	2		1	6			3			3	
Permitted Phases	2			6			3			3		
Detector Phase	5	2		1	6		3	3		3	3	
Switch Phase												
Minimum Initial (s)	5.0	10.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.0	16.0		11.0	28.0		35.0	35.0		35.0	35.0	
Total Split (s)	16.0	59.0		16.0	59.0		35.0	35.0		35.0	35.0	
Total Split (%)	14.5%	53.6%		14.5%	53.6%		31.8%	31.8%		31.8%	31.8%	
Maximum Green (s)	10.0	53.0		10.0	53.0		29.0	29.0		29.0	29.0	
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0		4.0	4.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)	6.0	6.0		6.0	6.0			6.0			6.0	
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	C-Max		None	Ped		Ped	Ped		Ped	Ped	
Walk Time (s)					10.0		7.0	7.0		7.0	7.0	
Flash Dont Walk (s)					12.0		22.0	22.0		22.0	22.0	
Pedestrian Calls (#/hr)					0		0	0		0	0	
Act Effct Green (s)	64.5	57.6		62.7	54.9			29.0			29.0	
Actuated g/C Ratio	0.59	0.52		0.57	0.50			0.26			0.26	
v/c Ratio	0.44	0.65		0.37	0.70			1.33			1.84	
Control Delay	20.1	9.9		17.3	37.5			196.7			421.6	
Queue Delay	0.0	0.0		0.0	0.0			0.0			0.0	
Total Delay	20.1	9.9		17.3	37.5			196.7			421.6	
LOS	C	A		B	D			F			F	
Approach Delay		10.6			36.2			196.7			421.6	
Approach LOS		B			D			F			F	
Queue Length 50th (ft)	21	130		37	423			~561			~444	
Queue Length 95th (ft)	m32	m143		m65	493			#785			#637	
Internal Link Dist (ft)		1351			1029			289			192	
Turn Bay Length (ft)	105			130								
Base Capacity (vph)	252	1908		265	1772			468			225	
Starvation Cap Reductn	0	0		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.39	0.65		0.32	0.70			1.33			1.84	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	69 (63%), Referenced to phase 2:EBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.84
Intersection Signal Delay:	97.1
Intersection LOS:	F

Lanes, Volumes, Timings
 28: Walnut Street & Yonkers Avenue

Mitigation Condition
 Weekday AM Peak Hour

Intersection Capacity Utilization 90.2% ICU Level of Service E

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.
 Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 28: Walnut Street & Yonkers Avenue

↙ Ø1 16 s	↘ Ø2 (R) 59 s	↕ Ø3 35 s
↗ Ø5 16 s	↖ Ø6 59 s	

Lanes, Volumes, Timings
29: Prescott Street & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	7	1375	5	93	1274	17	18	58	266	0	0	0
Future Volume (vph)	7	1375	5	93	1274	17	18	58	266	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	11	11	10	12	12	15	15	15	12	12	12
Storage Length (ft)	85		0	85		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.999			0.998			0.895				
Flt Protected	0.950			0.950				0.997				
Satd. Flow (prot)	1652	3418	0	1652	3447	0	0	1828	0	0	0	0
Flt Permitted	0.206			0.070				0.997				
Satd. Flow (perm)	358	3418	0	122	3447	0	0	1828	0	0	0	0
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)					2							
Link Speed (mph)		30			30			30				30
Link Distance (ft)		1109			370			410				164
Travel Time (s)		25.2			8.4			9.3				3.7
Peak Hour Factor	0.92	0.92	0.92	0.97	0.97	0.97	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	12	0	0	0	0	0	0	0
Adj. Flow (vph)	8	1495	5	96	1313	18	20	63	289	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	8	1500	0	96	1331	0	0	372	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.09	1.04	1.04	1.09	1.03	1.00	0.88	0.88	0.88	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2				
Detector Template	Left	Thru		Left	Thru		Left	Thru				
Leading Detector (ft)	20	100		20	100		20	100				
Trailing Detector (ft)	0	0		0	0		0	0				
Detector 1 Position(ft)	0	0		0	0		0	0				
Detector 1 Size(ft)	20	6		20	6		20	6				
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0				
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0				
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0				
Detector 2 Position(ft)		94			94			94				
Detector 2 Size(ft)		6			6			6				
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				
Turn Type	Perm	NA		pm+pt	NA		Perm	NA				

Lanes, Volumes, Timings
29: Prescott Street & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases		2		1	6			3				
Permitted Phases	2			6			3					
Detector Phase	2	2		1	6		3	3				
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		10.0	10.0				
Minimum Split (s)	11.0	11.0		11.0	11.0		32.0	32.0				
Total Split (s)	57.0	57.0		21.0	78.0		32.0	32.0				
Total Split (%)	51.8%	51.8%		19.1%	70.9%		29.1%	29.1%				
Maximum Green (s)	51.0	51.0		15.0	72.0		26.0	26.0				
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0				
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0				
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0				
Total Lost Time (s)	6.0	6.0		6.0	6.0			6.0				
Lead/Lag	Lag	Lag		Lead								
Lead-Lag Optimize?	Yes	Yes		Yes								
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0				
Recall Mode	C-Max	C-Max		Max	Max		Ped	Ped				
Walk Time (s)							7.0	7.0				
Flash Dont Walk (s)							19.0	19.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)	51.0	51.0		72.0	72.0			26.0				
Actuated g/C Ratio	0.46	0.46		0.65	0.65			0.24				
v/c Ratio	0.05	0.95		0.33	0.59			0.86				
Control Delay	10.6	28.7		29.5	5.4			60.8				
Queue Delay	0.0	0.0		0.0	0.2			0.0				
Total Delay	10.6	28.7		29.5	5.6			60.8				
LOS	B	C		C	A			E				
Approach Delay		28.6			7.2			60.8				
Approach LOS		C			A			E				
Queue Length 50th (ft)	2	592		28	77			253				
Queue Length 95th (ft)	m2	m607		m46	m79			#417				
Internal Link Dist (ft)		1029			290			330			84	
Turn Bay Length (ft)	85			85								
Base Capacity (vph)	165	1584		288	2256			432				
Starvation Cap Reductn	0	0		0	249			0				
Spillback Cap Reductn	0	0		0	0			0				
Storage Cap Reductn	0	0		0	0			0				
Reduced v/c Ratio	0.05	0.95		0.33	0.66			0.86				

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	103 (94%), Referenced to phase 2:EBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.95
Intersection Signal Delay:	23.0
Intersection Capacity Utilization:	78.8%
Intersection LOS:	C
ICU Level of Service:	D

Lanes, Volumes, Timings
 29: Prescott Street & Yonkers Avenue

Mitigation Condition
 Weekday AM Peak Hour

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 29: Prescott Street & Yonkers Avenue



Lanes, Volumes, Timings
30: Driveway/Ashburton Avenue & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	1619	22	4	1348	586	15	0	6	892	0	21
Future Volume (vph)	0	1619	22	4	1348	586	15	0	6	892	0	21
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	12	12	14	12	12	12	11	11	12
Storage Length (ft)	0		0	0		250	0		0	0		0
Storage Lanes	0		0	0		1	1		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00	0.95	0.95	1.00
Frt		0.998				0.850		0.865			0.993	
Flt Protected							0.950			0.950	0.954	
Satd. Flow (prot)	0	3332	0	0	3539	1689	1770	0	0	1625	1601	0
Flt Permitted					0.876		0.950			0.950	0.954	
Satd. Flow (perm)	0	3332	0	0	3100	1689	1770	0	0	1625	1601	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		2				604		169			109	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		370			325			129			377	
Travel Time (s)		8.4			7.4			2.9			8.6	
Peak Hour Factor	0.92	0.92	0.92	0.97	0.97	0.97	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	12	0	0	0	0	0	0	0	0	3	0
Adj. Flow (vph)	0	1760	24	4	1390	604	16	0	7	970	0	23
Shared Lane Traffic (%)										49%		
Lane Group Flow (vph)	0	1784	0	0	1394	604	16	7	0	495	498	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.04	1.08	1.04	1.00	1.00	0.92	1.00	1.00	1.00	1.04	1.06	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		2		1	2	1	1			1	2	
Detector Template		Thru		Left	Thru	Right	Left			Left	Thru	
Leading Detector (ft)		100		20	100	20	20			20	100	
Trailing Detector (ft)		0		0	0	0	0			0	0	
Detector 1 Position(ft)		0		0	0	0	0			0	0	
Detector 1 Size(ft)		6		20	6	20	20			20	6	
Detector 1 Type		Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0		0.0	0.0	0.0	0.0			0.0	0.0	
Detector 1 Queue (s)		0.0		0.0	0.0	0.0	0.0			0.0	0.0	
Detector 1 Delay (s)		0.0		0.0	0.0	0.0	0.0			0.0	0.0	
Detector 2 Position(ft)		94			94						94	
Detector 2 Size(ft)		6			6						6	
Detector 2 Type		Cl+Ex			Cl+Ex						Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0						0.0	
Turn Type		NA		Perm	NA	custom	Prot			Split	NA	

Lane Group	Ø1	Ø2
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Ideal Flow (vphpl)		
Lane Width (ft)		
Storage Length (ft)		
Storage Lanes		
Taper Length (ft)		
Lane Util. Factor		
Frt		
Flt Protected		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Right Turn on Red		
Satd. Flow (RTOR)		
Link Speed (mph)		
Link Distance (ft)		
Travel Time (s)		
Peak Hour Factor		
Bus Blockages (#/hr)		
Adj. Flow (vph)		
Shared Lane Traffic (%)		
Lane Group Flow (vph)		
Enter Blocked Intersection		
Lane Alignment		
Median Width(ft)		
Link Offset(ft)		
Crosswalk Width(ft)		
Two way Left Turn Lane		
Headway Factor		
Turning Speed (mph)		
Number of Detectors		
Detector Template		
Leading Detector (ft)		
Trailing Detector (ft)		
Detector 1 Position(ft)		
Detector 1 Size(ft)		
Detector 1 Type		
Detector 1 Channel		
Detector 1 Extend (s)		
Detector 1 Queue (s)		
Detector 1 Delay (s)		
Detector 2 Position(ft)		
Detector 2 Size(ft)		
Detector 2 Type		
Detector 2 Channel		
Detector 2 Extend (s)		
Turn Type		

Lanes, Volumes, Timings
30: Driveway/Ashburton Avenue & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases		1 2			1 2	2 3 4	4			3	3	
Permitted Phases				1 2								
Detector Phase		1 2		1 2	1 2	2 3 4	4			3	3	
Switch Phase												
Minimum Initial (s)							5.0			5.0	5.0	
Minimum Split (s)							10.0			32.0	32.0	
Total Split (s)							10.0			36.0	36.0	
Total Split (%)							9.1%			32.7%	32.7%	
Maximum Green (s)							5.0			30.0	30.0	
Yellow Time (s)							3.0			4.0	4.0	
All-Red Time (s)							2.0			2.0	2.0	
Lost Time Adjust (s)							0.0			0.0	0.0	
Total Lost Time (s)							5.0			6.0	6.0	
Lead/Lag							Lead			Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)							3.0			3.0	3.0	
Recall Mode							None			None	None	
Walk Time (s)										7.0	7.0	
Flash Dont Walk (s)										19.0	19.0	
Pedestrian Calls (#/hr)										0	0	
Act Effct Green (s)		61.0			61.0	87.0	5.0	0.0		30.0	30.0	
Actuated g/C Ratio		0.55			0.55	0.79	0.05	0.00		0.27	0.27	
v/c Ratio		0.97			0.81	0.41	0.20	0.04		1.12	0.97	
Control Delay		19.0			14.2	1.3	56.6	0.0		116.8	64.1	
Queue Delay		0.0			3.0	1.1	0.0	0.0		0.0	0.0	
Total Delay		19.0			17.3	2.4	56.6	0.0		116.8	64.1	
LOS		B			B	A	E	A		F	E	
Approach Delay		19.0			12.8			39.4			90.4	
Approach LOS		B			B			D			F	
Queue Length 50th (ft)		198			240	23	11	0		~424	298	
Queue Length 95th (ft)		m#247			315	36	35	0		#640	#527	
Internal Link Dist (ft)		290			245			49			297	
Turn Bay Length (ft)						250						
Base Capacity (vph)		1848			1719	1462	80	169		443	515	
Starvation Cap Reductn		0			224	587	0	0		0	0	
Spillback Cap Reductn		0			0	0	0	0		0	0	
Storage Cap Reductn		0			0	0	0	0		0	0	
Reduced v/c Ratio		0.97			0.93	0.69	0.20	0.04		1.12	0.97	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	0 (0%), Referenced to phase 2:EBWB, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.12
Intersection Signal Delay:	31.3
Intersection LOS:	C
Intersection Capacity Utilization Err%:	ICU Level of Service H

Lane Group	Ø1	Ø2
Protected Phases	1	2
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	5.0	5.0
Minimum Split (s)	17.0	11.0
Total Split (s)	17.0	47.0
Total Split (%)	15%	43%
Maximum Green (s)	14.0	41.0
Yellow Time (s)	2.0	4.0
All-Red Time (s)	1.0	2.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes
Vehicle Extension (s)	3.0	3.0
Recall Mode	None	C-Max
Walk Time (s)	5.0	
Flash Dont Walk (s)	9.0	
Pedestrian Calls (#/hr)	0	
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (ft)		
Queue Length 95th (ft)		
Internal Link Dist (ft)		
Turn Bay Length (ft)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
 30: Driveway/Ashburton Avenue & Yonkers Avenue

Mitigation Condition
 Weekday AM Peak Hour

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 30: Driveway/Ashburton Avenue & Yonkers Avenue



Lanes, Volumes, Timings
31: Yonkers Avenue & Saw Mill NB Ramps

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (vph)	528	1461	1310	222	78	367
Future Volume (vph)	528	1461	1310	222	78	367
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	11	11	16	11
Storage Length (ft)	180			0	0	0
Storage Lanes	1			1	1	1
Taper Length (ft)	25				25	
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00
Fr _t				0.850		0.850
Fl _t Protected	0.950				0.950	
Satd. Flow (prot)	1805	3539	3421	1561	2046	1561
Fl _t Permitted	0.080				0.950	
Satd. Flow (perm)	152	3539	3421	1561	2046	1561
Right Turn on Red				No		Yes
Satd. Flow (RTOR)						11
Link Speed (mph)		30	30		30	
Link Distance (ft)		399	747		226	
Travel Time (s)		9.1	17.0		5.1	
Peak Hour Factor	0.92	0.92	0.97	0.97	0.92	0.92
Heavy Vehicles (%)	0%	2%	2%	0%	0%	0%
Adj. Flow (vph)	574	1588	1351	229	85	399
Shared Lane Traffic (%)						
Lane Group Flow (vph)	574	1588	1351	229	85	399
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		12	12		16	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.04	1.04	0.85	1.04
Turning Speed (mph)	15			9	15	9
Number of Detectors	1	2	2	1	1	1
Detector Template	Left	Thru	Thru	Right	Left	Right
Leading Detector (ft)	20	100	100	20	20	20
Trailing Detector (ft)	0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0	0
Detector 1 Size(ft)	20	6	6	20	20	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94	94			
Detector 2 Size(ft)		6	6			
Detector 2 Type		Cl+Ex	Cl+Ex			
Detector 2 Channel						
Detector 2 Extend (s)		0.0	0.0			
Turn Type	pm+pt	NA	NA	Free	Prot	pt+ov

Lanes, Volumes, Timings
31: Yonkers Avenue & Saw Mill NB Ramps

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Protected Phases	1	6	2		3	13
Permitted Phases	6			Free		
Detector Phase	1	6	2		3	13
Switch Phase						
Minimum Initial (s)	5.0	10.0	10.0		5.0	
Minimum Split (s)	11.0	16.0	16.0		11.0	
Total Split (s)	43.0	93.0	50.0		17.0	
Total Split (%)	39.1%	84.5%	45.5%		15.5%	
Maximum Green (s)	37.0	87.0	44.0		11.0	
Yellow Time (s)	4.0	4.0	4.0		4.0	
All-Red Time (s)	2.0	2.0	2.0		2.0	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	
Total Lost Time (s)	6.0	6.0	6.0		6.0	
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Vehicle Extension (s)	3.0	3.0	3.0		3.0	
Recall Mode	Max	Max	C-Max		Max	
Act Effct Green (s)	87.0	87.0	44.0	110.0	11.0	54.0
Actuated g/C Ratio	0.79	0.79	0.40	1.00	0.10	0.49
v/c Ratio	0.85	0.57	0.99	0.15	0.42	0.52
Control Delay	36.9	5.9	53.2	0.2	53.2	21.5
Queue Delay	14.7	0.3	0.0	0.0	0.2	0.0
Total Delay	51.6	6.2	53.2	0.2	53.4	21.5
LOS	D	A	D	A	D	C
Approach Delay		18.2	45.5		27.1	
Approach LOS		B	D		C	
Queue Length 50th (ft)	288	185	531	0	57	180
Queue Length 95th (ft)	#505	198	#635	0	108	271
Internal Link Dist (ft)		319	667		146	
Turn Bay Length (ft)	180					
Base Capacity (vph)	676	2799	1368	1561	204	771
Starvation Cap Reductn	98	524	0	0	0	0
Spillback Cap Reductn	0	90	0	0	7	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.99	0.70	0.99	0.15	0.43	0.52


Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 101 (92%), Referenced to phase 2:WBT, Start of Green
 Natural Cycle: 80
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.99
 Intersection Signal Delay: 29.5
 Intersection LOS: C
 Intersection Capacity Utilization 84.8%
 ICU Level of Service E
 Analysis Period (min) 15
 # 95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

Lanes, Volumes, Timings
 31: Yonkers Avenue & Saw Mill NB Ramps

Mitigation Condition
 Weekday AM Peak Hour

Splits and Phases: 31: Yonkers Avenue & Saw Mill NB Ramps

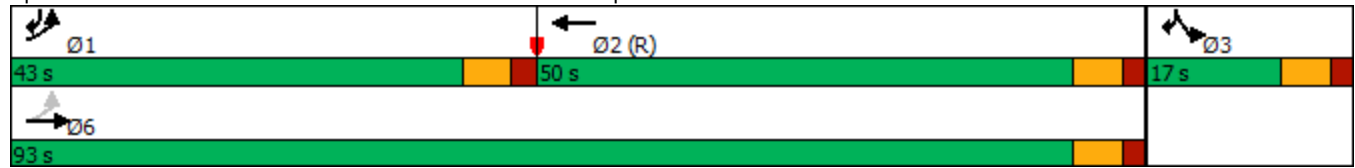

Lanes, Volumes, Timings
32: Yonkers Avenue & Fox Terrace & Wasylenko Lane

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	WBR2	SBL	SBR	SWL	SWR
Lane Configurations		↑↑	↑↑			↘		↘	
Traffic Volume (vph)	6	1533	1530	19	4	0	1	2	1
Future Volume (vph)	6	1533	1530	19	4	0	1	2	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	14	13	13	12	16	16	11	11
Lane Util. Factor	0.95	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Frt			0.998			0.865		0.955	
Flt Protected								0.968	
Satd. Flow (prot)	0	3685	3650	0	0	1826	0	1665	0
Flt Permitted		0.946						0.968	
Satd. Flow (perm)	0	3486	3650	0	0	1826	0	1665	0
Right Turn on Red					Yes		Yes		
Satd. Flow (RTOR)						321			
Link Speed (mph)		30	30			30		30	
Link Distance (ft)		747	1480			229		264	
Travel Time (s)		17.0	33.6			5.2		6.0	
Peak Hour Factor	0.92	0.92	0.97	0.97	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	12	0	0	0	0	0	0	0
Adj. Flow (vph)	7	1666	1577	20	4	0	1	2	1
Shared Lane Traffic (%)									
Lane Group Flow (vph)	0	1673	1601	0	0	1	0	3	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Right	Left	Right	Left	Right
Median Width(ft)		0	0			16		11	
Link Offset(ft)		0	0			0		0	
Crosswalk Width(ft)		16	16			16		16	
Two way Left Turn Lane									
Headway Factor	1.04	0.95	0.96	0.96	1.00	0.85	0.85	1.04	1.04
Turning Speed (mph)	15			9	9	15	9	15	9
Number of Detectors	1	2	2			1		1	
Detector Template	Left	Thru	Thru			Left		Left	
Leading Detector (ft)	20	100	100			20		20	
Trailing Detector (ft)	0	0	0			0		0	
Detector 1 Position(ft)	0	0	0			0		0	
Detector 1 Size(ft)	20	6	6			20		20	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	
Detector 1 Channel									
Detector 1 Extend (s)	0.0	0.0	0.0			0.0		0.0	
Detector 1 Queue (s)	0.0	0.0	0.0			0.0		0.0	
Detector 1 Delay (s)	0.0	0.0	0.0			0.0		0.0	
Detector 2 Position(ft)		94	94						
Detector 2 Size(ft)		6	6						
Detector 2 Type		Cl+Ex	Cl+Ex						
Detector 2 Channel									
Detector 2 Extend (s)		0.0	0.0						
Turn Type	Perm	NA	NA			Prot		Prot	
Protected Phases		6	2			4		3	
Permitted Phases	6								
Detector Phase	6	6	2			4		3	

Lanes, Volumes, Timings
32: Yonkers Avenue & Fox Terrace & Wasylenko Lane

Mitigation Condition
Weekday AM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	WBR2	SBL	SBR	SWL	SWR
Switch Phase									
Minimum Initial (s)	10.0	10.0	10.0			5.0		5.0	
Minimum Split (s)	16.0	16.0	16.0			11.0		27.0	
Total Split (s)	64.0	64.0	64.0			17.0		29.0	
Total Split (%)	58.2%	58.2%	58.2%			15.5%		26.4%	
Maximum Green (s)	58.0	58.0	58.0			11.0		23.0	
Yellow Time (s)	4.0	4.0	4.0			4.0		4.0	
All-Red Time (s)	2.0	2.0	2.0			2.0		2.0	
Lost Time Adjust (s)		0.0	0.0			0.0		0.0	
Total Lost Time (s)		6.0	6.0			6.0		6.0	
Lead/Lag						Lag		Lead	
Lead-Lag Optimize?						Yes		Yes	
Vehicle Extension (s)	3.0	3.0	3.0			3.0		3.0	
Recall Mode	Max	Max	C-Max			None		None	
Walk Time (s)								7.0	
Flash Dont Walk (s)								14.0	
Pedestrian Calls (#/hr)								5	
Act Effct Green (s)		101.1	101.1			5.5		8.7	
Actuated g/C Ratio		0.92	0.92			0.05		0.08	
v/c Ratio		0.52	0.48			0.00		0.02	
Control Delay		7.5	8.3			0.0		42.0	
Queue Delay		0.0	0.0			0.0		0.0	
Total Delay		7.5	8.3			0.0		42.0	
LOS		A	A			A		D	
Approach Delay		7.5	8.3					42.0	
Approach LOS		A	A					D	
Queue Length 50th (ft)		1	6			0		2	
Queue Length 95th (ft)		706	519			0		10	
Internal Link Dist (ft)		667	1400			149		184	
Turn Bay Length (ft)									
Base Capacity (vph)		3204	3355			471		348	
Starvation Cap Reductn		91	0			0		0	
Spillback Cap Reductn		0	0			0		0	
Storage Cap Reductn		0	0			0		0	
Reduced v/c Ratio		0.54	0.48			0.00		0.01	


Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	13 (12%), Referenced to phase 2:WBT, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.52
Intersection Signal Delay:	7.9
Intersection Capacity Utilization	69.9%
Analysis Period (min)	15
Intersection LOS:	A
ICU Level of Service	C

Lanes, Volumes, Timings
 32: Yonkers Avenue & Fox Terrace & Wasylenko Lane





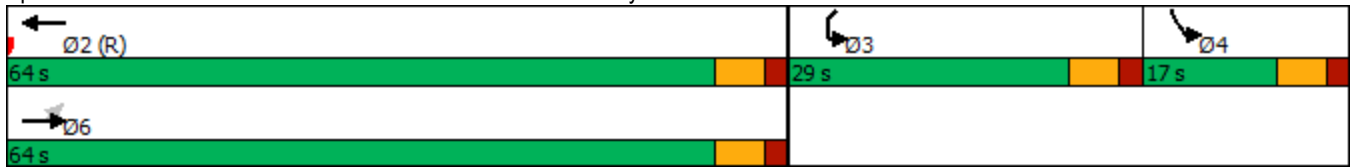







Mitigation Condition
 Weekday AM Peak Hour

Splits and Phases: 32: Yonkers Avenue & Fox Terrace & Wasylenko Lane



Lanes, Volumes, Timings
33: Yonkers Avenue & Midland Avenue West

Mitigation Condition
Wekday AM Peak Hour

						
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	214	473	1080	115	357	1178
Future Volume (vph)	214	473	1080	115	357	1178
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	9	11
Storage Length (ft)	0	0		100	180	
Storage Lanes	2	1		1	1	
Taper Length (ft)	25				25	
Lane Util. Factor	0.97	0.91	0.95	1.00	1.00	0.95
Frt	0.921	0.850		0.850		
Flt Protected	0.977				0.950	
Satd. Flow (prot)	3252	1424	3539	1583	1593	3367
Flt Permitted	0.977				0.085	
Satd. Flow (perm)	3252	1424	3539	1583	143	3367
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)	257	257		53		
Link Speed (mph)	30		30			30
Link Distance (ft)	520		563			1480
Travel Time (s)	11.8		12.8			33.6
Peak Hour Factor	0.92	0.92	0.97	0.97	0.92	0.92
Bus Blockages (#/hr)	0	3	0	0	0	8
Adj. Flow (vph)	233	514	1113	119	388	1280
Shared Lane Traffic (%)		50%				
Lane Group Flow (vph)	490	257	1113	119	388	1280
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	24		12			12
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.02	1.00	1.00	1.14	1.07
Turning Speed (mph)	15	9		9	15	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (ft)	20	20	100	20	20	100
Trailing Detector (ft)	0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0	0
Detector 1 Size(ft)	20	20	6	20	20	6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)			94			94
Detector 2 Size(ft)			6			6
Detector 2 Type			Cl+Ex			Cl+Ex
Detector 2 Channel						
Detector 2 Extend (s)			0.0			0.0
Turn Type	Prot	Prot	NA	Perm	pm+pt	NA

Lanes, Volumes, Timings
33: Yonkers Avenue & Midland Avenue West

Mitigation Condition
Wekday AM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Protected Phases	3	3	2		1	6
Permitted Phases				2	6	
Detector Phase	3	3	2	2	1	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	38.0	38.0	49.0	49.0	11.0	11.0
Total Split (s)	39.0	39.0	47.0	47.0	24.0	71.0
Total Split (%)	35.5%	35.5%	42.7%	42.7%	21.8%	64.5%
Maximum Green (s)	33.0	33.0	41.0	41.0	18.0	65.0
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag			Lag	Lag	Lead	
Lead-Lag Optimize?			Yes	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Ped	Ped	Ped	Ped	Max	C-Max
Walk Time (s)	7.0	7.0	16.0	16.0		
Flash Dont Walk (s)	25.0	25.0	27.0	27.0		
Pedestrian Calls (#/hr)	0	0	0	0		
Act Effct Green (s)	32.0	32.0	41.0	41.0	66.0	66.0
Actuated g/C Ratio	0.29	0.29	0.37	0.37	0.60	0.60
v/c Ratio	0.43	0.43	0.84	0.19	1.15	0.63
Control Delay	15.8	6.2	32.3	7.6	127.8	17.0
Queue Delay	0.0	0.0	0.1	0.0	0.0	1.1
Total Delay	15.8	6.2	32.4	7.6	127.8	18.1
LOS	B	A	C	A	F	B
Approach Delay	12.5		30.0			43.6
Approach LOS	B		C			D
Queue Length 50th (ft)	64	0	394	18	~276	280
Queue Length 95th (ft)	111	65	m468	m42	#485	341
Internal Link Dist (ft)	440		483			1400
Turn Bay Length (ft)				100	180	
Base Capacity (vph)	1155	607	1319	623	336	2020
Starvation Cap Reductn	0	0	11	0	0	0
Spillback Cap Reductn	35	0	0	0	0	465
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.44	0.42	0.85	0.19	1.15	0.82

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 0 (0%), Referenced to phase 6:SBTL, Start of Green
 Natural Cycle: 110
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 1.15
 Intersection Signal Delay: 32.6
 Intersection Capacity Utilization 75.7%

Intersection LOS: C
 ICU Level of Service D

Lanes, Volumes, Timings
 33: Yonkers Avenue & Midland Avenue West

Mitigation Condition
 Weekday AM Peak Hour

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.













m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 33: Yonkers Avenue & Midland Avenue West



Lanes, Volumes, Timings
34: Saw Mill SB Ramps & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑	↗		↑↑							↗
Traffic Volume (vph)	0	1989	528	0	1677	0	0	0	0	0	0	261
Future Volume (vph)	0	1989	528	0	1677	0	0	0	0	0	0	261
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t			0.850									0.865
Fl _t Protected												
Satd. Flow (prot)	0	3539	1615	0	3539	0	0	0	0	0	0	1644
Fl _t Permitted												
Satd. Flow (perm)	0	3539	1615	0	3539	0	0	0	0	0	0	1644
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)												30
Link Speed (mph)		30			30			30				30
Link Distance (ft)		325			399			181				209
Travel Time (s)		7.4			9.1			4.1				4.8
Peak Hour Factor	0.92	0.92	0.92	0.97	0.97	0.97	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	0%	2%	0%	0%	2%	0%	0%	0%	0%	0%	0%	0%
Adj. Flow (vph)	0	2162	574	0	1729	0	0	0	0	0	0	284
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	2162	574	0	1729	0	0	0	0	0	0	284
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		2	1		2							1
Detector Template		Thru	Right		Thru							Right
Leading Detector (ft)		100	20		100							20
Trailing Detector (ft)		0	0		0							0
Detector 1 Position(ft)		0	0		0							0
Detector 1 Size(ft)		6	20		6							20
Detector 1 Type		Cl+Ex	Cl+Ex		Cl+Ex							Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0		0.0							0.0
Detector 1 Queue (s)		0.0	0.0		0.0							0.0
Detector 1 Delay (s)		0.0	0.0		0.0							0.0
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type		NA	Perm		NA							Prot
Protected Phases		6			2							1
Permitted Phases			6									
Detector Phase		6	6		2							1
Switch Phase												

Lanes, Volumes, Timings
34: Saw Mill SB Ramps & Yonkers Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)		5.0	5.0		5.0							5.0
Minimum Split (s)		24.0	24.0		24.0							11.0
Total Split (s)		110.0	110.0		76.0							34.0
Total Split (%)		100.0%	100.0%		69.1%							30.9%
Maximum Green (s)		108.0	108.0		70.0							28.0
Yellow Time (s)		2.0	2.0		4.0							4.0
All-Red Time (s)		0.0	0.0		2.0							2.0
Lost Time Adjust (s)		0.0	0.0		0.0							0.0
Total Lost Time (s)		2.0	2.0		6.0							6.0
Lead/Lag					Lag							Lead
Lead-Lag Optimize?					Yes							Yes
Vehicle Extension (s)		3.0	3.0		3.0							3.0
Recall Mode		Max	Max		C-Max							Min
Walk Time (s)		7.0	7.0		7.0							
Flash Dont Walk (s)		11.0	11.0		11.0							
Pedestrian Calls (#/hr)		0	0		0							
Act Effct Green (s)		110.0	110.0		76.1							21.9
Actuated g/C Ratio		1.00	1.00		0.69							0.20
v/c Ratio		0.61	0.36		0.71							0.81
Control Delay		0.2	0.1		6.4							54.7
Queue Delay		0.1	0.0		0.6							0.0
Total Delay		0.3	0.1		6.9							54.8
LOS		A	A		A							D
Approach Delay		0.2			6.9							54.8
Approach LOS		A			A							D
Queue Length 50th (ft)		0	0		134							172
Queue Length 95th (ft)		m0	m0		m0							256
Internal Link Dist (ft)		245			319			101				129
Turn Bay Length (ft)												
Base Capacity (vph)		3539	1615		2447							440
Starvation Cap Reductn		0	0		280							0
Spillback Cap Reductn		233	0		323							2
Storage Cap Reductn		0	0		0							0
Reduced v/c Ratio		0.65	0.36		0.81							0.65

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 90 (82%), Referenced to phase 2:WBT, Start of Green
 Natural Cycle: 55
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.81
 Intersection Signal Delay: 5.9
 Intersection Capacity Utilization 72.5%
 Analysis Period (min) 15
 Intersection LOS: A
 ICU Level of Service C

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 34: Saw Mill SB Ramps & Yonkers Avenue




Lanes, Volumes, Timings

Mitigation Condition

35: Yonkers Avenue & Midland Avenue East & Cross County EB On-Ramp

Weekday AM Peak Hour



Lane Group	EBL2	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBL	NBT	NBR
Lane Configurations												
Traffic Volume (vph)	126	223	18	81	1	21	7	34	6	68	938	4
Future Volume (vph)	126	223	18	81	1	21	7	34	6	68	938	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	11	12	12	13	13	13	13	12	11	13	13
Storage Length (ft)		0		0	0		0			100		0
Storage Lanes		1		0	0		0			1		0
Taper Length (ft)		25			25					25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	0.95	0.95
Frt			0.878			0.912					0.999	
Flt Protected		0.950				0.999				0.950		
Satd. Flow (prot)	0	1711	1635	0	0	1754	0	0	0	1711	3654	0
Flt Permitted		0.712				0.998				0.074		
Satd. Flow (perm)	0	1282	1635	0	0	1752	0	0	0	133	3654	0
Right Turn on Red				Yes				Yes				Yes
Satd. Flow (RTOR)			88			37					1	
Link Speed (mph)			30			30					30	
Link Distance (ft)			264			380					327	
Travel Time (s)			6.0			8.6					7.4	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.97	0.97	0.97	0.97
Adj. Flow (vph)	137	242	20	88	1	23	8	37	6	70	967	4
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	379	108	0	0	69	0	0	0	76	971	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Left	Right	Right	Left	Left	Left	Right
Median Width(ft)			11			11					12	
Link Offset(ft)			0			0					0	
Crosswalk Width(ft)			16			16					16	
Two way Left Turn Lane												
Headway Factor	1.00	1.04	1.00	1.00	0.96	0.96	0.96	0.96	1.00	1.04	0.96	0.96
Turning Speed (mph)	15	15		9	15		9	9	15	15		9
Number of Detectors	1	1	2		1	2			1	1	2	
Detector Template	Left	Left	Thru		Left	Thru			Left	Left	Thru	
Leading Detector (ft)	20	20	100		20	100			20	20	100	
Trailing Detector (ft)	0	0	0		0	0			0	0	0	
Detector 1 Position(ft)	0	0	0		0	0			0	0	0	
Detector 1 Size(ft)	20	20	6		20	6			20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0	0.0	
Detector 2 Position(ft)			94			94					94	
Detector 2 Size(ft)			6			6					6	
Detector 2 Type			Cl+Ex			Cl+Ex					Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)			0.0			0.0					0.0	
Turn Type	Perm	Perm	NA		Perm	NA			custom	pm+pt	NA	
Protected Phases			3			3				1	6	




Lane Group	SBL	SBT	SBR	SBR2
Lane Configurations				
Traffic Volume (vph)	17	893	186	296
Future Volume (vph)	17	893	186	296
Ideal Flow (vphpl)	1900	1900	1900	1900
Lane Width (ft)	12	12	12	16
Storage Length (ft)	150		210	
Storage Lanes	1		0	
Taper Length (ft)	25			
Lane Util. Factor	1.00	0.95	0.95	0.95
Fr _t		0.947		
Fl _t Protected	0.950			
Satd. Flow (prot)	1770	3352	0	0
Fl _t Permitted	0.295			
Satd. Flow (perm)	550	3352	0	0
Right Turn on Red				Yes
Satd. Flow (RTOR)		40		
Link Speed (mph)		30		
Link Distance (ft)		563		
Travel Time (s)		12.8		
Peak Hour Factor	0.92	0.92	0.92	0.92
Adj. Flow (vph)	18	971	202	322
Shared Lane Traffic (%)				
Lane Group Flow (vph)	18	1495	0	0
Enter Blocked Intersection	No	No	No	No
Lane Alignment	Left	Left	Right	Right
Median Width(ft)		12		
Link Offset(ft)		0		
Crosswalk Width(ft)		16		
Two way Left Turn Lane				
Headway Factor	1.00	1.00	1.00	0.85
Turning Speed (mph)	15		9	9
Number of Detectors	1	2		
Detector Template	Left	Thru		
Leading Detector (ft)	20	100		
Trailing Detector (ft)	0	0		
Detector 1 Position(ft)	0	0		
Detector 1 Size(ft)	20	6		
Detector 1 Type	Cl+Ex	Cl+Ex		
Detector 1 Channel				
Detector 1 Extend (s)	0.0	0.0		
Detector 1 Queue (s)	0.0	0.0		
Detector 1 Delay (s)	0.0	0.0		
Detector 2 Position(ft)		94		
Detector 2 Size(ft)		6		
Detector 2 Type		Cl+Ex		
Detector 2 Channel				
Detector 2 Extend (s)		0.0		
Turn Type	Perm	NA		
Protected Phases		2		

Lanes, Volumes, Timings

Mitigation Condition

35: Yonkers Avenue & Midland Avenue East & Cross County EB On-Ramp

Weekday AM Peak Hour



Lane Group	EBL2	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBL	NBT	NBR
Permitted Phases	3	3			3				1	6		
Detector Phase	3	3	3		3	3			1	1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0			5.0	5.0	5.0	
Minimum Split (s)	39.0	39.0	39.0		39.0	39.0			11.0	11.0	69.0	
Total Split (s)	40.0	40.0	40.0		40.0	40.0			16.0	16.0	70.0	
Total Split (%)	36.4%	36.4%	36.4%		36.4%	36.4%			14.5%	14.5%	63.6%	
Maximum Green (s)	34.0	34.0	34.0		34.0	34.0			10.0	10.0	64.0	
Yellow Time (s)	4.0	4.0	4.0		4.0	4.0			4.0	4.0	4.0	
All-Red Time (s)	2.0	2.0	2.0		2.0	2.0			2.0	2.0	2.0	
Lost Time Adjust (s)		0.0	0.0			0.0				0.0	0.0	
Total Lost Time (s)		6.0	6.0			6.0				6.0	6.0	
Lead/Lag									Lead	Lead		
Lead-Lag Optimize?									Yes	Yes		
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0			3.0	3.0	3.0	
Recall Mode	Ped	Ped	Ped		Ped	Ped			Max	Max	C-Max	
Walk Time (s)	5.0	5.0	5.0		5.0	5.0					38.0	
Flash Dont Walk (s)	28.0	28.0	28.0		28.0	28.0					25.0	
Pedestrian Calls (#/hr)	0	0	0		0	0					0	
Act Effct Green (s)		33.8	33.8			33.8				64.2	64.2	
Actuated g/C Ratio		0.31	0.31			0.31				0.58	0.58	
v/c Ratio		0.96	0.19			0.12				0.34	0.46	
Control Delay		75.6	9.3			15.4				15.0	13.9	
Queue Delay		0.0	0.0			0.0				0.0	0.0	
Total Delay		75.6	9.3			15.4				15.0	13.9	
LOS		E	A			B				B	B	
Approach Delay			60.9			15.4					14.0	
Approach LOS			E			B					B	
Queue Length 50th (ft)		262	10			16				22	193	
Queue Length 95th (ft)		#453	50			49				47	241	
Internal Link Dist (ft)			184			300					247	
Turn Bay Length (ft)										100		
Base Capacity (vph)		396	566			567				223	2133	
Starvation Cap Reductn		0	0			0				0	0	
Spillback Cap Reductn		0	0			1				0	106	
Storage Cap Reductn		0	0			0				0	0	
Reduced v/c Ratio		0.96	0.19			0.12				0.34	0.48	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	0 (0%), Referenced to phase 6:NBT, Start of Green
Natural Cycle:	110
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.01
Intersection Signal Delay:	36.1
Intersection LOS:	D
Intersection Capacity Utilization:	85.3%
ICU Level of Service:	E
Analysis Period (min):	15



Lane Group	SBL	SBT	SBR	SBR2
Permitted Phases	2			
Detector Phase	2	2		
Switch Phase				
Minimum Initial (s)	5.0	5.0		
Minimum Split (s)	48.0	48.0		
Total Split (s)	54.0	54.0		
Total Split (%)	49.1%	49.1%		
Maximum Green (s)	48.0	48.0		
Yellow Time (s)	4.0	4.0		
All-Red Time (s)	2.0	2.0		
Lost Time Adjust (s)	0.0	0.0		
Total Lost Time (s)	6.0	6.0		
Lead/Lag	Lag	Lag		
Lead-Lag Optimize?	Yes	Yes		
Vehicle Extension (s)	3.0	3.0		
Recall Mode	Ped	Ped		
Walk Time (s)	20.0	20.0		
Flash Dont Walk (s)	22.0	22.0		
Pedestrian Calls (#/hr)	0	0		
Act Effct Green (s)	48.0	48.0		
Actuated g/C Ratio	0.44	0.44		
v/c Ratio	0.07	1.01		
Control Delay	13.3	44.7		
Queue Delay	0.0	0.0		
Total Delay	13.3	44.7		
LOS	B	D		
Approach Delay		44.3		
Approach LOS		D		
Queue Length 50th (ft)	3	~553		
Queue Length 95th (ft)	m8	#702		
Internal Link Dist (ft)		483		
Turn Bay Length (ft)	150			
Base Capacity (vph)	240	1485		
Starvation Cap Reductn	0	0		
Spillback Cap Reductn	0	0		
Storage Cap Reductn	0	0		
Reduced v/c Ratio	0.07	1.01		
Intersection Summary				

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 35: Yonkers Avenue & Midland Avenue East & Cross County EB On-Ramp



Lanes, Volumes, Timings
36: Hawthorne Avenue & Prospect Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔		↔	↔							
Traffic Volume (vph)	39	499	68	119	377	128	0	0	0	0	0	0
Future Volume (vph)	39	499	68	119	377	128	0	0	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	16	16	16	16	16	16	16	16	16
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.983			0.962							
Flt Protected		0.997		0.950								
Satd. Flow (prot)	0	3931	0	2006	2031	0	0	0	0	0	0	0
Flt Permitted		0.890		0.384								
Satd. Flow (perm)	0	3509	0	811	2031	0	0	0	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		26			33							
Link Speed (mph)		30			30			30				30
Link Distance (ft)		256			511			286				516
Travel Time (s)		5.8			11.6			6.5				11.7
Peak Hour Factor	0.86	0.86	0.86	0.86	0.86	0.86	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	45	580	79	138	438	149	0	0	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	704	0	138	587	0	0	0	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			24			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2							
Detector Template	Left	Thru		Left	Thru							
Leading Detector (ft)	20	100		20	100							
Trailing Detector (ft)	0	0		0	0							
Detector 1 Position(ft)	0	0		0	0							
Detector 1 Size(ft)	20	6		20	6							
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex							
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0							
Detector 1 Queue (s)	0.0	0.0		0.0	0.0							
Detector 1 Delay (s)	0.0	0.0		0.0	0.0							
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type	Perm	NA		Perm	NA							
Protected Phases		4			8							
Permitted Phases	4			8								
Detector Phase	4	4		8	8							
Switch Phase												

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	

Lanes, Volumes, Timings
36: Hawthorne Avenue & Prospect Street

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)	5.0	5.0		5.0	5.0							
Minimum Split (s)	10.0	10.0		10.0	10.0							
Total Split (s)	58.0	58.0		58.0	58.0							
Total Split (%)	64.4%	64.4%		64.4%	64.4%							
Maximum Green (s)	53.0	53.0		53.0	53.0							
Yellow Time (s)	3.0	3.0		3.0	3.0							
All-Red Time (s)	2.0	2.0		2.0	2.0							
Lost Time Adjust (s)		0.0		0.0	0.0							
Total Lost Time (s)		5.0		5.0	5.0							
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0							
Recall Mode	Max	Max		Max	Max							
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		73.8		73.8	73.8							
Actuated g/C Ratio		0.93		0.93	0.93							
v/c Ratio		0.22		0.18	0.31							
Control Delay		2.3		3.6	3.0							
Queue Delay		0.0		0.0	0.0							
Total Delay		2.4		3.6	3.1							
LOS		A		A	A							
Approach Delay		2.4			3.2							
Approach LOS		A			A							
Queue Length 50th (ft)		0		0	0							
Queue Length 95th (ft)		117		63	220							
Internal Link Dist (ft)		176			431			206			436	
Turn Bay Length (ft)												
Base Capacity (vph)		3263		754	1890							
Starvation Cap Reductn		443		0	151							
Spillback Cap Reductn		0		0	0							
Storage Cap Reductn		0		0	0							
Reduced v/c Ratio		0.25		0.18	0.34							

Intersection Summary

Area Type: Other
 Cycle Length: 90
 Actuated Cycle Length: 79.4
 Natural Cycle: 60
 Control Type: Semi Act-Uncoord
 Maximum v/c Ratio: 0.31
 Intersection Signal Delay: 2.8
 Intersection Capacity Utilization 53.1%
 Analysis Period (min) 15
 Intersection LOS: A
 ICU Level of Service A

Splits and Phases: 36: Hawthorne Avenue & Prospect Street



Lane Group	Ø9
Minimum Initial (s)	5.0
Minimum Split (s)	32.0
Total Split (s)	32.0
Total Split (%)	36%
Maximum Green (s)	27.0
Yellow Time (s)	3.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	7.0
Flash Dont Walk (s)	20.0
Pedestrian Calls (#/hr)	5
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
Intersection Summary	

Lanes, Volumes, Timings
37: Locust Hill Avenue & Ashburton Avenue

Mitigation Condition
Weekday AM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↔			↔	↔	
Traffic Volume (vph)	584	71	56	396	45	75
Future Volume (vph)	584	71	56	396	45	75
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	14	14	13	13
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.985			0.915		
Flt Protected				0.994	0.982	
Satd. Flow (prot)	1552	0	0	1975	1513	0
Flt Permitted				0.994	0.982	
Satd. Flow (perm)	1552	0	0	1975	1513	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	208			436	1494	
Travel Time (s)	4.7			9.9	34.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Parking (#/hr)	5			5		
Adj. Flow (vph)	635	77	61	430	49	82
Shared Lane Traffic (%)						
Lane Group Flow (vph)	712	0	0	491	131	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0	13	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.24	1.04	0.92	0.92	1.14	0.96
Turning Speed (mph)	9		15	15		9
Sign Control	Free			Free	Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	76.1% ICU Level of Service D
Analysis Period (min)	15

Lanes, Volumes, Timings
38: Palisade Avenue & Lafayette Place/Walsh Road

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Volume (vph)	29	8	19	24	0	39	0	308	32	28	287	0
Future Volume (vph)	29	8	19	24	0	39	0	308	32	28	287	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	15	15	15	13	13	13	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.954			0.917			0.987				
Flt Protected		0.975			0.981						0.996	
Satd. Flow (prot)	0	1668	0	0	1732	0	0	1816	0	0	1832	0
Flt Permitted		0.869			0.906						0.947	
Satd. Flow (perm)	0	1486	0	0	1599	0	0	1816	0	0	1742	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		21			45			13				30
Link Speed (mph)		30			30			30				30
Link Distance (ft)		226			227			1216				549
Travel Time (s)		5.1			5.2			27.6				12.5
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	1	0	0	1	0
Parking (#/hr)		5						5			5	
Adj. Flow (vph)	32	9	21	26	0	42	0	335	35	30	312	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	62	0	0	68	0	0	370	0	0	342	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.88	1.05	0.88	0.96	0.96	0.96	0.85	1.02	0.85	0.85	1.02	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Turn Type	Perm	NA		Perm	NA			NA		Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8						6		
Minimum Split (s)	10.0	10.0		10.0	10.0			10.0		10.0	10.0	
Total Split (s)	24.0	24.0		24.0	24.0			24.0		24.0	24.0	
Total Split (%)	50.0%	50.0%		50.0%	50.0%			50.0%		50.0%	50.0%	
Maximum Green (s)	19.0	19.0		19.0	19.0			19.0		19.0	19.0	
Yellow Time (s)	3.0	3.0		3.0	3.0			3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0			2.0		2.0	2.0	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		5.0			5.0			5.0			5.0	
Lead/Lag												
Lead-Lag Optimize?												
Act Effct Green (s)		19.0			19.0			19.0			19.0	
Actuated g/C Ratio		0.40			0.40			0.40			0.40	
v/c Ratio		0.10			0.10			0.51			0.50	
Control Delay		7.4			5.4			13.6			14.0	
Queue Delay		0.0			0.0			0.0			0.0	
Total Delay		7.4			5.4			13.6			14.0	

Lanes, Volumes, Timings
 38: Palisade Avenue & Lafayette Place/Walsh Road

Mitigation Condition
 Weekday AM Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS		A			A			B			B	
Approach Delay		7.4			5.4			13.6			14.0	
Approach LOS		A			A			B			B	
Queue Length 50th (ft)		7			4			71			68	
Queue Length 95th (ft)		24			21			133			127	
Internal Link Dist (ft)		146			147			1136			469	
Turn Bay Length (ft)												
Base Capacity (vph)		600			660			726			689	
Starvation Cap Reductn		0			0			0			0	
Spillback Cap Reductn		0			0			0			0	
Storage Cap Reductn		0			0			0			0	
Reduced v/c Ratio		0.10			0.10			0.51			0.50	

Intersection Summary

Area Type:	Other
Cycle Length:	48
Actuated Cycle Length:	48
Offset:	0 (0%), Referenced to phase 2:NBT and 6:SBTL, Start of Green
Natural Cycle:	40
Control Type:	Pretimed
Maximum v/c Ratio:	0.51
Intersection Signal Delay:	12.6
Intersection LOS:	B
Intersection Capacity Utilization	51.4%
ICU Level of Service	A
Analysis Period (min)	15

Splits and Phases: 38: Palisade Avenue & Lafayette Place/Walsh Road

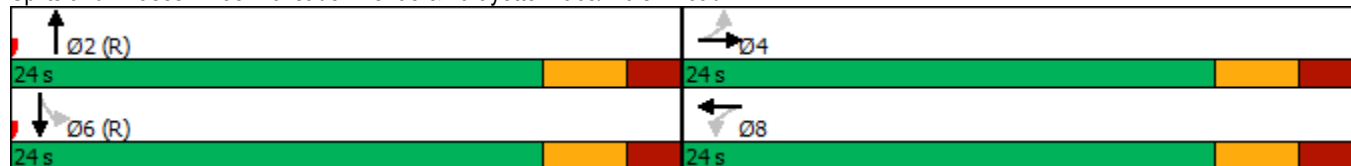

Lanes, Volumes, Timings
49: Palisade Avenue & Main Street/New Main Street

Mitigation Condition
Wekday AM Peak Hour















Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	0	299	165	0	166	0	0	0	0
Future Volume (vph)	0	0	0	0	299	165	0	166	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	16	16	16	16	16	16	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.952							
Flt Protected												
Satd. Flow (prot)	0	0	0	0	2010	0	0	1664	0	0	0	0
Flt Permitted												
Satd. Flow (perm)	0	0	0	0	2010	0	0	1664	0	0	0	0
Right Turn on Red			Yes			No			No			Yes
Satd. Flow (RTOR)												
Link Speed (mph)		30			30			30				30
Link Distance (ft)		81			430			212				254
Travel Time (s)		1.8			9.8			4.8				5.8
Peak Hour Factor	0.92	0.92	0.92	0.86	0.86	0.86	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	53	0	0	0	0
Adj. Flow (vph)	0	0	0	0	348	192	0	180	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	540	0	0	180	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	0.85	0.85	0.85	0.85	1.16	0.85	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors					2		1	2				
Detector Template					Thru		Left	Thru				
Leading Detector (ft)					100		20	100				
Trailing Detector (ft)					0		0	0				
Detector 1 Position(ft)					0		0	0				
Detector 1 Size(ft)					6		20	6				
Detector 1 Type					Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)					0.0		0.0	0.0				
Detector 1 Queue (s)					0.0		0.0	0.0				
Detector 1 Delay (s)					0.0		0.0	0.0				
Detector 2 Position(ft)					94			94				
Detector 2 Size(ft)					6			6				
Detector 2 Type					Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0				
Turn Type					NA			NA				
Protected Phases					1			3				
Permitted Phases							3					
Detector Phase					1		3	3				


Lane Group	Ø2	Ø6
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Ideal Flow (vphpl)		
Lane Width (ft)		
Lane Util. Factor		
Frt		
Flt Protected		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Right Turn on Red		
Satd. Flow (RTOR)		
Link Speed (mph)		
Link Distance (ft)		
Travel Time (s)		
Peak Hour Factor		
Bus Blockages (#/hr)		
Adj. Flow (vph)		
Shared Lane Traffic (%)		
Lane Group Flow (vph)		
Enter Blocked Intersection		
Lane Alignment		
Median Width(ft)		
Link Offset(ft)		
Crosswalk Width(ft)		
Two way Left Turn Lane		
Headway Factor		
Turning Speed (mph)		
Number of Detectors		
Detector Template		
Leading Detector (ft)		
Trailing Detector (ft)		
Detector 1 Position(ft)		
Detector 1 Size(ft)		
Detector 1 Type		
Detector 1 Channel		
Detector 1 Extend (s)		
Detector 1 Queue (s)		
Detector 1 Delay (s)		
Detector 2 Position(ft)		
Detector 2 Size(ft)		
Detector 2 Type		
Detector 2 Channel		
Detector 2 Extend (s)		
Turn Type		
Protected Phases	2	6
Permitted Phases		
Detector Phase		

Lanes, Volumes, Timings
49: Palisade Avenue & Main Street/New Main Street

Mitigation Condition
Weekday AM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Switch Phase												
Minimum Initial (s)					5.0		5.0	5.0				
Minimum Split (s)					50.0		45.0	45.0				
Total Split (s)					50.0		45.0	45.0				
Total Split (%)					47.6%		42.9%	42.9%				
Maximum Green (s)					45.0		40.0	40.0				
Yellow Time (s)					3.0		3.0	3.0				
All-Red Time (s)					2.0		2.0	2.0				
Lost Time Adjust (s)					0.0			0.0				
Total Lost Time (s)					5.0			5.0				
Lead/Lag					Lead							
Lead-Lag Optimize?					Yes							
Vehicle Extension (s)					3.0		3.0	3.0				
Recall Mode					Ped		Ped	Ped				
Walk Time (s)					35.0		30.0	30.0				
Flash Dont Walk (s)					10.0		10.0	10.0				
Pedestrian Calls (#/hr)					0		0	0				
Act Effct Green (s)					45.0			40.0				
Actuated g/C Ratio					0.43			0.38				
v/c Ratio					0.63			0.28				
Control Delay					27.5			24.1				
Queue Delay					0.0			0.0				
Total Delay					27.5			24.1				
LOS					C			C				
Approach Delay					27.5			24.1				
Approach LOS					C			C				
Queue Length 50th (ft)					277			83				
Queue Length 95th (ft)					366			137				
Internal Link Dist (ft)			1		350			132			174	
Turn Bay Length (ft)												
Base Capacity (vph)					861			633				
Starvation Cap Reductn					0			0				
Spillback Cap Reductn					0			0				
Storage Cap Reductn					0			0				
Reduced v/c Ratio					0.63			0.28				
Intersection Summary												
Area Type:	Other											
Cycle Length:	105											
Actuated Cycle Length:	105											
Natural Cycle:	105											
Control Type:	Semi Act-Uncoord											
Maximum v/c Ratio:	0.63											
Intersection Signal Delay:	26.6						Intersection LOS: C					
Intersection Capacity Utilization:	42.9%						ICU Level of Service A					
Analysis Period (min)	15											

Splits and Phases: 49: Palisade Avenue & Main Street/New Main Street

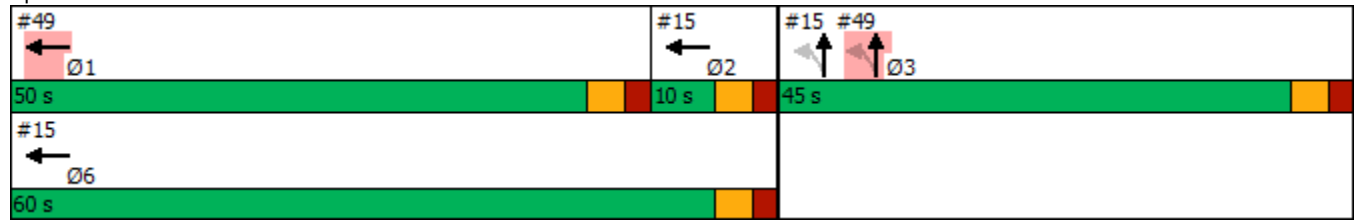

Lane Group	Ø2	Ø6
Switch Phase		
Minimum Initial (s)	2.0	5.0
Minimum Split (s)	7.0	10.0
Total Split (s)	10.0	60.0
Total Split (%)	10%	57%
Maximum Green (s)	5.0	55.0
Yellow Time (s)	3.0	3.0
All-Red Time (s)	2.0	2.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lag	
Lead-Lag Optimize?	Yes	
Vehicle Extension (s)	3.0	3.0
Recall Mode	Max	Max
Walk Time (s)		
Flash Dont Walk (s)		
Pedestrian Calls (#/hr)		
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (ft)		
Queue Length 95th (ft)		
Internal Link Dist (ft)		
Turn Bay Length (ft)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
50: Locust Hill Avenue & Overlook Terrace

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	25	94	46	95	115	12
Future Volume (vph)	25	94	46	95	115	12
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.893				0.987	
Flt Protected	0.990			0.984		
Satd. Flow (prot)	1647	0	0	1833	1839	0
Flt Permitted	0.990			0.984		
Satd. Flow (perm)	1647	0	0	1833	1839	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	126			499	1494	
Travel Time (s)	2.9			11.3	34.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	27	102	50	103	125	13
Shared Lane Traffic (%)						
Lane Group Flow (vph)	129	0	0	153	138	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	31.5%
Analysis Period (min)	15
	ICU Level of Service A

Lanes, Volumes, Timings
59: Buena Vista Avenue & South Driveway

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	18	92	26	391	499	5
Future Volume (vph)	18	92	26	391	499	5
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.887			0.999		
Flt Protected	0.992			0.997		
Satd. Flow (prot)	1639	0	0	1857	1861	0
Flt Permitted	0.992			0.997		
Satd. Flow (perm)	1639	0	0	1857	1861	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	172			284	235	
Travel Time (s)	3.9			6.5	5.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	20	100	28	425	542	5
Shared Lane Traffic (%)						
Lane Group Flow (vph)	120	0	0	453	547	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	55.3%
Analysis Period (min)	15
	ICU Level of Service B

Lanes, Volumes, Timings
130: Centre Street & Palisade Avenue

Mitigation Condition
Wekday AM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	354	9	0	0	0	7
Future Volume (vph)	354	9	0	0	0	7
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.997			0.865		
Flt Protected						
Satd. Flow (prot)	1857	0	0	0	0	1611
Flt Permitted						
Satd. Flow (perm)	1857	0	0	0	0	1611
Link Speed (mph)	30			30		
Link Distance (ft)	212			331		247
Travel Time (s)	4.8			7.5		5.6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	385	10	0	0	0	8
Shared Lane Traffic (%)						
Lane Group Flow (vph)	395	0	0	0	0	8
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0		
Link Offset(ft)	0			0		
Crosswalk Width(ft)	16			16		16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	9		15		9	
Sign Control	Free			Free		Stop

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	29.2% ICU Level of Service A
Analysis Period (min)	15

HCM 6th TWSC
4: Hawthorne Avenue & Main Street

Mitigation Condition
Weekday AM Peak Hour

Intersection												
Int Delay, s/veh	2.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔		↔				↔	
Traffic Vol, veh/h	0	113	27	27	139	0	18	0	32	4	0	10
Future Vol, veh/h	0	113	27	27	139	0	18	0	32	4	0	10
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	0	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	89	89	86	86	92	92	92	92	92	92	92
Heavy Vehicles, %	2	8	8	7	7	2	2	2	2	2	2	2
Mvmt Flow	0	127	30	31	162	0	20	0	35	4	0	11

Major/Minor	Major1		Major2		Minor1		Minor2					
Conflicting Flow All	-	0	0	157	0	0	372	-	142	384	381	162
Stage 1	-	-	-	-	-	-	142	-	-	224	224	-
Stage 2	-	-	-	-	-	-	230	-	-	160	157	-
Critical Hdwy	-	-	-	4.17	-	-	7.12	-	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	-	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	-	-	6.12	5.52	-
Follow-up Hdwy	-	-	-	2.263	-	-	3.518	-	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	0	-	-	1393	-	0	585	0	906	574	552	883
Stage 1	0	-	-	-	-	0	861	0	-	779	718	-
Stage 2	0	-	-	-	-	0	773	0	-	842	768	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	1393	-	-	567	-	906	542	539	883
Mov Cap-2 Maneuver	-	-	-	-	-	-	567	-	-	542	539	-
Stage 1	-	-	-	-	-	-	861	-	-	779	701	-
Stage 2	-	-	-	-	-	-	745	-	-	810	768	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	1.2	10.2	9.9
HCM LOS			B	A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	746	-	-	1393	-	748
HCM Lane V/C Ratio	0.073	-	-	0.023	-	0.02
HCM Control Delay (s)	10.2	-	-	7.6	0	9.9
HCM Lane LOS	B	-	-	A	A	A
HCM 95th %tile Q(veh)	0.2	-	-	0.1	-	0.1

HCM 6th TWSC
5: Hawthorne Avenue & Hudson Street

Mitigation Condition
Weekday AM Peak Hour

Intersection												
Int Delay, s/veh	6											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	1	140	0	0	0	0	24	49	58	22	0	32
Future Vol, veh/h	1	140	0	0	0	0	24	49	58	22	0	32
Conflicting Peds, #/hr	0	0	22	0	0	21	0	0	14	0	0	39
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	16979	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	82	82	82	92	92	92	86	86	86	81	81	81
Heavy Vehicles, %	13	13	13	2	2	2	11	11	11	10	10	10
Mvmt Flow	1	171	0	0	0	0	28	57	67	27	0	40

Major/Minor	Major1			Minor1			Minor2		
Conflicting Flow All	0	0	-	232	173	185	249	173	39
Stage 1	-	-	-	173	173	-	0	0	-
Stage 2	-	-	-	59	0	-	249	173	-
Critical Hdwy	4.23	-	-	7.21	6.61	6.31	7.2	6.6	6.3
Critical Hdwy Stg 1	-	-	-	6.21	5.61	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.2	5.6	-
Follow-up Hdwy	2.317	-	-	3.599	4.099	3.399	3.59	4.09	3.39
Pot Cap-1 Maneuver	-	-	0	704	704	835	688	706	1010
Stage 1	-	-	0	808	739	-	-	-	-
Stage 2	-	-	0	-	-	-	738	741	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	653	704	835	593	706	976
Mov Cap-2 Maneuver	-	-	-	653	704	-	593	706	-
Stage 1	-	-	-	808	739	-	-	-	-
Stage 2	-	-	-	-	-	-	626	741	-

Approach	EB	NB	SB
HCM Control Delay, s		11.1	10.1
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	SBLn1
Capacity (veh/h)	745	-	-	773
HCM Lane V/C Ratio	0.204	-	-	0.086
HCM Control Delay (s)	11.1	-	-	10.1
HCM Lane LOS	B	-	-	B
HCM 95th %tile Q(veh)	0.8	-	-	0.3

Intersection						
Int Delay, s/veh	5.6					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	↘			↗		
Traffic Vol, veh/h	223	0	0	428	0	0
Future Vol, veh/h	223	0	0	428	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	16979	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	242	0	0	465	0	0

Major/Minor	Minor2	Major1	
Conflicting Flow All	465	-	0
Stage 1	0	-	-
Stage 2	465	-	-
Critical Hdwy	6.42	-	-
Critical Hdwy Stg 1	-	-	-
Critical Hdwy Stg 2	5.42	-	-
Follow-up Hdwy	3.518	-	-
Pot Cap-1 Maneuver	556	0	0
Stage 1	-	0	0
Stage 2	632	0	0
Platoon blocked, %			-
Mov Cap-1 Maneuver	556	-	-
Mov Cap-2 Maneuver	556	-	-
Stage 1	-	-	-
Stage 2	632	-	-

Approach	EB	NB
HCM Control Delay, s	16.4	0
HCM LOS	C	

Minor Lane/Major Mvmt	NBT	EBLn1
Capacity (veh/h)	-	556
HCM Lane V/C Ratio	-	0.436
HCM Control Delay (s)	-	16.4
HCM Lane LOS	-	C
HCM 95th %tile Q(veh)	-	2.2

Intersection						
Int Delay, s/veh	3.1					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	584	71	56	396	45	75
Future Vol, veh/h	584	71	56	396	45	75
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	635	77	61	430	49	82

Major/Minor	Major1	Major2	Minor1	Minor2	Minor3
Conflicting Flow All	0	0	712	0	1226
Stage 1	-	-	-	-	674
Stage 2	-	-	-	-	552
Critical Hdwy	-	-	4.12	-	6.42
Critical Hdwy Stg 1	-	-	-	-	5.42
Critical Hdwy Stg 2	-	-	-	-	5.42
Follow-up Hdwy	-	-	2.218	-	3.518
Pot Cap-1 Maneuver	-	-	888	-	197
Stage 1	-	-	-	-	506
Stage 2	-	-	-	-	577
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	888	-	179
Mov Cap-2 Maneuver	-	-	-	-	179
Stage 1	-	-	-	-	506
Stage 2	-	-	-	-	525

Approach	EB	WB	NB
HCM Control Delay, s	0	1.2	27.4
HCM LOS			D

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT
Capacity (veh/h)	288	-	-	888	-
HCM Lane V/C Ratio	0.453	-	-	0.069	-
HCM Control Delay (s)	27.4	-	-	9.4	0
HCM Lane LOS	D	-	-	A	A
HCM 95th %tile Q(veh)	2.2	-	-	0.2	-

Intersection						
Int Delay, s/veh	4					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	25	94	46	95	115	12
Future Vol, veh/h	25	94	46	95	115	12
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	27	102	50	103	125	13

Major/Minor	Minor2	Major1		Major2	
Conflicting Flow All	335	132	138	0	0
Stage 1	132	-	-	-	-
Stage 2	203	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-
Pot Cap-1 Maneuver	660	917	1446	-	-
Stage 1	894	-	-	-	-
Stage 2	831	-	-	-	-
Platoon blocked, %				-	-
Mov Cap-1 Maneuver	636	917	1446	-	-
Mov Cap-2 Maneuver	636	-	-	-	-
Stage 1	861	-	-	-	-
Stage 2	831	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	10.1	2.5	0
HCM LOS	B		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1446	-	839	-	-
HCM Lane V/C Ratio	0.035	-	0.154	-	-
HCM Control Delay (s)	7.6	0	10.1	-	-
HCM Lane LOS	A	A	B	-	-
HCM 95th %tile Q(veh)	0.1	-	0.5	-	-

HCM 6th TWSC
59: Buena Vista Avenue & South Driveway

Mitigation Condition
Weekday AM Peak Hour

Intersection						
Int Delay, s/veh	1.9					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	T			T		T
Traffic Vol, veh/h	18	92	26	391	499	5
Future Vol, veh/h	18	92	26	391	499	5
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	20	100	28	425	542	5

Major/Minor	Minor2	Major1		Major2	
Conflicting Flow All	1026	545	547	0	0
Stage 1	545	-	-	-	-
Stage 2	481	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-
Pot Cap-1 Maneuver	260	538	1022	-	-
Stage 1	581	-	-	-	-
Stage 2	622	-	-	-	-
Platoon blocked, %				-	-
Mov Cap-1 Maneuver	251	538	1022	-	-
Mov Cap-2 Maneuver	251	-	-	-	-
Stage 1	560	-	-	-	-
Stage 2	622	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	15.8	0.5	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1022	-	453	-	-
HCM Lane V/C Ratio	0.028	-	0.264	-	-
HCM Control Delay (s)	8.6	0	15.8	-	-
HCM Lane LOS	A	A	C	-	-
HCM 95th %tile Q(veh)	0.1	-	1	-	-

Intersection						
Int Delay, s/veh	0.2					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↔				↔	
Traffic Vol, veh/h	354	9	0	0	0	7
Future Vol, veh/h	354	9	0	0	0	7
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	-	0
Veh in Median Storage, #	0	-	-	16983	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	385	10	0	0	0	8

Major/Minor	Major1		Minor1	
Conflicting Flow All	0	0	-	390
Stage 1	-	-	-	-
Stage 2	-	-	-	-
Critical Hdwy	-	-	-	6.22
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-
Follow-up Hdwy	-	-	-	3.318
Pot Cap-1 Maneuver	-	-	0	658
Stage 1	-	-	0	-
Stage 2	-	-	0	-
Platoon blocked, %	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	658
Mov Cap-2 Maneuver	-	-	-	-
Stage 1	-	-	-	-
Stage 2	-	-	-	-

Approach	EB	NB
HCM Control Delay, s	0	10.5
HCM LOS		B

Minor Lane/Major Mvmt	NBLn1	EBT	EBR
Capacity (veh/h)	658	-	-
HCM Lane V/C Ratio	0.012	-	-
HCM Control Delay (s)	10.5	-	-
HCM Lane LOS	B	-	-
HCM 95th %tile Q(veh)	0	-	-

Intersection	
Intersection Delay, s/veh	12
Intersection LOS	B

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	↘	↗		↕		
Traffic Vol, veh/h	228	190	0	293	0	0
Future Vol, veh/h	228	190	0	293	0	0
Peak Hour Factor	0.86	0.86	0.92	0.92	0.92	0.92
Heavy Vehicles, %	11	11	6	6	2	2
Mvmt Flow	265	221	0	318	0	0
Number of Lanes	1	1	0	1	0	0

Approach	EB	NB
Opposing Approach		
Opposing Lanes	0	0
Conflicting Approach Left		EB
Conflicting Lanes Left	0	2
Conflicting Approach Right	NB	
Conflicting Lanes Right	1	0
HCM Control Delay	11.7	12.4
HCM LOS	B	B

Lane	NBLn1	EBLn1	EBLn2
Vol Left, %	0%	100%	0%
Vol Thru, %	100%	0%	0%
Vol Right, %	0%	0%	100%
Sign Control	Stop	Stop	Stop
Traffic Vol by Lane	293	228	190
LT Vol	0	228	0
Through Vol	293	0	0
RT Vol	0	0	190
Lane Flow Rate	318	265	221
Geometry Grp	2	7	7
Degree of Util (X)	0.454	0.443	0.295
Departure Headway (Hd)	5.136	6.022	4.813
Convergence, Y/N	Yes	Yes	Yes
Cap	701	594	740
Service Time	3.181	3.79	2.58
HCM Lane V/C Ratio	0.454	0.446	0.299
HCM Control Delay	12.4	13.5	9.6
HCM Lane LOS	B	B	A
HCM 95th-tile Q	2.4	2.3	1.2

Intersection	
Intersection Delay, s/veh	10.9
Intersection LOS	B

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔						↔			↔	
Traffic Vol, veh/h	90	181	60	0	0	0	0	51	23	159	50	0
Future Vol, veh/h	90	181	60	0	0	0	0	51	23	159	50	0
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	98	197	65	0	0	0	0	55	25	173	54	0
Number of Lanes	0	1	0	0	0	0	0	1	0	0	1	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	1	1
Conflicting Approach Left	SB	EB	
Conflicting Lanes Left	1	1	0
Conflicting Approach Right	NB		EB
Conflicting Lanes Right	1	0	1
HCM Control Delay	11.7	8.6	10.5
HCM LOS	B	A	B

Lane	NBLn1	EBLn1	SBLn1
Vol Left, %	0%	27%	76%
Vol Thru, %	69%	55%	24%
Vol Right, %	31%	18%	0%
Sign Control	Stop	Stop	Stop
Traffic Vol by Lane	74	331	209
LT Vol	0	90	159
Through Vol	51	181	50
RT Vol	23	60	0
Lane Flow Rate	80	360	227
Geometry Grp	1	1	1
Degree of Util (X)	0.11	0.464	0.319
Departure Headway (Hd)	4.922	4.647	5.06
Convergence, Y/N	Yes	Yes	Yes
Cap	723	774	707
Service Time	2.989	2.693	3.117
HCM Lane V/C Ratio	0.111	0.465	0.321
HCM Control Delay	8.6	11.7	10.5
HCM Lane LOS	A	B	B
HCM 95th-tile Q	0.4	2.5	1.4

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Volume (vph)	14	185	168	63	89	165	53	296	32	69	498	10
Future Volume (vph)	14	185	168	63	89	165	53	296	32	69	498	10
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	14	14	14	11	11	11	13	13	13
Storage Length (ft)	150		150	150		150	150		150	150		150
Storage Lanes	0		0	0		0	0		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor		0.95			0.93			0.99			1.00	
Frt		0.938			0.930			0.989			0.998	
Flt Protected		0.998			0.990			0.993			0.994	
Satd. Flow (prot)	0	1599	0	0	1389	0	0	1482	0	0	1668	0
Flt Permitted		0.982			0.835			0.858			0.904	
Satd. Flow (perm)	0	1574	0	0	1171	0	0	1281	0	0	1517	0
Right Turn on Red			No			No			No			No
Satd. Flow (RTOR)												
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		113			249			300			234	
Travel Time (s)		2.6			5.7			6.8			5.3	
Confl. Peds. (#/hr)			67			93			107			49
Peak Hour Factor	0.86	0.86	0.86	0.92	0.92	0.92	0.84	0.84	0.84	0.88	0.88	0.88
Heavy Vehicles (%)	2%	2%	2%	6%	6%	6%	2%	2%	2%	11%	11%	11%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	12	0
Parking (#/hr)		10			10			10				
Adj. Flow (vph)	16	215	195	68	97	179	63	352	38	78	566	11
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	426	0	0	344	0	0	453	0	0	655	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	0.92	1.13	0.92	1.04	1.28	1.04	0.96	1.02	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0		0.0		0.0		0.0		0.0		0.0	
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases	1		1		1		2		2		2	
Permitted Phases	1			1			2			2		
Detector Phase	1	1		1	1		2	2		2	2	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	34.0	34.0		34.0	34.0		32.0	32.0		32.0	32.0	
Total Split (s)	34.0	34.0		34.0	34.0		41.0	41.0		41.0	41.0	
Total Split (%)	45.3%	45.3%		45.3%	45.3%		54.7%	54.7%		54.7%	54.7%	
Maximum Green (s)	29.0	29.0		29.0	29.0		36.0	36.0		36.0	36.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0		0.0		0.0		0.0		0.0		0.0	
Total Lost Time (s)	5.0		5.0		5.0		5.0		5.0		5.0	
Lead/Lag	Lead	Lead		Lead	Lead		Lag	Lag		Lag	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Max	Max		Max	Max		C-Max	C-Max		C-Max	C-Max	
Walk Time (s)	15.0	15.0		15.0	15.0		15.0	15.0		15.0	15.0	
Flash Dont Walk (s)	14.0	14.0		14.0	14.0		12.0	12.0		12.0	12.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)	29.0		29.0		36.0		36.0		36.0		36.0	
Actuated g/C Ratio	0.39		0.39		0.48		0.48		0.48		0.48	
v/c Ratio	0.70		0.76		0.74		0.74		0.90		0.90	
Control Delay	26.8		33.4		15.5		15.5		36.3		36.3	
Queue Delay	0.9		2.1		0.0		0.0		11.3		11.3	
Total Delay	27.7		35.5		15.6		15.6		47.6		47.6	
LOS	C		D		B		B		D		D	
Approach Delay	27.7		35.5		15.6		15.6		47.6		47.6	
Approach LOS	C		D		B		B		D		D	
Queue Length 50th (ft)	162		135		31		31		265		265	
Queue Length 95th (ft)	247		#270		65		65		#463		#463	
Internal Link Dist (ft)	33		169		220		220		154		154	
Turn Bay Length (ft)												
Base Capacity (vph)	608		452		614		614		728		728	
Starvation Cap Reductn	0		0		2		2		0		0	
Spillback Cap Reductn	48		36		0		0		67		67	
Storage Cap Reductn	0		0		0		0		0		0	
Reduced v/c Ratio	0.76		0.83		0.74		0.74		0.99		0.99	

Intersection Summary


Area Type: Other
 Cycle Length: 75
 Actuated Cycle Length: 75
 Offset: 0 (0%), Referenced to phase 2:NBSB, Start of Green
 Natural Cycle: 75

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Weekday PM Peak Hour

Control Type: Actuated-Coordinated
Maximum v/c Ratio: 0.90
Intersection Signal Delay: 33.1 Intersection LOS: C
Intersection Capacity Utilization 95.4% ICU Level of Service F
Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 1: Buena Vista Avenue & Main Street



Lanes, Volumes, Timings
2: Buena Vista Avenue & North Driveway/Hudson Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Volume (vph)	2	32	6	46	25	11	25	368	40	115	605	9
Future Volume (vph)	2	32	6	46	25	11	25	368	40	115	605	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	11	11	11	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor					0.95			1.00				1.00
Frt		0.979			0.982			0.987				0.998
Flt Protected		0.998			0.972			0.997				0.992
Satd. Flow (prot)	0	1820	0	0	1707	0	0	1590	0	0	1993	0
Flt Permitted		0.977			0.972			0.941				0.843
Satd. Flow (perm)	0	1782	0	0	1629	0	0	1500	0	0	1690	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		7			10			7				1
Link Speed (mph)		30			30			30				30
Link Distance (ft)		129			240			235				300
Travel Time (s)		2.9			5.5			5.3				6.8
Confl. Peds. (#/hr)				39					9	23		
Peak Hour Factor	0.92	0.92	0.92	0.91	0.92	0.91	0.92	0.82	0.82	0.87	0.87	0.92
Heavy Vehicles (%)	2%	2%	2%	3%	2%	3%	2%	17%	17%	7%	7%	2%
Parking (#/hr)				10				5				
Adj. Flow (vph)	2	35	7	51	27	12	27	449	49	132	695	10
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	44	0	0	90	0	0	525	0	0	837	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		30			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.04	1.04	1.04	0.85	1.01	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Split	NA		Perm	NA		Perm	NA	

Lanes, Volumes, Timings
2: Buena Vista Avenue & North Driveway/Hudson Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases		4		8	8			2				6
Permitted Phases	4						2			6		
Detector Phase	4	4		8	8		2	2		6		6
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0		5.0
Minimum Split (s)	22.0	22.0		22.0	22.0		25.0	25.0		25.0		25.0
Total Split (s)	22.0	22.0		22.0	22.0		31.0	31.0		31.0		31.0
Total Split (%)	29.3%	29.3%		29.3%	29.3%		41.3%	41.3%		41.3%		41.3%
Maximum Green (s)	17.0	17.0		17.0	17.0		25.0	25.0		25.0		25.0
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0		3.0
All-Red Time (s)	2.0	2.0		2.0	2.0		3.0	3.0		3.0		3.0
Lost Time Adjust (s)		0.0			0.0			0.0				0.0
Total Lost Time (s)		5.0			5.0			6.0				6.0
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0		3.0
Recall Mode	None	None		None	None		C-Min	C-Min		C-Min		C-Min
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0		7.0
Flash Dont Walk (s)	10.0	10.0		10.0	10.0		12.0	12.0		12.0		12.0
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0		0
Act Effct Green (s)		7.1			8.9			50.5				50.5
Actuated g/C Ratio		0.09			0.12			0.67				0.67
v/c Ratio		0.25			0.42			0.52				0.73
Control Delay		30.6			32.8			12.5				13.7
Queue Delay		0.0			0.0			0.0				1.1
Total Delay		30.6			32.8			12.5				14.8
LOS		C			C			B				B
Approach Delay		30.6			32.8			12.5				14.8
Approach LOS		C			C			B				B
Queue Length 50th (ft)		16			35			142				162
Queue Length 95th (ft)		44			73			247				m#522
Internal Link Dist (ft)		49			160			155				220
Turn Bay Length (ft)												
Base Capacity (vph)		409			394			1013				1139
Starvation Cap Reductn		0			0			0				122
Spillback Cap Reductn		0			0			10				0
Storage Cap Reductn		0			0			0				0
Reduced v/c Ratio		0.11			0.23			0.52				0.82

Intersection Summary

Area Type:	Other
Cycle Length:	75
Actuated Cycle Length:	75
Offset:	12 (16%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.73
Intersection Signal Delay:	15.6
Intersection Capacity Utilization	87.4%
Intersection LOS:	B
ICU Level of Service	E

Lanes, Volumes, Timings
 2: Buena Vista Avenue & North Driveway/Hudson Street

Mitigation Condition
 Weekday PM Peak Hour

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.













m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 2: Buena Vista Avenue & North Driveway/Hudson Street



Lanes, Volumes, Timings
3: Buena Vista Avenue & Prospect Street

Mitigation Condition
Weekday PM Peak Hour

						
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	128	334	185	229	560	146
Future Volume (vph)	128	334	185	229	560	146
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	9	9	9	9
Storage Length (ft)	0	0		50	150	
Storage Lanes	1	1		1	1	
Taper Length (ft)	25				25	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor	0.90			0.98	0.98	
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1583	1417	1513	1286	1533	1613
Flt Permitted	0.950				0.408	
Satd. Flow (perm)	1425	1417	1513	1259	647	1613
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)		412		208		
Link Speed (mph)	30		30			30
Link Distance (ft)	256		433			284
Travel Time (s)	5.8		9.8			6.5
Confl. Peds. (#/hr)	40			9	27	
Peak Hour Factor	0.81	0.81	0.82	0.82	0.87	0.87
Heavy Vehicles (%)	14%	14%	13%	13%	6%	6%
Adj. Flow (vph)	158	412	226	279	644	168
Shared Lane Traffic (%)						
Lane Group Flow (vph)	158	412	226	279	644	168
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	20		9			9
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.14	1.14	1.14	1.14
Turning Speed (mph)	15	9		9	15	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (ft)	20	20	100	20	20	100
Trailing Detector (ft)	0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0	0
Detector 1 Size(ft)	20	20	6	20	20	6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)			94			94
Detector 2 Size(ft)			6			6
Detector 2 Type			Cl+Ex			Cl+Ex
Detector 2 Channel						

Lanes, Volumes, Timings
3: Buena Vista Avenue & Prospect Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Detector 2 Extend (s)			0.0			0.0
Turn Type	Prot	Perm	NA	Perm	pm+pt	NA
Protected Phases	8		2		1	6
Permitted Phases		8		2	6	
Detector Phase	8	8	2	2	1	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	23.0	23.0	31.0	31.0	10.0	31.0
Total Split (s)	23.0	23.0	31.0	31.0	36.0	67.0
Total Split (%)	25.6%	25.6%	34.4%	34.4%	40.0%	74.4%
Maximum Green (s)	18.0	18.0	26.0	26.0	31.0	62.0
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag			Lag	Lag	Lead	
Lead-Lag Optimize?			Yes	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None	Min	Min	None	Min
Walk Time (s)	7.0	7.0	7.0	7.0		7.0
Flash Dont Walk (s)	11.0	11.0	19.0	19.0		19.0
Pedestrian Calls (#/hr)	0	0	0	0		0
Act Effct Green (s)	12.3	12.3	16.4	16.4	45.7	45.7
Actuated g/C Ratio	0.18	0.18	0.24	0.24	0.67	0.67
v/c Ratio	0.56	0.70	0.63	0.61	0.87	0.16
Control Delay	37.0	10.5	33.6	14.0	23.1	4.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	37.1	10.5	33.6	14.0	23.1	4.8
LOS	D	B	C	B	C	A
Approach Delay	17.9		22.8			19.4
Approach LOS	B		C			B
Queue Length 50th (ft)	62	0	85	24	127	22
Queue Length 95th (ft)	126	46	159	81	#357	48
Internal Link Dist (ft)	176		353			204
Turn Bay Length (ft)				50	150	
Base Capacity (vph)	441	692	609	631	863	1399
Starvation Cap Reductn	10	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.37	0.60	0.37	0.44	0.75	0.12

Intersection Summary

Area Type:	Other
Cycle Length:	90
Actuated Cycle Length:	68.7
Natural Cycle:	80
Control Type:	Actuated-Uncoordinated
Maximum v/c Ratio:	0.87
Intersection Signal Delay:	19.8
Intersection LOS:	B

Lanes, Volumes, Timings
 3: Buena Vista Avenue & Prospect Street

Mitigation Condition
 Weekday PM Peak Hour

Intersection Capacity Utilization 63.4% ICU Level of Service B

Analysis Period (min) 15

















95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

Splits and Phases: 3: Buena Vista Avenue & Prospect Street



Lanes, Volumes, Timings
4: Hawthorne Avenue & Main Street

Mitigation Condition
Weekday PM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	204	82	0	217	0	93	0	0	14	0	7
Future Volume (vph)	0	204	82	0	217	0	93	0	0	14	0	7
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	15	15	15	15	12	12	12	12	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.961									0.953	
Flt Protected							0.950				0.968	
Satd. Flow (prot)	0	1581	0	0	1676	0	1770	0	0	0	1718	0
Flt Permitted							0.950				0.968	
Satd. Flow (perm)	0	1581	0	0	1676	0	1770	0	0	0	1718	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		249			526			303			162	
Travel Time (s)		5.7			12.0			6.9			3.7	
Peak Hour Factor	0.92	0.86	0.86	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	2%	8%	8%	6%	6%	2%	2%	2%	2%	2%	2%	2%
Parking (#/hr)		10			10							
Adj. Flow (vph)	0	237	95	0	236	0	101	0	0	15	0	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	332	0	0	236	0	101	0	0	0	23	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			-50	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.09	0.88	0.88	1.09	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	29.4%
ICU Level of Service	A
Analysis Period (min)	15

Lanes, Volumes, Timings
5: Hawthorne Avenue & Hudson Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Volume (vph)	4	183	0	0	0	0	49	89	87	49	0	33
Future Volume (vph)	4	183	0	0	0	0	49	89	87	49	0	33
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	12	12	12	16	16	16	13	13	13
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor												
Frt								0.948			0.945	
Flt Protected		0.999						0.989			0.971	
Satd. Flow (prot)	0	1460	0	0	0	0	0	1651	0	0	1766	0
Flt Permitted		0.999						0.989			0.971	
Satd. Flow (perm)	0	1460	0	0	0	0	0	1651	0	0	1766	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		240			538			516			303	
Travel Time (s)		5.5			12.2			11.7			6.9	
Confl. Peds. (#/hr)			33				35		16			38
Peak Hour Factor	0.85	0.85	0.85	0.92	0.92	0.92	0.83	0.83	0.83	0.90	0.90	0.90
Heavy Vehicles (%)	10%	10%	10%	2%	2%	2%	7%	7%	7%	2%	2%	2%
Parking (#/hr)		5						5				
Adj. Flow (vph)	5	215	0	0	0	0	59	107	105	54	0	37
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	220	0	0	0	0	0	271	0	0	91	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.04	1.24	1.04	1.00	1.00	1.00	0.85	1.01	0.85	0.96	0.96	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	33.3%
ICU Level of Service	A
Analysis Period (min)	15

Lanes, Volumes, Timings
6: Warburton Avenue & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↖	↗			↕		↖	↗	
Traffic Volume (vph)	19	259	27	57	326	54	32	269	93	110	273	26
Future Volume (vph)	19	259	27	57	326	54	32	269	93	110	273	26
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	10	9	13	13	16	16	16	9	11	11
Storage Length (ft)	0		0	60		0	0		0	100		0
Storage Lanes	0		0	1		0	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.988			0.979			0.968			0.987	
Fl _t Protected		0.997		0.950				0.996		0.950		
Satd. Flow (prot)	0	1377	0	1547	1831	0	0	1593	0	1577	1760	0
Fl _t Permitted		0.961		0.451				0.948		0.295		
Satd. Flow (perm)	0	1327	0	734	1831	0	0	1517	0	490	1760	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		5			9			19				8
Link Speed (mph)		30			30			30				30
Link Distance (ft)		239			672			1367				278
Travel Time (s)		5.4			15.3			31.1				6.3
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.82	0.82	0.82	0.92	0.92	0.92
Heavy Vehicles (%)	11%	11%	11%	5%	5%	5%	14%	14%	14%	3%	3%	3%
Parking (#/hr)		5						5				
Adj. Flow (vph)	21	282	29	62	354	59	39	328	113	120	297	28
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	332	0	62	413	0	0	480	0	120	325	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			9			0				9
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.09	1.29	1.09	1.14	0.96	0.96	0.85	1.01	0.85	1.14	1.04	1.04
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lanes, Volumes, Timings
6: Warburton Avenue & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		Perm	NA		pm+pt	NA	
Protected Phases		2			6			8		7	4	
Permitted Phases	2			6			8			4		
Detector Phase	2	2		6	6		8	8		7	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		10.0	10.0		5.0	10.0	
Minimum Split (s)	32.0	32.0		32.0	32.0		32.0	32.0		10.0	32.0	
Total Split (s)	36.0	36.0		36.0	36.0		47.0	47.0		17.0	64.0	
Total Split (%)	36.0%	36.0%		36.0%	36.0%		47.0%	47.0%		17.0%	64.0%	
Maximum Green (s)	31.0	31.0		31.0	31.0		42.0	42.0		12.0	59.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0		0.0	0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0		5.0	5.0			5.0		5.0	5.0	
Lead/Lag							Lag	Lag		Lead		
Lead-Lag Optimize?							Yes	Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Ped	Ped		C-Max	C-Max		Ped	Ped		Max	Ped	
Walk Time (s)	15.0	15.0		15.0	15.0		15.0	15.0			15.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		12.0	12.0			12.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0			0	
Act Effct Green (s)		37.2		37.2	37.2			35.8		52.8	52.8	
Actuated g/C Ratio		0.37		0.37	0.37			0.36		0.53	0.53	
v/c Ratio		0.67		0.23	0.60			0.86		0.31	0.35	
Control Delay		35.9		31.4	32.8			44.6		13.1	13.7	
Queue Delay		0.0		0.0	0.0			0.0		0.0	0.0	
Total Delay		35.9		31.4	32.8			44.6		13.1	13.7	
LOS		D		C	C			D		B	B	
Approach Delay		35.9			32.6			44.6			13.5	
Approach LOS		D			C			D			B	
Queue Length 50th (ft)		176		25	168			265		36	108	
Queue Length 95th (ft)		#337		m33	m195			319		57	145	
Internal Link Dist (ft)		159			592			1287			198	
Turn Bay Length (ft)				60						100		
Base Capacity (vph)		496		273	686			648		389	1041	
Starvation Cap Reductn		0		0	0			0		0	0	
Spillback Cap Reductn		0		0	0			0		0	0	
Storage Cap Reductn		0		0	0			0		0	0	
Reduced v/c Ratio		0.67		0.23	0.60			0.74		0.31	0.31	

Intersection Summary

Area Type:	Other
Cycle Length:	100
Actuated Cycle Length:	100
Offset:	0 (0%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	75
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.86
Intersection Signal Delay:	31.7
Intersection LOS:	C

Lanes, Volumes, Timings
 6: Warburton Avenue & Ashburton Avenue

Mitigation Condition
 Weekday PM Peak Hour

Intersection Capacity Utilization 81.1% ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.







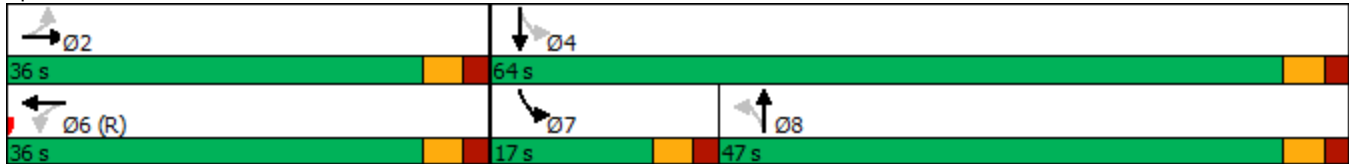










m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 6: Warburton Avenue & Ashburton Avenue



Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Weekday PM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	20	0	35	380	2	70	0	219	0	0	418	0
Future Volume (vph)	20	0	35	380	2	70	0	219	0	0	418	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	13	9	9	14	14	14	14	14	14
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.915			0.854							
Flt Protected		0.982		0.950								
Satd. Flow (prot)	0	1674	0	1600	1432	0	0	1689	0	0	1689	0
Flt Permitted		0.847		0.950								
Satd. Flow (perm)	0	1444	0	1600	1432	0	0	1689	0	0	1689	0
Right Turn on Red			Yes			No			Yes			Yes
Satd. Flow (RTOR)		81										
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		49			114			382			1367	
Travel Time (s)		1.1			2.6			8.7			31.1	
Peak Hour Factor	0.81	0.81	0.81	0.94	0.94	0.94	0.82	0.82	0.82	0.97	0.97	0.97
Parking (#/hr)				5		5		10			10	
Adj. Flow (vph)	25	0	43	404	2	74	0	267	0	0	431	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	68	0	404	76	0	0	267	0	0	431	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		13			13			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.14	1.14	1.14	0.92	1.13	0.92	0.92	1.13	0.92
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2			2			2	
Detector Template	Left	Thru		Left	Thru			Thru			Thru	
Leading Detector (ft)	20	100		20	100			100			100	
Trailing Detector (ft)	0	0		0	0			0			0	
Detector 1 Position(ft)	0	0		0	0			0			0	
Detector 1 Size(ft)	20	6		20	6			6			6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0			0.0			0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Split	NA			NA			NA	
Protected Phases		4		3	3			2			2	
Permitted Phases	4											
Detector Phase	4	4		3	3			2			2	

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0			5.0			5.0	
Minimum Split (s)	24.0	24.0		28.0	28.0			39.0			39.0	
Total Split (s)	25.0	25.0		29.0	29.0			40.0			40.0	
Total Split (%)	26.6%	26.6%		30.9%	30.9%			42.6%			42.6%	
Maximum Green (s)	20.0	20.0		24.0	24.0			35.0			35.0	
Yellow Time (s)	3.0	3.0		3.0	3.0			3.0			3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0			2.0			2.0	
Lost Time Adjust (s)		0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0		5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag		Lead	Lead							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Recall Mode	None	None		Ped	Ped			Ped			Ped	
Walk Time (s)	7.0	7.0		11.0	11.0			24.0			24.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0			10.0			10.0	
Pedestrian Calls (#/hr)	0	0		0	0			0			0	
Act Effct Green (s)		6.2		24.1	24.1			34.4			34.4	
Actuated g/C Ratio		0.08		0.31	0.31			0.45			0.45	
v/c Ratio		0.36		0.81	0.17			0.36			0.57	
Control Delay		12.6		40.8	22.2			16.8			20.7	
Queue Delay		0.0		0.0	0.0			0.0			0.0	
Total Delay		12.6		40.8	22.2			16.8			20.7	
LOS		B		D	C			B			C	
Approach Delay		12.6			37.9			16.8			20.7	
Approach LOS		B			D			B			C	
Queue Length 50th (ft)		0		182	27			85			155	
Queue Length 95th (ft)		23		#357	63			134			261	
Internal Link Dist (ft)		1			34			302			1287	
Turn Bay Length (ft)												
Base Capacity (vph)		435		499	446			768			768	
Starvation Cap Reductn		0		0	0			0			0	
Spillback Cap Reductn		0		0	0			0			0	
Storage Cap Reductn		0		0	0			0			0	
Reduced v/c Ratio		0.16		0.81	0.17			0.35			0.56	


Intersection Summary

Area Type:	Other
Cycle Length:	94
Actuated Cycle Length:	77.3
Natural Cycle:	95
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.81
Intersection Signal Delay:	26.0
Intersection LOS:	C
Intersection Capacity Utilization:	58.1%
ICU Level of Service:	B
Analysis Period (min):	15
# 95th percentile volume exceeds capacity, queue may be longer.	
Queue shown is maximum after two cycles.	

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Weekday PM Peak Hour

Splits and Phases: 7: Warburton Avenue & Wells Avenue



Lanes, Volumes, Timings

Mitigation Condition

8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square Weekday PM Peak Hour



Lane Group	NBL	NBT	NBR	SBL	SBT	SBR	SBR2	NEL2	NEL	NER	NER2	Ø9
Lane Configurations												
Traffic Volume (vph)	150	201	170	27	708	11	87	17	18	43	45	
Future Volume (vph)	150	201	170	27	708	11	87	17	18	43	45	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Lane Width (ft)	12	12	12	16	16	16	12	12	16	12	12	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Ped Bike Factor		0.92			0.98				0.62			
Frt		0.931			0.984				0.903			
Flt Protected	0.950				0.998				0.986			
Satd. Flow (prot)	1703	1309	0	0	1876	0	0	0	1027	0	0	
Flt Permitted	0.310				0.978				0.986			
Satd. Flow (perm)	556	1309	0	0	1838	0	0	0	1027	0	0	
Right Turn on Red			Yes				Yes				Yes	
Satd. Flow (RTOR)		61			8				85			
Link Speed (mph)		30			30				30			
Link Distance (ft)		431			382				174			
Travel Time (s)		9.8			8.7				4.0			
Confl. Peds. (#/hr)			134			139				89		
Peak Hour Factor	0.94	0.94	0.94	0.93	0.93	0.93	0.93	0.81	0.81	0.81	0.81	
Heavy Vehicles (%)	6%	6%	6%	6%	6%	6%	6%	2%	2%	2%	2%	
Bus Blockages (#/hr)	0	0	0	0	10	0	0	0	0	0	0	
Parking (#/hr)		10							5			
Adj. Flow (vph)	160	214	181	29	761	12	94	21	22	53	56	
Shared Lane Traffic (%)												
Lane Group Flow (vph)	160	395	0	0	896	0	0	0	152	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	
Lane Alignment	Left	Left	Right	Left	Left	Right	Right	Left	Left	Right	Right	
Median Width(ft)		12			0				16			
Link Offset(ft)		0			0				80			
Crosswalk Width(ft)		16			16				16			
Two way Left Turn Lane												
Headway Factor	1.00	1.23	1.00	0.85	0.89	0.85	1.00	1.00	1.01	1.00	1.00	
Turning Speed (mph)	15		9	15		9	9	15	15	9	9	
Number of Detectors	1	2		1	2			1	1			
Detector Template	Left	Thru		Left	Thru			Left	Left			
Leading Detector (ft)	20	100		20	100			20	20			
Trailing Detector (ft)	0	0		0	0			0	0			
Detector 1 Position(ft)	0	0		0	0			0	0			
Detector 1 Size(ft)	20	6		20	6			20	20			
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0			0.0	0.0			
Detector 1 Queue (s)	0.0	0.0		0.0	0.0			0.0	0.0			
Detector 1 Delay (s)	0.0	0.0		0.0	0.0			0.0	0.0			
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							

Lanes, Volumes, Timings

Mitigation Condition

8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square Weekday PM Peak Hour



Lane Group	NBL	NBT	NBR	SBL	SBT	SBR	SBR2	NEL2	NEL	NER	NER2	Ø9
Turn Type	Perm	NA		Perm	NA			Perm	Prot			
Protected Phases		3			3				1			9
Permitted Phases	3			3				1				
Detector Phase	3	3		3	3			1	1			
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0			5.0	5.0			5.0
Minimum Split (s)	13.0	13.0		13.0	13.0			13.0	13.0			27.0
Total Split (s)	48.0	48.0		48.0	48.0			15.0	15.0			27.0
Total Split (%)	53.3%	53.3%		53.3%	53.3%			16.7%	16.7%			30%
Maximum Green (s)	40.0	40.0		40.0	40.0			7.0	7.0			25.0
Yellow Time (s)	4.0	4.0		4.0	4.0			4.0	4.0			2.0
All-Red Time (s)	4.0	4.0		4.0	4.0			4.0	4.0			0.0
Lost Time Adjust (s)	0.0	0.0			0.0				0.0			
Total Lost Time (s)	8.0	8.0			8.0				8.0			
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0	3.0			3.0
Recall Mode	Max	Max		Max	Max			Max	Max			None
Walk Time (s)												10.0
Flash Dont Walk (s)												15.0
Pedestrian Calls (#/hr)												5
Act Effct Green (s)	40.8	40.8			40.8				7.1			
Actuated g/C Ratio	0.60	0.60			0.60				0.10			
v/c Ratio	0.48	0.49			0.82				0.83			
Control Delay	18.1	11.3			21.4				53.3			
Queue Delay	0.0	0.0			15.5				0.0			
Total Delay	18.1	11.4			36.9				53.3			
LOS	B	B			D				D			
Approach Delay		13.3			36.9				53.3			
Approach LOS		B			D				D			
Queue Length 50th (ft)	27	53			204				25			
Queue Length 95th (ft)	#167	247			#812				#130			
Internal Link Dist (ft)		351			302				94			
Turn Bay Length (ft)												
Base Capacity (vph)	332	805			1099				183			
Starvation Cap Reductn	0	18			207				0			
Spillback Cap Reductn	0	0			0				0			
Storage Cap Reductn	0	0			0				0			
Reduced v/c Ratio	0.48	0.50			1.00				0.83			

Intersection Summary

Area Type:	Other
Cycle Length:	90
Actuated Cycle Length:	68.4
Natural Cycle:	90
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.83
Intersection Signal Delay:	30.3
Intersection Capacity Utilization:	101.0%
Intersection LOS:	C
ICU Level of Service:	G

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square



Lanes, Volumes, Timings
 9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
 Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↖	↗		↖	↕			↗	
Traffic Volume (vph)	111	0	107	217	111	153	41	257	0	0	688	65
Future Volume (vph)	111	0	107	217	111	153	41	257	0	0	688	65
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	13	15	15	9	13	13	12	12	12
Storage Length (ft)	0		0	0		0	75		0	0		0
Storage Lanes	0		0	1		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	0.95
Ped Bike Factor		0.96			0.94						0.99	
Frt		0.934			0.913						0.987	
Flt Protected		0.975		0.950			0.950					
Satd. Flow (prot)	0	1374	0	1711	1393	0	1477	3141	0	0	3008	0
Flt Permitted		0.507		0.579			0.225					
Satd. Flow (perm)	0	714	0	1043	1393	0	350	3141	0	0	3008	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		98			75							11
Link Speed (mph)		30			30			30				30
Link Distance (ft)		526			497			325				431
Travel Time (s)		12.0			11.3			7.4				9.8
Confl. Peds. (#/hr)			82			104			126			103
Peak Hour Factor	0.82	0.82	0.82	0.83	0.83	0.83	0.98	0.98	0.98	0.91	0.91	0.91
Heavy Vehicles (%)	16%	16%	16%	9%	9%	9%	10%	10%	10%	8%	8%	8%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	6	0	0	0	0
Parking (#/hr)		10			10			5			10	
Adj. Flow (vph)	135	0	130	261	134	184	42	262	0	0	756	71
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	265	0	261	318	0	42	262	0	0	827	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			13			12				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	0.96	1.09	0.88	1.14	1.06	0.96	1.00	1.11	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2				2
Detector Template	Left	Thru		Left	Thru		Left	Thru				Thru
Leading Detector (ft)	20	100		20	100		20	100				100
Trailing Detector (ft)	0	0		0	0		0	0				0
Detector 1 Position(ft)	0	0		0	0		0	0				0
Detector 1 Size(ft)	20	6		20	6		20	6				6
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex				Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6

Lanes, Volumes, Timings
9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		NA		
Protected Phases	4			4			2	5		1		
Permitted Phases	4			4			5					
Detector Phase	4	4		4	4		2	5		1		
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0		
Minimum Split (s)	37.0	37.0		37.0	37.0		11.0	11.0		40.0		
Total Split (s)	40.0	40.0		40.0	40.0		19.0	60.0		41.0		
Total Split (%)	40.0%	40.0%		40.0%	40.0%		19.0%	60.0%		41.0%		
Maximum Green (s)	34.0	34.0		34.0	34.0		13.0	54.0		35.0		
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0		4.0		
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0		
Lost Time Adjust (s)	0.0			0.0			0.0			0.0		
Total Lost Time (s)	6.0			6.0			6.0			6.0		
Lead/Lag							Lag		Lead			
Lead-Lag Optimize?							Yes		Yes			
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0		
Recall Mode	Ped	Ped		Ped	Ped		Max	Max		C-Max		
Walk Time (s)	10.0	10.0		10.0	10.0					18.0		
Flash Dont Walk (s)	21.0	21.0		21.0	21.0					16.0		
Pedestrian Calls (#/hr)	0	0		0	0					0		
Act Effct Green (s)	32.8			32.8			55.2	55.2		36.2		
Actuated g/C Ratio	0.33			0.33			0.55	0.55		0.36		
v/c Ratio	0.89			0.76			0.12	0.15		0.76		
Control Delay	51.2			46.2		27.4	13.8	11.5		33.2		
Queue Delay	0.0			0.0		0.0	0.0	0.0		0.2		
Total Delay	51.2			46.2		27.4	13.8	11.5		33.5		
LOS	D			D		C	B	B		C		
Approach Delay	51.2			35.9			11.8			33.5		
Approach LOS	D			D			B			C		
Queue Length 50th (ft)	104			145		127	12	41		242		
Queue Length 95th (ft)	#217			219		193	28	63		318		
Internal Link Dist (ft)	446			417			245			351		
Turn Bay Length (ft)							75					
Base Capacity (vph)	307			354		523	339	1734		1095		
Starvation Cap Reductn	0			0		0	0	0		32		
Spillback Cap Reductn	0			0		0	0	0		0		
Storage Cap Reductn	0			0		0	0	0		0		
Reduced v/c Ratio	0.86			0.74		0.61	0.12	0.15		0.78		

Intersection Summary


Area Type: Other
 Cycle Length: 100
 Actuated Cycle Length: 100
 Offset: 0 (0%), Referenced to phase 1:SBT, Start of Green
 Natural Cycle: 90

Lanes, Volumes, Timings
 9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
 Weekday PM Peak Hour

Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.89
 Intersection Signal Delay: 33.2 Intersection LOS: C
 Intersection Capacity Utilization 100.7% ICU Level of Service G
 Analysis Period (min) 15
 # 95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

Splits and Phases: 9: Riverdale Avenue/Warburton Avenue & Main Street

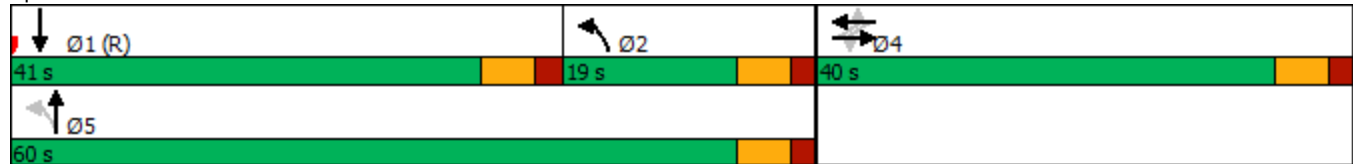

Lanes, Volumes, Timings
10: Riverdale Avenue & Hudson Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕		↕	↕	
Traffic Volume (vph)	29	206	84	0	0	0	0	269	242	308	704	0
Future Volume (vph)	29	206	84	0	0	0	0	269	242	308	704	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	11	11	11	9	12	12
Storage Length (ft)	0		0	0		0	0		0	125		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	1.00
Ped Bike Factor		0.94						0.84				
Frt		0.964						0.929				
Flt Protected		0.995								0.950		
Satd. Flow (prot)	0	1568	0	0	0	0	0	2428	0	1533	3087	0
Flt Permitted		0.995								0.399		
Satd. Flow (perm)	0	1568	0	0	0	0	0	2428	0	644	3087	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		18						150				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		538			379			525				325
Travel Time (s)		12.2			8.6			11.9				7.4
Confl. Peds. (#/hr)			178			100			148			55
Peak Hour Factor	0.85	0.85	0.85	0.92	0.92	0.92	0.94	0.94	0.94	0.93	0.93	0.93
Heavy Vehicles (%)	5%	5%	5%	2%	2%	2%	11%	11%	11%	6%	6%	6%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	7	0	0	10	0
Parking (#/hr)		10									10	
Adj. Flow (vph)	34	242	99	0	0	0	0	286	257	331	757	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	375	0	0	0	0	0	543	0	331	757	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			8			8	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	1.00	1.00	1.00	1.04	1.06	1.04	1.14	1.13	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	

Lanes, Volumes, Timings
10: Riverdale Avenue & Hudson Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex						Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)	0.0						0.0			0.0		
Turn Type	Perm	NA					NA			pm+pt	NA	
Protected Phases	3						5			6	1	
Permitted Phases	3									1		
Detector Phase	3	3					5			6	1	
Switch Phase												
Minimum Initial (s)	10.0	10.0					5.0			10.0	5.0	
Minimum Split (s)	30.0	30.0					30.0			16.0	30.0	
Total Split (s)	38.0	38.0					44.0			21.0	65.0	
Total Split (%)	36.9%	36.9%					42.7%			20.4%	63.1%	
Maximum Green (s)	32.0	32.0					38.0			15.0	59.0	
Yellow Time (s)	4.0	4.0					4.0			4.0	4.0	
All-Red Time (s)	2.0	2.0					2.0			2.0	2.0	
Lost Time Adjust (s)	0.0						0.0			0.0	0.0	
Total Lost Time (s)	6.0						6.0			6.0	6.0	
Lead/Lag							Lead			Lag		
Lead-Lag Optimize?							Yes			Yes		
Vehicle Extension (s)	3.0	3.0					3.0			3.0	3.0	
Recall Mode	None	None					C-Max			Max	C-Max	
Walk Time (s)	10.0	10.0					10.0				10.0	
Flash Dont Walk (s)	14.0	14.0					14.0				14.0	
Pedestrian Calls (#/hr)	0	0					0				0	
Act Effct Green (s)	27.7						42.3			63.3	63.3	
Actuated g/C Ratio	0.27						0.41			0.61	0.61	
v/c Ratio	0.86						0.50			0.63	0.40	
Control Delay	53.8						18.5			24.5	11.6	
Queue Delay	0.0						0.0			3.8	1.3	
Total Delay	53.8						18.5			28.3	12.9	
LOS	D						B			C	B	
Approach Delay	53.8						18.5				17.6	
Approach LOS	D						B				B	
Queue Length 50th (ft)	220						100			103	128	
Queue Length 95th (ft)	299						159			172	183	
Internal Link Dist (ft)	458						299			445	245	
Turn Bay Length (ft)										125		
Base Capacity (vph)	499						1086			525	1898	
Starvation Cap Reductn	0						0			120	876	
Spillback Cap Reductn	0						0			0	0	
Storage Cap Reductn	0						0			0	0	
Reduced v/c Ratio	0.75						0.50			0.82	0.74	

Intersection Summary


Area Type: Other
 Cycle Length: 103
 Actuated Cycle Length: 103
 Offset: 0 (0%), Referenced to phase 1:SBTL and 5:NBT, Start of Green
 Natural Cycle: 80

Lanes, Volumes, Timings
 10: Riverdale Avenue & Hudson Street

Mitigation Condition
 Weekday PM Peak Hour

Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.86	
Intersection Signal Delay: 24.6	Intersection LOS: C
Intersection Capacity Utilization 78.3%	ICU Level of Service D
Analysis Period (min) 15	

Splits and Phases: 10: Riverdale Avenue & Hudson Street

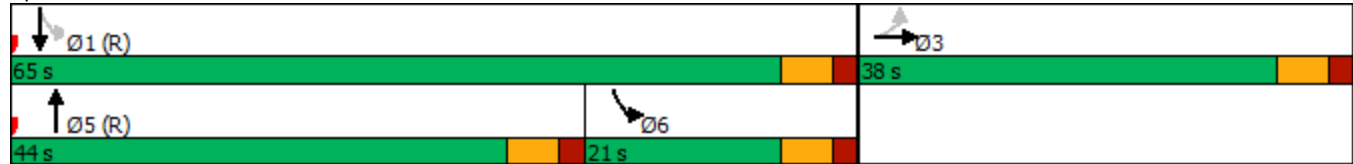

Lanes, Volumes, Timings
11: Riverdale Avenue & Prospect Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔		↖	↗	↗	↖	↕↕	↗	↖	↕↕	↗
Traffic Volume (vph)	12	547	114	447	819	138	135	361	372	252	485	45
Future Volume (vph)	12	547	114	447	819	138	135	361	372	252	485	45
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	10	11	11	10	11	11
Storage Length (ft)	0		0	160		0	100		250	155		0
Storage Lanes	0		0	1		1	1		1	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.96				0.89			0.92			0.93
Frt		0.975				0.850			0.850			0.850
Flt Protected		0.999		0.950			0.950			0.950		
Satd. Flow (prot)	0	3714	0	1719	1845	1442	1685	3388	1516	1574	3388	1531
Flt Permitted		0.687		0.236			0.190			0.520		
Satd. Flow (perm)	0	2554	0	427	1845	1282	337	3388	1389	862	3388	1429
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		23				87						129
Link Speed (mph)		30			30			30				30
Link Distance (ft)		511			403			1044				525
Travel Time (s)		11.6			9.2			23.7				11.9
Confl. Peds. (#/hr)			193			95			64			49
Peak Hour Factor	0.90	0.90	0.90	0.92	0.92	0.92	0.92	0.92	0.92	0.93	0.93	0.93
Heavy Vehicles (%)	27%	3%	3%	5%	3%	12%	0%	3%	3%	7%	3%	2%
Adj. Flow (vph)	13	608	127	486	890	150	147	392	404	271	522	48
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	748	0	486	890	150	147	392	404	271	522	48
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			10				16
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	1.00	1.00	1.00	1.09	1.04	1.04	1.09	1.04	1.04
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100		20	100	20	20	100	20	20	100	20
Trailing Detector (ft)	0	0		0	0	0	0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0	0	0	0	0	0	0	0
Detector 1 Size(ft)	20	6		20	6	20	20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				Cl+Ex
Detector 2 Channel												

Lanes, Volumes, Timings
11: Riverdale Avenue & Prospect Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		pm+pt	NA	pm+ov	pm+pt	NA	pm+ov	pm+pt	NA	Perm
Protected Phases		7		8	3	6	1	5	8	6	2	
Permitted Phases	7			3		3	5		5	2		2
Detector Phase	7	7		8	3	6	1	5	8	6	2	2
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	37.0	37.0		11.0	37.0	11.0	11.0	36.0	11.0	11.0	35.0	35.0
Total Split (s)	43.0	43.0		20.0	63.0	11.0	12.0	36.0	20.0	11.0	35.0	35.0
Total Split (%)	39.1%	39.1%		18.2%	57.3%	10.0%	10.9%	32.7%	18.2%	10.0%	31.8%	31.8%
Maximum Green (s)	37.0	37.0		14.0	57.0	5.0	8.0	30.0	14.0	5.0	29.0	29.0
Yellow Time (s)	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)		0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)		6.0		6.0	6.0	6.0	4.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead		Lag		Lag	Lead	Lead	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Ped	Ped		Max	C-Max	Max	Max	Ped	Max	Max	Ped	Ped
Walk Time (s)	7.0	7.0			7.0			11.0			11.0	11.0
Flash Dont Walk (s)	24.0	24.0			24.0			18.0			18.0	18.0
Pedestrian Calls (#/hr)	0	0			0			0			0	0
Act Effct Green (s)		35.4		57.0	57.0	63.0	31.0	29.0	44.6	29.0	29.0	29.0
Actuated g/C Ratio		0.32		0.52	0.52	0.57	0.28	0.26	0.41	0.26	0.26	0.26
v/c Ratio		0.89		1.20	0.93	0.19	0.76	0.44	0.70	1.02	0.58	0.10
Control Delay		48.6		128.3	21.3	1.1	64.0	41.4	37.9	102.9	38.4	0.4
Queue Delay		0.2		0.0	1.1	0.0	0.0	0.0	10.5	65.4	0.0	0.0
Total Delay		48.8		128.3	22.4	1.1	64.0	41.4	48.4	168.3	38.4	0.4
LOS		D		F	C	A	E	D	D	F	D	A
Approach Delay		48.8			54.0			47.9			78.1	
Approach LOS		D			D			D			E	
Queue Length 50th (ft)		250		~308	96	3	79	107	172	~175	168	0
Queue Length 95th (ft)		#356		m#439	#838	m5	m#206	205	407	#368	226	0
Internal Link Dist (ft)		431			323			964			445	
Turn Bay Length (ft)				160			100		250	155		
Base Capacity (vph)		874		404	956	780	193	924	581	266	893	471
Starvation Cap Reductn		0		0	13	0	0	0	0	0	0	0
Spillback Cap Reductn		5		0	0	0	0	0	149	218	0	0
Storage Cap Reductn		0		0	0	0	0	0	0	0	0	0
Reduced v/c Ratio		0.86		1.20	0.94	0.19	0.76	0.42	0.94	5.65	0.58	0.10

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 25 (23%), Referenced to phase 3:WBTL, Start of Green
 Natural Cycle: 105
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 1.20

Lanes, Volumes, Timings
 11: Riverdale Avenue & Prospect Street

Mitigation Condition
 Weekday PM Peak Hour

Intersection Signal Delay: 56.6 Intersection LOS: E

Intersection Capacity Utilization 127.1% ICU Level of Service H


Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.
 Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 11: Riverdale Avenue & Prospect Street

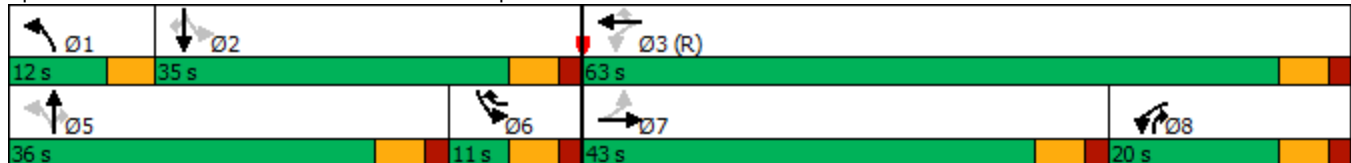

Lanes, Volumes, Timings
12: Riverdale Avenue & Vark Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕		↕	↕↔		↕	↕↔	
Traffic Volume (vph)	96	40	23	35	79	42	35	730	91	171	811	64
Future Volume (vph)	96	40	23	35	79	42	35	730	91	171	811	64
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	13	13	13	16	16	16	9	12	12	10	13	13
Storage Length (ft)	0		0	0		0	165		0	125		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	0.95
Frt		0.980			0.963			0.983			0.989	
Flt Protected		0.971			0.989		0.950			0.950		
Satd. Flow (prot)	0	1832	0	0	1759	0	1593	3242	0	1652	3346	0
Flt Permitted		0.636			0.894		0.213			0.237		
Satd. Flow (perm)	0	1200	0	0	1590	0	357	3242	0	412	3346	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		7			15			13			8	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		236			1171			338			1044	
Travel Time (s)		5.4			26.6			7.7			23.7	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	3	0	0	0	0
Parking (#/hr)					5			5			10	
Adj. Flow (vph)	104	43	25	38	86	46	38	793	99	186	882	70
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	172	0	0	170	0	38	892	0	186	952	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			10			10	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.96	0.96	0.96	0.85	1.01	0.85	1.14	1.10	1.00	1.09	1.06	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lane Group	Ø3
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Bus Blockages (#/hr)	
Parking (#/hr)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	

Lanes, Volumes, Timings
12: Riverdale Avenue & Vark Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			4		2	5		6	1	
Permitted Phases	4			4			5			1		
Detector Phase	4	4		4	4		2	5		6	1	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	11.0	11.0		11.0	11.0		11.0	11.0		11.0	11.0	
Total Split (s)	28.0	28.0		28.0	28.0		15.0	40.0		15.0	40.0	
Total Split (%)	25.5%	25.5%		25.5%	25.5%		13.6%	36.4%		13.6%	36.4%	
Maximum Green (s)	22.0	22.0		22.0	22.0		9.0	34.0		9.0	34.0	
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0		4.0	4.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0			0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)		6.0			6.0		6.0	6.0		6.0	6.0	
Lead/Lag	Lead	Lead		Lead	Lead		Lag	Lead		Lag	Lead	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Max	Max		Max	Max		Max	C-Max		Max	C-Max	
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		22.0			22.0		65.2	56.2		65.2	56.2	
Actuated g/C Ratio		0.20			0.20		0.59	0.51		0.59	0.51	
v/c Ratio		0.70			0.52		0.12	0.54		0.54	0.56	
Control Delay		55.9			42.0		12.8	21.2		19.5	12.7	
Queue Delay		0.0			0.0		0.0	0.0		0.0	0.0	
Total Delay		55.9			42.0		12.8	21.2		19.5	12.7	
LOS		E			D		B	C		B	B	
Approach Delay		55.9			42.0			20.9			13.8	
Approach LOS		E			D			C			B	
Queue Length 50th (ft)		109			98		8	190		34	117	
Queue Length 95th (ft)		#207			169		33	378		m91	m227	
Internal Link Dist (ft)		156			1091			258			964	
Turn Bay Length (ft)							165			125		
Base Capacity (vph)		245			330		312	1662		345	1713	
Starvation Cap Reductn		0			0		0	0		0	0	
Spillback Cap Reductn		0			0		0	0		0	0	
Storage Cap Reductn		0			0		0	0		0	0	
Reduced v/c Ratio		0.70			0.52		0.12	0.54		0.54	0.56	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	0 (0%), Referenced to phase 1:SBTL and 5:NBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.70
Intersection Signal Delay:	21.5
Intersection LOS:	C

Lane Group	Ø3
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	5.0
Minimum Split (s)	24.0
Total Split (s)	27.0
Total Split (%)	25%
Maximum Green (s)	24.0
Yellow Time (s)	3.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	Lag
Lead-Lag Optimize?	Yes
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	6.0
Flash Dont Walk (s)	15.0
Pedestrian Calls (#/hr)	5
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
Intersection Summary	

Lanes, Volumes, Timings
 12: Riverdale Avenue & Vark Street

Mitigation Condition
 Weekday PM Peak Hour

Intersection Capacity Utilization 67.8% ICU Level of Service C







Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 12: Riverdale Avenue & Vark Street

 Ø1 (R) 40 s	 Ø2 15 s	 Ø4 28 s	 Ø3 27 s
 Ø5 (R) 40 s	 Ø6 15 s		

Lanes, Volumes, Timings
13: North Broadway & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕		↕	↕	↕
Traffic Volume (vph)	50	397	15	111	352	122	13	223	140	187	182	72
Future Volume (vph)	50	397	15	111	352	122	13	223	140	187	182	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	10	14	14	14	16	16	16	10	13	13
Storage Length (ft)	0		0	0		0	0		0	80		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.996			0.972			0.950			0.958	
Fl _t Protected		0.995			0.991			0.998		0.950		
Satd. Flow (prot)	0	1508	0	0	1859	0	0	1898	0	1620	1809	0
Fl _t Permitted		0.879			0.757			0.985		0.259		
Satd. Flow (perm)	0	1332	0	0	1420	0	0	1873	0	442	1809	0
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		2			16							28
Link Speed (mph)		30			30			30				30
Link Distance (ft)		672			208			1727				316
Travel Time (s)		15.3			4.7			39.3				7.2
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	2%	2%	2%	5%	5%	5%	5%	5%	5%	4%	4%	4%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	6	0	0	0	0
Parking (#/hr)		5										
Adj. Flow (vph)	54	432	16	121	383	133	14	242	152	203	198	78
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	502	0	0	637	0	0	408	0	203	276	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			10	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	1.29	1.09	0.92	0.92	0.92	0.85	0.88	0.85	1.09	0.96	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												

Lanes, Volumes, Timings
13: North Broadway & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Perm	NA		Perm	NA		pm+pt	NA	
Protected Phases		2			6			8		7	4	
Permitted Phases	2			6			8			4		
Detector Phase	2	2		6	6		8	8		7	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		10.0	10.0		5.0	10.0	
Minimum Split (s)	10.0	10.0		32.0	32.0		32.0	32.0		10.0	32.0	
Total Split (s)	46.0	46.0		46.0	46.0		39.0	39.0		15.0	54.0	
Total Split (%)	46.0%	46.0%		46.0%	46.0%		39.0%	39.0%		15.0%	54.0%	
Maximum Green (s)	41.0	41.0		41.0	41.0		34.0	34.0		10.0	49.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		0.0			0.0			0.0		0.0	0.0	
Total Lost Time (s)		5.0			5.0			5.0		5.0	5.0	
Lead/Lag							Lag	Lag		Lead		
Lead-Lag Optimize?							Yes	Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Max	Max		C-Max	C-Max		Ped	Ped		Max	Ped	
Walk Time (s)				15.0	15.0		15.0	15.0			15.0	
Flash Dont Walk (s)				12.0	12.0		12.0	12.0			12.0	
Pedestrian Calls (#/hr)				0	0		0	0			0	
Act Effct Green (s)		45.8			45.8			29.2		44.2	44.2	
Actuated g/C Ratio		0.46			0.46			0.29		0.44	0.44	
v/c Ratio		0.82			0.97			0.75		0.65	0.34	
Control Delay		29.9			42.7			41.1		27.8	17.2	
Queue Delay		0.0			0.0			0.0		0.0	0.0	
Total Delay		29.9			42.7			41.1		27.8	17.2	
LOS		C			D			D		C	B	
Approach Delay		29.9			42.7			41.1			21.7	
Approach LOS		C			D			D			C	
Queue Length 50th (ft)		169			143			243		84	104	
Queue Length 95th (ft)		#493			m#640			321		120	146	
Internal Link Dist (ft)		592			128			1647			236	
Turn Bay Length (ft)										80		
Base Capacity (vph)		611			658			636		313	900	
Starvation Cap Reductn		0			0			0		0	0	
Spillback Cap Reductn		0			0			0		0	0	
Storage Cap Reductn		0			0			0		0	0	
Reduced v/c Ratio		0.82			0.97			0.64		0.65	0.31	

Intersection Summary

Area Type: Other
 Cycle Length: 100
 Actuated Cycle Length: 100
 Offset: 97 (97%), Referenced to phase 6:WBTL, Start of Green
 Natural Cycle: 90
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.97

Lanes, Volumes, Timings
 13: North Broadway & Ashburton Avenue

Mitigation Condition
 Weekday PM Peak Hour

Intersection Signal Delay: 34.2 Intersection LOS: C

Intersection Capacity Utilization 99.8% ICU Level of Service F


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 13: North Broadway & Ashburton Avenue

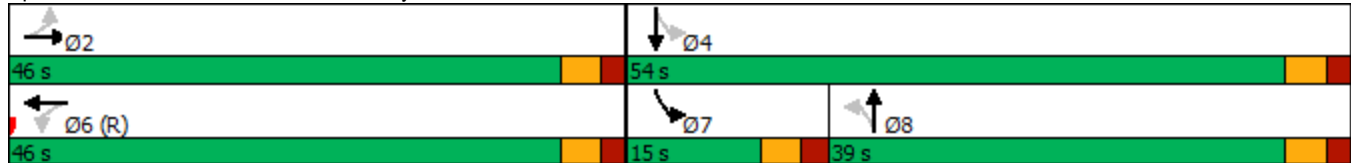

Lanes, Volumes, Timings
 14: North Broadway & Manor House Square

Mitigation Condition
 Weekday PM Peak Hour

















Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	240	0	0	395	0	0
Future Volume (vph)	240	0	0	395	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt						
Flt Protected	0.950					
Satd. Flow (prot)	1705	0	0	1794	0	0
Flt Permitted	0.950					
Satd. Flow (perm)	1705	0	0	1794	0	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	226			563	1727	
Travel Time (s)	5.1			12.8	39.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Parking (#/hr)	10			10		
Adj. Flow (vph)	261	0	0	429	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	261	0	0	429	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	16			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.05	0.85	0.85	1.05	0.85	0.85
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	40.8%
Analysis Period (min)	15
	ICU Level of Service A

Lanes, Volumes, Timings
15: North Broadway & Main Street

Mitigation Condition
Weekday PM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	0	368	113	113	282	0	0	0	0
Future Volume (vph)	0	0	0	0	368	113	113	282	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	16	16	16	16	16	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.968							
Flt Protected								0.986				
Satd. Flow (prot)	0	0	0	0	2044	0	0	2082	0	0	0	0
Flt Permitted								0.986				
Satd. Flow (perm)	0	0	0	0	2044	0	0	2082	0	0	0	0
Right Turn on Red			Yes			Yes	Yes		Yes			Yes
Satd. Flow (RTOR)					22			73				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		497			81			184				563
Travel Time (s)		11.3			1.8			4.2				12.8
Peak Hour Factor	0.92	0.92	0.92	0.83	0.83	0.83	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	0	443	136	123	307	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	579	0	0	430	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.85	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors					2		1	2				
Detector Template					Thru		Left	Thru				
Leading Detector (ft)					100		20	100				
Trailing Detector (ft)					0		0	0				
Detector 1 Position(ft)					0		0	0				
Detector 1 Size(ft)					6		20	6				
Detector 1 Type					Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)					0.0		0.0	0.0				
Detector 1 Queue (s)					0.0		0.0	0.0				
Detector 1 Delay (s)					0.0		0.0	0.0				
Detector 2 Position(ft)					94			94				
Detector 2 Size(ft)					6			6				
Detector 2 Type					Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0				
Turn Type					NA		Perm	NA				
Protected Phases					2 6			3				
Permitted Phases							3					
Detector Phase					2 6		3	3				
Switch Phase												

Lane Group	Ø1	Ø2	Ø6
Lane Configurations			
Traffic Volume (vph)			
Future Volume (vph)			
Ideal Flow (vphpl)			
Lane Width (ft)			
Lane Util. Factor			
Frt			
Flt Protected			
Satd. Flow (prot)			
Flt Permitted			
Satd. Flow (perm)			
Right Turn on Red			
Satd. Flow (RTOR)			
Link Speed (mph)			
Link Distance (ft)			
Travel Time (s)			
Peak Hour Factor			
Adj. Flow (vph)			
Shared Lane Traffic (%)			
Lane Group Flow (vph)			
Enter Blocked Intersection			
Lane Alignment			
Median Width(ft)			
Link Offset(ft)			
Crosswalk Width(ft)			
Two way Left Turn Lane			
Headway Factor			
Turning Speed (mph)			
Number of Detectors			
Detector Template			
Leading Detector (ft)			
Trailing Detector (ft)			
Detector 1 Position(ft)			
Detector 1 Size(ft)			
Detector 1 Type			
Detector 1 Channel			
Detector 1 Extend (s)			
Detector 1 Queue (s)			
Detector 1 Delay (s)			
Detector 2 Position(ft)			
Detector 2 Size(ft)			
Detector 2 Type			
Detector 2 Channel			
Detector 2 Extend (s)			
Turn Type			
Protected Phases	1	2	6
Permitted Phases			
Detector Phase			
Switch Phase			

Lanes, Volumes, Timings
15: North Broadway & Main Street


Mitigation Condition
Weekday PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)							5.0	5.0				
Minimum Split (s)							45.0	45.0				
Total Split (s)							45.0	45.0				
Total Split (%)							42.9%	42.9%				
Maximum Green (s)							40.0	40.0				
Yellow Time (s)							3.0	3.0				
All-Red Time (s)							2.0	2.0				
Lost Time Adjust (s)								0.0				
Total Lost Time (s)								5.0				
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)							3.0	3.0				
Recall Mode							Ped	Ped				
Walk Time (s)							30.0	30.0				
Flash Dont Walk (s)							10.0	10.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)					55.0			40.0				
Actuated g/C Ratio					0.52			0.38				
v/c Ratio					0.54			0.51				
Control Delay					1.7			23.0				
Queue Delay					0.0			0.0				
Total Delay					1.7			23.0				
LOS					A			C				
Approach Delay					1.7			23.0				
Approach LOS					A			C				
Queue Length 50th (ft)					11			181				
Queue Length 95th (ft)					12			274				
Internal Link Dist (ft)		417			1			104			483	
Turn Bay Length (ft)												
Base Capacity (vph)					1081			838				
Starvation Cap Reductn					0			0				
Spillback Cap Reductn					0			0				
Storage Cap Reductn					0			0				
Reduced v/c Ratio					0.54			0.51				

Intersection Summary

Area Type:	Other
Cycle Length:	105
Actuated Cycle Length:	105
Natural Cycle:	105
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.85
Intersection Signal Delay:	10.8
Intersection LOS:	B
Intersection Capacity Utilization:	55.7%
ICU Level of Service:	B
Analysis Period (min):	15

Splits and Phases: 15: North Broadway & Main Street

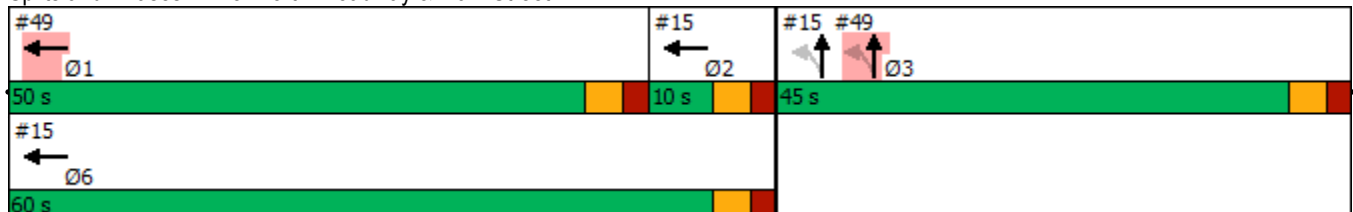

Lanes, Volumes, Timings
 15: North Broadway & Main Street

Mitigation Condition
 Weekday PM Peak Hour

Lane Group	Ø1	Ø2	Ø6
Minimum Initial (s)	5.0	2.0	5.0
Minimum Split (s)	50.0	7.0	10.0
Total Split (s)	50.0	10.0	60.0
Total Split (%)	48%	10%	57%
Maximum Green (s)	45.0	5.0	55.0
Yellow Time (s)	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0
Lost Time Adjust (s)			
Total Lost Time (s)			
Lead/Lag	Lead	Lag	
Lead-Lag Optimize?	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0
Recall Mode	Ped	Max	Max
Walk Time (s)	35.0		
Flash Dont Walk (s)	10.0		
Pedestrian Calls (#/hr)	0		
Act Effct Green (s)			
Actuated g/C Ratio			
v/c Ratio			
Control Delay			
Queue Delay			
Total Delay			
LOS			
Approach Delay			
Approach LOS			
Queue Length 50th (ft)			
Queue Length 95th (ft)			
Internal Link Dist (ft)			
Turn Bay Length (ft)			
Base Capacity (vph)			
Starvation Cap Reductn			
Spillback Cap Reductn			
Storage Cap Reductn			
Reduced v/c Ratio			
Intersection Summary			

Lanes, Volumes, Timings
 16: South Broadway/North Broadway & Hudson Street

Mitigation Condition
 Weekday PM Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	389	357	0	500	0	0
Future Volume (vph)	389	357	0	500	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	16	12	12
Storage Length (ft)	0	75	0			0
Storage Lanes	1	1	0			0
Taper Length (ft)	25		25			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor						
Frt		0.850				
Flt Protected	0.950					
Satd. Flow (prot)	1626	1583	0	1760	0	0
Flt Permitted	0.950					
Satd. Flow (perm)	1626	1583	0	1760	0	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	379			514	155	
Travel Time (s)	8.6			11.7	3.5	
Confl. Peds. (#/hr)	268		141			
Peak Hour Factor	0.97	0.97	0.87	0.87	0.92	0.92
Heavy Vehicles (%)	11%	2%	11%	4%	2%	2%
Parking (#/hr)				10		
Adj. Flow (vph)	401	368	0	575	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	401	368	0	575	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			0	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.05	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Stop	Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	55.1%
Analysis Period (min)	15
	ICU Level of Service B

Lanes, Volumes, Timings
 17: South Broadway & Prospect Street/Nepperhan Avenue

Mitigation Condition
 Weekday PM Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	36	1030	105	374	1213	253	119	211	288	215	70	72
Future Volume (vph)	36	1030	105	374	1213	253	119	211	288	215	70	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	13	12	12	12	13	10	12	12	12	16	16
Grade (%)		0%			7%			0%			0%	
Storage Length (ft)	107		0	315		0	120		200	100		0
Storage Lanes	1		0	1		1	1		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor		0.98				0.91			0.96		0.98	
Frt		0.986				0.850			0.850		0.924	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1752	3434	0	1613	3226	1491	1574	1509	1509	1687	1552	0
Flt Permitted	0.121			0.121			0.639			0.519		
Satd. Flow (perm)	223	3434	0	205	3226	1363	1059	1509	1450	922	1552	0
Right Turn on Red			No			Yes			No			Yes
Satd. Flow (RTOR)						266						49
Link Speed (mph)		30			30			30				30
Link Distance (ft)		403			838			1248				514
Travel Time (s)		9.2			19.0			28.4				11.7
Confl. Peds. (#/hr)			132			49			27			32
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.93	0.93	0.93	0.94	0.94	0.94
Heavy Vehicles (%)	3%	3%	3%	8%	8%	8%	7%	7%	7%	7%	7%	7%
Bus Blockages (#/hr)	0	9	0	0	0	0	0	0	0	0	6	0
Parking (#/hr)								10			5	
Adj. Flow (vph)	40	1157	118	394	1277	266	128	227	310	229	74	77
Shared Lane Traffic (%)												
Lane Group Flow (vph)	40	1275	0	394	1277	266	128	227	310	229	151	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	0.98	1.00	1.05	1.05	1.00	1.09	1.23	1.00	1.00	1.04	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1	1	2	
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100		20	100	20	20	100	20	20	100	
Trailing Detector (ft)	0	0		0	0	0	0	0	0	0	0	
Detector 1 Position(ft)	0	0		0	0	0	0	0	0	0	0	
Detector 1 Size(ft)	20	6		20	6	20	20	6	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	

Lanes, Volumes, Timings
 17: South Broadway & Prospect Street/Nepperhan Avenue

Mitigation Condition
 Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Size(ft)	6				6				6		6	
Detector 2 Type	Cl+Ex				Cl+Ex				Cl+Ex		Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0				0.0				0.0		0.0	
Turn Type	pm+pt	NA			pm+pt	NA	Perm	Perm	NA	Perm	Perm	NA
Protected Phases	5	1			2	6			3			3
Permitted Phases	1			6			6	3			3	3
Detector Phase	5	1			2	6	6	3	3	3	3	3
Switch Phase												
Minimum Initial (s)	5.0	5.0			5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	41.0			11.0	46.0	46.0	38.0	38.0	38.0	38.0	38.0
Total Split (s)	11.0	44.0			27.0	60.0	60.0	39.0	39.0	39.0	39.0	39.0
Total Split (%)	10.0%	40.0%			24.5%	54.5%	54.5%	35.5%	35.5%	35.5%	35.5%	35.5%
Maximum Green (s)	5.0	38.0			21.0	54.0	54.0	33.0	33.0	33.0	33.0	33.0
Yellow Time (s)	4.0	4.0			4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0			2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0			6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead			Lag	Lag	Lag					
Lead-Lag Optimize?	Yes	Yes			Yes	Yes	Yes					
Vehicle Extension (s)	3.0	3.0			3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Max	Ped			Max	C-Max	C-Max	Ped	Ped	Ped	Ped	Ped
Walk Time (s)	10.0				20.0	20.0	7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)	25.0				20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0
Pedestrian Calls (#/hr)	0				0	0	0	0	0	0	0	0
Act Effct Green (s)	38.4	38.4			54.0	54.0	54.0	32.6	32.6	32.6	32.6	32.6
Actuated g/C Ratio	0.35	0.35			0.49	0.49	0.49	0.30	0.30	0.30	0.30	0.30
v/c Ratio	0.26	1.06			1.07	0.81	0.33	0.41	0.51	0.72	0.84	0.31
Control Delay	28.2	74.6			79.2	8.9	0.8	35.7	36.7	45.6	63.3	21.7
Queue Delay	0.0	15.2			0.0	0.3	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.2	89.9			79.2	9.1	0.8	35.7	36.7	45.6	63.3	21.7
LOS	C	F			E	A	A	D	D	D	E	C
Approach Delay	88.0				22.2				40.6		46.8	
Approach LOS	F				C				D		D	
Queue Length 50th (ft)	17	~520			~259	55	0	72	132	195	150	54
Queue Length 95th (ft)	m22	m#620			m#401	68	m0	130	210	299	#288	109
Internal Link Dist (ft)	323				758				1168		434	
Turn Bay Length (ft)	107				315				120	200	100	
Base Capacity (vph)	152	1198			369	1583	804	317	452	435	276	499
Starvation Cap Reductn	0	201			0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0			0	41	0	0	0	0	0	0
Storage Cap Reductn	0	0			0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.26	1.28			1.07	0.83	0.33	0.40	0.50	0.71	0.83	0.30

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 18 (16%), Referenced to phase 6:WBTL, Start of Green

Lanes, Volumes, Timings
18: South Broadway & Vark Street/Park Hill Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕	↕		↕	
Traffic Volume (vph)	22	202	78	149	82	42	47	554	75	42	480	27
Future Volume (vph)	22	202	78	149	82	42	47	554	75	42	480	27
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	14	14	14	15	15	10	16	16	16
Storage Length (ft)	0		0	0		0	0		50	0		0
Storage Lanes	0		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.965			0.979				0.850		0.993	
Fl _t Protected		0.996			0.973			0.996			0.996	
Satd. Flow (prot)	0	2029	0	0	1893	0	0	2041	1478	0	1775	0
Fl _t Permitted		0.996			0.973			*0.912			*0.875	
Satd. Flow (perm)	0	2029	0	0	1893	0	0	1869	1478	0	1559	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		16			8				78			3
Link Speed (mph)		30			30			30				30
Link Distance (ft)		1171			125			465				1248
Travel Time (s)		26.6			2.8			10.6				28.4
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Parking (#/hr)												10
Adj. Flow (vph)	24	220	85	162	89	46	51	602	82	46	522	29
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	329	0	0	297	0	0	653	82	0	597	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	0.92	0.92	0.92	0.88	0.88	1.09	0.85	1.05	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2	1	1		2
Detector Template	Left	Thru		Left	Thru		Left	Thru	Right	Left		Thru
Leading Detector (ft)	20	100		20	100		20	100	20	20		100
Trailing Detector (ft)	0	0		0	0		0	0	0	0		0
Detector 1 Position(ft)	0	0		0	0		0	0	0	0		0
Detector 1 Size(ft)	20	6		20	6		20	6	20	20		6
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0		0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0		0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0		0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				0.0
Turn Type	Split	NA		Split	NA		Perm	NA	Perm	Perm		NA

Lanes, Volumes, Timings
18: South Broadway & Vark Street/Park Hill Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases	4	4		3	3			1				1
Permitted Phases							1		1	1		
Detector Phase	4	4		3	3		1	1	1	1		1
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0	5.0	5.0		5.0
Minimum Split (s)	25.0	25.0		10.0	10.0		39.0	39.0	39.0	39.0		39.0
Total Split (s)	26.0	26.0		25.0	25.0		47.0	47.0	47.0	47.0		47.0
Total Split (%)	26.5%	26.5%		25.5%	25.5%		48.0%	48.0%	48.0%	48.0%		48.0%
Maximum Green (s)	21.0	21.0		20.0	20.0		41.0	41.0	41.0	41.0		41.0
Yellow Time (s)	3.0	3.0		3.0	3.0		4.0	4.0	4.0	4.0		4.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0	2.0	2.0		2.0
Lost Time Adjust (s)		0.0			0.0			0.0	0.0			0.0
Total Lost Time (s)		5.0			5.0			6.0	6.0			6.0
Lead/Lag	Lag	Lag		Lead	Lead							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0		3.0
Recall Mode	Ped	Ped		Max	Max		Ped	Ped	Ped	Ped		Ped
Walk Time (s)	5.0	5.0					20.0	20.0	20.0	20.0		20.0
Flash Dont Walk (s)	15.0	15.0					13.0	13.0	13.0	13.0		13.0
Pedestrian Calls (#/hr)	0	0					0	0	0	0		0
Act Effct Green (s)		20.5			20.0			39.4	39.4			39.4
Actuated g/C Ratio		0.21			0.21			0.41	0.41			0.41
v/c Ratio		0.74			0.74			0.85	0.13			0.93
Control Delay		45.1			47.8			38.0	5.1			50.2
Queue Delay		0.0			0.0			0.0	0.0			0.0
Total Delay		45.1			47.8			38.0	5.1			50.2
LOS		D			D			D	A			D
Approach Delay		45.1			47.8			34.4				50.2
Approach LOS		D			D			C				D
Queue Length 50th (ft)		183			170			351	1			337
Queue Length 95th (ft)		#299			#291			#557	29			#563
Internal Link Dist (ft)		1091			45			385				1168
Turn Bay Length (ft)									50			
Base Capacity (vph)		457			401			799	676			668
Starvation Cap Reductn		0			0			0	0			0
Spillback Cap Reductn		0			0			0	0			0
Storage Cap Reductn		0			0			0	0			0
Reduced v/c Ratio		0.72			0.74			0.82	0.12			0.89

Intersection Summary


Area Type:	Other
Cycle Length:	98
Actuated Cycle Length:	96
Natural Cycle:	90
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.93
Intersection Signal Delay:	43.0
Intersection LOS:	D
Intersection Capacity Utilization:	106.9%
ICU Level of Service:	G
Analysis Period (min):	15

Lanes, Volumes, Timings
18: South Broadway & Vark Street/Park Hill Avenue

Mitigation Condition
Weekday PM Peak Hour

* User Entered Value
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

Splits and Phases: 18: South Broadway & Vark Street/Park Hill Avenue



Lanes, Volumes, Timings
 19: James Street/Locust Hill Avenue & Palisade Avenue

Mitigation Condition
 Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Volume (vph)	152	378	101	0	0	0	0	49	32	140	41	0
Future Volume (vph)	152	378	101	0	0	0	0	49	32	140	41	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	12	12	12	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.978						0.946				
Flt Protected		0.988									0.963	
Satd. Flow (prot)	0	2040	0	0	0	0	0	1762	0	0	1794	0
Flt Permitted		0.988									0.963	
Satd. Flow (perm)	0	2040	0	0	0	0	0	1762	0	0	1794	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		254			208			222			499	
Travel Time (s)		5.8			4.7			5.0			11.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	165	411	110	0	0	0	0	53	35	152	45	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	686	0	0	0	0	0	88	0	0	197	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	57.7%
ICU Level of Service	B
Analysis Period (min)	15

Lanes, Volumes, Timings
20: New Main Street & Nepperhan Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	50	1453	30	365	1508	310	64	193	304	0	0	0
Future Volume (vph)	50	1453	30	365	1508	310	64	193	304	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	12	12	12	10	10	10	12	12	12
Grade (%)		7%			0%			0%				0%
Storage Length (ft)	360		0	165		0	0		200	0		0
Storage Lanes	1		0	1		1	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	1.00	0.91	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.997				0.850			0.850			
Flt Protected	0.950			0.950				0.988				
Satd. Flow (prot)	1651	4893	0	1770	5085	1520	0	1718	1478	0	0	0
Flt Permitted	0.095			0.095				0.988				
Satd. Flow (perm)	165	4893	0	177	5085	1520	0	1718	1478	0	0	0
Right Turn on Red			Yes			No			No			Yes
Satd. Flow (RTOR)		3										
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		838			378			724			411	
Travel Time (s)		19.0			8.6			16.5			9.3	
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	10	0	0	0	0	0	0
Adj. Flow (vph)	56	1633	34	384	1587	326	70	210	330	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	56	1667	0	384	1587	326	0	280	330	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	1.05	1.05	1.00	1.00	1.05	1.09	1.09	1.09	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1			
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right			
Leading Detector (ft)	20	100		20	100	20	20	100	20			
Trailing Detector (ft)	0	0		0	0	0	0	0	0			
Detector 1 Position(ft)	0	0		0	0	0	0	0	0			
Detector 1 Size(ft)	20	6		20	6	20	20	6	20			
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 2 Position(ft)		94			94			94				
Detector 2 Size(ft)		6			6			6				
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				

Lanes, Volumes, Timings
20: New Main Street & Nepperhan Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA		pm+pt	NA	Perm	Perm	NA	pm+ov			
Protected Phases	5	2		1	6			3	1			
Permitted Phases	2			6		6	3		3			
Detector Phase	5	2		1	6	6	3	3	1			
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0			
Minimum Split (s)	11.0	46.0		11.0	46.0	46.0	40.0	40.0	11.0			
Total Split (s)	21.0	48.0		21.0	48.0	48.0	41.0	41.0	21.0			
Total Split (%)	19.1%	43.6%		19.1%	43.6%	43.6%	37.3%	37.3%	19.1%			
Maximum Green (s)	15.0	42.0		15.0	42.0	42.0	35.0	35.0	15.0			
Yellow Time (s)	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0			
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0			
Lost Time Adjust (s)	0.0	0.0		0.0	0.0	0.0		0.0	0.0			
Total Lost Time (s)	6.0	6.0		6.0	6.0	6.0		6.0	6.0			
Lead/Lag	Lead	Lag		Lead	Lag	Lag			Lead			
Lead-Lag Optimize?	Yes	Yes		Yes	Yes	Yes			Yes			
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0			
Recall Mode	Max	Ped		Max	C-Max	C-Max	Ped	Ped	Max			
Walk Time (s)		20.0			20.0	20.0	7.0	7.0				
Flash Dont Walk (s)		20.0			20.0	20.0	27.0	27.0				
Pedestrian Calls (#/hr)		0			0	0	0	0				
Act Effct Green (s)	58.0	42.0		58.0	42.0	42.0		34.0	56.0			
Actuated g/C Ratio	0.53	0.38		0.53	0.38	0.38		0.31	0.51			
v/c Ratio	0.18	0.89		1.18	0.82	0.56		0.53	0.44			
Control Delay	12.4	24.2		135.9	21.5	20.4		35.7	19.4			
Queue Delay	0.0	1.5		0.0	2.8	1.2		0.0	0.0			
Total Delay	12.4	25.7		135.9	24.3	21.6		35.7	19.4			
LOS	B	C		F	C	C		D	B			
Approach Delay		25.3			42.6			26.9				
Approach LOS		C			D			C				
Queue Length 50th (ft)	9	250		~287	141	79		162	142			
Queue Length 95th (ft)	m10	m247		m#334	m167	m95		248	217			
Internal Link Dist (ft)		758			298			644			331	
Turn Bay Length (ft)	360			165					200			
Base Capacity (vph)	303	1870		325	1941	580		546	752			
Starvation Cap Reductn	0	0		0	245	104		0	0			
Spillback Cap Reductn	0	84		0	0	0		0	0			
Storage Cap Reductn	0	0		0	0	0		0	0			
Reduced v/c Ratio	0.18	0.93		1.18	0.94	0.68		0.51	0.44			

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	10 (9%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	110
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.18
Intersection Signal Delay:	34.1
Intersection LOS:	C

Lanes, Volumes, Timings
 20: New Main Street & Nepperhan Avenue

Mitigation Condition
 Weekday PM Peak Hour

Intersection Capacity Utilization 77.7% ICU Level of Service D

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.
 Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 20: New Main Street & Nepperhan Avenue



Lanes, Volumes, Timings
21: Palisade Avenue & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	61	525	134	274	545	41	82	143	96	0	0	0
Future Volume (vph)	61	525	134	274	545	41	82	143	96	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	9	9	15	10	11	11	10	10	10	12	12	12
Storage Length (ft)	75		100	70		0	0		100	0		0
Storage Lanes	1		1	1		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t			0.850		0.989				0.850			
Fl _t Protected	0.950			0.950				0.982				
Satd. Flow (prot)	1547	1609	1692	1620	1705	0	0	1658	1436	0	0	0
Fl _t Permitted	0.197			0.253				0.982				
Satd. Flow (perm)	321	1609	1692	431	1705	0	0	1658	1436	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			85		5				104			
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		436			2061			549			169	
Travel Time (s)		9.9			46.8			12.5			3.8	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	5%	5%	5%	4%	4%	4%	5%	5%	5%	2%	2%	2%
Bus Blockages (#/hr)	0	3	0	0	6	0	0	0	0	0	0	0
Adj. Flow (vph)	66	571	146	298	592	45	89	155	104	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	66	571	146	298	637	0	0	244	104	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.14	1.16	0.88	1.09	1.08	1.04	1.09	1.09	1.09	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2	1			
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru	Right			
Leading Detector (ft)	20	100	20	20	100		20	100	20			
Trailing Detector (ft)	0	0	0	0	0		0	0	0			
Detector 1 Position(ft)	0	0	0	0	0		0	0	0			
Detector 1 Size(ft)	20	6	20	20	6		20	6	20			
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0	0.0			
Detector 2 Position(ft)		94			94			94				
Detector 2 Size(ft)		6			6			6				
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				

Lanes, Volumes, Timings
21: Palisade Avenue & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	Perm	pm+pt	NA		Perm	NA	Prot			
Protected Phases	5	2		1	6			8	8			
Permitted Phases	2		2	6			8					
Detector Phase	5	2	2	1	6		8	8	8			
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0		5.0	5.0	5.0			
Minimum Split (s)	10.0	37.0	37.0	10.0	37.0		28.0	28.0	28.0			
Total Split (s)	17.0	51.0	51.0	17.0	51.0		32.0	32.0	32.0			
Total Split (%)	17.0%	51.0%	51.0%	17.0%	51.0%		32.0%	32.0%	32.0%			
Maximum Green (s)	12.0	46.0	46.0	12.0	46.0		27.0	27.0	27.0			
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0			
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0	2.0			
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0			0.0	0.0			
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0			5.0	5.0			
Lead/Lag	Lead	Lag	Lag	Lead	Lag							
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes							
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0	3.0			
Recall Mode	Max	Ped	Ped	Max	C-Max		Ped	Ped	Ped			
Walk Time (s)		20.0	20.0		20.0		10.0	10.0	10.0			
Flash Dont Walk (s)		12.0	12.0		12.0		13.0	13.0	13.0			
Pedestrian Calls (#/hr)		0	0		0		0	0	0			
Act Effct Green (s)	61.2	46.0	46.0	61.2	46.0			23.8	23.8			
Actuated g/C Ratio	0.61	0.46	0.46	0.61	0.46			0.24	0.24			
v/c Ratio	0.17	0.77	0.18	0.67	0.81			0.62	0.25			
Control Delay	7.1	26.3	7.6	23.1	12.9			41.5	7.5			
Queue Delay	0.0	0.0	0.0	0.0	0.0			0.0	0.0			
Total Delay	7.1	26.3	7.6	23.1	12.9			41.5	7.5			
LOS	A	C	A	C	B			D	A			
Approach Delay		21.2			16.2			31.4				
Approach LOS		C			B			C				
Queue Length 50th (ft)	12	254	17	61	64			141	0			
Queue Length 95th (ft)	m21	m375	m41	m63	m73			213	40			
Internal Link Dist (ft)		356			1981			469			89	
Turn Bay Length (ft)	75		100	70					100			
Base Capacity (vph)	383	740	824	444	787			447	463			
Starvation Cap Reductn	0	0	0	0	0			0	0			
Spillback Cap Reductn	0	0	0	0	0			0	0			
Storage Cap Reductn	0	0	0	0	0			0	0			
Reduced v/c Ratio	0.17	0.77	0.18	0.67	0.81			0.55	0.22			

Intersection Summary

Area Type:	Other
Cycle Length:	100
Actuated Cycle Length:	100
Offset:	94 (94%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	80
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.81
Intersection Signal Delay:	20.6
Intersection LOS:	C

Lanes, Volumes, Timings
 21: Palisade Avenue & Ashburton Avenue

Mitigation Condition
 Weekday PM Peak Hour

Intersection Capacity Utilization 67.4% ICU Level of Service C
 Analysis Period (min) 15
 m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 21: Palisade Avenue & Ashburton Avenue



Lanes, Volumes, Timings
22: New School Street & Palisade Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Volume (vph)	150	301	84	0	0	0	0	166	152	93	362	0
Future Volume (vph)	150	301	84	0	0	0	0	166	152	93	362	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.979						0.935				
Flt Protected		0.986									0.990	
Satd. Flow (prot)	0	1783	0	0	0	0	0	1974	0	0	2073	0
Flt Permitted		0.986									0.842	
Satd. Flow (perm)	0	1783	0	0	0	0	0	1974	0	0	1763	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		15						82				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		327			733			245			1224	
Travel Time (s)		7.4			16.7			5.6			27.8	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	2	0
Parking (#/hr)		5										
Adj. Flow (vph)	163	327	91	0	0	0	0	180	165	101	393	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	581	0	0	0	0	0	345	0	0	494	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		-10			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.01	0.85	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.86	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	
Turn Type	Perm	NA						NA		Perm	NA	
Protected Phases		3						2			6	
Permitted Phases		3						6			6	

Lanes, Volumes, Timings
22: New School Street & Palisade Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	3	3						2		6	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0						5.0		5.0	5.0	
Minimum Split (s)	34.0	34.0						39.0		10.0	10.0	
Total Split (s)	35.0	35.0						40.0		40.0	40.0	
Total Split (%)	46.7%	46.7%						53.3%		53.3%	53.3%	
Maximum Green (s)	30.0	30.0						35.0		35.0	35.0	
Yellow Time (s)	3.0	3.0						3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0						2.0		2.0	2.0	
Lost Time Adjust (s)		0.0						0.0			0.0	
Total Lost Time (s)		5.0						5.0			5.0	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	Ped	Ped						Ped		Max	Max	
Walk Time (s)	9.0	9.0						14.0				
Flash Dont Walk (s)	20.0	20.0						20.0				
Pedestrian Calls (#/hr)	0	0						0				
Act Effct Green (s)		29.6						35.0			35.0	
Actuated g/C Ratio		0.40						0.47			0.47	
v/c Ratio		0.81						0.36			0.60	
Control Delay		30.5						10.7			18.5	
Queue Delay		0.0						0.0			0.0	
Total Delay		30.5						10.7			18.5	
LOS		C						B			B	
Approach Delay		30.5						10.7			18.5	
Approach LOS		C						B			B	
Queue Length 50th (ft)		226						72			162	
Queue Length 95th (ft)		#400						128			256	
Internal Link Dist (ft)		247			653			165			1144	
Turn Bay Length (ft)												
Base Capacity (vph)		726						969			826	
Starvation Cap Reductn		0						0			0	
Spillback Cap Reductn		0						0			0	
Storage Cap Reductn		0						0			0	
Reduced v/c Ratio		0.80						0.36			0.60	


Intersection Summary

Area Type:	Other
Cycle Length:	75
Actuated Cycle Length:	74.6
Natural Cycle:	75
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.81
Intersection Signal Delay:	21.5
Intersection LOS:	C
Intersection Capacity Utilization:	84.0%
ICU Level of Service:	E
Analysis Period (min):	15
# 95th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles.	

Lanes, Volumes, Timings
 22: New School Street & Palisade Avenue

Mitigation Condition
 Weekday PM Peak Hour

Splits and Phases: 22: New School Street & Palisade Avenue

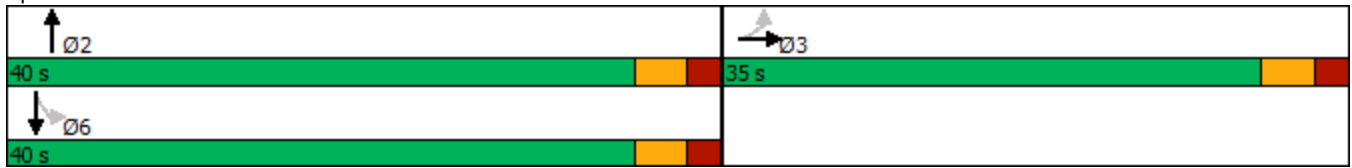


Lanes, Volumes, Timings
 23: New School Street & Maple Street & Nepperhan Avenue

Mitigation Condition
 Weekday PM Peak Hour

Lane Group	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	SBL2	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	121	1548	81	7	58	41	1859	339	144	48	16	324
Future Volume (vph)	121	1548	81	7	58	41	1859	339	144	48	16	324
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	12	12	11	12	11	16	16	16	16
Grade (%)		0%					-5%				0%	
Storage Length (ft)	100		0			210		0		0		0
Storage Lanes	1		0			1		1		0		0
Taper Length (ft)	25					25				25		
Lane Util. Factor	1.00	0.91	0.91	0.91	0.91	1.00	0.91	1.00	1.00	1.00	1.00	1.00
Frt		0.992						0.850			0.918	
Flt Protected	0.950					0.950					0.982	
Satd. Flow (prot)	1711	5045	0	0	0	1753	5212	1569	0	0	1903	0
Flt Permitted	0.091					0.091					0.982	
Satd. Flow (perm)	164	5045	0	0	0	168	5212	1569	0	0	1903	0
Right Turn on Red				Yes				Yes				Yes
Satd. Flow (RTOR)		1						299			76	
Link Speed (mph)		30					30				30	
Link Distance (ft)		378					492				339	
Travel Time (s)		8.6					11.2				7.7	
Peak Hour Factor	0.89	0.89	0.89	0.89	0.95	0.95	0.95	0.95	0.92	0.92	0.92	0.92
Adj. Flow (vph)	136	1739	91	8	61	43	1957	357	157	52	17	352
Shared Lane Traffic (%)												
Lane Group Flow (vph)	136	1838	0	0	0	104	1957	357	0	0	578	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Right	Left	Left	Left	Right	Left	Left	Left	Right
Median Width(ft)		12					12				0	
Link Offset(ft)		0					0				0	
Crosswalk Width(ft)		16					16				16	
Two way Left Turn Lane												
Headway Factor	1.04	1.00	1.00	1.00	0.97	1.01	0.97	1.01	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	9	15	15		9	15	15		9
Number of Detectors	1	2			1	1	2	1	1	1	2	
Detector Template	Left	Thru			Left	Left	Thru	Right	Left	Left	Thru	
Leading Detector (ft)	20	100			20	20	100	20	20	20	100	
Trailing Detector (ft)	0	0			0	0	0	0	0	0	0	
Detector 1 Position(ft)	0	0			0	0	0	0	0	0	0	
Detector 1 Size(ft)	20	6			20	20	6	20	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94					94				94	
Detector 2 Size(ft)		6					6				6	
Detector 2 Type		Cl+Ex					Cl+Ex				Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0					0.0				0.0	
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Perm	Perm	NA	

Lanes, Volumes, Timings
23: New School Street & Maple Street & Nepperhan Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	SBL2	SBL	SBT	SBR
Protected Phases	5	2			1	1	6					3
Permitted Phases	2				6	6		6	3	3		
Detector Phase	5	2			1	1	6	6	3	3		3
Switch Phase												
Minimum Initial (s)	5.0	5.0			5.0	5.0	5.0	5.0	5.0	5.0		5.0
Minimum Split (s)	11.0	46.0			11.0	11.0	46.0	46.0	40.0	40.0		40.0
Total Split (s)	18.0	50.0			18.0	18.0	50.0	50.0	42.0	42.0		42.0
Total Split (%)	16.4%	45.5%			16.4%	16.4%	45.5%	45.5%	38.2%	38.2%		38.2%
Maximum Green (s)	12.0	44.0			12.0	12.0	44.0	44.0	36.0	36.0		36.0
Yellow Time (s)	4.0	4.0			4.0	4.0	4.0	4.0	4.0	4.0		4.0
All-Red Time (s)	2.0	2.0			2.0	2.0	2.0	2.0	2.0	2.0		2.0
Lost Time Adjust (s)	0.0	0.0					0.0	0.0				0.0
Total Lost Time (s)	6.0	6.0					6.0	6.0				6.0
Lead/Lag	Lead	Lag			Lead	Lead	Lag	Lag				
Lead-Lag Optimize?	Yes	Yes			Yes	Yes	Yes	Yes				
Vehicle Extension (s)	3.0	3.0			3.0	3.0	3.0	3.0	3.0	3.0		3.0
Recall Mode	Max	Ped			Max	Max	C-Max	C-Max	Ped	Ped		Ped
Walk Time (s)		20.0					20.0	20.0	7.0	7.0		7.0
Flash Dont Walk (s)		20.0					20.0	20.0	27.0	27.0		27.0
Pedestrian Calls (#/hr)		0					0	0	0	0		0
Act Effct Green (s)	56.8	44.0				56.8	44.0	44.0				35.2
Actuated g/C Ratio	0.52	0.40				0.52	0.40	0.40				0.32
v/c Ratio	0.52	0.91				0.38	0.94	0.44				0.88
Control Delay	37.9	19.9				30.3	49.7	16.8				46.3
Queue Delay	0.0	13.8				0.0	2.0	0.3				0.2
Total Delay	37.9	33.7				30.3	51.7	17.0				46.5
LOS	D	C				C	D	B				D
Approach Delay		34.0					45.7					46.5
Approach LOS		C					D					D
Queue Length 50th (ft)	60	138				48	424	86				336
Queue Length 95th (ft)	m81	168				m117	#435	m190				#532
Internal Link Dist (ft)		298					412					259
Turn Bay Length (ft)	100					210						
Base Capacity (vph)	264	2018				271	2084	807				673
Starvation Cap Reductn	0	108				0	57	112				0
Spillback Cap Reductn	0	212				0	40	0				3
Storage Cap Reductn	0	0				0	0	0				0
Reduced v/c Ratio	0.52	1.02				0.38	0.97	0.51				0.86

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	10 (9%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.94
Intersection Signal Delay:	41.1
Intersection Capacity Utilization	89.0%
Intersection LOS:	D
ICU Level of Service	E

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 23: New School Street & Maple Street & Nepperhan Avenue

 Ø1 18 s	 Ø2 50 s	 Ø3 42 s
 Ø5 18 s	 Ø6 (R) 50 s	

Lanes, Volumes, Timings
24: Waverly Street & Nepperhan Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø9
Lane Configurations	↑↑↑		↙	↑↑↑	↘		
Traffic Volume (vph)	1692	0	1	2214	83	137	
Future Volume (vph)	1692	0	1	2214	83	137	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Width (ft)	12	12	12	15	15	15	
Grade (%)	5%			-5%	0%		
Storage Length (ft)		0	120		0	0	
Storage Lanes		0	1		1	0	
Taper Length (ft)			25		25		
Lane Util. Factor	0.91	0.91	1.00	0.91	1.00	1.00	
Frt					0.916		
Flt Protected			0.950		0.982		
Satd. Flow (prot)	4752	0	1814	5673	1843	0	
Flt Permitted			0.082		0.982		
Satd. Flow (perm)	4752	0	157	5673	1843	0	
Right Turn on Red		Yes				Yes	
Satd. Flow (RTOR)					62		
Link Speed (mph)	30			30	30		
Link Distance (ft)	492			401	154		
Travel Time (s)	11.2			9.1	3.5		
Peak Hour Factor	0.89	0.89	0.95	0.95	0.92	0.92	
Bus Blockages (#/hr)	0	0	0	8	0	0	
Parking (#/hr)	5						
Adj. Flow (vph)	1901	0	1	2331	90	149	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	1901	0	1	2331	239	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	12			12	15		
Link Offset(ft)	0			0	0		
Crosswalk Width(ft)	16			16	16		
Two way Left Turn Lane							
Headway Factor	1.09	1.03	0.97	0.87	0.88	0.88	
Turning Speed (mph)		9	15		15	9	
Number of Detectors	2		1	2	1		
Detector Template	Thru		Left	Thru	Left		
Leading Detector (ft)	100		20	100	20		
Trailing Detector (ft)	0		0	0	0		
Detector 1 Position(ft)	0		0	0	0		
Detector 1 Size(ft)	6		20	6	20		
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex		
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0	0.0		
Detector 1 Queue (s)	0.0		0.0	0.0	0.0		
Detector 1 Delay (s)	0.0		0.0	0.0	0.0		
Detector 2 Position(ft)	94			94			
Detector 2 Size(ft)	6			6			
Detector 2 Type	Cl+Ex			Cl+Ex			
Detector 2 Channel							

Lanes, Volumes, Timings
24: Waverly Street & Nepperhan Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø9
Detector 2 Extend (s)	0.0			0.0			
Turn Type	NA		Perm	NA	Prot		
Protected Phases	1			6	3		9
Permitted Phases			6				
Detector Phase	1		6	6	3		
Switch Phase							
Minimum Initial (s)	5.0		5.0	5.0	5.0		5.0
Minimum Split (s)	11.0		11.0	11.0	11.0		42.0
Total Split (s)	48.0		48.0	48.0	20.0		42.0
Total Split (%)	43.6%		43.6%	43.6%	18.2%		38%
Maximum Green (s)	42.0		42.0	42.0	14.0		40.0
Yellow Time (s)	4.0		4.0	4.0	4.0		2.0
All-Red Time (s)	2.0		2.0	2.0	2.0		0.0
Lost Time Adjust (s)	0.0		0.0	0.0	0.0		
Total Lost Time (s)	6.0		6.0	6.0	6.0		
Lead/Lag							
Lead-Lag Optimize?							
Vehicle Extension (s)	3.0		3.0	3.0	3.0		3.0
Recall Mode	Max		C-Max	C-Max	Min		None
Walk Time (s)							20.0
Flash Dont Walk (s)							20.0
Pedestrian Calls (#/hr)							5
Act Effct Green (s)	76.3		76.3	76.3	13.3		
Actuated g/C Ratio	0.69		0.69	0.69	0.12		
v/c Ratio	0.58		0.01	0.59	0.86		
Control Delay	6.1		12.0	8.3	63.6		
Queue Delay	0.1		0.0	0.3	10.7		
Total Delay	6.2		12.0	8.6	74.3		
LOS	A		B	A	E		
Approach Delay	6.2			8.6	74.3		
Approach LOS	A			A	E		
Queue Length 50th (ft)	30		0	66	124		
Queue Length 95th (ft)	#642		m0	#750	#257		
Internal Link Dist (ft)	412			321	74		
Turn Bay Length (ft)			120				
Base Capacity (vph)	3295		108	3934	288		
Starvation Cap Reductn	271		0	776	0		
Spillback Cap Reductn	394		0	25	33		
Storage Cap Reductn	0		0	0	0		
Reduced v/c Ratio	0.66		0.01	0.74	0.94		

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 30 (27%), Referenced to phase 6:WBTL, Start of Green
 Natural Cycle: 100
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.86

Lanes, Volumes, Timings
25: Nepperhan Avenue & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	122	522	35	116	564	76	71	370	80	135	362	148
Future Volume (vph)	122	522	35	116	564	76	71	370	80	135	362	148
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	11	10	10	11	11	10	13	13	10	12	11
Storage Length (ft)	150		80	120		0	185		0	120		0
Storage Lanes	1		1	1		0	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	1.00
Frt			0.850		0.982			0.973				0.850
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1620	1766	1449	1636	1751	0	1636	3524	0	1589	3406	1473
Flt Permitted	0.129			0.130			0.950			0.950		
Satd. Flow (perm)	220	1766	1449	224	1751	0	1636	3524	0	1589	3406	1473
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			98		7			25				154
Link Speed (mph)		30			30			30				30
Link Distance (ft)		2061			390			1273				212
Travel Time (s)		46.8			8.9			28.9				4.8
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	4%	4%	4%	3%	3%	3%	3%	3%	3%	6%	6%	6%
Adj. Flow (vph)	133	567	38	126	613	83	77	402	87	147	393	161
Shared Lane Traffic (%)												
Lane Group Flow (vph)	133	567	38	126	696	0	77	489	0	147	393	161
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			10				10
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.09	1.04	1.09	1.09	1.04	1.04	1.09	0.96	0.96	1.09	1.00	1.04
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2	1	1	2		1	2		1	2	1
Detector Template	Left	Thru	Right	Left	Thru		Left	Thru		Left	Thru	Right
Leading Detector (ft)	20	100	20	20	100		20	100		20	100	20
Trailing Detector (ft)	0	0	0	0	0		0	0		0	0	0
Detector 1 Position(ft)	0	0	0	0	0		0	0		0	0	0
Detector 1 Size(ft)	20	6	20	20	6		20	6		20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				0.0
Turn Type	pm+pt	NA	pm+ov	pm+pt	NA		Prot	NA		Prot	NA	pm+ov

Lanes, Volumes, Timings
25: Nepperhan Avenue & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases	7	4	5	3	8		5	2		1	6	7
Permitted Phases	4		4	8								6
Detector Phase	7	4	5	3	8		5	2		1	6	7
Switch Phase												
Minimum Initial (s)	5.0	10.0	5.0	5.0	10.0		5.0	10.0		5.0	10.0	5.0
Minimum Split (s)	11.0	36.0	11.0	11.0	36.0		11.0	30.0		11.0	30.0	11.0
Total Split (s)	16.0	36.0	16.0	16.0	36.0		16.0	32.0		16.0	32.0	16.0
Total Split (%)	16.0%	36.0%	16.0%	16.0%	36.0%		16.0%	32.0%		16.0%	32.0%	16.0%
Maximum Green (s)	10.0	30.0	10.0	10.0	30.0		10.0	26.0		10.0	26.0	10.0
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0		4.0	4.0		4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0		2.0	2.0		2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0		6.0	6.0		6.0	6.0	6.0
Lead/Lag	Lead	Lag	Lead	Lead	Lag		Lead	Lag		Lead	Lag	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes		Yes	Yes		Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0		3.0	3.0		3.0	3.0	3.0
Recall Mode	None	Ped	None	None	Ped		None	C-Max		None	Ped	None
Walk Time (s)		7.0			7.0			7.0			7.0	
Flash Dont Walk (s)		23.0			23.0			17.0			17.0	
Pedestrian Calls (#/hr)		0			0			0			0	
Act Effct Green (s)	40.1	30.9	45.8	39.9	30.8		8.9	26.0		10.0	29.5	44.7
Actuated g/C Ratio	0.40	0.31	0.46	0.40	0.31		0.09	0.26		0.10	0.30	0.45
v/c Ratio	0.61	1.04	0.05	0.58	1.28		0.53	0.52		0.93	0.39	0.22
Control Delay	41.9	67.0	0.2	28.7	170.5		56.8	32.4		101.8	30.8	4.2
Queue Delay	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Delay	41.9	67.0	0.2	28.7	170.5		56.8	32.4		101.8	30.8	4.2
LOS	D	E	A	C	F		E	C		F	C	A
Approach Delay		59.1			148.8			35.7			39.6	
Approach LOS		E			F			D			D	
Queue Length 50th (ft)	42	~402	0	46	~576		47	133		94	110	3
Queue Length 95th (ft)	m77	#601	m1	88	#799		95	184		#214	156	40
Internal Link Dist (ft)		1981			310			1193			132	
Turn Bay Length (ft)	150		80	120			185			120		
Base Capacity (vph)	230	545	731	232	544		163	934		158	1005	754
Starvation Cap Reductn	0	0	0	0	0		0	0		0	0	0
Spillback Cap Reductn	0	0	0	0	0		0	0		0	0	0
Storage Cap Reductn	0	0	0	0	0		0	0		0	0	0
Reduced v/c Ratio	0.58	1.04	0.05	0.54	1.28		0.47	0.52		0.93	0.39	0.21

Intersection Summary

Area Type:	Other
Cycle Length:	100
Actuated Cycle Length:	100
Offset:	0 (0%), Referenced to phase 2:NBT, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.28
Intersection Signal Delay:	75.6
Intersection Capacity Utilization	81.3%
Intersection LOS:	E
ICU Level of Service	D

Lanes, Volumes, Timings
 25: Nepperhan Avenue & Ashburton Avenue

Mitigation Condition
 Weekday PM Peak Hour

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.









Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 25: Nepperhan Avenue & Ashburton Avenue

 Ø1	 Ø2 (R)	 Ø3	 Ø4
16 s	32 s	16 s	36 s
 Ø5	 Ø6	 Ø7	 Ø8
16 s	32 s	16 s	36 s

Lanes, Volumes, Timings
26: Nepperhan Avenue & Copcutt Lane

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↑↑	↑↑		↘	
Traffic Volume (vph)	0	475	513	0	46	38
Future Volume (vph)	0	475	513	0	46	38
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	16	16
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.939	
Flt Protected					0.973	
Satd. Flow (prot)	0	3278	3504	0	1929	0
Flt Permitted					0.973	
Satd. Flow (perm)	0	3278	3504	0	1929	0
Right Turn on Red				No		Yes
Satd. Flow (RTOR)					39	
Link Speed (mph)		30	30		30	
Link Distance (ft)		427	310		81	
Travel Time (s)		9.7	7.0		1.8	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	6	5	0	0	0
Parking (#/hr)		5				
Adj. Flow (vph)	0	516	558	0	50	41
Shared Lane Traffic (%)						
Lane Group Flow (vph)	0	516	558	0	91	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		0	0		16	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.10	1.01	1.00	0.85	0.85
Turning Speed (mph)	15			9	15	9
Number of Detectors		2	2		1	
Detector Template		Thru	Thru		Left	
Leading Detector (ft)		100	100		20	
Trailing Detector (ft)		0	0		0	
Detector 1 Position(ft)		0	0		0	
Detector 1 Size(ft)		6	6		20	
Detector 1 Type		Cl+Ex	Cl+Ex		Cl+Ex	
Detector 1 Channel						
Detector 1 Extend (s)		0.0	0.0		0.0	
Detector 1 Queue (s)		0.0	0.0		0.0	
Detector 1 Delay (s)		0.0	0.0		0.0	
Detector 2 Position(ft)		94	94			
Detector 2 Size(ft)		6	6			
Detector 2 Type		Cl+Ex	Cl+Ex			
Detector 2 Channel						
Detector 2 Extend (s)		0.0	0.0			
Turn Type		NA	NA		Prot	
Protected Phases		2	6		3	
Permitted Phases						

Lanes, Volumes, Timings
26: Nepperhan Avenue & Copcutt Lane

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Detector Phase		2	6		3	
Switch Phase						
Minimum Initial (s)		5.0	5.0		5.0	
Minimum Split (s)		10.0	10.0		35.0	
Total Split (s)		35.0	35.0		35.0	
Total Split (%)		33.3%	33.3%		33.3%	
Maximum Green (s)		30.0	30.0		30.0	
Yellow Time (s)		3.0	3.0		3.0	
All-Red Time (s)		2.0	2.0		2.0	
Lost Time Adjust (s)		0.0	0.0		0.0	
Total Lost Time (s)		5.0	5.0		5.0	
Lead/Lag						
Lead-Lag Optimize?						
Vehicle Extension (s)		3.0	3.0		3.0	
Recall Mode		Max	Max		None	
Walk Time (s)					7.0	
Flash Dont Walk (s)					23.0	
Pedestrian Calls (#/hr)					5	
Act Effct Green (s)		30.5	30.5		10.8	
Actuated g/C Ratio		0.36	0.36		0.13	
v/c Ratio		0.44	0.44		0.32	
Control Delay		24.0	24.0		23.6	
Queue Delay		0.0	0.0		0.0	
Total Delay		24.0	24.0		23.6	
LOS		C	C		C	
Approach Delay		24.0	24.0		23.6	
Approach LOS		C	C		C	
Queue Length 50th (ft)		104	113		26	
Queue Length 95th (ft)		208	223		65	
Internal Link Dist (ft)		347	230		1	
Turn Bay Length (ft)						
Base Capacity (vph)		1182	1263		720	
Starvation Cap Reductn		0	0		0	
Spillback Cap Reductn		0	0		0	
Storage Cap Reductn		0	0		0	
Reduced v/c Ratio		0.44	0.44		0.13	

Intersection Summary

Area Type:	Other
Cycle Length:	105
Actuated Cycle Length:	84.6
Natural Cycle:	70
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.44
Intersection Signal Delay:	24.0
Intersection LOS:	C
Intersection Capacity Utilization:	27.4%
ICU Level of Service:	A
Analysis Period (min):	15

Lanes, Volumes, Timings
26: Nepperhan Avenue & Copcutt Lane

Mitigation Condition
Weekday PM Peak Hour

Splits and Phases: 26: Nepperhan Avenue & Copcutt Lane



Lanes, Volumes, Timings
27: Nepperhan Avenue & Elm Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	401	120	25	246	0	56	0	1707	122	123	1944	0
Future Volume (vph)	401	120	25	246	0	56	0	1707	122	123	1944	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	10	10	10	12	12	12	11	12	12
Grade (%)		0%			0%			5%			0%	
Storage Length (ft)	0		0	0		50	0		0	140		0
Storage Lanes	1		0	1		1	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.91	0.91	1.00	0.91	1.00
Frt		0.974				0.850		0.990				
Flt Protected	0.950			0.950						0.950		
Satd. Flow (prot)	1454	1754	0	1652	0	1478	0	4909	0	1711	5085	0
Flt Permitted	0.950			0.635						0.074		
Satd. Flow (perm)	1454	1754	0	1104	0	1478	0	4909	0	133	5085	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		8				30		13				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		733			401			401			720	
Travel Time (s)		16.7			9.1			9.1			16.4	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.89	0.89	0.89	0.95	0.95	0.95
Parking (#/hr)	10											
Adj. Flow (vph)	436	130	27	267	0	61	0	1918	137	129	2046	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	436	157	0	267	0	61	0	2055	0	129	2046	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		11			11			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.28	1.04	1.04	1.09	1.09	1.09	1.03	1.03	1.03	1.04	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1		1		2		1	2	
Detector Template	Left	Thru		Left		Right		Thru		Left	Thru	
Leading Detector (ft)	20	100		20		20		100		20	100	
Trailing Detector (ft)	0	0		0		0		0		0	0	
Detector 1 Position(ft)	0	0		0		0		0		0	0	
Detector 1 Size(ft)	20	6		20		20		6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0		0.0		0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0		0.0		0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0		0.0		0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	

Lanes, Volumes, Timings
27: Nepperhan Avenue & Elm Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm		pm+ov		NA		pm+pt	NA	
Protected Phases		3				1		2		1	6	
Permitted Phases	3			7		7				6		
Detector Phase	3	3		7		1		2		1	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0		5.0		5.0		5.0	5.0	
Minimum Split (s)	40.0	40.0		40.0		11.0		39.0		11.0	39.0	
Total Split (s)	41.0	41.0		41.0		15.0		54.0		15.0	69.0	
Total Split (%)	37.3%	37.3%		37.3%		13.6%		49.1%		13.6%	62.7%	
Maximum Green (s)	35.0	35.0		35.0		9.0		48.0		9.0	63.0	
Yellow Time (s)	4.0	4.0		4.0		4.0		4.0		4.0	4.0	
All-Red Time (s)	2.0	2.0		2.0		2.0		2.0		2.0	2.0	
Lost Time Adjust (s)	0.0	0.0		0.0		0.0		0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0		6.0		6.0		6.0		6.0	6.0	
Lead/Lag						Lead		Lag		Lead		
Lead-Lag Optimize?						Yes		Yes		Yes		
Vehicle Extension (s)	3.0	3.0		3.0		3.0		3.0		3.0	3.0	
Recall Mode	Ped	Ped		Ped		Max		Ped		Max	C-Max	
Walk Time (s)	7.0	7.0		7.0				20.0			20.0	
Flash Dont Walk (s)	27.0	27.0		27.0				13.0			13.0	
Pedestrian Calls (#/hr)	0	0		0				0			0	
Act Effct Green (s)	34.8	34.8		34.8		50.0		48.0		63.2	63.2	
Actuated g/C Ratio	0.32	0.32		0.32		0.45		0.44		0.57	0.57	
v/c Ratio	0.95	0.28		0.77		0.09		0.96		0.62	0.70	
Control Delay	68.8	28.3		50.0		10.4		24.7		28.1	14.6	
Queue Delay	0.0	0.0		0.0		0.0		23.0		0.0	0.2	
Total Delay	68.8	28.3		50.0		10.4		47.7		28.1	14.7	
LOS	E	C		D		B		D		C	B	
Approach Delay		58.1			42.6			47.7			15.5	
Approach LOS		E			D			D			B	
Queue Length 50th (ft)	299	78		169		12		571		27	411	
Queue Length 95th (ft)	#499	134		#300		36		#632		m57	549	
Internal Link Dist (ft)		653			321			321			640	
Turn Bay Length (ft)						50				140		
Base Capacity (vph)	462	563		351		688		2149		208	2921	
Starvation Cap Reductn	0	0		0		0		193		0	0	
Spillback Cap Reductn	0	0		0		0		0		0	212	
Storage Cap Reductn	0	0		0		0		0		0	0	
Reduced v/c Ratio	0.94	0.28		0.76		0.09		1.05		0.62	0.76	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	22 (20%), Referenced to phase 6:SBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.96
Intersection Signal Delay:	35.0
Intersection LOS:	D

Lanes, Volumes, Timings
 27: Nepperhan Avenue & Elm Street

Mitigation Condition
 Weekday PM Peak Hour

Intersection Capacity Utilization 84.0% ICU Level of Service E

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 27: Nepperhan Avenue & Elm Street



Lanes, Volumes, Timings
28: Walnut Street & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	178	1368	143	127	1383	32	41	97	110	29	137	92
Future Volume (vph)	178	1368	143	127	1383	32	41	97	110	29	137	92
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	13	13	10	13	13	14	14	14	12	12	12
Storage Length (ft)	105		0	130		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.986			0.997			0.940			0.952	
Flt Protected	0.950			0.950				0.992			0.994	
Satd. Flow (prot)	1652	3606	0	1652	3624	0	0	1853	0	0	1524	0
Flt Permitted	0.075			0.078				0.847			0.924	
Satd. Flow (perm)	130	3606	0	136	3624	0	0	1582	0	0	1417	0
Right Turn on Red			No			Yes			Yes			No
Satd. Flow (RTOR)					3			36				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		1429			1109			369			272	
Travel Time (s)		32.5			25.2			8.4			6.2	
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	3	0	0	0	0	0	3	0
Parking (#/hr)											5	
Adj. Flow (vph)	200	1537	161	134	1456	34	45	105	120	32	149	100
Shared Lane Traffic (%)												
Lane Group Flow (vph)	200	1698	0	134	1490	0	0	270	0	0	281	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	0.96	0.96	1.09	0.97	0.96	0.92	0.92	0.92	1.00	1.20	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lanes, Volumes, Timings
28: Walnut Street & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases	5	2		1	6			3				3
Permitted Phases	2			6			3			3		
Detector Phase	5	2		1	6		3	3		3		3
Switch Phase												
Minimum Initial (s)	5.0	10.0		5.0	5.0		5.0	5.0		5.0		5.0
Minimum Split (s)	11.0	16.0		11.0	28.0		35.0	35.0		35.0		35.0
Total Split (s)	19.0	56.0		19.0	56.0		35.0	35.0		35.0		35.0
Total Split (%)	17.3%	50.9%		17.3%	50.9%		31.8%	31.8%		31.8%		31.8%
Maximum Green (s)	13.0	50.0		13.0	50.0		29.0	29.0		29.0		29.0
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0		4.0		4.0
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0		2.0
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0				0.0
Total Lost Time (s)	6.0	6.0		6.0	6.0			6.0				6.0
Lead/Lag	Lead	Lag		Lead	Lag							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0		3.0
Recall Mode	None	C-Max		None	Ped		Ped	Ped		Ped		Ped
Walk Time (s)					10.0		7.0	7.0		7.0		7.0
Flash Dont Walk (s)					12.0		22.0	22.0		22.0		22.0
Pedestrian Calls (#/hr)					0		0	0		0		0
Act Effct Green (s)	64.9	53.0		61.1	51.1			29.0				29.0
Actuated g/C Ratio	0.59	0.48		0.56	0.46			0.26				0.26
v/c Ratio	0.83	0.98		0.63	0.88			0.61				0.75
Control Delay	48.2	31.7		25.5	39.0			37.4				51.5
Queue Delay	0.0	0.0		0.0	0.0			0.0				0.0
Total Delay	48.2	31.7		25.5	39.0			37.4				51.5
LOS	D	C		C	D			D				D
Approach Delay		33.4			37.9			37.4				51.5
Approach LOS		C			D			D				D
Queue Length 50th (ft)	113	295		58	461			145				183
Queue Length 95th (ft)	m123	m#730		m93	#547			237				#307
Internal Link Dist (ft)		1349			1029			289				192
Turn Bay Length (ft)	105			130								
Base Capacity (vph)	257	1738		258	1684			443				373
Starvation Cap Reductn	0	0		0	0			0				0
Spillback Cap Reductn	0	0		0	0			0				0
Storage Cap Reductn	0	0		0	0			0				0
Reduced v/c Ratio	0.78	0.98		0.52	0.88			0.61				0.75

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	69 (63%), Referenced to phase 2:EBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.98
Intersection Signal Delay:	36.7
Intersection LOS:	D

Lanes, Volumes, Timings
 28: Walnut Street & Yonkers Avenue

Mitigation Condition
 Weekday PM Peak Hour

Intersection Capacity Utilization 85.8% ICU Level of Service E

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 28: Walnut Street & Yonkers Avenue



Lanes, Volumes, Timings
29: Prescott Street & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	40	1413	54	122	1530	31	12	11	78	0	0	0
Future Volume (vph)	40	1413	54	122	1530	31	12	11	78	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	11	11	10	12	12	15	15	15	12	12	12
Storage Length (ft)	85		0	85		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.994			0.997			0.896				
Fl _t Protected	0.950			0.950				0.994				
Satd. Flow (prot)	1652	3401	0	1652	3507	0	0	1825	0	0	0	0
Fl _t Permitted	0.126			0.070				0.994				
Satd. Flow (perm)	219	3401	0	122	3507	0	0	1825	0	0	0	0
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		5			4							
Link Speed (mph)		30			30			30				30
Link Distance (ft)		1109			370			410				164
Travel Time (s)		25.2			8.4			9.3				3.7
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	3	0	0	0	0	0	0	0
Adj. Flow (vph)	45	1588	61	128	1611	33	13	12	85	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	45	1649	0	128	1644	0	0	110	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.09	1.04	1.04	1.09	1.01	1.00	0.88	0.88	0.88	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2				
Detector Template	Left	Thru		Left	Thru		Left	Thru				
Leading Detector (ft)	20	100		20	100		20	100				
Trailing Detector (ft)	0	0		0	0		0	0				
Detector 1 Position(ft)	0	0		0	0		0	0				
Detector 1 Size(ft)	20	6		20	6		20	6				
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0				
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0				
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0				
Detector 2 Position(ft)		94			94			94				
Detector 2 Size(ft)		6			6			6				
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				
Turn Type	Perm	NA		pm+pt	NA		Perm	NA				

Lanes, Volumes, Timings
29: Prescott Street & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases		2		1	6			3				
Permitted Phases	2			6			3					
Detector Phase	2	2		1	6		3	3				
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		10.0	10.0				
Minimum Split (s)	11.0	11.0		11.0	11.0		32.0	32.0				
Total Split (s)	57.0	57.0		21.0	78.0		32.0	32.0				
Total Split (%)	51.8%	51.8%		19.1%	70.9%		29.1%	29.1%				
Maximum Green (s)	51.0	51.0		15.0	72.0		26.0	26.0				
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0				
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0				
Lost Time Adjust (s)	0.0	0.0		0.0	0.0			0.0				
Total Lost Time (s)	6.0	6.0		6.0	6.0			6.0				
Lead/Lag	Lag	Lag		Lead								
Lead-Lag Optimize?	Yes	Yes		Yes								
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0				
Recall Mode	C-Max	C-Max		Max	Max		Ped	Ped				
Walk Time (s)							7.0	7.0				
Flash Dont Walk (s)							19.0	19.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)	51.0	51.0		72.0	72.0			26.0				
Actuated g/C Ratio	0.46	0.46		0.65	0.65			0.24				
v/c Ratio	0.45	1.04		0.44	0.72			0.26				
Control Delay	13.3	42.9		33.4	7.4			36.1				
Queue Delay	0.0	0.0		0.0	0.8			0.0				
Total Delay	13.3	42.9		33.4	8.2			36.1				
LOS	B	D		C	A			D				
Approach Delay		42.2			10.0			36.1				
Approach LOS		D			B			D				
Queue Length 50th (ft)	10	~678		57	148			63				
Queue Length 95th (ft)	m8	m#720		m56	m145			114				
Internal Link Dist (ft)		1029			290			330			84	
Turn Bay Length (ft)	85			85								
Base Capacity (vph)	101	1579		288	2296			431				
Starvation Cap Reductn	0	0		0	332			0				
Spillback Cap Reductn	0	0		0	0			0				
Storage Cap Reductn	0	0		0	0			0				
Reduced v/c Ratio	0.45	1.04		0.44	0.84			0.26				

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	103 (94%), Referenced to phase 2:EBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.04
Intersection Signal Delay:	26.0
Intersection Capacity Utilization:	70.9%
Intersection LOS:	C
ICU Level of Service:	C

Lanes, Volumes, Timings
 29: Prescott Street & Yonkers Avenue

Mitigation Condition
 Weekday PM Peak Hour

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.



















m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 29: Prescott Street & Yonkers Avenue

↙ Ø1	↘ Ø2 (R)	↑ Ø3
21 s	57 s	32 s
↖ Ø6		
78 s		

Lanes, Volumes, Timings
30: Driveway/Ashburton Avenue & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	1447	44	8	1646	658	13	0	2	780	1	24
Future Volume (vph)	0	1447	44	8	1646	658	13	0	2	780	1	24
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	12	12	14	12	12	12	11	11	12
Storage Length (ft)	0		0	0		250	0		0	0		0
Storage Lanes	0		0	0		1	1		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00	0.95	0.95	1.00
Fr _t		0.996				0.850		0.865			0.991	
Fl _t Protected							0.950			0.950	0.955	
Satd. Flow (prot)	0	3408	0	0	3539	1689	1770	0	0	1625	1600	0
Fl _t Permitted					0.874		0.950			0.950	0.955	
Satd. Flow (perm)	0	3408	0	0	3093	1689	1770	0	0	1625	1600	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4				555		169			3	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		370			325			129			377	
Travel Time (s)		8.4			7.4			2.9			8.6	
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	3	0
Adj. Flow (vph)	0	1626	49	8	1733	693	14	0	2	848	1	26
Shared Lane Traffic (%)										48%		
Lane Group Flow (vph)	0	1675	0	0	1741	693	14	2	0	441	434	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		10			10			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.04	1.04	1.04	1.00	1.00	0.92	1.00	1.00	1.00	1.04	1.06	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		2		1	2	1	1			1	2	
Detector Template		Thru		Left	Thru	Right	Left			Left	Thru	
Leading Detector (ft)		100		20	100	20	20			20	100	
Trailing Detector (ft)		0		0	0	0	0			0	0	
Detector 1 Position(ft)		0		0	0	0	0			0	0	
Detector 1 Size(ft)		6		20	6	20	20			20	6	
Detector 1 Type		Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0		0.0	0.0	0.0	0.0			0.0	0.0	
Detector 1 Queue (s)		0.0		0.0	0.0	0.0	0.0			0.0	0.0	
Detector 1 Delay (s)		0.0		0.0	0.0	0.0	0.0			0.0	0.0	
Detector 2 Position(ft)		94			94						94	
Detector 2 Size(ft)		6			6						6	
Detector 2 Type		Cl+Ex			Cl+Ex						Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0						0.0	
Turn Type		NA		Perm	NA	custom	Prot			Split	NA	

Lane Group	Ø1	Ø2
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Ideal Flow (vphpl)		
Lane Width (ft)		
Storage Length (ft)		
Storage Lanes		
Taper Length (ft)		
Lane Util. Factor		
Frt		
Flt Protected		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Right Turn on Red		
Satd. Flow (RTOR)		
Link Speed (mph)		
Link Distance (ft)		
Travel Time (s)		
Peak Hour Factor		
Bus Blockages (#/hr)		
Adj. Flow (vph)		
Shared Lane Traffic (%)		
Lane Group Flow (vph)		
Enter Blocked Intersection		
Lane Alignment		
Median Width(ft)		
Link Offset(ft)		
Crosswalk Width(ft)		
Two way Left Turn Lane		
Headway Factor		
Turning Speed (mph)		
Number of Detectors		
Detector Template		
Leading Detector (ft)		
Trailing Detector (ft)		
Detector 1 Position(ft)		
Detector 1 Size(ft)		
Detector 1 Type		
Detector 1 Channel		
Detector 1 Extend (s)		
Detector 1 Queue (s)		
Detector 1 Delay (s)		
Detector 2 Position(ft)		
Detector 2 Size(ft)		
Detector 2 Type		
Detector 2 Channel		
Detector 2 Extend (s)		
Turn Type		

Lanes, Volumes, Timings
30: Driveway/Ashburton Avenue & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases		1 2			1 2	2 3 4	4			3	3	
Permitted Phases				1 2								
Detector Phase		1 2		1 2	1 2	2 3 4	4			3	3	
Switch Phase												
Minimum Initial (s)							5.0			5.0	5.0	
Minimum Split (s)							10.0			32.0	32.0	
Total Split (s)							10.0			36.0	36.0	
Total Split (%)							9.1%			32.7%	32.7%	
Maximum Green (s)							5.0			30.0	30.0	
Yellow Time (s)							3.0			4.0	4.0	
All-Red Time (s)							2.0			2.0	2.0	
Lost Time Adjust (s)							0.0			0.0	0.0	
Total Lost Time (s)							5.0			6.0	6.0	
Lead/Lag							Lead			Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)							3.0			3.0	3.0	
Recall Mode							None			None	None	
Walk Time (s)										7.0	7.0	
Flash Dont Walk (s)										19.0	19.0	
Pedestrian Calls (#/hr)										0	0	
Act Effct Green (s)		61.0			61.0	56.0	5.0	0.0		30.0	30.0	
Actuated g/C Ratio		0.55			0.55	0.51	0.05	0.00		0.27	0.27	
v/c Ratio		0.89			1.02	0.61	0.17	0.01		1.00	0.99	
Control Delay		8.9			33.4	10.1	55.7	0.0		82.6	81.4	
Queue Delay		0.6			32.9	5.9	0.0	0.0		0.0	0.0	
Total Delay		9.4			66.3	16.0	55.7	0.0		82.6	81.4	
LOS		A			E	B	E	A		F	F	
Approach Delay		9.4			52.0			48.7			82.0	
Approach LOS		A			D			D			F	
Queue Length 50th (ft)		80			~698	126	10	0		327	320	
Queue Length 95th (ft)		m73			m#797	m161	31	0		#548	#541	
Internal Link Dist (ft)		290			245			49			297	
Turn Bay Length (ft)						250						
Base Capacity (vph)		1891			1715	1132	80	169		443	438	
Starvation Cap Reductn		45			259	376	0	0		0	0	
Spillback Cap Reductn		0			0	0	0	0		0	0	
Storage Cap Reductn		0			0	0	0	0		0	0	
Reduced v/c Ratio		0.91			1.20	0.92	0.17	0.01		1.00	0.99	

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	98 (89%), Referenced to phase 2:EBWB, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.02
Intersection Signal Delay:	43.0
Intersection LOS:	D
Intersection Capacity Utilization Err%	ICU Level of Service H

Lane Group	Ø1	Ø2
Protected Phases	1	2
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	5.0	5.0
Minimum Split (s)	17.0	11.0
Total Split (s)	48.0	16.0
Total Split (%)	44%	15%
Maximum Green (s)	45.0	10.0
Yellow Time (s)	2.0	4.0
All-Red Time (s)	1.0	2.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lag	Lead
Lead-Lag Optimize?	Yes	Yes
Vehicle Extension (s)	3.0	3.0
Recall Mode	None	C-Max
Walk Time (s)	5.0	
Flash Dont Walk (s)	9.0	
Pedestrian Calls (#/hr)	0	
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (ft)		
Queue Length 95th (ft)		
Internal Link Dist (ft)		
Turn Bay Length (ft)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
 30: Driveway/Ashburton Avenue & Yonkers Avenue

Mitigation Condition
 Weekday PM Peak Hour

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.


m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 30: Driveway/Ashburton Avenue & Yonkers Avenue



Lanes, Volumes, Timings
31: Yonkers Avenue & Saw Mill NB Ramps

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (vph)	415	1380	1413	159	66	452
Future Volume (vph)	415	1380	1413	159	66	452
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	11	11	15	12
Storage Length (ft)	180			0	0	0
Storage Lanes	1			1	1	1
Taper Length (ft)	25				25	
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00
Fr _t				0.850		0.850
Fl _t Protected	0.950				0.950	
Satd. Flow (prot)	1805	3539	3421	1561	1986	1615
Fl _t Permitted	0.074				0.950	
Satd. Flow (perm)	141	3539	3421	1561	1986	1615
Right Turn on Red				No		Yes
Satd. Flow (RTOR)						10
Link Speed (mph)		30	30		30	
Link Distance (ft)		399	747		226	
Travel Time (s)		9.1	17.0		5.1	
Peak Hour Factor	0.89	0.89	0.95	0.95	0.92	0.92
Heavy Vehicles (%)	0%	2%	2%	0%	0%	0%
Adj. Flow (vph)	466	1551	1487	167	72	491
Shared Lane Traffic (%)						
Lane Group Flow (vph)	466	1551	1487	167	72	491
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right
Median Width(ft)		12	12		15	
Link Offset(ft)		0	0		0	
Crosswalk Width(ft)		16	16		16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.04	1.04	0.88	1.00
Turning Speed (mph)	15			9	15	9
Number of Detectors	1	2	2	1	1	1
Detector Template	Left	Thru	Thru	Right	Left	Right
Leading Detector (ft)	20	100	100	20	20	20
Trailing Detector (ft)	0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0	0
Detector 1 Size(ft)	20	6	6	20	20	20
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94	94			
Detector 2 Size(ft)		6	6			
Detector 2 Type		Cl+Ex	Cl+Ex			
Detector 2 Channel						
Detector 2 Extend (s)		0.0	0.0			
Turn Type	pm+pt	NA	NA	Free	Prot	pt+ov

Lanes, Volumes, Timings
31: Yonkers Avenue & Saw Mill NB Ramps

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR
Protected Phases	1	6	2		3	13
Permitted Phases	6			Free		
Detector Phase	1	6	2		3	13
Switch Phase						
Minimum Initial (s)	5.0	10.0	10.0		5.0	
Minimum Split (s)	11.0	16.0	16.0		11.0	
Total Split (s)	35.0	89.0	54.0		21.0	
Total Split (%)	31.8%	80.9%	49.1%		19.1%	
Maximum Green (s)	29.0	83.0	48.0		15.0	
Yellow Time (s)	4.0	4.0	4.0		4.0	
All-Red Time (s)	2.0	2.0	2.0		2.0	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	
Total Lost Time (s)	6.0	6.0	6.0		6.0	
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Vehicle Extension (s)	3.0	3.0	3.0		3.0	
Recall Mode	Max	Max	C-Max		Max	
Act Effct Green (s)	83.0	83.0	48.0	110.0	15.0	50.0
Actuated g/C Ratio	0.75	0.75	0.44	1.00	0.14	0.45
v/c Ratio	0.86	0.58	1.00	0.11	0.27	0.66
Control Delay	42.3	7.6	50.0	0.1	45.5	28.3
Queue Delay	5.1	0.3	0.0	0.0	0.0	0.7
Total Delay	47.4	7.8	50.0	0.1	45.5	29.1
LOS	D	A	D	A	D	C
Approach Delay		17.0	45.0		31.2	
Approach LOS		B	D		C	
Queue Length 50th (ft)	238	201	586	0	46	259
Queue Length 95th (ft)	#420	196	#694	0	91	381
Internal Link Dist (ft)		319	667		146	
Turn Bay Length (ft)	180					
Base Capacity (vph)	545	2670	1492	1561	270	739
Starvation Cap Reductn	43	426	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	69
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.93	0.69	1.00	0.11	0.27	0.73


Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 101 (92%), Referenced to phase 2:WBT, Start of Green
 Natural Cycle: 80
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 1.00
 Intersection Signal Delay: 29.8
 Intersection LOS: C
 Intersection Capacity Utilization 81.2%
 ICU Level of Service D
 Analysis Period (min) 15
 # 95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

Lanes, Volumes, Timings
 31: Yonkers Avenue & Saw Mill NB Ramps

Mitigation Condition
 Weekday PM Peak Hour

Splits and Phases: 31: Yonkers Avenue & Saw Mill NB Ramps

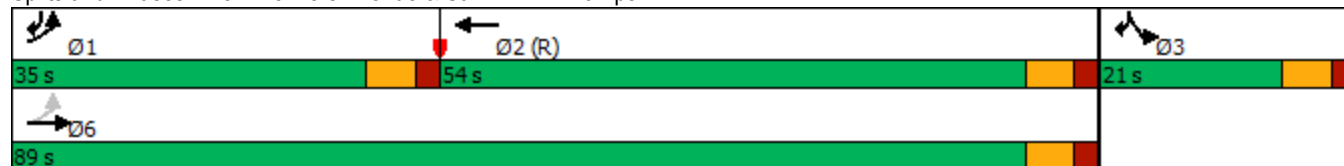

Lanes, Volumes, Timings
32: Yonkers Avenue & Fox Terrace & Wasylenko Lane

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	SWL	SWR
Lane Configurations		↕↕	↕↔		↔		↔	
Traffic Volume (vph)	4	1442	1561	7	0	1	11	10
Future Volume (vph)	4	1442	1561	7	0	1	11	10
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	14	13	13	16	16	11	11
Lane Util. Factor	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Frt			0.999		0.865		0.935	
Flt Protected							0.975	
Satd. Flow (prot)	0	3753	3654	0	1826	0	1642	0
Flt Permitted		0.951					0.975	
Satd. Flow (perm)	0	3569	3654	0	1826	0	1642	0
Right Turn on Red							Yes	
Satd. Flow (RTOR)					301			
Link Speed (mph)		30	30		30		30	
Link Distance (ft)		747	1476		229		311	
Travel Time (s)		17.0	33.5		5.2		7.1	
Peak Hour Factor	0.89	0.89	0.95	0.95	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	3	0	0	0	0	0	0
Adj. Flow (vph)	4	1620	1643	7	0	1	12	11
Shared Lane Traffic (%)								
Lane Group Flow (vph)	0	1624	1650	0	1	0	23	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Right	Left	Right
Median Width(ft)		0	0		16		11	
Link Offset(ft)		0	0		0		0	
Crosswalk Width(ft)		16	16		16		16	
Two way Left Turn Lane								
Headway Factor	1.04	0.93	0.96	0.96	0.85	0.85	1.04	1.04
Turning Speed (mph)	15			9	15	9	15	9
Number of Detectors	1	2	2		1		1	
Detector Template	Left	Thru	Thru		Left		Left	
Leading Detector (ft)	20	100	100		20		20	
Trailing Detector (ft)	0	0	0		0		0	
Detector 1 Position(ft)	0	0	0		0		0	
Detector 1 Size(ft)	20	6	6		20		20	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex		Cl+Ex	
Detector 1 Channel								
Detector 1 Extend (s)	0.0	0.0	0.0		0.0		0.0	
Detector 1 Queue (s)	0.0	0.0	0.0		0.0		0.0	
Detector 1 Delay (s)	0.0	0.0	0.0		0.0		0.0	
Detector 2 Position(ft)		94	94					
Detector 2 Size(ft)		6	6					
Detector 2 Type		Cl+Ex	Cl+Ex					
Detector 2 Channel								
Detector 2 Extend (s)		0.0	0.0					
Turn Type	Perm	NA	NA		Prot		Prot	
Protected Phases		6	2		4		3	
Permitted Phases	6							
Detector Phase	6	6	2		4		3	

Lanes, Volumes, Timings
32: Yonkers Avenue & Fox Terrace & Wasylenko Lane

Mitigation Condition
Weekday PM Peak Hour




Lane Group	EBL	EBT	WBT	WBR	SBL	SBR	SWL	SWR
Switch Phase								
Minimum Initial (s)	10.0	10.0	10.0		5.0		5.0	
Minimum Split (s)	16.0	16.0	16.0		11.0		27.0	
Total Split (s)	64.0	64.0	64.0		17.0		29.0	
Total Split (%)	58.2%	58.2%	58.2%		15.5%		26.4%	
Maximum Green (s)	58.0	58.0	58.0		11.0		23.0	
Yellow Time (s)	4.0	4.0	4.0		4.0		4.0	
All-Red Time (s)	2.0	2.0	2.0		2.0		2.0	
Lost Time Adjust (s)		0.0	0.0		0.0		0.0	
Total Lost Time (s)		6.0	6.0		6.0		6.0	
Lead/Lag					Lag		Lead	
Lead-Lag Optimize?					Yes		Yes	
Vehicle Extension (s)	3.0	3.0	3.0		3.0		3.0	
Recall Mode	Max	Max	C-Max		None		None	
Walk Time (s)							7.0	
Flash Dont Walk (s)							14.0	
Pedestrian Calls (#/hr)							0	
Act Effct Green (s)		99.5	99.5		5.5		7.1	
Actuated g/C Ratio		0.90	0.90		0.05		0.06	
v/c Ratio		0.50	0.50		0.00		0.22	
Control Delay		4.3	8.3		0.0		52.9	
Queue Delay		0.0	0.0		0.0		0.0	
Total Delay		4.3	8.3		0.0		52.9	
LOS		A	A		A		D	
Approach Delay		4.3	8.3				52.9	
Approach LOS		A	A				D	
Queue Length 50th (ft)		0	10		0		16	
Queue Length 95th (ft)		432	488		0		42	
Internal Link Dist (ft)		667	1396		149		231	
Turn Bay Length (ft)								
Base Capacity (vph)		3227	3304		453		343	
Starvation Cap Reductn		145	0		0		0	
Spillback Cap Reductn		0	0		0		0	
Storage Cap Reductn		0	0		0		0	
Reduced v/c Ratio		0.53	0.50		0.00		0.07	

Intersection Summary	
Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	13 (12%), Referenced to phase 2:WBT, Start of Green
Natural Cycle:	80
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.50
Intersection Signal Delay:	6.6
Intersection Capacity Utilization	66.7%
Analysis Period (min)	15
Intersection LOS:	A
ICU Level of Service	C

Lanes, Volumes, Timings
 32: Yonkers Avenue & Fox Terrace & Wasylenko Lane





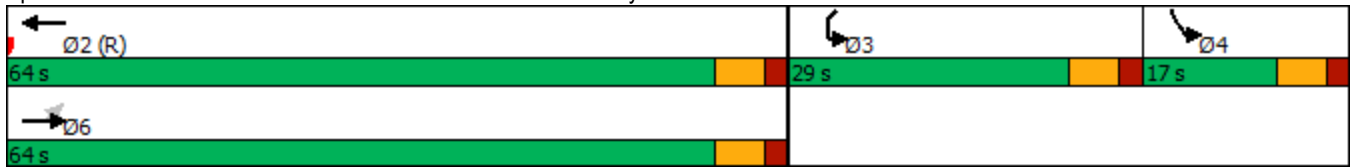










Mitigation Condition
 Weekday PM Peak Hour

Splits and Phases: 32: Yonkers Avenue & Fox Terrace & Wasylenko Lane



Lanes, Volumes, Timings
33: Yonkers Avenue & Midland Avenue West

Mitigation Condition
Weekday PM Peak Hour

						
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	 		 			 
Traffic Volume (vph)	168	453	1115	152	304	1149
Future Volume (vph)	168	453	1115	152	304	1149
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	9	11
Storage Length (ft)	0	0		100	180	
Storage Lanes	2	1		1	1	
Taper Length (ft)	25				25	
Lane Util. Factor	0.97	0.91	0.95	1.00	1.00	0.95
Frt	0.914	0.850		0.850		
Flt Protected	0.979				0.950	
Satd. Flow (prot)	3234	1424	3539	1583	1593	3394
Flt Permitted	0.979				0.080	
Satd. Flow (perm)	3234	1424	3539	1583	134	3394
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)	246	246		71		
Link Speed (mph)	30		30			30
Link Distance (ft)	520		563			1476
Travel Time (s)	11.8		12.8			33.5
Peak Hour Factor	0.92	0.92	0.95	0.95	0.89	0.89
Bus Blockages (#/hr)	0	3	0	0	0	4
Adj. Flow (vph)	183	492	1174	160	342	1291
Shared Lane Traffic (%)		50%				
Lane Group Flow (vph)	429	246	1174	160	342	1291
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	24		12			12
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	1.00	1.02	1.00	1.00	1.14	1.06
Turning Speed (mph)	15	9		9	15	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (ft)	20	20	100	20	20	100
Trailing Detector (ft)	0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0	0
Detector 1 Size(ft)	20	20	6	20	20	6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)			94			94
Detector 2 Size(ft)			6			6
Detector 2 Type			Cl+Ex			Cl+Ex
Detector 2 Channel						
Detector 2 Extend (s)			0.0			0.0
Turn Type	Prot	Prot	NA	Perm	pm+pt	NA

Lanes, Volumes, Timings
33: Yonkers Avenue & Midland Avenue West

Mitigation Condition
Weekday PM Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Protected Phases	3	3	2		1	6
Permitted Phases				2	6	
Detector Phase	3	3	2	2	1	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	38.0	38.0	49.0	49.0	11.0	11.0
Total Split (s)	39.0	39.0	50.0	50.0	21.0	71.0
Total Split (%)	35.5%	35.5%	45.5%	45.5%	19.1%	64.5%
Maximum Green (s)	33.0	33.0	44.0	44.0	15.0	65.0
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag			Lag	Lag	Lead	
Lead-Lag Optimize?			Yes	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Ped	Ped	Ped	Ped	Max	C-Max
Walk Time (s)	7.0	7.0	16.0	16.0		
Flash Dont Walk (s)	25.0	25.0	27.0	27.0		
Pedestrian Calls (#/hr)	0	0	0	0		
Act Effct Green (s)	32.0	32.0	44.0	44.0	66.0	66.0
Actuated g/C Ratio	0.29	0.29	0.40	0.40	0.60	0.60
v/c Ratio	0.38	0.42	0.83	0.24	1.17	0.63
Control Delay	13.8	6.1	29.4	6.6	141.8	14.6
Queue Delay	0.0	0.0	0.2	0.0	0.0	0.8
Total Delay	13.9	6.1	29.6	6.6	141.8	15.4
LOS	B	A	C	A	F	B
Approach Delay	11.1		26.8			41.9
Approach LOS	B		C			D
Queue Length 50th (ft)	50	0	408	15	~233	193
Queue Length 95th (ft)	92	64	495	m37	#431	212
Internal Link Dist (ft)	440		483			1396
Turn Bay Length (ft)				100	180	
Base Capacity (vph)	1142	599	1415	675	292	2036
Starvation Cap Reductn	0	0	20	0	0	0
Spillback Cap Reductn	29	0	0	0	0	409
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.39	0.41	0.84	0.24	1.17	0.79

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 0 (0%), Referenced to phase 6:SBTL, Start of Green
 Natural Cycle: 110
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 1.17
 Intersection Signal Delay: 30.6
 Intersection Capacity Utilization 72.2%

Intersection LOS: C
 ICU Level of Service C

Lanes, Volumes, Timings
 33: Yonkers Avenue & Midland Avenue West

Mitigation Condition
 Weekday PM Peak Hour

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.













m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 33: Yonkers Avenue & Midland Avenue West

↙ Ø1	↑ Ø2	↘ Ø3
21 s	50 s	39 s
↓ Ø6 (R)		
71 s		

Lanes, Volumes, Timings
34: Saw Mill SB Ramps & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑	↗		↑↑							↗
Traffic Volume (vph)	0	1795	434	0	1865	0	0	0	0	0	0	447
Future Volume (vph)	0	1795	434	0	1865	0	0	0	0	0	0	447
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t		0.850										0.865
Fl _t Protected												
Satd. Flow (prot)	0	3539	1615	0	3539	0	0	0	0	0	0	1644
Fl _t Permitted												
Satd. Flow (perm)	0	3539	1615	0	3539	0	0	0	0	0	0	1644
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)												30
Link Speed (mph)		30			30			30				30
Link Distance (ft)		325			399			181				209
Travel Time (s)		7.4			9.1			4.1				4.8
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	0%	2%	0%	0%	2%	0%	0%	0%	0%	0%	0%	0%
Adj. Flow (vph)	0	2017	488	0	1963	0	0	0	0	0	0	486
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	2017	488	0	1963	0	0	0	0	0	0	486
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		2	1		2							1
Detector Template		Thru	Right		Thru							Right
Leading Detector (ft)		100	20		100							20
Trailing Detector (ft)		0	0		0							0
Detector 1 Position(ft)		0	0		0							0
Detector 1 Size(ft)		6	20		6							20
Detector 1 Type		Cl+Ex	Cl+Ex		Cl+Ex							Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0		0.0							0.0
Detector 1 Queue (s)		0.0	0.0		0.0							0.0
Detector 1 Delay (s)		0.0	0.0		0.0							0.0
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type		NA	Perm		NA							Prot
Protected Phases		6			2							1
Permitted Phases			6									
Detector Phase		6	6		2							1
Switch Phase												

Lanes, Volumes, Timings
34: Saw Mill SB Ramps & Yonkers Avenue

Mitigation Condition
Weekday PM Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)		5.0	5.0		5.0							5.0
Minimum Split (s)		20.0	20.0		24.0							11.0
Total Split (s)		110.0	110.0		71.0							39.0
Total Split (%)		100.0%	100.0%		64.5%							35.5%
Maximum Green (s)		108.0	108.0		65.0							33.0
Yellow Time (s)		2.0	2.0		4.0							4.0
All-Red Time (s)		0.0	0.0		2.0							2.0
Lost Time Adjust (s)		0.0	0.0		0.0							0.0
Total Lost Time (s)		2.0	2.0		6.0							6.0
Lead/Lag					Lag							Lead
Lead-Lag Optimize?					Yes							Yes
Vehicle Extension (s)		3.0	3.0		3.0							3.0
Recall Mode		Max	Max		C-Max							Min
Walk Time (s)		7.0	7.0		7.0							
Flash Dont Walk (s)		11.0	11.0		11.0							
Pedestrian Calls (#/hr)		0	0		0							
Act Effct Green (s)		110.0	110.0		65.6							32.4
Actuated g/C Ratio		1.00	1.00		0.60							0.29
v/c Ratio		0.57	0.30		0.93							0.96
Control Delay		0.3	0.2		16.5							68.3
Queue Delay		0.0	0.0		45.5							11.2
Total Delay		0.3	0.2		62.0							79.5
LOS		A	A		E							E
Approach Delay		0.3			62.0						79.5	
Approach LOS		A			E						E	
Queue Length 50th (ft)		0	0		300							318
Queue Length 95th (ft)		m0	m0		m311							#527
Internal Link Dist (ft)		245			319			101			129	
Turn Bay Length (ft)												
Base Capacity (vph)		3539	1615		2110							514
Starvation Cap Reductn		0	0		110							0
Spillback Cap Reductn		165	0		566							30
Storage Cap Reductn		0	0		0							0
Reduced v/c Ratio		0.60	0.30		1.27							1.00

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 84 (76%), Referenced to phase 2:WBT, Start of Green
 Natural Cycle: 90
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.96
 Intersection Signal Delay: 32.5
 Intersection LOS: C
 Intersection Capacity Utilization 89.2%
 ICU Level of Service E
 Analysis Period (min) 15
 # 95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.
 m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 34: Saw Mill SB Ramps & Yonkers Avenue

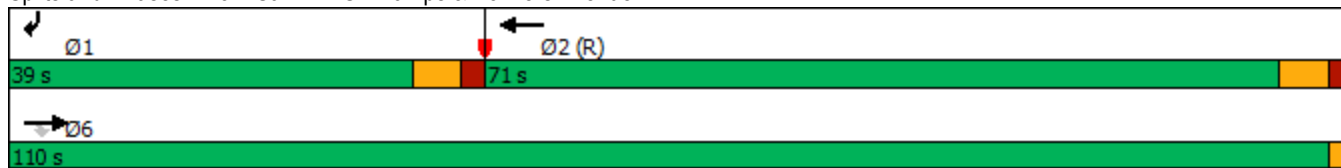


Lanes, Volumes, Timings

Mitigation Condition

35: Yonkers Avenue & Midland Avenue East & Cross County EB On-Ramp

Weekday PM Peak Hour



Lane Group	EBL2	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBL	NBT	NBR
Lane Configurations												
Traffic Volume (vph)	46	219	24	59	5	14	4	49	27	55	999	12
Future Volume (vph)	46	219	24	59	5	14	4	49	27	55	999	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	11	12	12	13	13	13	13	12	11	13	13
Storage Length (ft)		0		0	0		0			100		0
Storage Lanes		1		0	0		0			1		0
Taper Length (ft)		25			25					25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	0.95	0.95
Frt			0.893			0.900					0.998	
Flt Protected		0.950				0.997				0.950		
Satd. Flow (prot)	0	1711	1663	0	0	1727	0	0	0	1711	3650	0
Flt Permitted		0.755				0.987				0.082		
Satd. Flow (perm)	0	1359	1663	0	0	1710	0	0	0	148	3650	0
Right Turn on Red				Yes				Yes				Yes
Satd. Flow (RTOR)			64			53					2	
Link Speed (mph)			30			30					30	
Link Distance (ft)			264			382					327	
Travel Time (s)			6.0			8.7					7.4	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.95	0.95	0.95	0.95
Adj. Flow (vph)	50	238	26	64	5	15	4	53	28	58	1052	13
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	288	90	0	0	77	0	0	0	86	1065	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Left	Right	Left	Left	Right	Right	Left	Left	Left	Right
Median Width(ft)			11			0					12	
Link Offset(ft)			0			0					0	
Crosswalk Width(ft)			16			16					16	
Two way Left Turn Lane												
Headway Factor	1.00	1.04	1.00	1.00	0.96	0.96	0.96	0.96	1.00	1.04	0.96	0.96
Turning Speed (mph)	15	15		9	15		9	9	15	15		9
Number of Detectors	1	1	2		1	2			1	1	2	
Detector Template	Left	Left	Thru		Left	Thru			Left	Left	Thru	
Leading Detector (ft)	20	20	100		20	100			20	20	100	
Trailing Detector (ft)	0	0	0		0	0			0	0	0	
Detector 1 Position(ft)	0	0	0		0	0			0	0	0	
Detector 1 Size(ft)	20	20	6		20	6			20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0			0.0	0.0	0.0	
Detector 2 Position(ft)			94			94					94	
Detector 2 Size(ft)			6			6					6	
Detector 2 Type			Cl+Ex			Cl+Ex					Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)			0.0			0.0					0.0	
Turn Type		Perm	NA		Perm	NA				pm+pt	NA	
Protected Phases			3			3				1	6	




Lane Group	SBL	SBT	SBR	SBR2
Lane Configurations	↙	↑↑		
Traffic Volume (vph)	41	833	201	242
Future Volume (vph)	41	833	201	242
Ideal Flow (vphpl)	1900	1900	1900	1900
Lane Width (ft)	12	12	12	16
Storage Length (ft)	150		210	
Storage Lanes	1		0	
Taper Length (ft)	25			
Lane Util. Factor	1.00	0.95	0.95	0.95
Fr _t		0.948		
Fl _t Protected	0.950			
Satd. Flow (prot)	1770	3355	0	0
Fl _t Permitted	0.269			
Satd. Flow (perm)	501	3355	0	0
Right Turn on Red				Yes
Satd. Flow (RTOR)		30		
Link Speed (mph)		30		
Link Distance (ft)		563		
Travel Time (s)		12.8		
Peak Hour Factor	0.89	0.89	0.89	0.89
Adj. Flow (vph)	46	936	226	272
Shared Lane Traffic (%)				
Lane Group Flow (vph)	46	1434	0	0
Enter Blocked Intersection	No	No	No	No
Lane Alignment	Left	Left	Right	Right
Median Width(ft)		12		
Link Offset(ft)		0		
Crosswalk Width(ft)		16		
Two way Left Turn Lane				
Headway Factor	1.00	1.00	1.00	0.85
Turning Speed (mph)	15		9	9
Number of Detectors	1	2		
Detector Template	Left	Thru		
Leading Detector (ft)	20	100		
Trailing Detector (ft)	0	0		
Detector 1 Position(ft)	0	0		
Detector 1 Size(ft)	20	6		
Detector 1 Type	Cl+Ex	Cl+Ex		
Detector 1 Channel				
Detector 1 Extend (s)	0.0	0.0		
Detector 1 Queue (s)	0.0	0.0		
Detector 1 Delay (s)	0.0	0.0		
Detector 2 Position(ft)		94		
Detector 2 Size(ft)		6		
Detector 2 Type		Cl+Ex		
Detector 2 Channel				
Detector 2 Extend (s)		0.0		
Turn Type	Perm	NA		
Protected Phases		2		

Lanes, Volumes, Timings

Mitigation Condition

35: Yonkers Avenue & Midland Avenue East & Cross County EB On-Ramp


Weekday PM Peak Hour



Lane Group	EBL2	EBL	EBT	EBR	WBL	WBT	WBR	WBR2	NBL2	NBL	NBT	NBR
Permitted Phases		3			3					6		
Detector Phase		3	3		3	3				1	6	
Switch Phase												
Minimum Initial (s)		5.0	5.0		5.0	5.0				5.0	5.0	
Minimum Split (s)		39.0	39.0		39.0	39.0				11.0	69.0	
Total Split (s)		40.0	40.0		40.0	40.0				21.0	70.0	
Total Split (%)		36.4%	36.4%		36.4%	36.4%				19.1%	63.6%	
Maximum Green (s)		34.0	34.0		34.0	34.0				15.0	64.0	
Yellow Time (s)		4.0	4.0		4.0	4.0				4.0	4.0	
All-Red Time (s)		2.0	2.0		2.0	2.0				2.0	2.0	
Lost Time Adjust (s)		0.0	0.0			0.0				0.0	0.0	
Total Lost Time (s)		6.0	6.0			6.0				6.0	6.0	
Lead/Lag										Lead		
Lead-Lag Optimize?										Yes		
Vehicle Extension (s)		3.0	3.0		3.0	3.0				3.0	3.0	
Recall Mode		Ped	Ped		Ped	Ped				Max	C-Max	
Walk Time (s)		5.0	5.0		5.0	5.0					38.0	
Flash Dont Walk (s)		28.0	28.0		28.0	28.0					25.0	
Pedestrian Calls (#/hr)		0	0		0	0					0	
Act Effct Green (s)		33.2	33.2			33.2				64.8	64.8	
Actuated g/C Ratio		0.30	0.30			0.30				0.59	0.59	
v/c Ratio		0.70	0.16			0.14				0.28	0.50	
Control Delay		44.6	11.5			12.2				12.7	14.1	
Queue Delay		0.0	0.0			0.0				0.0	0.1	
Total Delay		44.6	11.5			12.2				12.7	14.2	
LOS		D	B			B				B	B	
Approach Delay			36.7			12.2					14.1	
Approach LOS			D			B					B	
Queue Length 50th (ft)		180	13			12				25	214	
Queue Length 95th (ft)		279	50			47				51	272	
Internal Link Dist (ft)			184			302					247	
Turn Bay Length (ft)										100		
Base Capacity (vph)		420	558			565				311	2150	
Starvation Cap Reductn		0	0			0				0	0	
Spillback Cap Reductn		0	0			1				0	136	
Storage Cap Reductn		0	0			0				0	0	
Reduced v/c Ratio		0.69	0.16			0.14				0.28	0.53	

Intersection Summary


Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	0 (0%), Referenced to phase 6:NBTL, Start of Green
Natural Cycle:	110
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	1.08
Intersection Signal Delay:	42.9
Intersection LOS:	D
Intersection Capacity Utilization:	78.1%
ICU Level of Service:	D
Analysis Period (min):	15



Lane Group	SBL	SBT	SBR	SBR2
Permitted Phases	2			
Detector Phase	2	2		
Switch Phase				
Minimum Initial (s)	5.0	5.0		
Minimum Split (s)	48.0	48.0		
Total Split (s)	49.0	49.0		
Total Split (%)	44.5%	44.5%		
Maximum Green (s)	43.0	43.0		
Yellow Time (s)	4.0	4.0		
All-Red Time (s)	2.0	2.0		
Lost Time Adjust (s)	0.0	0.0		
Total Lost Time (s)	6.0	6.0		
Lead/Lag	Lag	Lag		
Lead-Lag Optimize?	Yes	Yes		
Vehicle Extension (s)	3.0	3.0		
Recall Mode	Ped	Ped		
Walk Time (s)	20.0	20.0		
Flash Dont Walk (s)	22.0	22.0		
Pedestrian Calls (#/hr)	0	0		
Act Effct Green (s)	43.0	43.0		
Actuated g/C Ratio	0.39	0.39		
v/c Ratio	0.24	1.08		
Control Delay	17.7	70.1		
Queue Delay	0.0	0.0		
Total Delay	17.7	70.1		
LOS	B	E		
Approach Delay		68.5		
Approach LOS		E		
Queue Length 50th (ft)	12	~592		
Queue Length 95th (ft)	m29	#702		
Internal Link Dist (ft)		483		
Turn Bay Length (ft)	150			
Base Capacity (vph)	195	1329		
Starvation Cap Reductn	0	0		
Spillback Cap Reductn	0	0		
Storage Cap Reductn	0	0		
Reduced v/c Ratio	0.24	1.08		
Intersection Summary				

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 35: Yonkers Avenue & Midland Avenue East & Cross County EB On-Ramp

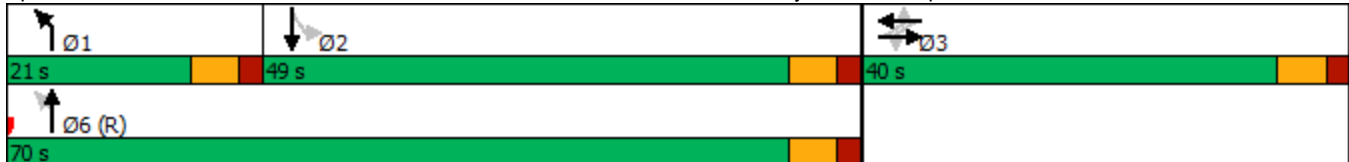

Lanes, Volumes, Timings
36: Hawthorne Avenue & Prospect Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔		↔	↔							
Traffic Volume (vph)	53	673	63	178	462	252	0	0	0	0	0	0
Future Volume (vph)	53	673	63	178	462	252	0	0	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	16	16	16	16	16	16	16	16	16
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.988			0.947							
Flt Protected		0.997		0.950								
Satd. Flow (prot)	0	3951	0	2006	1999	0	0	0	0	0	0	0
Flt Permitted		0.841		0.324								
Satd. Flow (perm)	0	3333	0	684	1999	0	0	0	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		17			53							
Link Speed (mph)		30			30			30				30
Link Distance (ft)		256			511			286				516
Travel Time (s)		5.8			11.6			6.5				11.7
Peak Hour Factor	0.90	0.90	0.90	0.81	0.81	0.81	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	59	748	70	220	570	311	0	0	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	877	0	220	881	0	0	0	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			24			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2							
Detector Template	Left	Thru		Left	Thru							
Leading Detector (ft)	20	100		20	100							
Trailing Detector (ft)	0	0		0	0							
Detector 1 Position(ft)	0	0		0	0							
Detector 1 Size(ft)	20	6		20	6							
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex							
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0							
Detector 1 Queue (s)	0.0	0.0		0.0	0.0							
Detector 1 Delay (s)	0.0	0.0		0.0	0.0							
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type	Perm	NA		Perm	NA							
Protected Phases		4			8							
Permitted Phases	4			8								
Detector Phase	4	4		8	8							
Switch Phase												

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	

Lanes, Volumes, Timings
36: Hawthorne Avenue & Prospect Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)	5.0	5.0		5.0	5.0							
Minimum Split (s)	10.0	10.0		10.0	10.0							
Total Split (s)	58.0	58.0		58.0	58.0							
Total Split (%)	64.4%	64.4%		64.4%	64.4%							
Maximum Green (s)	53.0	53.0		53.0	53.0							
Yellow Time (s)	3.0	3.0		3.0	3.0							
All-Red Time (s)	2.0	2.0		2.0	2.0							
Lost Time Adjust (s)		0.0		0.0	0.0							
Total Lost Time (s)		5.0		5.0	5.0							
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0							
Recall Mode	Max	Max		Max	Max							
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		73.8		73.8	73.8							
Actuated g/C Ratio		0.93		0.93	0.93							
v/c Ratio		0.28		0.35	0.47							
Control Delay		2.6		5.4	4.3							
Queue Delay		0.0		0.0	0.0							
Total Delay		2.7		5.4	4.3							
LOS		A		A	A							
Approach Delay		2.7			4.5							
Approach LOS		A			A							
Queue Length 50th (ft)		0		0	0							
Queue Length 95th (ft)		169		111	361							
Internal Link Dist (ft)		176			431			206			436	
Turn Bay Length (ft)												
Base Capacity (vph)		3099		636	1862							
Starvation Cap Reductn		375		0	106							
Spillback Cap Reductn		0		0	0							
Storage Cap Reductn		0		0	0							
Reduced v/c Ratio		0.32		0.35	0.50							

Intersection Summary

Area Type: Other
 Cycle Length: 90
 Actuated Cycle Length: 79.4
 Natural Cycle: 75
 Control Type: Semi Act-Uncoord
 Maximum v/c Ratio: 0.47
 Intersection Signal Delay: 3.7
 Intersection Capacity Utilization 70.2%
 Analysis Period (min) 15
 Intersection LOS: A
 ICU Level of Service C

Splits and Phases: 36: Hawthorne Avenue & Prospect Street



Lane Group	Ø9
Minimum Initial (s)	5.0
Minimum Split (s)	32.0
Total Split (s)	32.0
Total Split (%)	36%
Maximum Green (s)	27.0
Yellow Time (s)	3.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	7.0
Flash Dont Walk (s)	20.0
Pedestrian Calls (#/hr)	5
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
Intersection Summary	

Lanes, Volumes, Timings
37: Locust Hill Avenue & Ashburton Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	→			←	↘	↙
Traffic Volume (vph)	672	52	82	545	40	48
Future Volume (vph)	672	52	82	545	40	48
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	14	14	13	13
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.990				0.926	
Flt Protected			0.994		0.978	
Satd. Flow (prot)	1560	0	0	1975	1525	0
Flt Permitted			0.994		0.978	
Satd. Flow (perm)	1560	0	0	1975	1525	0
Link Speed (mph)	30		30		30	
Link Distance (ft)	208		436		1494	
Travel Time (s)	4.7		9.9		34.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Parking (#/hr)	5				5	
Adj. Flow (vph)	730	57	89	592	43	52
Shared Lane Traffic (%)						
Lane Group Flow (vph)	787	0	0	681	95	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0		0		13	
Link Offset(ft)	0		0		0	
Crosswalk Width(ft)	16		16		16	
Two way Left Turn Lane						
Headway Factor	1.24	1.04	0.92	0.92	1.14	0.96
Turning Speed (mph)	9		15		15	
Sign Control	Free		Free		Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	86.9%
Analysis Period (min)	15
	ICU Level of Service E

Lanes, Volumes, Timings
38: Palisade Avenue & Lafayette Place/Walsh Road

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Volume (vph)	15	5	15	59	0	28	0	278	38	27	381	0
Future Volume (vph)	15	5	15	59	0	28	0	278	38	27	381	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	15	15	15	13	13	13	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.942			0.957			0.984				
Flt Protected		0.979			0.967						0.997	
Satd. Flow (prot)	0	1653	0	0	1781	0	0	1803	0	0	1827	0
Flt Permitted		0.901			0.818						0.962	
Satd. Flow (perm)	0	1522	0	0	1507	0	0	1803	0	0	1763	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		16			45			17				30
Link Speed (mph)		30			30			30				30
Link Distance (ft)		226			227			1224				549
Travel Time (s)		5.1			5.2			27.8				12.5
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	2	0	0	2	0
Parking (#/hr)		5						5			5	
Adj. Flow (vph)	16	5	16	64	0	30	0	302	41	29	414	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	37	0	0	94	0	0	343	0	0	443	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.88	1.05	0.88	0.96	0.96	0.96	0.85	1.02	0.85	0.85	1.02	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Turn Type	Perm	NA		Perm	NA			NA		Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8						6		
Minimum Split (s)	10.0	10.0		10.0	10.0			10.0		10.0	10.0	
Total Split (s)	24.0	24.0		24.0	24.0			24.0		24.0	24.0	
Total Split (%)	50.0%	50.0%		50.0%	50.0%			50.0%		50.0%	50.0%	
Maximum Green (s)	19.0	19.0		19.0	19.0			19.0		19.0	19.0	
Yellow Time (s)	3.0	3.0		3.0	3.0			3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0			2.0		2.0	2.0	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		5.0			5.0			5.0			5.0	
Lead/Lag												
Lead-Lag Optimize?												
Act Effct Green (s)		19.0			19.0			19.0			19.0	
Actuated g/C Ratio		0.40			0.40			0.40			0.40	
v/c Ratio		0.06			0.15			0.47			0.64	
Control Delay		6.9			6.5			12.9			16.8	
Queue Delay		0.0			0.0			0.0			0.0	
Total Delay		6.9			6.5			12.9			16.8	

Lanes, Volumes, Timings
 38: Palisade Avenue & Lafayette Place/Walsh Road

Mitigation Condition
 Weekday PM Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
LOS		A			A			B			B	
Approach Delay		6.9			6.5			12.9			16.8	
Approach LOS		A			A			B			B	
Queue Length 50th (ft)		3			8			64			95	
Queue Length 95th (ft)		16			29			120			173	
Internal Link Dist (ft)		146			147			1144			469	
Turn Bay Length (ft)												
Base Capacity (vph)		612			623			723			697	
Starvation Cap Reductn		0			0			0			0	
Spillback Cap Reductn		0			0			0			0	
Storage Cap Reductn		0			0			0			0	
Reduced v/c Ratio		0.06			0.15			0.47			0.64	

Intersection Summary







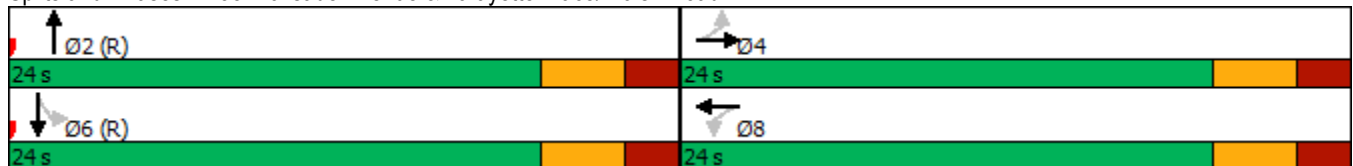







Area Type:	Other
Cycle Length:	48
Actuated Cycle Length:	48
Offset:	0 (0%), Referenced to phase 2:NBT and 6:SBTL, Start of Green
Natural Cycle:	40
Control Type:	Pretimed
Maximum v/c Ratio:	0.64
Intersection Signal Delay:	13.9
Intersection LOS:	B
Intersection Capacity Utilization	58.5%
ICU Level of Service	B
Analysis Period (min)	15

Splits and Phases: 38: Palisade Avenue & Lafayette Place/Walsh Road



Lanes, Volumes, Timings
49: Palisade Avenue & Main Street/New Main Street

Mitigation Condition
Weekday PM Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	0	460	158	21	473	0	0	0	0
Future Volume (vph)	0	0	0	0	460	158	21	473	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	16	16	16	16	16	16	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.966							
Flt Protected								0.998				
Satd. Flow (prot)	0	0	0	0	2039	0	0	1879	0	0	0	0
Flt Permitted								0.998				
Satd. Flow (perm)	0	0	0	0	2039	0	0	1879	0	0	0	0
Right Turn on Red			Yes			No			No			Yes
Satd. Flow (RTOR)												
Link Speed (mph)		30			30			30				30
Link Distance (ft)		81			430			212				254
Travel Time (s)		1.8			9.8			4.8				5.8
Peak Hour Factor	0.92	0.92	0.92	0.83	0.83	0.83	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	27	0	0	0	0
Adj. Flow (vph)	0	0	0	0	554	190	23	514	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	744	0	0	537	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.99	0.85	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors					2		1	2				
Detector Template					Thru		Left	Thru				
Leading Detector (ft)					100		20	100				
Trailing Detector (ft)					0		0	0				
Detector 1 Position(ft)					0		0	0				
Detector 1 Size(ft)					6		20	6				
Detector 1 Type					Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)					0.0		0.0	0.0				
Detector 1 Queue (s)					0.0		0.0	0.0				
Detector 1 Delay (s)					0.0		0.0	0.0				
Detector 2 Position(ft)					94			94				
Detector 2 Size(ft)					6			6				
Detector 2 Type					Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0				
Turn Type					NA		Perm	NA				
Protected Phases					1			3				
Permitted Phases							3					
Detector Phase					1		3	3				

Lane Group	Ø2	Ø6
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Ideal Flow (vphpl)		
Lane Width (ft)		
Lane Util. Factor		
Frt		
Flt Protected		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Right Turn on Red		
Satd. Flow (RTOR)		
Link Speed (mph)		
Link Distance (ft)		
Travel Time (s)		
Peak Hour Factor		
Bus Blockages (#/hr)		
Adj. Flow (vph)		
Shared Lane Traffic (%)		
Lane Group Flow (vph)		
Enter Blocked Intersection		
Lane Alignment		
Median Width(ft)		
Link Offset(ft)		
Crosswalk Width(ft)		
Two way Left Turn Lane		
Headway Factor		
Turning Speed (mph)		
Number of Detectors		
Detector Template		
Leading Detector (ft)		
Trailing Detector (ft)		
Detector 1 Position(ft)		
Detector 1 Size(ft)		
Detector 1 Type		
Detector 1 Channel		
Detector 1 Extend (s)		
Detector 1 Queue (s)		
Detector 1 Delay (s)		
Detector 2 Position(ft)		
Detector 2 Size(ft)		
Detector 2 Type		
Detector 2 Channel		
Detector 2 Extend (s)		
Turn Type		
Protected Phases	2	6
Permitted Phases		
Detector Phase		


Lanes, Volumes, Timings
49: Palisade Avenue & Main Street/New Main Street

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Switch Phase												
Minimum Initial (s)					5.0		5.0	5.0				
Minimum Split (s)					50.0		45.0	45.0				
Total Split (s)					50.0		45.0	45.0				
Total Split (%)					47.6%		42.9%	42.9%				
Maximum Green (s)					45.0		40.0	40.0				
Yellow Time (s)					3.0		3.0	3.0				
All-Red Time (s)					2.0		2.0	2.0				
Lost Time Adjust (s)					0.0			0.0				
Total Lost Time (s)					5.0			5.0				
Lead/Lag					Lead							
Lead-Lag Optimize?					Yes							
Vehicle Extension (s)					3.0		3.0	3.0				
Recall Mode					Ped		Ped	Ped				
Walk Time (s)					35.0		30.0	30.0				
Flash Dont Walk (s)					10.0		10.0	10.0				
Pedestrian Calls (#/hr)					0		0	0				
Act Effct Green (s)					45.0			40.0				
Actuated g/C Ratio					0.43			0.38				
v/c Ratio					0.85			0.75				
Control Delay					38.2			36.1				
Queue Delay					0.0			0.0				
Total Delay					38.2			36.1				
LOS					D			D				
Approach Delay					38.2			36.1				
Approach LOS					D			D				
Queue Length 50th (ft)					439			308				
Queue Length 95th (ft)					532			441				
Internal Link Dist (ft)			1		350			132			174	
Turn Bay Length (ft)												
Base Capacity (vph)					873			715				
Starvation Cap Reductn					0			0				
Spillback Cap Reductn					0			0				
Storage Cap Reductn					0			0				
Reduced v/c Ratio					0.85			0.75				
Intersection Summary												
Area Type:	Other											
Cycle Length:	105											
Actuated Cycle Length:	105											
Natural Cycle:	105											
Control Type:	Semi Act-Uncoord											
Maximum v/c Ratio:	0.85											
Intersection Signal Delay:	37.3						Intersection LOS: D					
Intersection Capacity Utilization	68.2%						ICU Level of Service C					
Analysis Period (min)	15											

Splits and Phases: 49: Palisade Avenue & Main Street/New Main Street

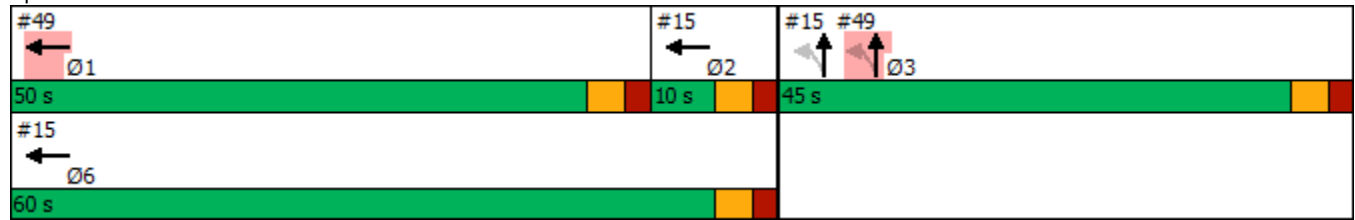

Lane Group	Ø2	Ø6
Switch Phase		
Minimum Initial (s)	2.0	5.0
Minimum Split (s)	7.0	10.0
Total Split (s)	10.0	60.0
Total Split (%)	10%	57%
Maximum Green (s)	5.0	55.0
Yellow Time (s)	3.0	3.0
All-Red Time (s)	2.0	2.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lag	
Lead-Lag Optimize?	Yes	
Vehicle Extension (s)	3.0	3.0
Recall Mode	Max	Max
Walk Time (s)		
Flash Dont Walk (s)		
Pedestrian Calls (#/hr)		
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (ft)		
Queue Length 95th (ft)		
Internal Link Dist (ft)		
Turn Bay Length (ft)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
50: Locust Hill Avenue & Overlook Terrace

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	27	100	98	103	81	26
Future Volume (vph)	27	100	98	103	81	26
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.893				0.967	
Flt Protected	0.990			0.976		
Satd. Flow (prot)	1647	0	0	1818	1801	0
Flt Permitted	0.990			0.976		
Satd. Flow (perm)	1647	0	0	1818	1801	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	126			499	1494	
Travel Time (s)	2.9			11.3	34.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	29	109	107	112	88	28
Shared Lane Traffic (%)						
Lane Group Flow (vph)	138	0	0	219	116	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	31.8%
Analysis Period (min)	15
	ICU Level of Service A

Lanes, Volumes, Timings
59: Buena Vista Avenue & South Driveway

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	14	69	100	419	637	20
Future Volume (vph)	14	69	100	419	637	20
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.887				0.996	
Flt Protected	0.992			0.990		
Satd. Flow (prot)	1639	0	0	1844	1855	0
Flt Permitted	0.992			0.990		
Satd. Flow (perm)	1639	0	0	1844	1855	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	172			284	235	
Travel Time (s)	3.9			6.5	5.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	15	75	109	455	692	22
Shared Lane Traffic (%)						
Lane Group Flow (vph)	90	0	0	564	714	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			9	9	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	77.4%
Analysis Period (min)	15
	ICU Level of Service D

Lanes, Volumes, Timings
130: Centre Street & Palisade Avenue

Mitigation Condition
Weekday PM Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	529	21	0	0	0	6
Future Volume (vph)	529	21	0	0	0	6
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Fr _t	0.995			0.865		
Flt Protected						
Satd. Flow (prot)	1853	0	0	0	0	1611
Flt Permitted						
Satd. Flow (perm)	1853	0	0	0	0	1611
Link Speed (mph)	30			30		
Link Distance (ft)	208			327		272
Travel Time (s)	4.7			7.4		6.2
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	575	23	0	0	0	7
Shared Lane Traffic (%)						
Lane Group Flow (vph)	598	0	0	0	0	7
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0		
Link Offset(ft)	0			0		
Crosswalk Width(ft)	16			16		16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	9		15		9	
Sign Control	Free			Free		Stop

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	39.1% ICU Level of Service A
Analysis Period (min)	15

HCM 6th TWSC
4: Hawthorne Avenue & Main Street

Mitigation Condition
Weekday PM Peak Hour

Intersection												
Int Delay, s/veh	2.6											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↻			↻		↻				↻	
Traffic Vol, veh/h	0	204	82	0	217	0	93	0	0	14	0	7
Future Vol, veh/h	0	204	82	0	217	0	93	0	0	14	0	7
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	0	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	86	86	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	8	8	6	6	2	2	2	2	2	2	2
Mvmt Flow	0	237	95	0	236	0	101	0	0	15	0	8

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	-	0	0	332	0	0	525	-	-	521	568	236
Stage 1	-	-	-	-	-	-	285	-	-	236	236	-
Stage 2	-	-	-	-	-	-	240	-	-	285	332	-
Critical Hdwy	-	-	-	4.16	-	-	7.12	-	-	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	-	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	-	-	6.12	5.52	-
Follow-up Hdwy	-	-	-	2.254	-	-	3.518	-	-	3.518	4.018	3.318
Pot Cap-1 Maneuver	0	-	-	1205	-	0	463	0	0	466	432	803
Stage 1	0	-	-	-	-	0	722	0	0	767	710	-
Stage 2	0	-	-	-	-	0	763	0	0	722	644	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	1205	-	-	459	-	-	466	432	803
Mov Cap-2 Maneuver	-	-	-	-	-	-	459	-	-	466	432	-
Stage 1	-	-	-	-	-	-	722	-	-	767	710	-
Stage 2	-	-	-	-	-	-	756	-	-	722	644	-

Approach	EB			WB			NB			SB		
HCM Control Delay, s	0			0			15			11.9		
HCM LOS							C			B		

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	459	-	-	1205	-	542
HCM Lane V/C Ratio	0.22	-	-	-	-	0.042
HCM Control Delay (s)	15	-	-	0	-	11.9
HCM Lane LOS	C	-	-	A	-	B
HCM 95th %tile Q(veh)	0.8	-	-	0	-	0.1

Intersection												
Int Delay, s/veh	8.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	4	183	0	0	0	0	49	89	87	49	0	33
Future Vol, veh/h	4	183	0	0	0	0	49	89	87	49	0	33
Conflicting Peds, #/hr	0	0	33	0	0	35	0	0	16	0	0	38
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	16979	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	85	85	85	92	92	92	83	83	83	90	90	90
Heavy Vehicles, %	10	10	10	2	2	2	7	7	7	2	2	2
Mvmt Flow	5	215	0	0	0	0	59	107	105	54	0	37

Major/Minor	Major1			Minor1			Minor2		
Conflicting Flow All	0	0	-	282	225	231	347	225	38
Stage 1	-	-	-	225	225	-	0	0	-
Stage 2	-	-	-	57	0	-	347	225	-
Critical Hdwy	4.2	-	-	7.17	6.57	6.27	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	6.17	5.57	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-
Follow-up Hdwy	2.29	-	-	3.563	4.063	3.363	3.518	4.018	3.318
Pot Cap-1 Maneuver	-	-	0	660	665	796	607	674	1034
Stage 1	-	-	0	766	708	-	-	-	-
Stage 2	-	-	0	-	-	-	669	718	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	614	665	796	462	674	1000
Mov Cap-2 Maneuver	-	-	-	614	665	-	462	674	-
Stage 1	-	-	-	766	708	-	-	-	-
Stage 2	-	-	-	-	-	-	493	718	-

Approach	EB	NB	SB
HCM Control Delay, s		13.4	12.2
HCM LOS		B	B

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	SBLn1
Capacity (veh/h)	697	-	-	590
HCM Lane V/C Ratio	0.389	-	-	0.154
HCM Control Delay (s)	13.4	-	-	12.2
HCM Lane LOS	B	-	-	B
HCM 95th %tile Q(veh)	1.8	-	-	0.5

Intersection						
Int Delay, s/veh	6.1					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	↘			↗		
Traffic Vol, veh/h	240	0	0	395	0	0
Future Vol, veh/h	240	0	0	395	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	16979	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	261	0	0	429	0	0

Major/Minor	Minor2	Major1	
Conflicting Flow All	429	-	0
Stage 1	0	-	-
Stage 2	429	-	-
Critical Hdwy	6.42	-	-
Critical Hdwy Stg 1	-	-	-
Critical Hdwy Stg 2	5.42	-	-
Follow-up Hdwy	3.518	-	-
Pot Cap-1 Maneuver	583	0	0
Stage 1	-	0	0
Stage 2	657	0	0
Platoon blocked, %			-
Mov Cap-1 Maneuver	583	-	-
Mov Cap-2 Maneuver	583	-	-
Stage 1	-	-	-
Stage 2	657	-	-

Approach	EB	NB
HCM Control Delay, s	16.1	0
HCM LOS	C	

Minor Lane/Major Mvmt	NBT	EBLn1
Capacity (veh/h)	-	583
HCM Lane V/C Ratio	-	0.447
HCM Control Delay (s)	-	16.1
HCM Lane LOS	-	C
HCM 95th %tile Q(veh)	-	2.3

Intersection						
Int Delay, s/veh	3.4					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Vol, veh/h	672	52	82	545	40	48
Future Vol, veh/h	672	52	82	545	40	48
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	730	57	89	592	43	52

Major/Minor	Major1	Major2	Minor1	Minor2	Minor3
Conflicting Flow All	0	0	787	0	1529 759
Stage 1	-	-	-	-	759 -
Stage 2	-	-	-	-	770 -
Critical Hdwy	-	-	4.12	-	6.42 6.22
Critical Hdwy Stg 1	-	-	-	-	5.42 -
Critical Hdwy Stg 2	-	-	-	-	5.42 -
Follow-up Hdwy	-	-	2.218	-	3.518 3.318
Pot Cap-1 Maneuver	-	-	832	-	129 406
Stage 1	-	-	-	-	462 -
Stage 2	-	-	-	-	457 -
Platoon blocked, %	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	832	-	108 406
Mov Cap-2 Maneuver	-	-	-	-	108 -
Stage 1	-	-	-	-	462 -
Stage 2	-	-	-	-	384 -

Approach	EB	WB	NB
HCM Control Delay, s	0	1.3	45.7
HCM LOS			E

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT
Capacity (veh/h)	180	-	-	832	-
HCM Lane V/C Ratio	0.531	-	-	0.107	-
HCM Control Delay (s)	45.7	-	-	9.8	0
HCM Lane LOS	E	-	-	A	A
HCM 95th %tile Q(veh)	2.7	-	-	0.4	-

Intersection						
Int Delay, s/veh	4.7					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	T			T		T
Traffic Vol, veh/h	27	100	98	103	81	26
Future Vol, veh/h	27	100	98	103	81	26
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	29	109	107	112	88	28

Major/Minor	Minor2	Major1		Major2	
Conflicting Flow All	428	102	116	0	0
Stage 1	102	-	-	-	-
Stage 2	326	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-
Pot Cap-1 Maneuver	584	953	1473	-	-
Stage 1	922	-	-	-	-
Stage 2	731	-	-	-	-
Platoon blocked, %				-	-
Mov Cap-1 Maneuver	539	953	1473	-	-
Mov Cap-2 Maneuver	539	-	-	-	-
Stage 1	851	-	-	-	-
Stage 2	731	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	10.3	3.7	0
HCM LOS	B		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1473	-	819	-	-
HCM Lane V/C Ratio	0.072	-	0.169	-	-
HCM Control Delay (s)	7.6	0	10.3	-	-
HCM Lane LOS	A	A	B	-	-
HCM 95th %tile Q(veh)	0.2	-	0.6	-	-

Intersection						
Int Delay, s/veh	2.2					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	T			T		
Traffic Vol, veh/h	14	69	100	419	637	20
Future Vol, veh/h	14	69	100	419	637	20
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	15	75	109	455	692	22

Major/Minor	Minor2	Major1	Major2			
Conflicting Flow All	1376	703	714	0	-	0
Stage 1	703	-	-	-	-	-
Stage 2	673	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	160	438	886	-	-	-
Stage 1	491	-	-	-	-	-
Stage 2	507	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	134	438	886	-	-	-
Mov Cap-2 Maneuver	134	-	-	-	-	-
Stage 1	410	-	-	-	-	-
Stage 2	507	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	20.8	1.9	0
HCM LOS	C		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	886	-	317	-	-
HCM Lane V/C Ratio	0.123	-	0.285	-	-
HCM Control Delay (s)	9.6	0	20.8	-	-
HCM Lane LOS	A	A	C	-	-
HCM 95th %tile Q(veh)	0.4	-	1.1	-	-

Intersection						
Int Delay, s/veh	0.1					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↔				↔	
Traffic Vol, veh/h	529	21	0	0	0	6
Future Vol, veh/h	529	21	0	0	0	6
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	-	0
Veh in Median Storage, #	0	-	-	16983	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	575	23	0	0	0	7

Major/Minor	Major1		Minor1	
Conflicting Flow All	0	0	-	587
Stage 1	-	-	-	-
Stage 2	-	-	-	-
Critical Hdwy	-	-	-	6.22
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-
Follow-up Hdwy	-	-	-	3.318
Pot Cap-1 Maneuver	-	-	0	510
Stage 1	-	-	0	-
Stage 2	-	-	0	-
Platoon blocked, %	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	510
Mov Cap-2 Maneuver	-	-	-	-
Stage 1	-	-	-	-
Stage 2	-	-	-	-

Approach	EB	NB
HCM Control Delay, s	0	12.2
HCM LOS		B

Minor Lane/Major Mvmt	NBLn1	EBT	EBR
Capacity (veh/h)	510	-	-
HCM Lane V/C Ratio	0.013	-	-
HCM Control Delay (s)	12.2	-	-
HCM Lane LOS	B	-	-
HCM 95th %tile Q(veh)	0	-	-

Intersection	
Intersection Delay, s/veh	31
Intersection LOS	D

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	↘	↗		↕		
Traffic Vol, veh/h	389	357	0	500	0	0
Future Vol, veh/h	389	357	0	500	0	0
Peak Hour Factor	0.97	0.97	0.87	0.87	0.92	0.92
Heavy Vehicles, %	11	2	11	4	2	2
Mvmt Flow	401	368	0	575	0	0
Number of Lanes	1	1	0	1	0	0

Approach	EB	NB
Opposing Approach		
Opposing Lanes	0	0
Conflicting Approach Left		EB
Conflicting Lanes Left	0	2
Conflicting Approach Right	NB	
Conflicting Lanes Right	1	0
HCM Control Delay	23.1	41.6
HCM LOS	C	E

Lane	NBLn1	EBLn1	EBLn2
Vol Left, %	0%	100%	0%
Vol Thru, %	100%	0%	0%
Vol Right, %	0%	0%	100%
Sign Control	Stop	Stop	Stop
Traffic Vol by Lane	500	389	357
LT Vol	0	389	0
Through Vol	500	0	0
RT Vol	0	0	357
Lane Flow Rate	575	401	368
Geometry Grp	2	7	7
Degree of Util (X)	0.914	0.776	0.572
Departure Headway (Hd)	5.723	6.967	5.592
Convergence, Y/N	Yes	Yes	Yes
Cap	638	521	644
Service Time	3.723	4.705	3.329
HCM Lane V/C Ratio	0.901	0.77	0.571
HCM Control Delay	41.6	29.9	15.6
HCM Lane LOS	E	D	C
HCM 95th-tile Q	11.7	7	3.6

Intersection	
Intersection Delay, s/veh	26.9
Intersection LOS	D

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↔			↕	
Traffic Vol, veh/h	152	378	101	0	0	0	0	49	32	140	41	0
Future Vol, veh/h	152	378	101	0	0	0	0	49	32	140	41	0
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	165	411	110	0	0	0	0	53	35	152	45	0
Number of Lanes	0	1	0	0	0	0	0	1	0	0	1	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	1	1
Conflicting Approach Left	SB	EB	
Conflicting Lanes Left	1	1	0
Conflicting Approach Right	NB		EB
Conflicting Lanes Right	1	0	1
HCM Control Delay	33.4	9.8	11.9
HCM LOS	D	A	B

Lane	NBLn1	EBLn1	SBLn1
Vol Left, %	0%	24%	77%
Vol Thru, %	60%	60%	23%
Vol Right, %	40%	16%	0%
Sign Control	Stop	Stop	Stop
Traffic Vol by Lane	81	631	181
LT Vol	0	152	140
Through Vol	49	378	41
RT Vol	32	101	0
Lane Flow Rate	88	686	197
Geometry Grp	1	1	1
Degree of Util (X)	0.143	0.891	0.329
Departure Headway (Hd)	5.839	4.678	6.018
Convergence, Y/N	Yes	Yes	Yes
Cap	617	761	600
Service Time	3.849	2.776	4.023
HCM Lane V/C Ratio	0.143	0.901	0.328
HCM Control Delay	9.8	33.4	11.9
HCM Lane LOS	A	D	B
HCM 95th-tile Q	0.5	11.5	1.4

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Traffic Volume (vph)	5	45	53	50	49	42	48	224	31	18	224	7
Future Volume (vph)	5	45	53	50	49	42	48	224	31	18	224	7
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	14	14	14	11	11	11	13	13	13
Storage Length (ft)	150		150	150		150	150		150	150		150
Storage Lanes	0		0	0		0	0		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor		0.95			0.96			0.98			1.00	
Frt		0.930			0.959			0.986			0.996	
Flt Protected		0.998			0.983			0.992			0.996	
Satd. Flow (prot)	0	1575	0	0	1469	0	0	1472	0	0	1687	0
Flt Permitted		0.989			0.871			0.911			0.965	
Satd. Flow (perm)	0	1561	0	0	1301	0	0	1351	0	0	1635	0
Right Turn on Red			No			No			No			No
Satd. Flow (RTOR)												
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		113			249			300			234	
Travel Time (s)		2.6			5.7			6.8			5.3	
Confl. Peds. (#/hr)			67			93			107			49
Peak Hour Factor	0.86	0.86	0.86	0.92	0.92	0.92	0.84	0.84	0.84	0.88	0.88	0.88
Heavy Vehicles (%)	2%	2%	2%	6%	6%	6%	2%	2%	2%	11%	11%	11%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	9	0
Parking (#/hr)		10			10			10				
Adj. Flow (vph)	6	52	62	54	53	46	57	267	37	20	255	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	120	0	0	153	0	0	361	0	0	283	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	0.92	1.13	0.92	1.04	1.28	1.04	0.96	1.01	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0		0.0		0.0		0.0		0.0		0.0	
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases	1		1		1		2		2		2	
Permitted Phases	1			1			2			2		
Detector Phase	1	1		1	1		2	2		2	2	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	34.0	34.0		34.0	34.0		32.0	32.0		32.0	32.0	
Total Split (s)	34.0	34.0		34.0	34.0		41.0	41.0		41.0	41.0	
Total Split (%)	45.3%	45.3%		45.3%	45.3%		54.7%	54.7%		54.7%	54.7%	
Maximum Green (s)	29.0	29.0		29.0	29.0		36.0	36.0		36.0	36.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	0.0		0.0		0.0		0.0		0.0		0.0	
Total Lost Time (s)	5.0		5.0		5.0		5.0		5.0		5.0	
Lead/Lag	Lead	Lead		Lead	Lead		Lag	Lag		Lag	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	Max	Max		Max	Max		C-Max	C-Max		C-Max	C-Max	
Walk Time (s)	15.0	15.0		15.0	15.0		15.0	15.0		15.0	15.0	
Flash Dont Walk (s)	14.0	14.0		14.0	14.0		12.0	12.0		12.0	12.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)	29.0		29.0		36.0		36.0		36.0		36.0	
Actuated g/C Ratio	0.39		0.39		0.48		0.48		0.48		0.48	
v/c Ratio	0.20		0.30		0.56		0.56		0.36		0.36	
Control Delay	16.4		18.1		10.1		10.1		13.9		13.9	
Queue Delay	0.0		0.0		0.1		0.1		0.0		0.0	
Total Delay	16.4		18.1		10.2		10.2		13.9		13.9	
LOS	B		B		B		B		B		B	
Approach Delay	16.4		18.1		10.2		10.2		13.9		13.9	
Approach LOS	B		B		B		B		B		B	
Queue Length 50th (ft)	36		48		115		115		79		79	
Queue Length 95th (ft)	68		92		34		34		129		129	
Internal Link Dist (ft)	33		169		220		220		154		154	
Turn Bay Length (ft)												
Base Capacity (vph)	603		503		648		648		784		784	
Starvation Cap Reductn	0		0		16		16		0		0	
Spillback Cap Reductn	0		0		0		0		0		0	
Storage Cap Reductn	0		0		0		0		0		0	
Reduced v/c Ratio	0.20		0.30		0.57		0.57		0.36		0.36	

Intersection Summary


Area Type: Other
 Cycle Length: 75
 Actuated Cycle Length: 75
 Offset: 0 (0%), Referenced to phase 2:NBSB, Start of Green
 Natural Cycle: 70

Lanes, Volumes, Timings
1: Buena Vista Avenue & Main Street

Mitigation Condition
Saturday Peak Hour

















Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.56	
Intersection Signal Delay: 13.5	Intersection LOS: B
Intersection Capacity Utilization 61.3%	ICU Level of Service B
Analysis Period (min) 15	

Splits and Phases: 1: Buena Vista Avenue & Main Street



Lanes, Volumes, Timings
2: Buena Vista Avenue & North Driveway/Hudson Street

Mitigation Condition
Saturday Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	3	36	6	55	23	9	22	291	20	10	309	8
Future Volume (vph)	3	36	6	55	23	9	22	291	20	10	309	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	11	11	11	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor					0.95			1.00				1.00
Frt		0.981			0.986			0.992				0.997
Flt Protected		0.997			0.969			0.997				0.999
Satd. Flow (prot)	0	1822	0	0	1708	0	0	1601	0	0	2007	0
Flt Permitted		0.973			0.969			0.968				0.987
Satd. Flow (perm)	0	1778	0	0	1621	0	0	1555	0	0	1981	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		7			7			5				2
Link Speed (mph)		30			30			30				30
Link Distance (ft)		146			240			235				300
Travel Time (s)		3.3			5.5			5.3				6.8
Confl. Peds. (#/hr)				39					9	23		
Peak Hour Factor	0.92	0.92	0.92	0.91	0.92	0.91	0.92	0.82	0.82	0.87	0.87	0.92
Heavy Vehicles (%)	2%	2%	2%	3%	2%	3%	2%	17%	17%	7%	7%	2%
Parking (#/hr)				10				5				
Adj. Flow (vph)	3	39	7	60	25	10	24	355	24	11	355	9
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	49	0	0	95	0	0	403	0	0	375	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		30			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.04	1.04	1.04	0.85	1.01	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru		Left	Thru		Left	Thru		Left	Thru	
Leading Detector (ft)	20	100		20	100		20	100		20	100	
Trailing Detector (ft)	0	0		0	0		0	0		0	0	
Detector 1 Position(ft)	0	0		0	0		0	0		0	0	
Detector 1 Size(ft)	20	6		20	6		20	6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	
Turn Type	Perm	NA		Split	NA		Perm	NA		Perm	NA	

Lanes, Volumes, Timings
2: Buena Vista Avenue & North Driveway/Hudson Street

Mitigation Condition
Saturday Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Protected Phases		4		8	8			2			6	
Permitted Phases	4						2			6		
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	22.0	22.0		22.0	22.0		25.0	25.0		25.0	25.0	
Total Split (s)	22.0	22.0		22.0	22.0		31.0	31.0		31.0	31.0	
Total Split (%)	29.3%	29.3%		29.3%	29.3%		41.3%	41.3%		41.3%	41.3%	
Maximum Green (s)	17.0	17.0		17.0	17.0		25.0	25.0		25.0	25.0	
Yellow Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)		0.0			0.0			0.0			0.0	
Total Lost Time (s)		5.0			5.0			6.0			6.0	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Recall Mode	None	None		None	None		C-Min	C-Min		C-Min	C-Min	
Walk Time (s)	7.0	7.0		7.0	7.0		7.0	7.0		7.0	7.0	
Flash Dont Walk (s)	10.0	10.0		10.0	10.0		12.0	12.0		12.0	12.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)		7.3			9.2			50.1			50.1	
Actuated g/C Ratio		0.10			0.12			0.67			0.67	
v/c Ratio		0.27			0.44			0.39			0.28	
Control Delay		31.1			33.9			10.7			6.8	
Queue Delay		0.0			0.0			0.0			0.2	
Total Delay		31.1			33.9			10.7			7.0	
LOS		C			C			B			A	
Approach Delay		31.1			33.9			10.7			7.0	
Approach LOS		C			C			B			A	
Queue Length 50th (ft)		19			39			98			71	
Queue Length 95th (ft)		48			77			174			99	
Internal Link Dist (ft)		66			160			155			220	
Turn Bay Length (ft)												
Base Capacity (vph)		408			392			1040			1324	
Starvation Cap Reductn		0			0			0			366	
Spillback Cap Reductn		0			0			0			0	
Storage Cap Reductn		0			0			0			0	
Reduced v/c Ratio		0.12			0.24			0.39			0.39	

Intersection Summary

Area Type:	Other
Cycle Length:	75
Actuated Cycle Length:	75
Offset:	12 (16%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green
Natural Cycle:	70
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.44
Intersection Signal Delay:	12.7
Intersection Capacity Utilization	47.0%
Intersection LOS:	B
ICU Level of Service	A





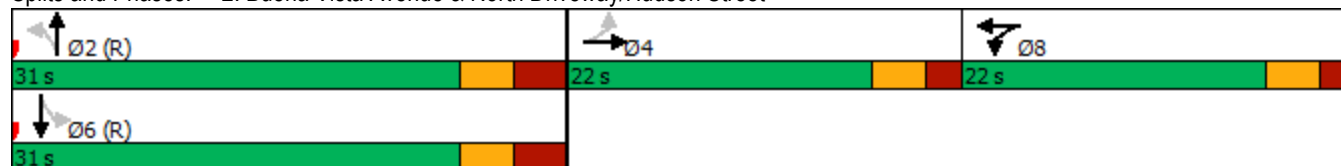







Analysis Period (min) 15

Splits and Phases: 2: Buena Vista Avenue & North Driveway/Hudson Street



Lanes, Volumes, Timings
3: Buena Vista Avenue & Prospect Street

Mitigation Condition
Saturday Peak Hour

						
Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	83	287	121	137	339	90
Future Volume (vph)	83	287	121	137	339	90
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	15	15	9	9	9	9
Storage Length (ft)	0	0		50	150	
Storage Lanes	1	1		1	1	
Taper Length (ft)	25				25	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor	0.90			0.98	0.98	
Frt		0.850		0.850		
Flt Protected	0.950				0.950	
Satd. Flow (prot)	1742	1558	1513	1286	1533	1613
Flt Permitted	0.950				0.950	
Satd. Flow (perm)	1567	1558	1513	1259	1498	1613
Right Turn on Red		Yes		Yes		
Satd. Flow (RTOR)		354		167		
Link Speed (mph)	30		30			30
Link Distance (ft)	256		433			284
Travel Time (s)	5.8		9.8			6.5
Confl. Peds. (#/hr)	40			9	27	
Peak Hour Factor	0.81	0.81	0.82	0.82	0.87	0.87
Heavy Vehicles (%)	14%	14%	13%	13%	6%	6%
Adj. Flow (vph)	102	354	148	167	390	103
Shared Lane Traffic (%)						
Lane Group Flow (vph)	102	354	148	167	390	103
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(ft)	20		9			9
Link Offset(ft)	0		0			0
Crosswalk Width(ft)	16		16			16
Two way Left Turn Lane						
Headway Factor	0.88	0.88	1.14	1.14	1.14	1.14
Turning Speed (mph)	15	9		9	15	
Number of Detectors	1	1	2	1	1	2
Detector Template	Left	Right	Thru	Right	Left	Thru
Leading Detector (ft)	20	20	100	20	20	100
Trailing Detector (ft)	0	0	0	0	0	0
Detector 1 Position(ft)	0	0	0	0	0	0
Detector 1 Size(ft)	20	20	6	20	20	6
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel						
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)			94			94
Detector 2 Size(ft)			6			6
Detector 2 Type			Cl+Ex			Cl+Ex
Detector 2 Channel						

Lanes, Volumes, Timings
3: Buena Vista Avenue & Prospect Street

Mitigation Condition
Saturday Peak Hour



Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Detector 2 Extend (s)			0.0			0.0
Turn Type	Prot	Perm	NA	Perm	Prot	NA
Protected Phases	8		2		1	6
Permitted Phases		8		2		
Detector Phase	8	8	2	2	1	6
Switch Phase						
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	23.0	23.0	31.0	31.0	22.5	31.0
Total Split (s)	23.0	23.0	31.0	31.0	36.0	67.0
Total Split (%)	25.6%	25.6%	34.4%	34.4%	40.0%	74.4%
Maximum Green (s)	18.0	18.0	26.0	26.0	31.0	62.0
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.0	5.0	5.0	5.0	5.0	5.0
Lead/Lag			Lag	Lag	Lead	
Lead-Lag Optimize?			Yes	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	None	None	Min	Min	None	Min
Walk Time (s)	7.0	7.0	7.0	7.0		7.0
Flash Dont Walk (s)	11.0	11.0	19.0	19.0		19.0
Pedestrian Calls (#/hr)	0	0	0	0		0
Act Effct Green (s)	9.5	9.5	11.8	11.8	20.0	37.1
Actuated g/C Ratio	0.17	0.17	0.21	0.21	0.35	0.65
v/c Ratio	0.35	0.64	0.48	0.43	0.73	0.10
Control Delay	28.1	9.5	28.2	8.4	26.2	4.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.1	9.5	28.2	8.4	26.2	4.1
LOS	C	A	C	A	C	A
Approach Delay	13.7		17.7			21.6
Approach LOS	B		B			C
Queue Length 50th (ft)	30	0	43	0	107	10
Queue Length 95th (ft)	79	44	105	35	243	28
Internal Link Dist (ft)	176		353			204
Turn Bay Length (ft)				50	150	
Base Capacity (vph)	582	756	730	694	882	1527
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.18	0.47	0.20	0.24	0.44	0.07

Intersection Summary


Area Type:	Other
Cycle Length:	90
Actuated Cycle Length:	57.3
Natural Cycle:	80
Control Type:	Actuated-Uncoordinated
Maximum v/c Ratio:	0.73
Intersection Signal Delay:	17.8
Intersection LOS:	B

Lanes, Volumes, Timings
 3: Buena Vista Avenue & Prospect Street

Mitigation Condition
 Saturday Peak Hour







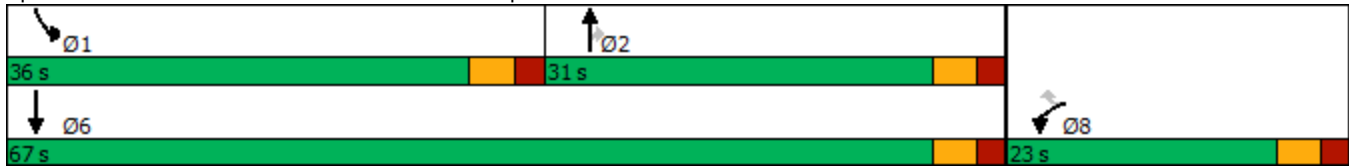









Intersection Capacity Utilization 46.2% ICU Level of Service A
 Analysis Period (min) 15

Splits and Phases: 3: Buena Vista Avenue & Prospect Street



Lanes, Volumes, Timings
4: Hawthorne Avenue & Main Street

Mitigation Condition
Saturday Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	85	9	38	110	0	25	0	21	7	0	6
Future Volume (vph)	0	85	9	38	110	0	25	0	21	7	0	6
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	15	15	15	15	12	12	12	12	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.988						0.865			0.937	
Flt Protected					0.987		0.950				0.974	
Satd. Flow (prot)	0	1625	0	0	1654	0	1770	0	0	0	1700	0
Flt Permitted					0.987		0.950				0.974	
Satd. Flow (perm)	0	1625	0	0	1654	0	1770	0	0	0	1700	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		249			526			303			186	
Travel Time (s)		5.7			12.0			6.9			4.2	
Peak Hour Factor	0.92	0.86	0.86	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles (%)	2%	8%	8%	6%	6%	2%	2%	2%	2%	2%	2%	2%
Parking (#/hr)		10			10							
Adj. Flow (vph)	0	99	10	41	120	0	27	0	23	8	0	7
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	109	0	0	161	0	27	23	0	0	15	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			-50	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.09	0.88	0.88	1.09	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization Err%	ICU Level of Service H
Analysis Period (min)	15

Lanes, Volumes, Timings
5: Hawthorne Avenue & Hudson Street

Mitigation Condition
Saturday Peak Hour




















Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Volume (vph)	8	58	0	0	0	0	57	38	47	17	0	30
Future Volume (vph)	8	58	0	0	0	0	57	38	47	17	0	30
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	12	12	12	16	16	16	13	13	13
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor												
Frt								0.955			0.914	
Flt Protected		0.994						0.980			0.982	
Satd. Flow (prot)	0	1452	0	0	0	0	0	1648	0	0	1728	0
Flt Permitted		0.994						0.980			0.982	
Satd. Flow (perm)	0	1452	0	0	0	0	0	1648	0	0	1728	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		240			538			516			303	
Travel Time (s)		5.5			12.2			11.7			6.9	
Confl. Peds. (#/hr)			33				35		16			38
Peak Hour Factor	0.85	0.85	0.85	0.92	0.92	0.92	0.83	0.83	0.83	0.90	0.90	0.90
Heavy Vehicles (%)	10%	10%	10%	2%	2%	2%	7%	7%	7%	2%	2%	2%
Parking (#/hr)		5						5				
Adj. Flow (vph)	9	68	0	0	0	0	69	46	57	19	0	33
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	77	0	0	0	0	0	172	0	0	52	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.04	1.24	1.04	1.00	1.00	1.00	0.85	1.01	0.85	0.96	0.96	0.96
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Free			Free			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	31.0%
ICU Level of Service	A
Analysis Period (min)	15

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Saturday Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	1	0	2	330	0	50	0	210	0	0	305	22
Future Volume (vph)	1	0	2	330	0	50	0	210	0	0	305	22
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	13	9	9	14	14	14	14	14	14
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.910			0.850							0.991
Flt Protected		0.984		0.950								
Satd. Flow (prot)	0	1668	0	1554	1425	0	0	1689	0	0	1969	0
Flt Permitted				0.950								
Satd. Flow (perm)	0	1695	0	1554	1425	0	0	1689	0	0	1969	0
Right Turn on Red			Yes			No			Yes			Yes
Satd. Flow (RTOR)		81										4
Link Speed (mph)		30			30			30				30
Link Distance (ft)		49			114			382				684
Travel Time (s)		1.1			2.6			8.7				15.5
Peak Hour Factor	0.81	0.81	0.81	0.94	0.94	0.94	0.82	0.82	0.82	0.97	0.97	0.97
Parking (#/hr)				10		5		10				
Adj. Flow (vph)	1	0	2	351	0	53	0	256	0	0	314	23
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	3	0	351	53	0	0	256	0	0	337	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		13			13			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.18	1.14	1.14	0.92	1.13	0.92	0.92	0.92	0.92
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2			2				2
Detector Template	Left	Thru		Left	Thru			Thru				Thru
Leading Detector (ft)	20	100		20	100			100				100
Trailing Detector (ft)	0	0		0	0			0				0
Detector 1 Position(ft)	0	0		0	0			0				0
Detector 1 Size(ft)	20	6		20	6			6				6
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex			Cl+Ex				Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0			0.0				0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0			0.0				0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0			0.0				0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				Cl+Ex
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				0.0
Turn Type	Perm	NA		Split	NA			NA				NA
Protected Phases		4		3	3			2				2
Permitted Phases	4											
Detector Phase	4	4		3	3			2				2

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0			5.0			5.0	
Minimum Split (s)	24.0	24.0		28.0	28.0			39.0			39.0	
Total Split (s)	25.0	25.0		29.0	29.0			40.0			40.0	
Total Split (%)	26.6%	26.6%		30.9%	30.9%			42.6%			42.6%	
Maximum Green (s)	20.0	20.0		24.0	24.0			35.0			35.0	
Yellow Time (s)	3.0	3.0		3.0	3.0			3.0			3.0	
All-Red Time (s)	2.0	2.0		2.0	2.0			2.0			2.0	
Lost Time Adjust (s)		0.0		0.0	0.0			0.0			0.0	
Total Lost Time (s)		5.0		5.0	5.0			5.0			5.0	
Lead/Lag	Lag	Lag		Lead	Lead							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Recall Mode	None	None		Ped	Ped			Ped			Ped	
Walk Time (s)	7.0	7.0		11.0	11.0			24.0			24.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0			10.0			10.0	
Pedestrian Calls (#/hr)	0	0		0	0			0			0	
Act Effct Green (s)		5.5		23.5	23.5			34.1			34.1	
Actuated g/C Ratio		0.08		0.34	0.34			0.49			0.49	
v/c Ratio		0.01		0.67	0.11			0.31			0.35	
Control Delay		0.0		28.4	17.8			12.8			12.8	
Queue Delay		0.0		0.0	0.0			0.0			0.0	
Total Delay		0.0		28.4	17.8			12.8			12.8	
LOS		A		C	B			B			B	
Approach Delay					27.0			12.8			12.8	
Approach LOS					C			B			B	
Queue Length 50th (ft)		0		120	15			56			75	
Queue Length 95th (ft)		0		#276	45			121			172	
Internal Link Dist (ft)		1			34			302			604	
Turn Bay Length (ft)												
Base Capacity (vph)		547		538	493			854			997	
Starvation Cap Reductn		0		0	0			0			0	
Spillback Cap Reductn		0		0	0			0			0	
Storage Cap Reductn		0		0	0			0			0	
Reduced v/c Ratio		0.01		0.65	0.11			0.30			0.34	


Intersection Summary

Area Type:	Other
Cycle Length:	94
Actuated Cycle Length:	69.5
Natural Cycle:	95
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.67
Intersection Signal Delay:	18.5
Intersection LOS:	B
Intersection Capacity Utilization:	50.7%
ICU Level of Service:	A
Analysis Period (min):	15
# 95th percentile volume exceeds capacity, queue may be longer.	
Queue shown is maximum after two cycles.	

Lanes, Volumes, Timings
7: Warburton Avenue & Wells Avenue

Mitigation Condition
Saturday Peak Hour

Splits and Phases: 7: Warburton Avenue & Wells Avenue



Lanes, Volumes, Timings

Mitigation Condition

8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square Saturday Peak Hour



Lane Group	NBL	NBT	NBR	SBL	SBT	SBR	NEL	NER	NER2	Ø9
Lane Configurations										
Traffic Volume (vph)	55	199	86	21	561	55	11	5	21	
Future Volume (vph)	55	199	86	21	561	55	11	5	21	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Lane Width (ft)	12	12	12	16	16	16	16	12	12	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Ped Bike Factor		0.95			0.99		0.60			
Frt		0.955			0.988		0.906			
Flt Protected	0.950				0.998		0.985			
Satd. Flow (prot)	1703	1385	0	0	1911	0	996	0	0	
Flt Permitted	0.406				0.983		0.985			
Satd. Flow (perm)	728	1385	0	0	1883	0	996	0	0	
Right Turn on Red			Yes						Yes	
Satd. Flow (RTOR)		32					85			
Link Speed (mph)		30			30		30			
Link Distance (ft)		431			382		174			
Travel Time (s)		9.8			8.7		4.0			
Confl. Peds. (#/hr)			134			139		89		
Peak Hour Factor	0.94	0.94	0.94	0.93	0.93	0.93	0.81	0.81	0.81	
Heavy Vehicles (%)	6%	6%	6%	6%	6%	6%	2%	2%	2%	
Bus Blockages (#/hr)	0	0	0	0	8	0	0	0	0	
Parking (#/hr)		10					5			
Adj. Flow (vph)	59	212	91	23	603	59	14	6	26	
Shared Lane Traffic (%)										
Lane Group Flow (vph)	59	303	0	0	685	0	46	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Right	Right	
Median Width(ft)		12			0		16			
Link Offset(ft)		0			0		80			
Crosswalk Width(ft)		16			16		16			
Two way Left Turn Lane										
Headway Factor	1.00	1.23	1.00	0.85	0.88	0.85	1.01	1.00	1.00	
Turning Speed (mph)	15		9	15		9	15	9	9	
Number of Detectors	1	2		1	2		1			
Detector Template	Left	Thru		Left	Thru		Left			
Leading Detector (ft)	20	100		20	100		20			
Trailing Detector (ft)	0	0		0	0		0			
Detector 1 Position(ft)	0	0		0	0		0			
Detector 1 Size(ft)	20	6		20	6		20			
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex			
Detector 1 Channel										
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0			
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0			
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0			
Detector 2 Position(ft)		94			94					
Detector 2 Size(ft)		6			6					
Detector 2 Type		Cl+Ex			Cl+Ex					
Detector 2 Channel										
Detector 2 Extend (s)		0.0			0.0					

Lanes, Volumes, Timings

Mitigation Condition

8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square Saturday Peak Hour




Lane Group	NBL	NBT	NBR	SBL	SBT	SBR	NEL	NER	NER2	Ø9
Turn Type	Perm	NA		Perm	NA		Prot			
Protected Phases		3			3		1			9
Permitted Phases	3			3						
Detector Phase	3	3		3	3		1			
Switch Phase										
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0			5.0
Minimum Split (s)	13.0	13.0		13.0	13.0		13.0			27.0
Total Split (s)	50.0	50.0		50.0	50.0		13.0			27.0
Total Split (%)	55.6%	55.6%		55.6%	55.6%		14.4%			30%
Maximum Green (s)	42.0	42.0		42.0	42.0		5.0			25.0
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0			2.0
All-Red Time (s)	4.0	4.0		4.0	4.0		4.0			0.0
Lost Time Adjust (s)	0.0	0.0			0.0		0.0			
Total Lost Time (s)	8.0	8.0			8.0		8.0			
Lead/Lag										
Lead-Lag Optimize?										
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0			3.0
Recall Mode	Max	Max		Max	Max		Max			None
Walk Time (s)										10.0
Flash Dont Walk (s)										15.0
Pedestrian Calls (#/hr)										5
Act Effct Green (s)	42.9	42.9			42.9		5.1			
Actuated g/C Ratio	0.63	0.63			0.63		0.07			
v/c Ratio	0.13	0.34			0.58		0.30			
Control Delay	9.1	8.8			12.6		7.8			
Queue Delay	0.0	0.0			1.6		0.0			
Total Delay	9.1	8.8			14.2		7.8			
LOS	A	A			B		A			
Approach Delay		8.9			14.2		7.8			
Approach LOS		A			B		A			
Queue Length 50th (ft)	7	35			113		0			
Queue Length 95th (ft)	44	170			463		6			
Internal Link Dist (ft)		351			302		94			
Turn Bay Length (ft)										
Base Capacity (vph)	456	880			1180		153			
Starvation Cap Reductn	0	0			311		0			
Spillback Cap Reductn	0	0			0		0			
Storage Cap Reductn	0	0			0		0			
Reduced v/c Ratio	0.13	0.34			0.79		0.30			

Intersection Summary

Area Type:	Other
Cycle Length:	90
Actuated Cycle Length:	68.4
Natural Cycle:	80
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.58
Intersection Signal Delay:	12.2
Intersection LOS:	B
Intersection Capacity Utilization:	70.1%
ICU Level of Service:	C

Analysis Period (min) 15

Splits and Phases: 8: Nepperhan Street & Warburton Avenue & Dock Street/Manor House Square



Lanes, Volumes, Timings
9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕		↖	↗		↖	↕			↗	
Traffic Volume (vph)	43	0	70	219	70	75	12	222	0	0	516	66
Future Volume (vph)	43	0	70	219	70	75	12	222	0	0	516	66
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	13	15	15	9	13	13	12	12	12
Storage Length (ft)	0		0	0		0	75		0	0		0
Storage Lanes	0		0	1		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	0.95
Ped Bike Factor		0.94			0.94						0.98	
Frt		0.916			0.922						0.983	
Flt Protected		0.981		0.950			0.950					
Satd. Flow (prot)	0	1339	0	1711	1417	0	1477	3154	0	0	2981	0
Flt Permitted		0.831		0.674			0.322					
Satd. Flow (perm)	0	1134	0	1214	1417	0	501	3154	0	0	2981	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		98			57							15
Link Speed (mph)		30			30			30				30
Link Distance (ft)		526			497			325				431
Travel Time (s)		12.0			11.3			7.4				9.8
Confl. Peds. (#/hr)			82			104			126			103
Peak Hour Factor	0.82	0.82	0.82	0.83	0.83	0.83	0.98	0.98	0.98	0.91	0.91	0.91
Heavy Vehicles (%)	16%	16%	16%	9%	9%	9%	10%	10%	10%	8%	8%	8%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	4	0	0	0	0
Parking (#/hr)		10			10			5			10	
Adj. Flow (vph)	52	0	85	264	84	90	12	227	0	0	567	73
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	137	0	264	174	0	12	227	0	0	640	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	0.96	1.09	0.88	1.14	1.05	0.96	1.00	1.11	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2		1	2				2
Detector Template	Left	Thru		Left	Thru		Left	Thru				Thru
Leading Detector (ft)	20	100		20	100		20	100				100
Trailing Detector (ft)	0	0		0	0		0	0				0
Detector 1 Position(ft)	0	0		0	0		0	0				0
Detector 1 Size(ft)	20	6		20	6		20	6				6
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex				Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Detector 2 Position(ft)		94			94			94				94
Detector 2 Size(ft)		6			6			6				6

Lanes, Volumes, Timings
 9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
 Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		NA		
Protected Phases	4			4			2	5		1		
Permitted Phases	4			4			5					
Detector Phase	4	4		4	4		2	5		1		
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0		
Minimum Split (s)	37.0	37.0		37.0	37.0		11.0	11.0		40.0		
Total Split (s)	38.0	38.0		38.0	38.0		21.0	62.0		41.0		
Total Split (%)	38.0%	38.0%		38.0%	38.0%		21.0%	62.0%		41.0%		
Maximum Green (s)	32.0	32.0		32.0	32.0		15.0	56.0		35.0		
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0		4.0		
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0		
Lost Time Adjust (s)	0.0			0.0			0.0			0.0		
Total Lost Time (s)	6.0			6.0			6.0			6.0		
Lead/Lag							Lag		Lead			
Lead-Lag Optimize?							Yes		Yes			
Vehicle Extension (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0		
Recall Mode	Ped	Ped		Ped	Ped		Max	Max		C-Max		
Walk Time (s)	10.0	10.0		10.0	10.0					18.0		
Flash Dont Walk (s)	21.0	21.0		21.0	21.0					16.0		
Pedestrian Calls (#/hr)	0	0		0	0					0		
Act Effct Green (s)	31.4			31.4			56.6			35.6		
Actuated g/C Ratio	0.31			0.31			0.57			0.36		
v/c Ratio	0.32			0.69			0.03			0.60		
Control Delay	11.2			41.0			10.3			28.6		
Queue Delay	0.0			0.0			0.0			0.0		
Total Delay	11.2			41.0			10.3			28.6		
LOS	B			D			B			C		
Approach Delay	11.2			32.6			10.5			28.6		
Approach LOS	B			C			B			C		
Queue Length 50th (ft)	18			148			3			168		
Queue Length 95th (ft)	52			214			11			231		
Internal Link Dist (ft)	446			417			245			351		
Turn Bay Length (ft)							75					
Base Capacity (vph)	429			388			429			1785		
Starvation Cap Reductn	0			0			0			0		
Spillback Cap Reductn	0			0			0			0		
Storage Cap Reductn	0			0			0			0		
Reduced v/c Ratio	0.32			0.68			0.03			0.60		

Intersection Summary


Area Type: Other
 Cycle Length: 100
 Actuated Cycle Length: 100
 Offset: 0 (0%), Referenced to phase 1:SBT, Start of Green
 Natural Cycle: 90

Lanes, Volumes, Timings
 9: Riverdale Avenue/Warburton Avenue & Main Street

Mitigation Condition
 Saturday Peak Hour

Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.69	
Intersection Signal Delay: 25.2	Intersection LOS: C
Intersection Capacity Utilization 87.9%	ICU Level of Service E
Analysis Period (min) 15	

Splits and Phases: 9: Riverdale Avenue/Warburton Avenue & Main Street

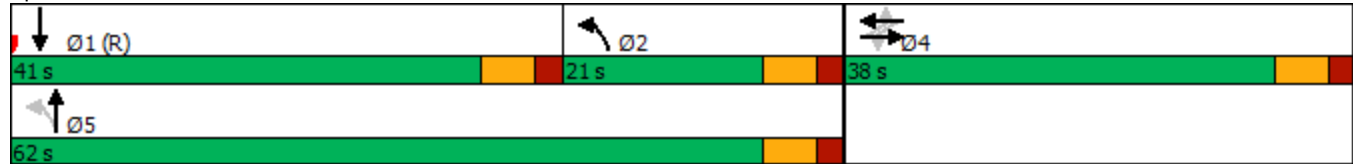

Lanes, Volumes, Timings
10: Riverdale Avenue & Hudson Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕		↕	↕	
Traffic Volume (vph)	27	76	19	0	0	0	0	207	191	242	563	0
Future Volume (vph)	27	76	19	0	0	0	0	207	191	242	563	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	11	11	11	9	12	12
Storage Length (ft)	0		0	0		0	0		0	125		0
Storage Lanes	0		0	0		0	0		0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	1.00
Ped Bike Factor		0.96						0.84				
Frt		0.979						0.928				
Flt Protected		0.989								0.950		
Satd. Flow (prot)	0	1626	0	0	0	0	0	2419	0	1533	3119	0
Flt Permitted		0.989								0.500		
Satd. Flow (perm)	0	1626	0	0	0	0	0	2419	0	807	3119	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		9						203				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		538			379			525				325
Travel Time (s)		12.2			8.6			11.9				7.4
Confl. Peds. (#/hr)			178			100			148			55
Peak Hour Factor	0.85	0.85	0.85	0.92	0.92	0.92	0.94	0.94	0.94	0.93	0.93	0.93
Heavy Vehicles (%)	5%	5%	5%	2%	2%	2%	11%	11%	11%	6%	6%	6%
Bus Blockages (#/hr)	0	0	0	0	0	0	0	7	0	0	5	0
Parking (#/hr)		10									10	
Adj. Flow (vph)	32	89	22	0	0	0	0	220	203	260	605	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	143	0	0	0	0	0	423	0	260	605	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			8			8	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	1.00	1.00	1.00	1.04	1.06	1.04	1.14	1.12	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	

Lanes, Volumes, Timings
10: Riverdale Avenue & Hudson Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Type	Cl+Ex						Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)	0.0						0.0			0.0		
Turn Type	Perm	NA					NA			pm+pt	NA	
Protected Phases	3						5			6	1	
Permitted Phases	3									1		
Detector Phase	3	3					5			6	1	
Switch Phase												
Minimum Initial (s)	10.0	10.0					5.0			10.0	5.0	
Minimum Split (s)	30.0	30.0					30.0			16.0	30.0	
Total Split (s)	36.0	36.0					46.0			21.0	67.0	
Total Split (%)	35.0%	35.0%					44.7%			20.4%	65.0%	
Maximum Green (s)	30.0	30.0					40.0			15.0	61.0	
Yellow Time (s)	4.0	4.0					4.0			4.0	4.0	
All-Red Time (s)	2.0	2.0					2.0			2.0	2.0	
Lost Time Adjust (s)	0.0						0.0			0.0	0.0	
Total Lost Time (s)	6.0						6.0			6.0	6.0	
Lead/Lag							Lead			Lag		
Lead-Lag Optimize?							Yes			Yes		
Vehicle Extension (s)	3.0	3.0					3.0			3.0	3.0	
Recall Mode	None	None					C-Max			Max	C-Max	
Walk Time (s)	10.0	10.0					10.0			10.0		
Flash Dont Walk (s)	14.0	14.0					14.0			14.0		
Pedestrian Calls (#/hr)	0	0					0			0		
Act Effct Green (s)	14.2						55.8			76.8	76.8	
Actuated g/C Ratio	0.14						0.54			0.75	0.75	
v/c Ratio	0.62						0.30			0.37	0.26	
Control Delay	50.1						7.5			7.5	4.8	
Queue Delay	0.0						0.0			1.5	0.7	
Total Delay	50.1						7.5			9.0	5.5	
LOS	D						A			A	A	
Approach Delay	50.1						7.5			6.5		
Approach LOS	D						A			A		
Queue Length 50th (ft)	84						36			43	54	
Queue Length 95th (ft)	131						73			88	94	
Internal Link Dist (ft)	458						299			445	245	
Turn Bay Length (ft)										125		
Base Capacity (vph)	479						1402			707	2324	
Starvation Cap Reductn	0						0			279	1297	
Spillback Cap Reductn	0						0			0	0	
Storage Cap Reductn	0						0			0	0	
Reduced v/c Ratio	0.30						0.30			0.61	0.59	

Intersection Summary


Area Type: Other
 Cycle Length: 103
 Actuated Cycle Length: 103
 Offset: 0 (0%), Referenced to phase 1:SBTL and 5:NBT, Start of Green
 Natural Cycle: 80

Lanes, Volumes, Timings
 10: Riverdale Avenue & Hudson Street

Mitigation Condition
 Saturday Peak Hour







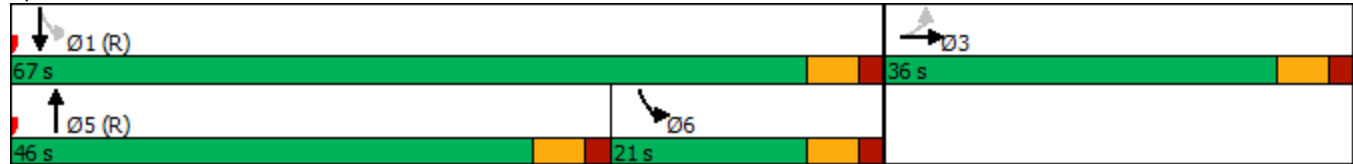















Control Type: Actuated-Coordinated	
Maximum v/c Ratio: 0.62	
Intersection Signal Delay: 11.2	Intersection LOS: B
Intersection Capacity Utilization 68.4%	ICU Level of Service C
Analysis Period (min) 15	

Splits and Phases: 10: Riverdale Avenue & Hudson Street



Lanes, Volumes, Timings
11: Riverdale Avenue & Prospect Street

Mitigation Condition
Saturday Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	8	334	56	275	480	133	81	257	338	260	299	23
Future Volume (vph)	8	334	56	275	480	133	81	257	338	260	299	23
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	10	11	11	10	11	11
Storage Length (ft)	0		50	160		0	100		250	155		0
Storage Lanes	0		0	1		1	1		1	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Ped Bike Factor		0.97				0.89			0.92			0.94
Frt		0.979				0.850			0.850			0.850
Flt Protected		0.999		0.950			0.950			0.950		
Satd. Flow (prot)	0	3806	0	1770	1863	1583	1652	3421	1531	1652	3421	1531
Flt Permitted		0.894		0.419			0.371			0.580		
Satd. Flow (perm)	0	3406	0	780	1863	1407	645	3421	1407	1008	3421	1431
Right Turn on Red			Yes			Yes			No			Yes
Satd. Flow (RTOR)		17				145						129
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		511			403			522			525	
Travel Time (s)		11.6			9.2			11.9			11.9	
Confl. Peds. (#/hr)			193			95			64			49
Peak Hour Factor	0.90	0.90	0.90	0.92	0.92	0.92	0.92	0.92	0.92	0.93	0.93	0.93
Adj. Flow (vph)	9	371	62	299	522	145	88	279	367	280	322	25
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	442	0	299	522	145	88	279	367	280	322	25
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			10			20	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	1.00	1.00	1.00	1.09	1.04	1.04	1.09	1.04	1.04
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1	1	2	1
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Leading Detector (ft)	20	100		20	100	20	20	100	20	20	100	20
Trailing Detector (ft)	0	0		0	0	0	0	0	0	0	0	0
Detector 1 Position(ft)	0	0		0	0	0	0	0	0	0	0	0
Detector 1 Size(ft)	20	6		20	6	20	20	6	20	20	6	20
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(ft)		94			94			94			94	
Detector 2 Size(ft)		6			6			6			6	
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0			0.0	

Lanes, Volumes, Timings
11: Riverdale Avenue & Prospect Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		pm+pt	NA	pm+ov	pm+pt	NA	pm+ov	pm+pt	NA	Perm
Protected Phases		7		8	3	6	1	5	8	6	2	
Permitted Phases	7			3		3	5		5	2		2
Detector Phase	7	7		8	3	6	1	5	8	6	2	2
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	39.0	39.0		11.0	39.0	11.0	11.0	39.0	11.0	11.0	39.0	39.0
Total Split (s)	39.0	39.0		16.0	55.0	16.0	16.0	39.0	16.0	16.0	39.0	39.0
Total Split (%)	35.5%	35.5%		14.5%	50.0%	14.5%	14.5%	35.5%	14.5%	14.5%	35.5%	35.5%
Maximum Green (s)	33.0	33.0		10.0	49.0	10.0	12.0	33.0	10.0	10.0	33.0	33.0
Yellow Time (s)	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)		0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)		6.0		6.0	6.0	6.0	4.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead		Lag		Lag	Lead	Lead	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes		Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Ped	Ped		Max	C-Max	Max	Max	Ped	Max	Max	Ped	Ped
Walk Time (s)	7.0	7.0			7.0			12.0			12.0	12.0
Flash Dont Walk (s)	24.0	24.0			24.0			18.0			18.0	18.0
Pedestrian Calls (#/hr)	0	0			0			0			0	0
Act Effct Green (s)		31.0		49.0	49.0	62.0	32.0	30.0	42.0	33.0	33.0	33.0
Actuated g/C Ratio		0.28		0.45	0.45	0.56	0.29	0.27	0.38	0.30	0.30	0.30
v/c Ratio		0.45		0.66	0.63	0.17	0.30	0.30	0.67	0.74	0.31	0.05
Control Delay		33.0		14.8	8.5	0.4	32.2	32.8	32.3	50.1	30.8	0.2
Queue Delay		0.0		0.0	0.1	0.0	0.0	0.0	0.0	55.7	0.0	0.0
Total Delay		33.0		14.8	8.6	0.4	32.2	32.8	32.3	105.7	30.8	0.2
LOS		C		B	A	A	C	C	C	F	C	A
Approach Delay		33.0			9.3			32.5			63.1	
Approach LOS		C			A			C			E	
Queue Length 50th (ft)		130		22	39	0	47	82	188	166	92	0
Queue Length 95th (ft)		179		81	50	1	87	119	282	#268	131	0
Internal Link Dist (ft)		431			323			442			445	
Turn Bay Length (ft)				160			100		250	155		
Base Capacity (vph)		1033		455	829	877	297	1026	550	378	1026	519
Starvation Cap Reductn		0		0	28	0	0	0	0	0	0	0
Spillback Cap Reductn		1		0	0	0	0	0	0	122	0	0
Storage Cap Reductn		0		0	0	0	0	0	0	0	0	0
Reduced v/c Ratio		0.43		0.66	0.65	0.17	0.30	0.27	0.67	1.09	0.31	0.05

Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	25 (23%), Referenced to phase 3:WBTL, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.74
Intersection Signal Delay:	31.4
Intersection LOS:	C

Lanes, Volumes, Timings
 11: Riverdale Avenue & Prospect Street


Mitigation Condition
 Saturday Peak Hour

Intersection Capacity Utilization 111.1% ICU Level of Service H

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.
 Queue shown is maximum after two cycles.

Splits and Phases: 11: Riverdale Avenue & Prospect Street

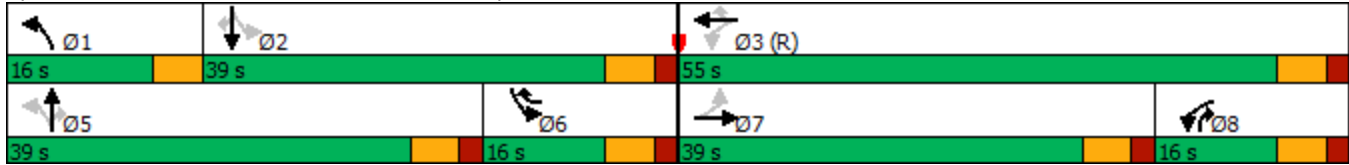

Lanes, Volumes, Timings
 14: North Broadway & Manor House Square

Mitigation Condition
 Saturday Peak Hour

















Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	112	0	0	332	0	0
Future Volume (vph)	112	0	0	332	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt						
Flt Protected	0.950					
Satd. Flow (prot)	1705	0	0	1794	0	0
Flt Permitted	0.950					
Satd. Flow (perm)	1705	0	0	1794	0	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	226			563	857	
Travel Time (s)	5.1			12.8	19.5	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Parking (#/hr)	10			10		
Adj. Flow (vph)	122	0	0	361	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	122	0	0	361	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	16			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.05	0.85	0.85	1.05	0.85	0.85
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	30.3%
Analysis Period (min)	15
	ICU Level of Service A

Lanes, Volumes, Timings
15: North Broadway & Main Street

Mitigation Condition
Saturday Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	0	271	142	93	190	0	0	0	0
Future Volume (vph)	0	0	0	0	271	142	93	190	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	12	16	16	16	16	16	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.954							
Flt Protected								0.984				
Satd. Flow (prot)	0	0	0	0	2014	0	0	2077	0	0	0	0
Flt Permitted								0.984				
Satd. Flow (perm)	0	0	0	0	2014	0	0	2077	0	0	0	0
Right Turn on Red			Yes			Yes	Yes		Yes			Yes
Satd. Flow (RTOR)					38			73				
Link Speed (mph)		30			30			30				30
Link Distance (ft)		497			81			184				563
Travel Time (s)		11.3			1.8			4.2				12.8
Peak Hour Factor	0.92	0.92	0.92	0.83	0.83	0.83	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	0	327	171	101	207	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	498	0	0	308	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.85	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors					2		1	2				
Detector Template					Thru		Left	Thru				
Leading Detector (ft)					100		20	100				
Trailing Detector (ft)					0		0	0				
Detector 1 Position(ft)					0		0	0				
Detector 1 Size(ft)					6		20	6				
Detector 1 Type					Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)					0.0		0.0	0.0				
Detector 1 Queue (s)					0.0		0.0	0.0				
Detector 1 Delay (s)					0.0		0.0	0.0				
Detector 2 Position(ft)					94			94				
Detector 2 Size(ft)					6			6				
Detector 2 Type					Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0				
Turn Type					NA		Perm	NA				
Protected Phases					2 6			3				
Permitted Phases							3					
Detector Phase					2 6		3	3				
Switch Phase												

Lane Group	Ø1	Ø2	Ø6
Lane Configurations			
Traffic Volume (vph)			
Future Volume (vph)			
Ideal Flow (vphpl)			
Lane Width (ft)			
Lane Util. Factor			
Frt			
Flt Protected			
Satd. Flow (prot)			
Flt Permitted			
Satd. Flow (perm)			
Right Turn on Red			
Satd. Flow (RTOR)			
Link Speed (mph)			
Link Distance (ft)			
Travel Time (s)			
Peak Hour Factor			
Adj. Flow (vph)			
Shared Lane Traffic (%)			
Lane Group Flow (vph)			
Enter Blocked Intersection			
Lane Alignment			
Median Width(ft)			
Link Offset(ft)			
Crosswalk Width(ft)			
Two way Left Turn Lane			
Headway Factor			
Turning Speed (mph)			
Number of Detectors			
Detector Template			
Leading Detector (ft)			
Trailing Detector (ft)			
Detector 1 Position(ft)			
Detector 1 Size(ft)			
Detector 1 Type			
Detector 1 Channel			
Detector 1 Extend (s)			
Detector 1 Queue (s)			
Detector 1 Delay (s)			
Detector 2 Position(ft)			
Detector 2 Size(ft)			
Detector 2 Type			
Detector 2 Channel			
Detector 2 Extend (s)			
Turn Type			
Protected Phases	1	2	6
Permitted Phases			
Detector Phase			
Switch Phase			

Lanes, Volumes, Timings
15: North Broadway & Main Street

Mitigation Condition
Saturday Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)							5.0	5.0				
Minimum Split (s)							45.0	45.0				
Total Split (s)							45.0	45.0				
Total Split (%)							42.9%	42.9%				
Maximum Green (s)							40.0	40.0				
Yellow Time (s)							3.0	3.0				
All-Red Time (s)							2.0	2.0				
Lost Time Adjust (s)								0.0				
Total Lost Time (s)								5.0				
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)							3.0	3.0				
Recall Mode							Ped	Ped				
Walk Time (s)							30.0	30.0				
Flash Dont Walk (s)							10.0	10.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)					55.0			40.0				
Actuated g/C Ratio					0.52			0.38				
v/c Ratio					0.46			0.37				
Control Delay					2.6			19.0				
Queue Delay					0.0			0.0				
Total Delay					2.6			19.0				
LOS					A			B				
Approach Delay					2.6			19.0				
Approach LOS					A			B				
Queue Length 50th (ft)					16			110				
Queue Length 95th (ft)					21			180				
Internal Link Dist (ft)		417			1			104			483	
Turn Bay Length (ft)												
Base Capacity (vph)					1073			836				
Starvation Cap Reductn					0			0				
Spillback Cap Reductn					0			0				
Storage Cap Reductn					0			0				
Reduced v/c Ratio					0.46			0.37				

Intersection Summary

Area Type:	Other
Cycle Length:	105
Actuated Cycle Length:	105
Natural Cycle:	105
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.69
Intersection Signal Delay:	8.9
Intersection LOS:	A
Intersection Capacity Utilization:	46.4%
ICU Level of Service:	A
Analysis Period (min):	15

Splits and Phases: 15: North Broadway & Main Street

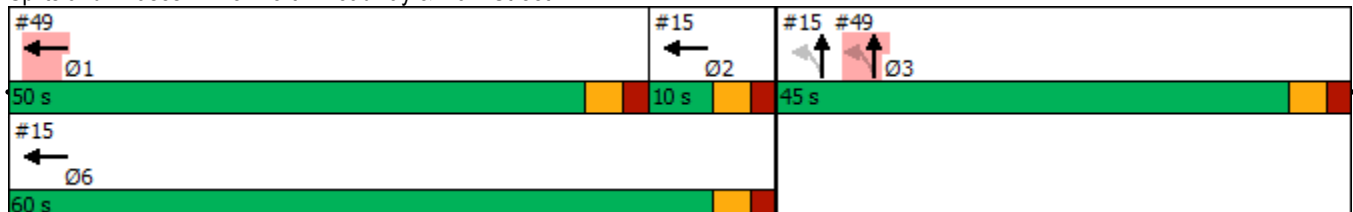

Lane Group	Ø1	Ø2	Ø6
Minimum Initial (s)	5.0	2.0	5.0
Minimum Split (s)	50.0	7.0	10.0
Total Split (s)	50.0	10.0	60.0
Total Split (%)	48%	10%	57%
Maximum Green (s)	45.0	5.0	55.0
Yellow Time (s)	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	2.0
Lost Time Adjust (s)			
Total Lost Time (s)			
Lead/Lag	Lead	Lag	
Lead-Lag Optimize?	Yes	Yes	
Vehicle Extension (s)	3.0	3.0	3.0
Recall Mode	Ped	Max	Max
Walk Time (s)	35.0		
Flash Dont Walk (s)	10.0		
Pedestrian Calls (#/hr)	0		
Act Effct Green (s)			
Actuated g/C Ratio			
v/c Ratio			
Control Delay			
Queue Delay			
Total Delay			
LOS			
Approach Delay			
Approach LOS			
Queue Length 50th (ft)			
Queue Length 95th (ft)			
Internal Link Dist (ft)			
Turn Bay Length (ft)			
Base Capacity (vph)			
Starvation Cap Reductn			
Spillback Cap Reductn			
Storage Cap Reductn			
Reduced v/c Ratio			
Intersection Summary			

Lanes, Volumes, Timings
 16: South Broadway/North Broadway & Hudson Street

Mitigation Condition
 Saturday Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	304	205	0	321	0	0
Future Volume (vph)	304	205	0	321	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Lane Width (ft)	14	14	12	16	12	12
Storage Length (ft)	0	75	0			0
Storage Lanes	1	1	0			0
Taper Length (ft)	25		25			
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor						
Frt		0.850				
Flt Protected	0.950					
Satd. Flow (prot)	1714	1689	0	1760	0	0
Flt Permitted	0.950					
Satd. Flow (perm)	1714	1689	0	1760	0	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	379			514	155	
Travel Time (s)	8.6			11.7	3.5	
Confl. Peds. (#/hr)	268		141			
Peak Hour Factor	0.97	0.97	0.87	0.87	0.92	0.92
Heavy Vehicles (%)	11%	2%	11%	4%	2%	2%
Bus Blockages (#/hr)	3	0	0	0	0	0
Parking (#/hr)				10		
Adj. Flow (vph)	313	211	0	369	0	0
Shared Lane Traffic (%)						
Lane Group Flow (vph)	313	211	0	369	0	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	14			12	12	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	0.93	0.92	1.00	1.05	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Stop	Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	40.4%
	ICU Level of Service A
Analysis Period (min)	15

Lanes, Volumes, Timings
 17: South Broadway & Prospect Street/Nepperhan Avenue

Mitigation Condition
 Saturday Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	44	834	54	125	813	66	54	211	87	117	67	21
Future Volume (vph)	44	834	54	125	813	66	54	211	87	117	67	21
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	13	12	12	12	13	10	16	16	12	16	16
Grade (%)		0%			7%			0%			0%	
Storage Length (ft)	107		0	0		0	120		200	100		0
Storage Lanes	1		0	1		1	1		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor		0.99				0.91			0.96		0.99	
Frt		0.991				0.850			0.850		0.965	
Flt Protected	0.950			0.950			0.950			0.950		
Satd. Flow (prot)	1752	3491	0	1613	3226	1491	1574	2012	1711	1687	1642	0
Flt Permitted	0.129			0.215			0.697			0.527		
Satd. Flow (perm)	238	3491	0	365	3226	1363	1155	2012	1646	936	1642	0
Right Turn on Red			No			Yes			No			Yes
Satd. Flow (RTOR)						89						15
Link Speed (mph)		30			30			30				30
Link Distance (ft)		403			838			623				514
Travel Time (s)		9.2			19.0			14.2				11.7
Confl. Peds. (#/hr)			132			49			27			32
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.93	0.93	0.93	0.94	0.94	0.94
Heavy Vehicles (%)	3%	3%	3%	8%	8%	8%	7%	7%	7%	7%	7%	7%
Bus Blockages (#/hr)	0	7	0	0	0	0	0	0	0	0	6	0
Parking (#/hr)												5
Adj. Flow (vph)	49	937	61	132	856	69	58	227	94	124	71	22
Shared Lane Traffic (%)												
Lane Group Flow (vph)	49	998	0	132	856	69	58	227	94	124	93	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			23			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	0.98	1.00	1.05	1.05	1.00	1.09	0.85	0.85	1.00	1.04	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1	1	2	
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right	Left	Thru	
Leading Detector (ft)	20	100		20	100	20	20	100	20	20	100	
Trailing Detector (ft)	0	0		0	0	0	0	0	0	0	0	
Detector 1 Position(ft)	0	0		0	0	0	0	0	0	0	0	
Detector 1 Size(ft)	20	6		20	6	20	20	6	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94			94			94			94	

Lanes, Volumes, Timings
 17: South Broadway & Prospect Street/Nepperhan Avenue

Mitigation Condition
 Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector 2 Size(ft)	6				6		6		6			
Detector 2 Type	Cl+Ex				Cl+Ex		Cl+Ex		Cl+Ex			
Detector 2 Channel												
Detector 2 Extend (s)	0.0				0.0		0.0		0.0		0.0	
Turn Type	pm+pt	NA	pm+pt		NA	Perm	Perm	NA	Perm	Perm	NA	
Protected Phases	5	1	2		6			3		3		3
Permitted Phases	1			6		6	3	3		3		
Detector Phase	5	1	2		6	6	3	3	3	3	3	
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	11.0	41.0	11.0		46.0	46.0	40.0	40.0	40.0	40.0	40.0	40.0
Total Split (s)	14.0	50.0	19.0		55.0	55.0	41.0	41.0	41.0	41.0	41.0	41.0
Total Split (%)	12.7%	45.5%	17.3%		50.0%	50.0%	37.3%	37.3%	37.3%	37.3%	37.3%	37.3%
Maximum Green (s)	8.0	44.0	13.0		49.0	49.0	35.0	35.0	35.0	35.0	35.0	35.0
Yellow Time (s)	4.0	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.0		6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead	Lag		Lag	Lag						
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes						
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	Max	Ped	Max		C-Max	C-Max	Ped	Ped	Ped	Ped	Ped	Ped
Walk Time (s)	10.0				20.0	20.0	7.0	7.0	7.0	7.0	7.0	7.0
Flash Dont Walk (s)	25.0				20.0	20.0	27.0	27.0	27.0	27.0	27.0	27.0
Pedestrian Calls (#/hr)	0				0	0	0	0	0	0	0	0
Act Effct Green (s)	40.0	40.0	49.0		49.0	49.0	34.0	34.0	34.0	34.0	34.0	34.0
Actuated g/C Ratio	0.36	0.36	0.45		0.45	0.45	0.31	0.31	0.31	0.31	0.31	0.31
v/c Ratio	0.23	0.79	0.36		0.60	0.11	0.16	0.37	0.19	0.43	0.18	
Control Delay	20.8	33.7	8.8		4.5	0.3	29.3	31.7	29.1	35.9	24.3	
Queue Delay	0.0	4.6	0.0		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	20.8	38.2	8.8		4.5	0.3	29.3	31.7	29.1	35.9	24.3	
LOS	C	D	A		A	A	C	C	C	D	C	
Approach Delay	37.4				4.8		30.7				31.0	
Approach LOS	D				A		C				C	
Queue Length 50th (ft)	20	326	14		27	0	30	125	49	70	40	
Queue Length 95th (ft)	m28	324	38		26	m0	63	193	90	128	81	
Internal Link Dist (ft)	323				758		543				434	
Turn Bay Length (ft)	107						120		200	100		
Base Capacity (vph)	210	1402	366		1437	656	367	640	523	297	532	
Starvation Cap Reductn	0	326	0		0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0		4	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0		0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.23	0.93	0.36		0.60	0.11	0.16	0.35	0.18	0.42	0.17	

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 15 (14%), Referenced to phase 6:WBTL, Start of Green

Lanes, Volumes, Timings
 19: James Street/Locust Hill Avenue & Palisade Avenue

Mitigation Condition
 Saturday Peak Hour

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	129	238	63	0	0	0	0	38	33	121	32	0
Future Volume (vph)	129	238	63	0	0	0	0	38	33	121	32	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	12	12	12	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.980						0.937				
Flt Protected		0.985									0.962	
Satd. Flow (prot)	0	2038	0	0	0	0	0	1745	0	0	1792	0
Flt Permitted		0.985									0.962	
Satd. Flow (perm)	0	2038	0	0	0	0	0	1745	0	0	1792	0
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		254			216			222			499	
Travel Time (s)		5.8			4.9			5.0			11.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	140	259	68	0	0	0	0	41	36	132	35	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	467	0	0	0	0	0	77	0	0	167	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Sign Control		Stop			Stop			Stop			Stop	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	45.2%
ICU Level of Service	A
Analysis Period (min)	15

Lanes, Volumes, Timings
20: New Main Street & Nepperhan Avenue

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↕↕↕		↖	↕↕↕	↗		↖	↗			
Traffic Volume (vph)	59	917	62	340	964	311	40	101	281	0	0	0
Future Volume (vph)	59	917	62	340	964	311	40	101	281	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	12	12	12	10	10	10	12	12	12
Grade (%)		7%			0%			0%			0%	
Storage Length (ft)	360		0	180		0	0		200	0		0
Storage Lanes	1		0	1		1	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	1.00	0.91	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990				0.850			0.850			
Flt Protected	0.950			0.950				0.986				
Satd. Flow (prot)	1651	4858	0	1770	5085	1526	0	1714	1478	0	0	0
Flt Permitted	0.188			0.159				0.986				
Satd. Flow (perm)	327	4858	0	296	5085	1526	0	1714	1478	0	0	0
Right Turn on Red			Yes			No			No			Yes
Satd. Flow (RTOR)		11										
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		838			378			724			411	
Travel Time (s)		19.0			8.6			16.5			9.3	
Peak Hour Factor	0.89	0.89	0.89	0.95	0.95	0.95	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	9	0	0	0	0	0	0
Adj. Flow (vph)	66	1030	70	358	1015	327	43	110	305	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	66	1100	0	358	1015	327	0	153	305	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.09	1.05	1.05	1.00	1.00	1.05	1.09	1.09	1.09	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2	1	1	2	1			
Detector Template	Left	Thru		Left	Thru	Right	Left	Thru	Right			
Leading Detector (ft)	20	100		20	100	20	20	100	20			
Trailing Detector (ft)	0	0		0	0	0	0	0	0			
Detector 1 Position(ft)	0	0		0	0	0	0	0	0			
Detector 1 Size(ft)	20	6		20	6	20	20	6	20			
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0		0.0	0.0	0.0	0.0	0.0	0.0			
Detector 2 Position(ft)		94			94			94				
Detector 2 Size(ft)		6			6			6				
Detector 2 Type		Cl+Ex			Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0			0.0				

Lanes, Volumes, Timings
20: New Main Street & Nepperhan Avenue

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA		pm+pt	NA	Perm	Perm	NA	pm+ov			
Protected Phases	5	2		1	6			3	1			
Permitted Phases	2			6		6	3		3			
Detector Phase	5	2		1	6	6	3	3	1			
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0	5.0	5.0	5.0	5.0			
Minimum Split (s)	11.0	41.0		11.0	46.0	46.0	40.0	40.0	11.0			
Total Split (s)	23.0	46.0		23.0	46.0	46.0	41.0	41.0	23.0			
Total Split (%)	20.9%	41.8%		20.9%	41.8%	41.8%	37.3%	37.3%	20.9%			
Maximum Green (s)	17.0	40.0		17.0	40.0	40.0	35.0	35.0	17.0			
Yellow Time (s)	4.0	4.0		4.0	4.0	4.0	4.0	4.0	4.0			
All-Red Time (s)	2.0	2.0		2.0	2.0	2.0	2.0	2.0	2.0			
Lost Time Adjust (s)	0.0	0.0		0.0	0.0	0.0		0.0	0.0			
Total Lost Time (s)	6.0	6.0		6.0	6.0	6.0		6.0	6.0			
Lead/Lag	Lead	Lag		Lead	Lag	Lag			Lead			
Lead-Lag Optimize?	Yes	Yes		Yes	Yes	Yes			Yes			
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0			
Recall Mode	Max	Ped		Max	C-Max	C-Max	Ped	Ped	Max			
Walk Time (s)		15.0			20.0	20.0	7.0	7.0				
Flash Dont Walk (s)		20.0			20.0	20.0	27.0	27.0				
Pedestrian Calls (#/hr)		0			0	0	0	0				
Act Effct Green (s)	58.0	40.0		58.0	40.0	40.0		34.0	58.0			
Actuated g/C Ratio	0.53	0.36		0.53	0.36	0.36		0.31	0.53			
v/c Ratio	0.17	0.62		0.90	0.55	0.59		0.29	0.39			
Control Delay	12.4	22.6		62.7	31.3	33.9		30.7	17.4			
Queue Delay	0.0	0.0		0.0	0.3	0.7		0.0	0.0			
Total Delay	12.4	22.6		62.7	31.6	34.6		30.7	17.4			
LOS	B	C		E	C	C		C	B			
Approach Delay		22.0			38.7			21.8				
Approach LOS		C			D			C				
Queue Length 50th (ft)	14	135		226	154	136		82	123			
Queue Length 95th (ft)	m28	193		#349	163	169		137	189			
Internal Link Dist (ft)		758			298			644			331	
Turn Bay Length (ft)	360			180					200			
Base Capacity (vph)	389	1773		397	1849	554		545	779			
Starvation Cap Reductn	0	0		0	290	58		0	0			
Spillback Cap Reductn	0	11		0	0	0		0	0			
Storage Cap Reductn	0	0		0	0	0		0	0			
Reduced v/c Ratio	0.17	0.62		0.90	0.65	0.66		0.28	0.39			

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 0 (0%), Referenced to phase 6:WBTL, Start of Green
 Natural Cycle: 100
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.90
 Intersection Signal Delay: 30.5
 Intersection LOS: C

Lanes, Volumes, Timings
 20: New Main Street & Nepperhan Avenue

Mitigation Condition
 Saturday Peak Hour

Intersection Capacity Utilization 60.5% ICU Level of Service B

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 20: New Main Street & Nepperhan Avenue



Lanes, Volumes, Timings
22: New School Street & Palisade Avenue

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Volume (vph)	95	199	83	0	0	0	0	114	161	69	143	0
Future Volume (vph)	95	199	83	0	0	0	0	114	161	69	143	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	12	12	12	16	16	16	16	16	16
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.970						0.921				
Flt Protected		0.988									0.984	
Satd. Flow (prot)	0	1720	0	0	0	0	0	1944	0	0	2027	0
Flt Permitted		0.988									0.817	
Satd. Flow (perm)	0	1720	0	0	0	0	0	1944	0	0	1683	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		23						127				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		307			736			222			625	
Travel Time (s)		7.0			16.7			5.0			14.2	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	0	0	0	6	0
Parking (#/hr)		10										
Adj. Flow (vph)	103	216	90	0	0	0	0	124	175	75	155	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	409	0	0	0	0	0	299	0	0	230	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		-10			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	0.85	1.05	0.85	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.88	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2						2		1	2	
Detector Template	Left	Thru						Thru		Left	Thru	
Leading Detector (ft)	20	100						100		20	100	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	20	6						6		20	6	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	
Turn Type	Perm	NA						NA		Perm	NA	
Protected Phases		3						2			6	
Permitted Phases		3									6	

Lanes, Volumes, Timings
22: New School Street & Palisade Avenue

Mitigation Condition
Saturday Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	3	3						2		6	6	
Switch Phase												
Minimum Initial (s)	5.0	5.0						5.0		5.0	5.0	
Minimum Split (s)	34.0	34.0						39.0		10.0	10.0	
Total Split (s)	35.0	35.0						40.0		40.0	40.0	
Total Split (%)	46.7%	46.7%						53.3%		53.3%	53.3%	
Maximum Green (s)	30.0	30.0						35.0		35.0	35.0	
Yellow Time (s)	3.0	3.0						3.0		3.0	3.0	
All-Red Time (s)	2.0	2.0						2.0		2.0	2.0	
Lost Time Adjust (s)		0.0						0.0			0.0	
Total Lost Time (s)		5.0						5.0			5.0	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						3.0		3.0	3.0	
Recall Mode	Ped	Ped						Ped		Max	Max	
Walk Time (s)	9.0	9.0						14.0				
Flash Dont Walk (s)	20.0	20.0						20.0				
Pedestrian Calls (#/hr)	0	0						0				
Act Effct Green (s)		29.2						35.0			35.0	
Actuated g/C Ratio		0.39						0.47			0.47	
v/c Ratio		0.59						0.30			0.29	
Control Delay		21.0						7.7			13.3	
Queue Delay		0.0						0.0			0.0	
Total Delay		21.0						7.7			13.3	
LOS		C						A			B	
Approach Delay		21.0						7.7			13.3	
Approach LOS		C						A			B	
Queue Length 50th (ft)		136						43			61	
Queue Length 95th (ft)		223						91			110	
Internal Link Dist (ft)		227			656			142			545	
Turn Bay Length (ft)												
Base Capacity (vph)		708						984			794	
Starvation Cap Reductn		0						0			0	
Spillback Cap Reductn		0						0			0	
Storage Cap Reductn		0						0			0	
Reduced v/c Ratio		0.58						0.30			0.29	

Intersection Summary

Area Type:	Other
Cycle Length:	75
Actuated Cycle Length:	74.2
Natural Cycle:	75
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.59
Intersection Signal Delay:	14.9
Intersection Capacity Utilization:	60.5%
Analysis Period (min):	15
Intersection LOS:	B
ICU Level of Service:	B

Splits and Phases: 22: New School Street & Palisade Avenue

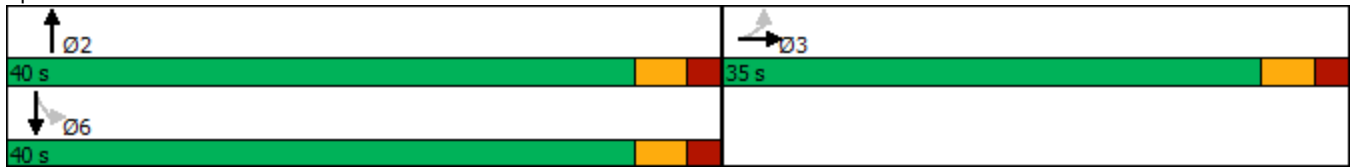


Lanes, Volumes, Timings
23: New School Street & Maple Street & Nepperhan Avenue

Mitigation Condition
Saturday Peak Hour

Lane Group	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	SBL2	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	132	999	63	4	21	37	1395	319	76	36	11	220
Future Volume (vph)	132	999	63	4	21	37	1395	319	76	36	11	220
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	12	12	12	12	11	12	11	16	16	16	16
Grade (%)		0%					-5%				0%	
Storage Length (ft)	100		0			210		0		0		0
Storage Lanes	1		0			1		1		0		0
Taper Length (ft)	25					25				25		
Lane Util. Factor	1.00	0.91	0.91	0.91	0.91	1.00	0.91	1.00	1.00	1.00	1.00	1.00
Frt		0.991						0.850			0.913	
Flt Protected	0.950					0.950					0.984	
Satd. Flow (prot)	1711	5040	0	0	0	1753	5212	1569	0	0	1897	0
Flt Permitted	0.091					0.146					0.984	
Satd. Flow (perm)	164	5040	0	0	0	269	5212	1569	0	0	1897	0
Right Turn on Red				Yes				Yes				Yes
Satd. Flow (RTOR)		1						336			87	
Link Speed (mph)		30					30				30	
Link Distance (ft)		378					492				359	
Travel Time (s)		8.6					11.2				8.2	
Peak Hour Factor	0.89	0.89	0.89	0.89	0.95	0.95	0.95	0.95	0.92	0.92	0.92	0.92
Adj. Flow (vph)	148	1122	71	4	22	39	1468	336	83	39	12	239
Shared Lane Traffic (%)												
Lane Group Flow (vph)	148	1197	0	0	0	61	1468	336	0	0	373	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Right	Left	Left	Left	Right	Left	Left	Left	Right
Median Width(ft)		12					12				0	
Link Offset(ft)		0					0				0	
Crosswalk Width(ft)		16					16				16	
Two way Left Turn Lane												
Headway Factor	1.04	1.00	1.00	1.00	0.97	1.01	0.97	1.01	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	9	15	15		9	15	15		9
Number of Detectors	1	2			1	1	2	1	1	1	2	
Detector Template	Left	Thru			Left	Left	Thru	Right	Left	Left	Thru	
Leading Detector (ft)	20	100			20	20	100	20	20	20	100	
Trailing Detector (ft)	0	0			0	0	0	0	0	0	0	
Detector 1 Position(ft)	0	0			0	0	0	0	0	0	0	
Detector 1 Size(ft)	20	6			20	20	6	20	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94					94				94	
Detector 2 Size(ft)		6					6				6	
Detector 2 Type		Cl+Ex					Cl+Ex				Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0					0.0				0.0	
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Perm	Perm	NA	

Lanes, Volumes, Timings
 23: New School Street & Maple Street & Nepperhan Avenue

Mitigation Condition
 Saturday Peak Hour



Lane Group	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	SBL2	SBL	SBT	SBR
Protected Phases	5	2			1	1	6					3
Permitted Phases	2				6	6		6	3	3		
Detector Phase	5	2			1	1	6	6	3	3		3
Switch Phase												
Minimum Initial (s)	5.0	5.0			5.0	5.0	5.0	5.0	5.0	5.0		5.0
Minimum Split (s)	11.0	46.0			11.0	11.0	46.0	46.0	40.0	40.0		40.0
Total Split (s)	18.0	50.0			18.0	18.0	50.0	50.0	42.0	42.0		42.0
Total Split (%)	16.4%	45.5%			16.4%	16.4%	45.5%	45.5%	38.2%	38.2%		38.2%
Maximum Green (s)	12.0	44.0			12.0	12.0	44.0	44.0	36.0	36.0		36.0
Yellow Time (s)	4.0	4.0			4.0	4.0	4.0	4.0	4.0	4.0		4.0
All-Red Time (s)	2.0	2.0			2.0	2.0	2.0	2.0	2.0	2.0		2.0
Lost Time Adjust (s)	0.0	0.0					0.0	0.0				0.0
Total Lost Time (s)	6.0	6.0					6.0	6.0				6.0
Lead/Lag	Lead	Lag			Lead	Lead	Lag	Lag				
Lead-Lag Optimize?	Yes	Yes			Yes	Yes	Yes	Yes				
Vehicle Extension (s)	3.0	3.0			3.0	3.0	3.0	3.0	3.0	3.0		3.0
Recall Mode	Max	Ped			Max	Max	C-Max	C-Max	Ped	Ped		Ped
Walk Time (s)		20.0					20.0	20.0	7.0	7.0		7.0
Flash Dont Walk (s)		20.0					20.0	20.0	27.0	27.0		27.0
Pedestrian Calls (#/hr)		0					0	0	0	0		0
Act Effct Green (s)	58.0	44.0				58.0	44.0	44.0				34.0
Actuated g/C Ratio	0.53	0.40				0.53	0.40	0.40				0.31
v/c Ratio	0.52	0.59				0.18	0.70	0.41				0.58
Control Delay	41.6	15.0				16.7	26.8	8.8				28.2
Queue Delay	0.0	0.5				0.0	0.2	0.0				0.3
Total Delay	41.6	15.5				16.7	27.0	8.8				28.5
LOS	D	B				B	C	A				C
Approach Delay		18.4					23.4					28.5
Approach LOS		B					C					C
Queue Length 50th (ft)	60	162				12	188	5				169
Queue Length 95th (ft)	125	180				m67	320	165				268
Internal Link Dist (ft)		298					412					279
Turn Bay Length (ft)	100					210						
Base Capacity (vph)	283	2016				330	2084	829				679
Starvation Cap Reductn	0	382				0	119	0				0
Spillback Cap Reductn	0	0				0	5	0				52
Storage Cap Reductn	0	0				0	0	0				0
Reduced v/c Ratio	0.52	0.73				0.18	0.75	0.41				0.59


Intersection Summary

Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	10 (9%), Referenced to phase 6:WBTL, Start of Green
Natural Cycle:	100
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.70
Intersection Signal Delay:	22.1
Intersection Capacity Utilization:	69.6%
Intersection LOS:	C
ICU Level of Service:	C

Analysis Period (min) 15


m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 23: New School Street & Maple Street & Nepperhan Avenue

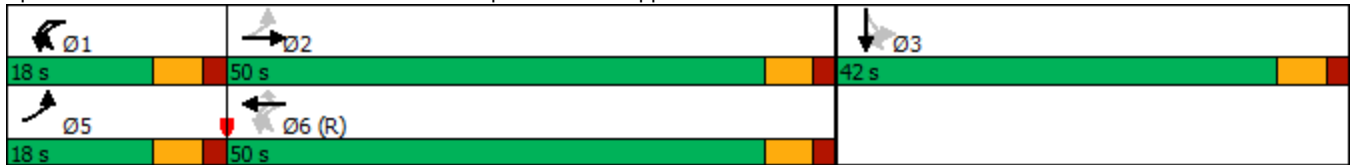

Lanes, Volumes, Timings
24: Waverly Street & Nepperhan Avenue

Mitigation Condition
Saturday Peak Hour



Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø9
Lane Configurations	↑↑↑		↙	↑↑↑	↘		
Traffic Volume (vph)	1075	0	1	1701	71	119	
Future Volume (vph)	1075	0	1	1701	71	119	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Lane Width (ft)	12	12	12	15	15	15	
Grade (%)	5%			-5%	0%		
Storage Length (ft)		0	120		0	0	
Storage Lanes		0	1		1	0	
Taper Length (ft)			25		25		
Lane Util. Factor	0.91	0.91	1.00	0.91	1.00	1.00	
Frt					0.915		
Flt Protected			0.950		0.982		
Satd. Flow (prot)	4752	0	1814	5703	1841	0	
Flt Permitted			0.206		0.982		
Satd. Flow (perm)	4752	0	393	5703	1841	0	
Right Turn on Red		Yes				Yes	
Satd. Flow (RTOR)					63		
Link Speed (mph)	30			30	30		
Link Distance (ft)	492			401	154		
Travel Time (s)	11.2			9.1	3.5		
Peak Hour Factor	0.89	0.89	0.95	0.95	0.92	0.92	
Bus Blockages (#/hr)	0	0	0	4	0	0	
Parking (#/hr)	5						
Adj. Flow (vph)	1208	0	1	1791	77	129	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	1208	0	1	1791	206	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	12			12	15		
Link Offset(ft)	0			0	0		
Crosswalk Width(ft)	16			16	16		
Two way Left Turn Lane							
Headway Factor	1.09	1.03	0.97	0.86	0.88	0.88	
Turning Speed (mph)		9	15		15	9	
Number of Detectors	2		1	2	1		
Detector Template	Thru		Left	Thru	Left		
Leading Detector (ft)	100		20	100	20		
Trailing Detector (ft)	0		0	0	0		
Detector 1 Position(ft)	0		0	0	0		
Detector 1 Size(ft)	6		20	6	20		
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex		
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0	0.0		
Detector 1 Queue (s)	0.0		0.0	0.0	0.0		
Detector 1 Delay (s)	0.0		0.0	0.0	0.0		
Detector 2 Position(ft)	94			94			
Detector 2 Size(ft)	6			6			
Detector 2 Type	Cl+Ex			Cl+Ex			
Detector 2 Channel							

Lanes, Volumes, Timings
 24: Waverly Street & Nepperhan Avenue

Mitigation Condition
 Saturday Peak Hour
























Lane Group	EBT	EBR	WBL	WBT	NBL	NBR	Ø9
Detector 2 Extend (s)	0.0			0.0			
Turn Type	NA		Perm	NA	Prot		
Protected Phases	1			6	3		9
Permitted Phases			6				
Detector Phase	1		6	6	3		
Switch Phase							
Minimum Initial (s)	5.0		5.0	5.0	5.0		5.0
Minimum Split (s)	11.0		11.0	11.0	11.0		42.0
Total Split (s)	48.0		48.0	48.0	20.0		42.0
Total Split (%)	43.6%		43.6%	43.6%	18.2%		38%
Maximum Green (s)	42.0		42.0	42.0	14.0		40.0
Yellow Time (s)	4.0		4.0	4.0	4.0		2.0
All-Red Time (s)	2.0		2.0	2.0	2.0		0.0
Lost Time Adjust (s)	0.0		0.0	0.0	0.0		
Total Lost Time (s)	6.0		6.0	6.0	6.0		
Lead/Lag							
Lead-Lag Optimize?							
Vehicle Extension (s)	3.0		3.0	3.0	3.0		3.0
Recall Mode	Max		C-Max	C-Max	Min		None
Walk Time (s)							20.0
Flash Dont Walk (s)							20.0
Pedestrian Calls (#/hr)							5
Act Effct Green (s)	77.2		77.2	77.2	12.4		
Actuated g/C Ratio	0.70		0.70	0.70	0.11		
v/c Ratio	0.36		0.00	0.45	0.78		
Control Delay	4.0		7.0	5.9	53.4		
Queue Delay	0.0		0.0	0.1	0.0		
Total Delay	4.0		7.0	5.9	53.4		
LOS	A		A	A	D		
Approach Delay	4.0			5.9	53.4		
Approach LOS	A			A	D		
Queue Length 50th (ft)	16		0	71	98		
Queue Length 95th (ft)	334		m0	326	#198		
Internal Link Dist (ft)	412			321	74		
Turn Bay Length (ft)			120				
Base Capacity (vph)	3335		276	4003	289		
Starvation Cap Reductn	0		0	495	0		
Spillback Cap Reductn	40		0	0	0		
Storage Cap Reductn	0		0	0	0		
Reduced v/c Ratio	0.37		0.00	0.51	0.71		

Intersection Summary

Area Type: Other
 Cycle Length: 110
 Actuated Cycle Length: 110
 Offset: 30 (27%), Referenced to phase 6:WBTL, Start of Green
 Natural Cycle: 90
 Control Type: Actuated-Coordinated
 Maximum v/c Ratio: 0.78

Lanes, Volumes, Timings
27: Nepperhan Avenue & Elm Street

Mitigation Condition
Saturday Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	341	67	21	208	0	39	0	1090	104	64	1473	0
Future Volume (vph)	341	67	21	208	0	39	0	1090	104	64	1473	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	11	11	11	10	10	10	12	12	12	11	12	12
Grade (%)		0%			0%			5%			0%	
Storage Length (ft)	0		0	0		50	0		0	140		0
Storage Lanes	1		0	1		1	0		1	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.91	1.00	1.00	0.91	1.00
Frt		0.964				0.850			0.850			
Flt Protected	0.950			0.950						0.950		
Satd. Flow (prot)	1454	1736	0	1652	0	1478	0	4958	1544	1711	5085	0
Flt Permitted	0.950			0.695						0.100		
Satd. Flow (perm)	1454	1736	0	1208	0	1478	0	4958	1544	180	5085	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		11				30			117			
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		736			401			401			583	
Travel Time (s)		16.7			9.1			9.1			13.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.89	0.89	0.89	0.95	0.95	0.95
Parking (#/hr)	10											
Adj. Flow (vph)	371	73	23	226	0	42	0	1225	117	67	1551	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	371	96	0	226	0	42	0	1225	117	67	1551	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		11			11			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.28	1.04	1.04	1.09	1.09	1.09	1.03	1.03	1.03	1.04	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1		1		2	1	1	2	
Detector Template	Left	Thru		Left		Right		Thru	Right	Left	Thru	
Leading Detector (ft)	20	100		20		20		100	20	20	100	
Trailing Detector (ft)	0	0		0		0		0	0	0	0	
Detector 1 Position(ft)	0	0		0		0		0	0	0	0	
Detector 1 Size(ft)	20	6		20		20		6	20	20	6	
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0	0.0	
Detector 1 Queue (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0	0.0	
Detector 1 Delay (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0	0.0	
Detector 2 Position(ft)		94						94			94	
Detector 2 Size(ft)		6						6			6	
Detector 2 Type		Cl+Ex						Cl+Ex			Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)		0.0						0.0			0.0	

Lanes, Volumes, Timings
27: Nepperhan Avenue & Elm Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA		Perm		pm+ov		NA	Perm	pm+pt		NA
Protected Phases		3				1		2		1		6
Permitted Phases	3			7		7			2	6		
Detector Phase	3	3		7		1		2	2	1		6
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0		5.0		5.0	5.0	5.0		5.0
Minimum Split (s)	40.0	40.0		40.0		11.0		39.0	39.0	11.0		39.0
Total Split (s)	53.0	53.0		53.0		17.0		40.0	40.0	17.0		57.0
Total Split (%)	48.2%	48.2%		48.2%		15.5%		36.4%	36.4%	15.5%		51.8%
Maximum Green (s)	47.0	47.0		47.0		11.0		34.0	34.0	11.0		51.0
Yellow Time (s)	4.0	4.0		4.0		4.0		4.0	4.0	4.0		4.0
All-Red Time (s)	2.0	2.0		2.0		2.0		2.0	2.0	2.0		2.0
Lost Time Adjust (s)	0.0	0.0		0.0		0.0		0.0	0.0	0.0		0.0
Total Lost Time (s)	6.0	6.0		6.0		6.0		6.0	6.0	6.0		6.0
Lead/Lag						Lead		Lag	Lag	Lead		
Lead-Lag Optimize?						Yes		Yes	Yes	Yes		
Vehicle Extension (s)	3.0	3.0		3.0		3.0		3.0	3.0	3.0		3.0
Recall Mode	Ped	Ped		Ped		Max		Ped	Ped	Max		C-Max
Walk Time (s)	7.0	7.0		7.0				20.0	20.0			20.0
Flash Dont Walk (s)	27.0	27.0		27.0				13.0	13.0			13.0
Pedestrian Calls (#/hr)	0	0		0				0	0			0
Act Effct Green (s)	37.3	37.3		37.3		64.0		34.0	34.0	60.7		60.7
Actuated g/C Ratio	0.34	0.34		0.34		0.58		0.31	0.31	0.55		0.55
v/c Ratio	0.75	0.16		0.55		0.05		0.80	0.21	0.17		0.55
Control Delay	42.3	22.0		34.5		4.8		16.0	1.6	14.0		17.5
Queue Delay	0.0	0.0		0.0		0.0		0.9	0.0	0.0		0.0
Total Delay	42.3	22.0		34.5		4.8		16.9	1.6	14.0		17.5
LOS	D	C		C		A		B	A	B		B
Approach Delay		38.2			29.9			15.6				17.4
Approach LOS		D			C			B				B
Queue Length 50th (ft)	242	44		135		3		247	7	19		227
Queue Length 95th (ft)	308	71		186		18		36	m0	50		341
Internal Link Dist (ft)		656			321			321				503
Turn Bay Length (ft)						50				140		
Base Capacity (vph)	621	748		516		872		1532	558	387		2805
Starvation Cap Reductn	0	0		0		0		111	0	0		0
Spillback Cap Reductn	0	0		0		0		0	0	0		117
Storage Cap Reductn	0	0		0		0		0	0	0		0
Reduced v/c Ratio	0.60	0.13		0.44		0.05		0.86	0.21	0.17		0.58

Intersection Summary


Area Type:	Other
Cycle Length:	110
Actuated Cycle Length:	110
Offset:	22 (20%), Referenced to phase 6:SBTL, Start of Green
Natural Cycle:	90
Control Type:	Actuated-Coordinated
Maximum v/c Ratio:	0.80
Intersection Signal Delay:	20.2
Intersection LOS:	C

Lanes, Volumes, Timings
 27: Nepperhan Avenue & Elm Street

Mitigation Condition
 Saturday Peak Hour

Intersection Capacity Utilization 61.6% ICU Level of Service B
 Analysis Period (min) 15
 m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 27: Nepperhan Avenue & Elm Street

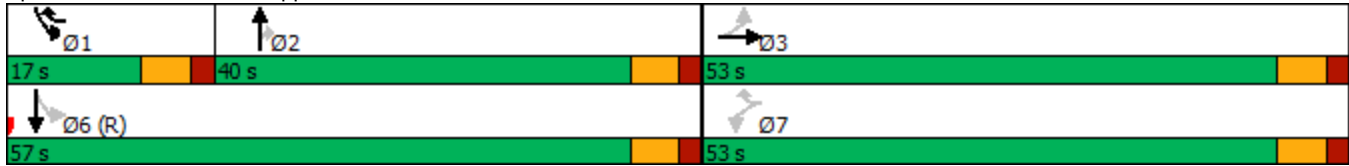

Lanes, Volumes, Timings
36: Hawthorne Avenue & Prospect Street

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕↕		↖	↗							
Traffic Volume (vph)	15	398	63	87	370	127	0	0	0	0	0	0
Future Volume (vph)	15	398	63	87	370	127	0	0	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	16	16	16	16	16	16	16	16	16	16	16	16
Lane Util. Factor	0.95	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.980			0.962							
Flt Protected		0.998		0.950								
Satd. Flow (prot)	0	3923	0	2006	2031	0	0	0	0	0	0	0
Flt Permitted		0.933		0.456								
Satd. Flow (perm)	0	3668	0	963	2031	0	0	0	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		33			33							
Link Speed (mph)		30			30			30				30
Link Distance (ft)		256			511			286				516
Travel Time (s)		5.8			11.6			6.5				11.7
Peak Hour Factor	0.90	0.90	0.90	0.81	0.81	0.81	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	17	442	70	107	457	157	0	0	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	529	0	107	614	0	0	0	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			24			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85	0.85
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2		1	2							
Detector Template	Left	Thru		Left	Thru							
Leading Detector (ft)	20	100		20	100							
Trailing Detector (ft)	0	0		0	0							
Detector 1 Position(ft)	0	0		0	0							
Detector 1 Size(ft)	20	6		20	6							
Detector 1 Type	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex							
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0		0.0	0.0							
Detector 1 Queue (s)	0.0	0.0		0.0	0.0							
Detector 1 Delay (s)	0.0	0.0		0.0	0.0							
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type	Perm	NA		Perm	NA							
Protected Phases		4			8							
Permitted Phases	4			8								
Detector Phase	4	4		8	8							
Switch Phase												

Lane Group	Ø9
Lane Configurations	
Traffic Volume (vph)	
Future Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Lane Util. Factor	
Frt	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Detector 2 Position(ft)	
Detector 2 Size(ft)	
Detector 2 Type	
Detector 2 Channel	
Detector 2 Extend (s)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	

Lanes, Volumes, Timings
 36: Hawthorne Avenue & Prospect Street

Mitigation Condition
 Saturday Peak Hour




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Minimum Initial (s)	5.0	5.0		5.0	5.0							
Minimum Split (s)	10.0	10.0		10.0	10.0							
Total Split (s)	58.0	58.0		58.0	58.0							
Total Split (%)	64.4%	64.4%		64.4%	64.4%							
Maximum Green (s)	53.0	53.0		53.0	53.0							
Yellow Time (s)	3.0	3.0		3.0	3.0							
All-Red Time (s)	2.0	2.0		2.0	2.0							
Lost Time Adjust (s)		0.0		0.0	0.0							
Total Lost Time (s)		5.0		5.0	5.0							
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0		3.0	3.0							
Recall Mode	Max	Max		Max	Max							
Walk Time (s)												
Flash Dont Walk (s)												
Pedestrian Calls (#/hr)												
Act Effct Green (s)		73.8		73.8	73.8							
Actuated g/C Ratio		0.93		0.93	0.93							
v/c Ratio		0.16		0.12	0.32							
Control Delay		2.1		3.1	3.1							
Queue Delay		0.0		0.0	0.0							
Total Delay		2.2		3.1	3.2							
LOS		A		A	A							
Approach Delay		2.2			3.2							
Approach LOS		A			A							
Queue Length 50th (ft)		0		0	0							
Queue Length 95th (ft)		88		44	213							
Internal Link Dist (ft)		176			431			206			436	
Turn Bay Length (ft)												
Base Capacity (vph)		3412		895	1890							
Starvation Cap Reductn		511		0	148							
Spillback Cap Reductn		0		0	0							
Storage Cap Reductn		0		0	0							
Reduced v/c Ratio		0.18		0.12	0.35							

Intersection Summary

Area Type:	Other
Cycle Length:	90
Actuated Cycle Length:	79.4
Natural Cycle:	60
Control Type:	Semi Act-Uncoord
Maximum v/c Ratio:	0.32
Intersection Signal Delay:	2.7
Intersection LOS:	A
Intersection Capacity Utilization:	49.0%
ICU Level of Service:	A
Analysis Period (min):	15

Splits and Phases: 36: Hawthorne Avenue & Prospect Street

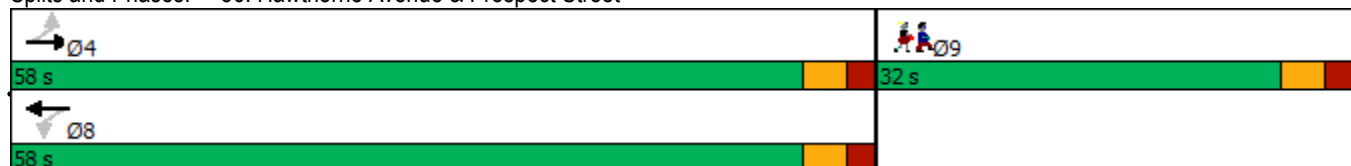

Lane Group	Ø9
Minimum Initial (s)	5.0
Minimum Split (s)	32.0
Total Split (s)	32.0
Total Split (%)	36%
Maximum Green (s)	27.0
Yellow Time (s)	3.0
All-Red Time (s)	2.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	7.0
Flash Dont Walk (s)	20.0
Pedestrian Calls (#/hr)	5
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
Intersection Summary	

Lanes, Volumes, Timings
49: Palisade Avenue & Main Street/New Main Street

Mitigation Condition
Saturday Peak Hour















Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	0	0	0	0	381	120	32	310	0	0	0	0
Future Volume (vph)	0	0	0	0	381	120	32	310	0	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	12	12	16	16	16	16	16	16	12	12	12
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt					0.968							
Flt Protected								0.995				
Satd. Flow (prot)	0	0	0	0	2044	0	0	1983	0	0	0	0
Flt Permitted								0.995				
Satd. Flow (perm)	0	0	0	0	2044	0	0	1983	0	0	0	0
Right Turn on Red			Yes			No			No			Yes
Satd. Flow (RTOR)												
Link Speed (mph)		30			30			30				30
Link Distance (ft)		81			430			212				254
Travel Time (s)		1.8			9.8			4.8				5.8
Peak Hour Factor	0.92	0.92	0.92	0.83	0.83	0.83	0.92	0.92	0.92	0.92	0.92	0.92
Bus Blockages (#/hr)	0	0	0	0	0	0	0	14	0	0	0	0
Adj. Flow (vph)	0	0	0	0	459	145	35	337	0	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	604	0	0	372	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	0.85	0.85	0.85	0.85	0.92	0.85	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors					2		1	2				
Detector Template					Thru		Left	Thru				
Leading Detector (ft)					100		20	100				
Trailing Detector (ft)					0		0	0				
Detector 1 Position(ft)					0		0	0				
Detector 1 Size(ft)					6		20	6				
Detector 1 Type					Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)					0.0		0.0	0.0				
Detector 1 Queue (s)					0.0		0.0	0.0				
Detector 1 Delay (s)					0.0		0.0	0.0				
Detector 2 Position(ft)					94			94				
Detector 2 Size(ft)					6			6				
Detector 2 Type					Cl+Ex			Cl+Ex				
Detector 2 Channel												
Detector 2 Extend (s)					0.0			0.0				
Turn Type					NA		Perm	NA				
Protected Phases					1			3				
Permitted Phases							3					
Detector Phase					1		3	3				


Lane Group	Ø2	Ø6
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Ideal Flow (vphpl)		
Lane Width (ft)		
Lane Util. Factor		
Frt		
Flt Protected		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Right Turn on Red		
Satd. Flow (RTOR)		
Link Speed (mph)		
Link Distance (ft)		
Travel Time (s)		
Peak Hour Factor		
Bus Blockages (#/hr)		
Adj. Flow (vph)		
Shared Lane Traffic (%)		
Lane Group Flow (vph)		
Enter Blocked Intersection		
Lane Alignment		
Median Width(ft)		
Link Offset(ft)		
Crosswalk Width(ft)		
Two way Left Turn Lane		
Headway Factor		
Turning Speed (mph)		
Number of Detectors		
Detector Template		
Leading Detector (ft)		
Trailing Detector (ft)		
Detector 1 Position(ft)		
Detector 1 Size(ft)		
Detector 1 Type		
Detector 1 Channel		
Detector 1 Extend (s)		
Detector 1 Queue (s)		
Detector 1 Delay (s)		
Detector 2 Position(ft)		
Detector 2 Size(ft)		
Detector 2 Type		
Detector 2 Channel		
Detector 2 Extend (s)		
Turn Type		
Protected Phases	2	6
Permitted Phases		
Detector Phase		

Lanes, Volumes, Timings
49: Palisade Avenue & Main Street/New Main Street

Mitigation Condition
Saturday Peak Hour

												
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Switch Phase												
Minimum Initial (s)					5.0		5.0	5.0				
Minimum Split (s)					50.0		45.0	45.0				
Total Split (s)					50.0		45.0	45.0				
Total Split (%)					47.6%		42.9%	42.9%				
Maximum Green (s)					45.0		40.0	40.0				
Yellow Time (s)					3.0		3.0	3.0				
All-Red Time (s)					2.0		2.0	2.0				
Lost Time Adjust (s)					0.0			0.0				
Total Lost Time (s)					5.0			5.0				
Lead/Lag					Lead							
Lead-Lag Optimize?					Yes							
Vehicle Extension (s)					3.0		3.0	3.0				
Recall Mode					Ped		Ped	Ped				
Walk Time (s)					35.0		30.0	30.0				
Flash Dont Walk (s)					10.0		10.0	10.0				
Pedestrian Calls (#/hr)					0		0	0				
Act Effct Green (s)					45.0			40.0				
Actuated g/C Ratio					0.43			0.38				
v/c Ratio					0.69			0.49				
Control Delay					29.4			27.5				
Queue Delay					0.0			0.0				
Total Delay					29.4			27.5				
LOS					C			C				
Approach Delay					29.4			27.5				
Approach LOS					C			C				
Queue Length 50th (ft)					322			188				
Queue Length 95th (ft)					398			276				
Internal Link Dist (ft)			1		350			132			174	
Turn Bay Length (ft)												
Base Capacity (vph)					876			755				
Starvation Cap Reductn					0			0				
Spillback Cap Reductn					0			0				
Storage Cap Reductn					0			0				
Reduced v/c Ratio					0.69			0.49				
Intersection Summary												
Area Type:	Other											
Cycle Length:	105											
Actuated Cycle Length:	105											
Natural Cycle:	105											
Control Type:	Semi Act-Uncoord											
Maximum v/c Ratio:	0.69											
Intersection Signal Delay:	28.7						Intersection LOS: C					
Intersection Capacity Utilization	53.8%						ICU Level of Service A					
Analysis Period (min)	15											

Splits and Phases: 49: Palisade Avenue & Main Street/New Main Street

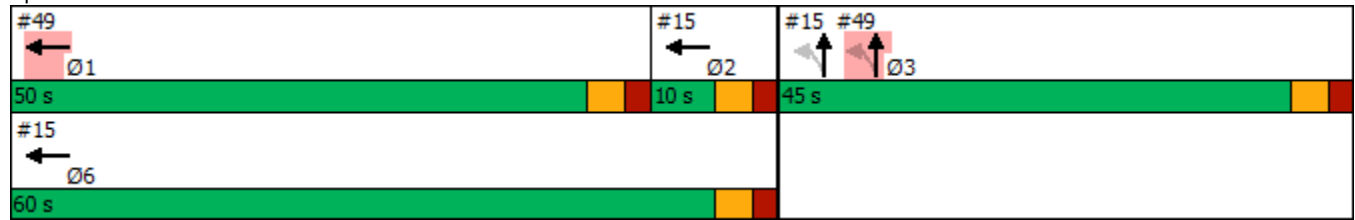

Lane Group	Ø2	Ø6
Switch Phase		
Minimum Initial (s)	2.0	5.0
Minimum Split (s)	7.0	10.0
Total Split (s)	10.0	60.0
Total Split (%)	10%	57%
Maximum Green (s)	5.0	55.0
Yellow Time (s)	3.0	3.0
All-Red Time (s)	2.0	2.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lag	
Lead-Lag Optimize?	Yes	
Vehicle Extension (s)	3.0	3.0
Recall Mode	Max	Max
Walk Time (s)		
Flash Dont Walk (s)		
Pedestrian Calls (#/hr)		
Act Effct Green (s)		
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (ft)		
Queue Length 95th (ft)		
Internal Link Dist (ft)		
Turn Bay Length (ft)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		

Lanes, Volumes, Timings
50: Locust Hill Avenue & Overlook Terrace

Mitigation Condition
Saturday Peak Hour



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	20	77	94	73	76	25
Future Volume (vph)	20	77	94	73	76	25
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.893				0.967	
Flt Protected	0.990			0.973		
Satd. Flow (prot)	1647	0	0	1812	1801	0
Flt Permitted	0.990			0.973		
Satd. Flow (perm)	1647	0	0	1812	1801	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	126			499	747	
Travel Time (s)	2.9			11.3	17.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	22	84	102	79	83	27
Shared Lane Traffic (%)						
Lane Group Flow (vph)	106	0	0	181	110	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			0	0	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	28.2%
Analysis Period (min)	15
	ICU Level of Service A

Lanes, Volumes, Timings
59: Buena Vista Avenue & South Driveway

Mitigation Condition
Saturday Peak Hour











Lane Group	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (vph)	15	77	90	318	352	18
Future Volume (vph)	15	77	90	318	352	18
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.887				0.993	
Flt Protected	0.992			0.989		
Satd. Flow (prot)	1639	0	0	1842	1850	0
Flt Permitted	0.992			0.989		
Satd. Flow (perm)	1639	0	0	1842	1850	0
Link Speed (mph)	30			30	30	
Link Distance (ft)	172			284	235	
Travel Time (s)	3.9			6.5	5.3	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	16	84	98	346	383	20
Shared Lane Traffic (%)						
Lane Group Flow (vph)	100	0	0	444	403	0
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	12			9	9	
Link Offset(ft)	0			0	0	
Crosswalk Width(ft)	16			16	16	
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	9	15			9
Sign Control	Stop			Free	Free	

Intersection Summary

Area Type:	Other
Control Type:	Unsignalized
Intersection Capacity Utilization	56.9%
Analysis Period (min)	15
	ICU Level of Service B

Lanes, Volumes, Timings
130: Palisade Avenue

Mitigation Condition
Saturday Peak Hour

						
Lane Group	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations						
Traffic Volume (vph)	371	21	0	0	0	6
Future Volume (vph)	371	21	0	0	0	6
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.993			0.865		
Flt Protected						
Satd. Flow (prot)	1850	0	0	0	0	1611
Flt Permitted						
Satd. Flow (perm)	1850	0	0	0	0	1611
Link Speed (mph)	30			30		
Link Distance (ft)	216			307		260
Travel Time (s)	4.9			7.0		5.9
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	403	23	0	0	0	7
Shared Lane Traffic (%)						
Lane Group Flow (vph)	426	0	0	0	0	7
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Left	Left	Right
Median Width(ft)	0			0		
Link Offset(ft)	0			0		
Crosswalk Width(ft)	16			16		16
Two way Left Turn Lane						
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	9		15		15	
Sign Control	Free			Free		Stop
Intersection Summary						
Area Type:	Other					
Control Type:	Unsignalized					
Intersection Capacity Utilization	30.8%			ICU Level of Service A		
Analysis Period (min)	15					

HCM 6th TWSC
4: Hawthorne Avenue & Main Street

Mitigation Condition
Saturday Peak Hour

Intersection												
Int Delay, s/veh	2.9											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔		↔				↔	
Traffic Vol, veh/h	0	85	9	38	110	0	25	0	21	7	0	6
Future Vol, veh/h	0	85	9	38	110	0	25	0	21	7	0	6
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	0	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	86	86	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	8	8	6	6	2	2	2	2	2	2	2
Mvmt Flow	0	99	10	41	120	0	27	0	23	8	0	7

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	-	0	0	109	0	0	310	-	104	318	311	120
Stage 1	-	-	-	-	-	-	104	-	-	202	202	-
Stage 2	-	-	-	-	-	-	206	-	-	116	109	-
Critical Hdwy	-	-	-	4.16	-	-	7.12	-	6.22	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	-	-	-	6.12	-	-	6.12	5.52	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	-	-	6.12	5.52	-
Follow-up Hdwy	-	-	-	2.254	-	-	3.518	-	3.318	3.518	4.018	3.318
Pot Cap-1 Maneuver	0	-	-	1457	-	0	642	0	951	635	604	931
Stage 1	0	-	-	-	-	0	902	0	-	800	734	-
Stage 2	0	-	-	-	-	0	796	0	-	889	805	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	1457	-	-	623	-	951	606	586	931
Mov Cap-2 Maneuver	-	-	-	-	-	-	623	-	-	606	586	-
Stage 1	-	-	-	-	-	-	902	-	-	800	712	-
Stage 2	-	-	-	-	-	-	767	-	-	868	805	-

Approach	EB			WB			NB			SB		
HCM Control Delay, s	0			1.9			10.2			10.1		
HCM LOS							B			B		

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	739	-	-	1457	-	722
HCM Lane V/C Ratio	0.068	-	-	0.028	-	0.02
HCM Control Delay (s)	10.2	-	-	7.5	0	10.1
HCM Lane LOS	B	-	-	A	A	B
HCM 95th %tile Q(veh)	0.2	-	-	0.1	-	0.1

Intersection												
Int Delay, s/veh	7.6											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕						↕			↕	
Traffic Vol, veh/h	8	58	0	0	0	0	57	38	47	17	0	30
Future Vol, veh/h	8	58	0	0	0	0	57	38	47	17	0	30
Conflicting Peds, #/hr	0	0	33	0	0	35	0	0	16	0	0	38
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	16979	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	85	85	85	92	92	92	83	83	83	90	90	90
Heavy Vehicles, %	10	10	10	2	2	2	7	7	7	2	2	2
Mvmt Flow	9	68	0	0	0	0	69	46	57	19	0	33

Major/Minor	Major1			Minor1			Minor2		
Conflicting Flow All	0	0	-	141	86	84	154	86	38
Stage 1	-	-	-	86	86	-	0	0	-
Stage 2	-	-	-	55	0	-	154	86	-
Critical Hdwy	4.2	-	-	7.17	6.57	6.27	7.12	6.52	6.22
Critical Hdwy Stg 1	-	-	-	6.17	5.57	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.12	5.52	-
Follow-up Hdwy	2.29	-	-	3.563	4.063	3.363	3.518	4.018	3.318
Pot Cap-1 Maneuver	-	-	0	817	795	962	813	804	1034
Stage 1	-	-	0	910	814	-	-	-	-
Stage 2	-	-	0	-	-	-	848	824	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	764	795	962	732	804	1000
Mov Cap-2 Maneuver	-	-	-	764	795	-	732	804	-
Stage 1	-	-	-	910	814	-	-	-	-
Stage 2	-	-	-	-	-	-	753	824	-

Approach	EB	NB	SB
HCM Control Delay, s		10.5	9.3
HCM LOS		B	A

Minor Lane/Major Mvmt	NBLn1	EBL	EBT	SBLn1
Capacity (veh/h)	829	-	-	883
HCM Lane V/C Ratio	0.206	-	-	0.059
HCM Control Delay (s)	10.5	-	-	9.3
HCM Lane LOS	B	-	-	A
HCM 95th %tile Q(veh)	0.8	-	-	0.2

Intersection						
Int Delay, s/veh	3					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	↘			↗		
Traffic Vol, veh/h	112	0	0	332	0	0
Future Vol, veh/h	112	0	0	332	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	16979	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	122	0	0	361	0	0

Major/Minor	Minor2	Major1	
Conflicting Flow All	361	-	0
Stage 1	0	-	-
Stage 2	361	-	-
Critical Hdwy	6.42	-	-
Critical Hdwy Stg 1	-	-	-
Critical Hdwy Stg 2	5.42	-	-
Follow-up Hdwy	3.518	-	-
Pot Cap-1 Maneuver	638	0	0
Stage 1	-	0	0
Stage 2	705	0	0
Platoon blocked, %			-
Mov Cap-1 Maneuver	638	-	-
Mov Cap-2 Maneuver	638	-	-
Stage 1	-	-	-
Stage 2	705	-	-

Approach	EB	NB
HCM Control Delay, s	12	0
HCM LOS	B	

Minor Lane/Major Mvmt	NBT	EBLn1
Capacity (veh/h)	-	638
HCM Lane V/C Ratio	-	0.191
HCM Control Delay (s)	-	12
HCM Lane LOS	-	B
HCM 95th %tile Q(veh)	-	0.7

Intersection						
Int Delay, s/veh	4.6					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Vol, veh/h	20	77	94	73	76	25
Future Vol, veh/h	20	77	94	73	76	25
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	22	84	102	79	83	27

Major/Minor	Minor2	Major1		Major2	
Conflicting Flow All	380	97	110	0	0
Stage 1	97	-	-	-	-
Stage 2	283	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-
Pot Cap-1 Maneuver	622	959	1480	-	-
Stage 1	927	-	-	-	-
Stage 2	765	-	-	-	-
Platoon blocked, %				-	-
Mov Cap-1 Maneuver	577	959	1480	-	-
Mov Cap-2 Maneuver	577	-	-	-	-
Stage 1	860	-	-	-	-
Stage 2	765	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	9.9	4.3	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1480	-	844	-	-
HCM Lane V/C Ratio	0.069	-	0.125	-	-
HCM Control Delay (s)	7.6	0	9.9	-	-
HCM Lane LOS	A	A	A	-	-
HCM 95th %tile Q(veh)	0.2	-	0.4	-	-

Intersection						
Int Delay, s/veh	2.3					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	T			T		T
Traffic Vol, veh/h	15	77	90	318	352	18
Future Vol, veh/h	15	77	90	318	352	18
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	16	84	98	346	383	20

Major/Minor	Minor2	Major1	Major2			
Conflicting Flow All	935	393	403	0	-	0
Stage 1	393	-	-	-	-	-
Stage 2	542	-	-	-	-	-
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	-
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	295	656	1156	-	-	-
Stage 1	682	-	-	-	-	-
Stage 2	583	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	264	656	1156	-	-	-
Mov Cap-2 Maneuver	264	-	-	-	-	-
Stage 1	610	-	-	-	-	-
Stage 2	583	-	-	-	-	-

Approach	EB	NB	SB
HCM Control Delay, s	13.4	1.9	0
HCM LOS	B		

Minor Lane/Major Mvmt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)	1156	-	528	-	-
HCM Lane V/C Ratio	0.085	-	0.189	-	-
HCM Control Delay (s)	8.4	0	13.4	-	-
HCM Lane LOS	A	A	B	-	-
HCM 95th %tile Q(veh)	0.3	-	0.7	-	-

Intersection						
Int Delay, s/veh	0.2					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↔				↔	
Traffic Vol, veh/h	371	21	0	0	0	6
Future Vol, veh/h	371	21	0	0	0	6
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	-	0
Veh in Median Storage, #	0	-	-	16983	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	403	23	0	0	0	7

Major/Minor	Major1		Minor1	
Conflicting Flow All	0	0	-	415
Stage 1	-	-	-	-
Stage 2	-	-	-	-
Critical Hdwy	-	-	-	6.22
Critical Hdwy Stg 1	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-
Follow-up Hdwy	-	-	-	3.318
Pot Cap-1 Maneuver	-	-	0	637
Stage 1	-	-	0	-
Stage 2	-	-	0	-
Platoon blocked, %	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	637
Mov Cap-2 Maneuver	-	-	-	-
Stage 1	-	-	-	-
Stage 2	-	-	-	-

Approach	EB	NB
HCM Control Delay, s	0	10.7
HCM LOS		B

Minor Lane/Major Mvmt	NBLn1	EBT	EBR
Capacity (veh/h)	637	-	-
HCM Lane V/C Ratio	0.01	-	-
HCM Control Delay (s)	10.7	-	-
HCM Lane LOS	B	-	-
HCM 95th %tile Q(veh)	0	-	-

Intersection	
Intersection Delay, s/veh	13.6
Intersection LOS	B

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	↘	↗		↗		
Traffic Vol, veh/h	304	205	0	321	0	0
Future Vol, veh/h	304	205	0	321	0	0
Peak Hour Factor	0.97	0.97	0.87	0.87	0.92	0.92
Heavy Vehicles, %	11	2	11	4	2	2
Mvmt Flow	313	211	0	369	0	0
Number of Lanes	1	1	0	1	0	0

Approach	EB	NB
Opposing Approach		
Opposing Lanes	0	0
Conflicting Approach Left		EB
Conflicting Lanes Left	0	2
Conflicting Approach Right	NB	
Conflicting Lanes Right	1	0
HCM Control Delay	13.3	14.1
HCM LOS	B	B

Lane	NBLn1	EBLn1	EBLn2
Vol Left, %	0%	100%	0%
Vol Thru, %	100%	0%	0%
Vol Right, %	0%	0%	100%
Sign Control	Stop	Stop	Stop
Traffic Vol by Lane	321	304	205
LT Vol	0	304	0
Through Vol	321	0	0
RT Vol	0	0	205
Lane Flow Rate	369	313	211
Geometry Grp	2	7	7
Degree of Util (X)	0.534	0.536	0.281
Departure Headway (Hd)	5.206	6.159	4.795
Convergence, Y/N	Yes	Yes	Yes
Cap	690	580	740
Service Time	3.262	3.949	2.583
HCM Lane V/C Ratio	0.535	0.54	0.285
HCM Control Delay	14.1	15.9	9.5
HCM Lane LOS	B	C	A
HCM 95th-tile Q	3.2	3.2	1.2

Intersection	
Intersection Delay, s/veh	12.4
Intersection LOS	B

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔						↔			↔	
Traffic Vol, veh/h	129	238	63	0	0	0	0	38	33	121	32	0
Future Vol, veh/h	129	238	63	0	0	0	0	38	33	121	32	0
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	140	259	68	0	0	0	0	41	36	132	35	0
Number of Lanes	0	1	0	0	0	0	0	1	0	0	1	0

Approach	EB	NB	SB
Opposing Approach		SB	NB
Opposing Lanes	0	1	1
Conflicting Approach Left	SB	EB	
Conflicting Lanes Left	1	1	0
Conflicting Approach Right	NB		EB
Conflicting Lanes Right	1	0	1
HCM Control Delay	13.9	8.7	10.1
HCM LOS	B	A	B

Lane	NBLn1	EBLn1	SBLn1
Vol Left, %	0%	30%	79%
Vol Thru, %	54%	55%	21%
Vol Right, %	46%	15%	0%
Sign Control	Stop	Stop	Stop
Traffic Vol by Lane	71	430	153
LT Vol	0	129	121
Through Vol	38	238	32
RT Vol	33	63	0
Lane Flow Rate	77	467	166
Geometry Grp	1	1	1
Degree of Util (X)	0.107	0.589	0.245
Departure Headway (Hd)	5.005	4.533	5.307
Convergence, Y/N	Yes	Yes	Yes
Cap	710	795	672
Service Time	3.079	2.576	3.372
HCM Lane V/C Ratio	0.108	0.587	0.247
HCM Control Delay	8.7	13.9	10.1
HCM Lane LOS	A	B	B
HCM 95th-tile Q	0.4	3.9	1