




AN EXPERT IN FANS




FA series rectangular ventilating fan

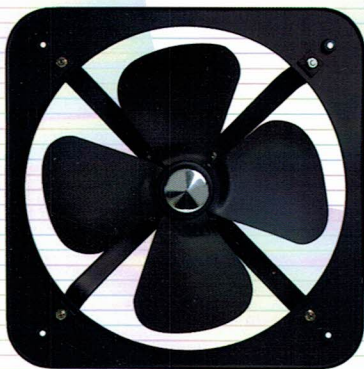


FA2 series rectangular ventilating fan



FB series rectangular ventilating fan with shutter

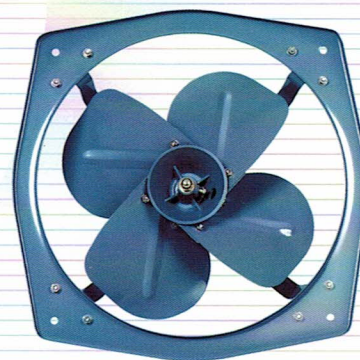

FQ series powerful ventilating fan

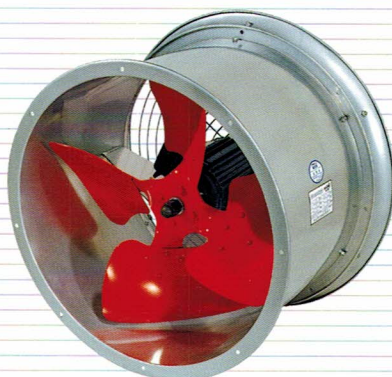

FG series low noise axial duct fan



FB series low noise wall style fan

Voltage/ frequency may as per client's requires

Trinidad Distributor:
JNCL :
111 Boundary Road,
San Juan, Trinidad.
Tel: 868-675-9022 Email : office@jncltt.com
Website: www.deton-trinidad.com

ng County,



112




AN EXPERT IN FANS


ALL FANS SUPPLIED IN
TRINIDAD & TOBAGO ARE
110-120V / 60MHZ


厂告技科NO DTF S008

Type	Specification	Rating Voltage (v)	Frequency (Hz)	Power (W)	R.P.M	Air volume (m³/h)
 FA series rectangular ventilating fan  FB series rectangular ventilating fan with shutter	FAD20-4(FBD20-4)	220	50	35	1400	780
	FAD25-4(FBD25-4)	220	50	40	1400	840
	FAD30-4(FBD30-4)	220	50	45	1400	1080
	FAD35-4(FBD35-4)	220	50	75	1400	2280
	FAD40-4(FBD40-4)	220	50	145	1400	2880
	FAS40-4(FBS40-4)	380	50	145	1400	2880
	FAD50-4	220	50	350	1400	5700
	FAS50-4	380	50	350	1400	5700
	FAD60-4	220	50	600	1400	8700
	FAS60-4	380	50	600	1400	8700

Type	Model	Size (mm)	Voltage (v)	Frequency (Hz)	Power (W)	R.P.M	Air volume (m³/h)	Noise dB(A)
 FA2 series rectangular ventilating fan	FA2D25-4	250	220	50	40	1400	840	< 55
	FA2D30-4	300	220	50	45	1400	1080	< 58
	FA2D35-4	350	220	50	75	1400	2280	< 65
	FA2D40-4	400	220	50	145	1400	2880	< 67
	FA2S40-4	400	380	50	145	1400	2880	< 67
	FA2D50-4	500	220	50	350	1400	5700	< 70
	FA2S50-4	500	380	50	350	1400	5700	< 70
	FA2D60-4	600	220	50	600	1400	8700	< 75
	FA2S60-4	600	380	50	600	1400	8700	< 75

Type	Model	Size		Power (W)	Air volume (m³/h)	Noise dB(A)
 FQ series powerful ventilating fan		(mm)	inch			
	FQD30-4	300	12	80	35	< 70
	FQD35-4	350	14	120	50	< 72
	FQD40-4	400	16	170	65	< 74
	FQD45-4	450	18	230	82	< 76
	FQD60-4	600	24	800	285	< 78

Type	Model	Phase	Voltage (v)	Frequency (Hz)	Power (W)	Speed (r/min)	Wheel dia (mm)	Pressure (Pa)	Air volume (m³/h)	Noise dB(A)	Weight (kg)
 FG series low noise axial duct fan	SF3G-4	Three	380	50	0.08	1420	300	65	1600	< 65	11
	DF3G-4	Single	220	50	0.08	1420	300	65	1600	< 65	11
	SF3½G-4	Three	380	50	0.37	1420	350	130	3700	< 67	15
	DF3½G-4	Single	220	50	0.37	1420	350	130	3700	< 67	15
	SF4G-2	Three	380	50	1.1	2800	400	307	6640	< 82	27
	SF4G-4	Three	380	50	0.55	1420	400	166	5300	< 72	22
	DF4G-4	Single	220	50	0.55	1420	400	166	5300	< 72	22
	SF5G-2	Three	380	50	1.5	2800	500	350	14000	< 85	38
	SF5G-4	Three	380	50	0.75	1420	500	196	9300	< 74	28
	DF5G-4	Single	220	50	0.75	1420	500	196	9300	< 74	28
	SF5G-6	Three	380	50	0.37	960	500	98	7700	< 68	30
	SF6G-2	Three	380	50	3	2800	600	400	20000	< 86	61
	SF6G-4	Three	380	50	1.1	960	600	176	13000	< 71	50
	SF6G-6	Three	380	50	2.2	1420	600	294	18700	< 75	61
	SF7G-4	Three	380	50	3	1420	700	315	24500	< 78	78
	SF7G-6	Three	380	50	2.2	960	700	195	23000	< 75	85
	SF8G-4	Three	380	50	4	1420	800	345	30000	< 81	100
	SF8G-6	Three	380	50	2.2	960	800	196	28000	< 78	95

Type	Specification	Rating Voltage (v)	Frequency (Hz)	Power (W)	R.P.M	Air volume (m³/h)	Pressure (Pa)
 FB series low noise wall style fan	SF3B-4	380	50	0.12	1420	2200	68
	DF3B-4	220	50	0.12	1420	2200	68
	SF3.5B-4	380	50	0.18	1420	2800	90
	DF3.5B-4	220	50	0.18	1420	2800	90
	SF4B-4	380	50	0.25	1420	4500	108
	DF4B-4	220	50	0.25	1420	4500	108
	SF5B-4	380	50	0.37	1420	5800	118
	DF5B-4	220	50	0.37	1420	5800	118
	SF6B-4	380	50	0.55	1420	8500	130
	DF6B-4	220	50	0.55	1420	8500	130