


# FLOOR POWERFUL FAN

- Utilize CAD optimized design,durable
- Built-in overload protecting device for safe operation
- Aluminum blade for powerful wind
- Stylish appearance,graceful and with durable luster
- Three speeds,adjustable angle of pitch for easy of use
- Ideal choise for cooling and ventilation of home,offices,hotels,stores and other place



ALL MODELS IMPORTED  
IN TRINIDAD & TOBAGO  
ARE 110-120 V / 60 MHZ

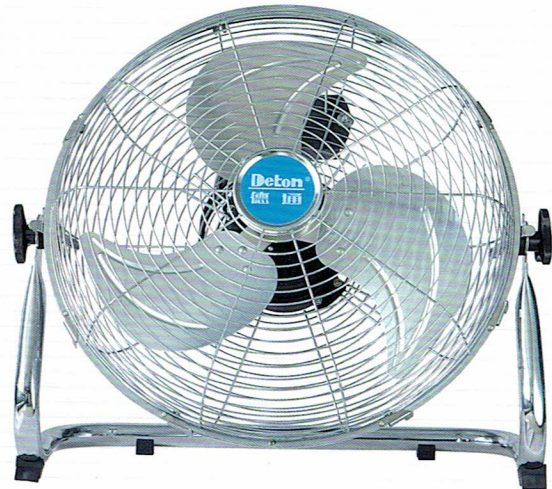

Model	Size		Rating Voltage (v)	Low speed				Middle speed				High speed			
	mm	inch		R.P.M	Volume (m <sup>3</sup> /min)	Noise (dB)	Power (w)	R.P.M	Volume (m <sup>3</sup> /min)	Noise (dB)	Power (w)	R.P.M	Volume (m <sup>3</sup> /min)	Noise (dB)	Power (w)
FE4-30	300	12	220	950	27	50	31	1150	33	52	35	1400	41	54	50
FE4-40	400	16	220	950	48	55	67	1150	58	64	80	1400	72	60	100
FE4-45	450	18	220	950	57	58	70	1150	69	60	90	1400	84	62	110
FE4-50	500	20	220	950	65	61	110	1150	8	63	150	1400	96	65	190




EXPERT IN FANS

CB CE RoHS

# COMMERCIAL STAND & WALL FAN

## Product features

- Streamline blade design, low noise, large air volume, soft wind
- Adjustable angle of pitch, large wind covering area
- Three speeds, oscillation angle adjustable
- Simple and easy operation
- Novel appearance, graceful color and excellent craftcode
- Oscillation controlled by micromotor, durable using.
- Motor over-heat self-protection for long service life and safety
- Ideal choice for cooling and ventilation of home, offices, hotels, stores and other place.
- 18", 20" two different sizes with domestic guard and industrial guard
- Air volume: 84-96 m<sup>3</sup>/min

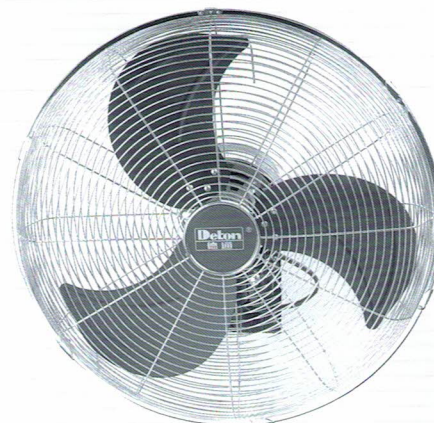

45/50T-W (18" 20")



45/50T-S (18" 20")

110-120V / 60mhz

## Performance data

Model	Size		Rating Voltage	Speed	Power watts	Speed rpm	Air volume m <sup>3</sup> /min	Noise (dB)
	mm	inch						
45T-S	450	18	220	1	60	950	57	48
				2	70	1250	69	50
				3	90	1400	84	55
50T-S	500	20	220	1	87	950	65	50
				2	95	1250	78	53
				3	120	1400	96	58
45T-W	450	18	220	1	60	950	57	48
				2	70	1250	69	50
				3	90	1400	84	55
50T-W	500	20	220	1	87	950	65	50
				2	95	1250	78	53
				3	120	1400	96	58

Trinidad Distributor:

JNCL :

111 Boundary Road,

San Juan, Trinidad.

Tel: 868-675-9022 Email : office@jncclt.com

Website: www.deton-trinidad.com





EXPERT IN FANS




CB CE RoHS

# COMMERCIAL STAND & WALL FAN

## Product features

- Streamline blade design, low noise, large air volume, soft wind
- Adjustable angle of pitch, large wind covering area
- Three speeds, oscillation angle adjustable
- Simple and easy operation
- Novel appearance, graceful color and excellent craft code
- Oscillation controlled by micromotor, durable using.
- Motor over-heat self-protection for long service life and safety
- Ideal choice for cooling and ventilation of home, offices, hotels, stores and other place.
- 18"、20" two different sizes with domestic guard and industrial guard
- Air volume: 84-96 m<sup>3</sup>/min

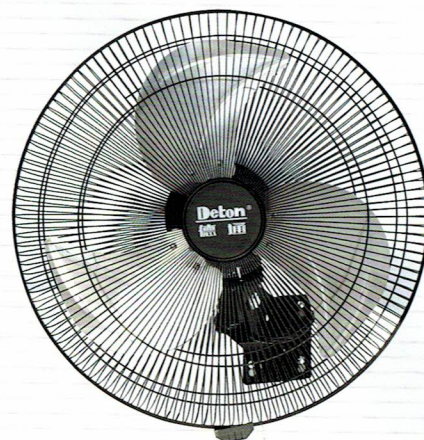

45/50T-W(18" 20")



45/50T-S(18" 20" )

110-120 v / 60 mhz

## Performance data

Model	Size		Rating Voltage	Speed	Power watts	Speed rpm	Air volume m <sup>3</sup> /min	Noise (dB)
	mm	inch						
45T-S	450	18	220	1	60	950	57	48
				2	70	1250	69	50
				3	90	1400	84	55
50T-S	500	20	220	1	87	950	65	50
				2	95	1250	78	53
				3	120	1400	96	58
45T-W	450	18	220	1	60	950	57	48
				2	70	1250	69	50
				3	90	1400	84	55
50T-W	500	20	220	1	87	950	65	50
				2	95	1250	78	53
				3	120	1400	96	58